




User's Guide

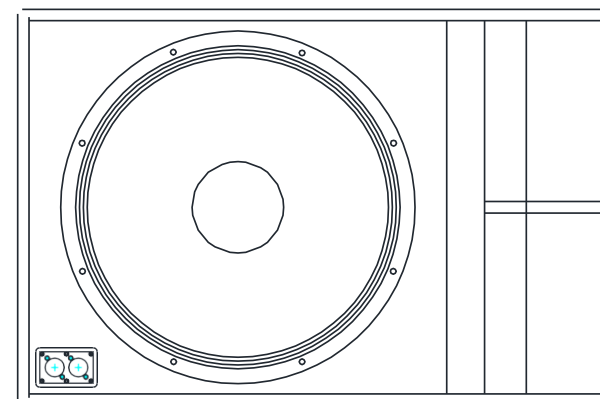

DIGIRUSS


NO. MZY20 081107—02

MODEL:
DHP12BA
DHP15BA
DHP18BA

Standards : SJ/T 10406-93
1Please keep the user's manual!

Use the product carefully before you read the instructions

Function indication

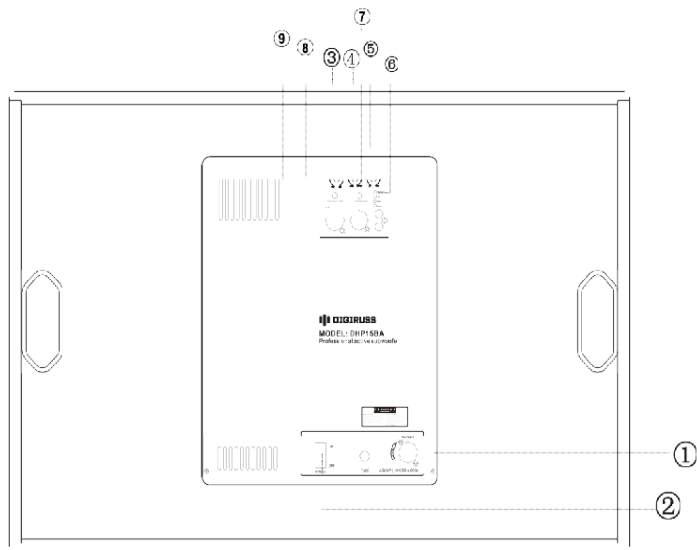

- 1 .Power input socket
- 2. Power switch
- 3. Volume control
- 4. Low-pass frequency adjustment
- 5. phase adjustment
- 6 .LED indicator light
- 7. XLR/RCA input jack
- 8 .Low cut/by pass key
- 9. Hig cut/by pass key

Parameter	DHP12BA	DHP15BA	DHP18BA
Тип системы	Активная низкочастотная акустическая система		
Разъёмы:	XLR F (input), XLR M (link), Powercon (type A).		
Компоненты:	1*12 inch	1*15 inch	1*18 inch
Встр..усилит./мощн. :	400 Вт	500 Вт	700 Вт
Вес	32 кг.	43 кг.	47 кг.
Частотный диапазон	45Гц-200Гц	43Гц-200 Гц	40Гц-200Гц
Корпус	Фанера	Фанера	Фанера
Max SPL	121 дБ	123 дБ	127 дБ
Размер(ВХШхГ)	600X460X500	660X520X560	780"520"560

