



(A Key)
MODE/LIGHT

(B Key) SET

A . Features

- 3.5 Digits LCD Display , Display Hour ,Minute ,Second ,Month and Day .
- EL backlight.

B . Operational Manual



Time

Date


Second

Display

Display

Display

1. **At any state ,press A key EL backlight for 3s .**
2. At time setting mode ,press A key to activate auto advance function.
3. press A key once displaying Date ;twice displaying Second , Press A key again to return to Real Time mode .
4. Time setting.
 - Press B key twice to entry Time Setting mode ,select item in turn as following :

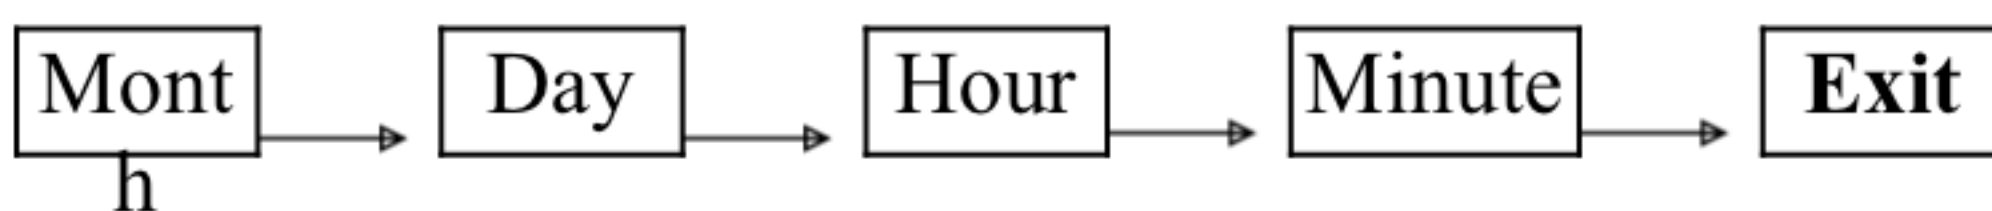

- Press A key to adjust the flashing item.
- Press B key to confirm.

C. Specifications

- Module Size : $\Phi 30.60\text{mm}$
- Module Thickness (include buzzer) : 4.85mm
- Operational Temperature Range : $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : $\pm 60\text{sec/month}$
- Battery Code : CR1620(capacitance: 80m Ah)
- static average current : $\leq 2.7\mu\text{A}$ (static maximum current : 3.5uA)
- EL lighten average current : $\leq 4.87\text{mA}$ (ELlighten maximum current : 10.0mA)
- Battery life(85%) : $\geq 24\text{ month}$

Battery life according to EL backlight shows 4 times and 3 second/time, totally 12 seconds a day.