

User Manual



I. Specifications:

Working temperature: -20-60 ℃

Product size: L114×W64×H25mm

Package size: L135×W72×H42mm

Output: Three CMOS drain- open output

Connecting Mode: Common anode ☒ cathode ☐

Max load current: 4 A ☒ 8A ☐ each color

Supply voltage: DC5V ☐ 12-24V ☒

Net weight: 165g


Gross weight: 185g

II. Control Method:

The key-press functions are shown in the table below (in accordance with the key position order)

Brightness+	Brightness-	Play/Stop	ON/OFF
RED	GREEN	BLUE	WHITE
ORANGE	YELLOW	CYAN	PURPLE
AUTO	JUMP3	FADE3	SPEED+
FLASH	JUMP7	FADE7	SPEED-

III. Panel specification and connecting drawing as follows:

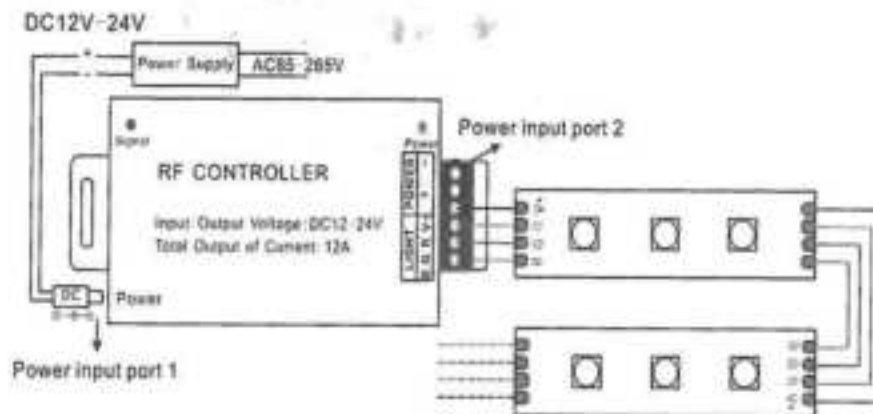

IV. Warning:

1. Supply voltage of this product is DC5V ☐ 12-24V ☒ , never connect to AC110V or AC220V.
2. Never connect two wires directly in case of short circuit.
3. Lead wire should be connected correctly according to colors that connecting diagram offers.
4. Warranty of this product is one year, but exclude the artificial situation of damaged or overload working