

# Regulated Power Supply, 380...500V AC, 24V, 10A, 3 phases, Universal

ABLU3A24100

Product availability: Stock - Normally stocked in distribution facility

#### Main

Range of Product	Modicon Power Supply	
Product or Component Type	Power supply	
Power supply type	Regulated switch mode	
Variant option	Universal	
Enclosure Material	Metal	
Nominal input voltage	380500 V AC three phase	
Kw Rating	240 W	
Output voltage	24 V DC	
Power supply output current	10 A	
Permissible temporary current	1.5 x In for 5 seconds)	

#### Complementary

Efficiency at full load	320575 V AC 3 phase
Nominal network frequency	5060 Hz
Network system compatibility	TN
	TT
	ΙΤ
Maximum leakage current	2 mA 500 V AC
Input protection type	Integrated fuse (not interchangeable) 3.15 A
	External protection (recommended)
Inrush current	25 A 380 V
	25 A 500 V
Power factor	0.50 at 380 V AC
	0.50 at 500 V AC
Efficiency	89.5 % 380 V AC
	89.5 % 500 V AC
Output voltage adjustment	2428 V
Power dissipation in W	27 W
Current consumption	< 0.75 A 380 V AC
	< 0.65 A 500 V AC
Turn-on time	<1s
Holding time	> 20 ms 380 V AC
	> 40 ms 500 V AC
Startup with capacitive loads	200000 μF
Residual ripple	< 100 mV

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Meantime between failure [MTBF]	1095200 h at 77 °F (25 °C), full load conforming to SR 332 416700 h at 131 °F (55 °C), 80 % load conforming to SR 332	
Output protection type	Against overload and short-circuits, protection technology: manual or automatic reset by switch Against over temperature, protection technology: automatic reset Against overvoltage, protection technology: manual reset	
Connections - terminals	Screw connection 1.56 mm², AWG 16AWG 10) without wire end ferrule output Screw connection 1.5 x 4 mm², AWG 16AWG 12) with wire end ferrule output Screw connection 0.756 mm², AWG 18AWG 10) without wire end ferrule input Screw connection 0.754 mm², AWG 18AWG 12) with wire end ferrule input Cage clamp 0.21.5 mm², AWG 22AWG 16) without wire end ferrule diagnost relay  Cage clamp 0.20.75 mm², AWG 22AWG 18) with wire end ferrule diagnostic relay  Cage clamp 0.20.75 mm², AWG 22AWG 18) with wire end ferrule shut down input	
Line and load regulation	< 0.17 % network 100 % load in line at 77 °F (25 °C) < 0.6 % +/- 0.5 % network 150 % load at 77 °F (25 °C)	
Status LED	LED (green and red) product status     LED (Green) input voltage	
Depth	4.9 in (125.2 mm)	
Height	4.9 in (124 mm)	
Width	2.0 in (50 mm)	
Product Weight	2.006 lb(US) (0.91 kg)	
Marking	CE UKCA	
Mounting support	Top hat type TH35-15 rail IEC 60715 Top hat type TH35-7.5 rail IEC 60715 Double-profile DIN rail	
Supply	SELV IEC 60950-1 SELV IEC 60204-1 SELV IEC 60364-4-41	
Dielectric strength	4000 V AC with input to output 2000 V AC with input to ground 1500 V AC with output to ground 4000 V AC with input to diagnostic relay 500 V AC with output to diagnostic relay 1500 V AC with diagnostic relay to ground with shutdown input not isolated from output	
Diagnostic relay	Electromechanical relay 1000.0 mA 30 V	
Service life	10 year(s) 104 °F (40 °C) 80 % load	
Overvoltage category	III II	

#### **Environment**

Standards	IEC 62368-1	
	EN/IEC 61204-3	
	IEC 61000-6-1	
	IEC 61000-6-2	
	IEC 61000-6-3	
	IEC 61000-6-4	
	IEC 61000-3-2	
	EN 61000-3-3	
	UL 62368-1	
	CSA C22.2 No 62368-1	
	CSA C22.2 No. 107.1	

CE	
CUL Listed	
CUL Recognized	
RCM	
CB Scheme	
EAC	
KC	
UKCA	
CURus	
< 5000 m overvoltage category III	
overvoltage category II	
150 m/s² 11 ms	
IP20	
-13131 °F (-2555 °C) without current derating mounting position A < 6561.68 ft	
(2000 m)	
131158 °F (5570 °C) with current derating of 3.3 % per °C mounting position A <	
6561.68 ft (2000 m)	
s Class I	
2	
3.5 mm (f= 311.9 Hz) conforming to IEC 60068-2-6	
20 m/s² (f= 11.9150 Hz) conforming to IEC 60068-2-6	
Immunity to electrostatic discharge - test level: 8 kV (contact discharge) conforming	
to IEC 61000-4-2	
Immunity to electrostatic discharge - test level: 15 kV (air discharge) conforming to IEC 61000-4-2	
Immunity to conducted RF disturbances - test level: 15 V/m (80 MHz2 GHz) conforming to IEC 61000-4-3	
Immunity to conducted RF disturbances - test level: 5 V/m (22.7 GHz) conforming	
to IEC 61000-4-3	
Immunity to conducted RF disturbances - test level: 5 V/m (2.76 GHz) conforming to IEC 61000-4-3	
Immunity to fast transients - test level: 4 kV (on input-output) conforming to IEC	
61000-4-4 Surge immunity test - test level: 4 kV (between power supply and earth) conforming	
to IEC 61000-4-5	
Surge immunity test - test level: 3 kV (between phases) conforming to IEC 61000-4-5	
Immunity to conducted RF disturbances - test level: 15 V (0.1580 MHz) conforming	
to IEC 61000-4-6	
Immunity to magnetic fields - test level: 30 A/m (5060 Hz) conforming to IEC	
61000-4-8	
Immunity to voltage dips conforming to IEC 61000-4-11	
Disturbing field emission conforming to EN 55016-2-3	
Limits for harmonic current emissions conforming to IEC 61000-3-2	
and anning to EN FEO16 1.0	
conforming to EN 55016-1-2	
conforming to EN 55016-1-2 conforming to EN 55016-2-1	

## Ordering and shipping details

_	
Category	US1CP1222525
Discount Schedule	CP12
GTIN	3606482185241
Returnability	Yes
Country of origin	IN

## **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3 15 in (8 000 cm)

Package 1 Width	7.09 in (18.000 cm)
Package 1 Length	7.48 in (19.000 cm)
Package 1 Weight	2.575 lb(US) (1.168 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	21.839 lb(US) (9.906 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	192
Package 3 Height	41.34 in (105.000 cm)
Package 3 Width	31.50 in (80.000 cm)
Package 3 Length	47.24 in (120.000 cm)
Package 3 Weight	551.156 lb(US) (250.000 kg)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

## Environmental footprint Environmental Disclosure Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration


#### **Use Again**

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

#### ABLU3A24100

#### **Dimensions Drawings**


#### **Dimensions**

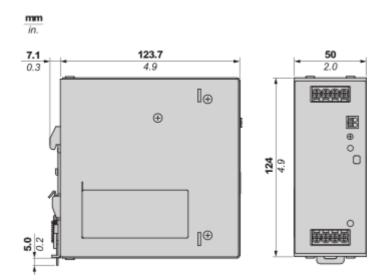


#### ABLU3A24100

Connections and Schema

Wiring



#### **Block Diagram**

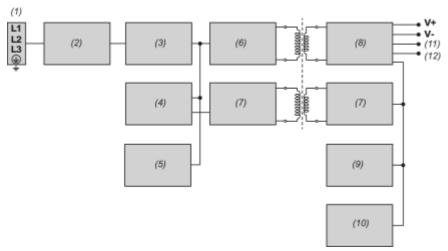

(1): Input

(2): EMI filter, inrush current limit

(3): AC/DC converter
(4): Start-up circuit
(5): PWM controller
(6): Flyback converter
(7): Auxillary bias circuit

(9): Opto coupler & feedback controller


(10): OVP & OTP circuit (11): DC OK LED (12): DC OK relay contact

(8): Output rectifier


Mounting and Clearance


#### Mounting

#### **Mounting Position A**




#### **Mounting Position B**






#### **Mounting Position C**



#### ABLU3A24100


#### **Incorrect Mounting**

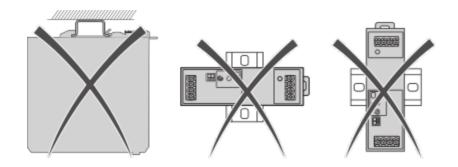


#### Performance Curves

#### **Performance Curve**

#### **Mounting Position A**

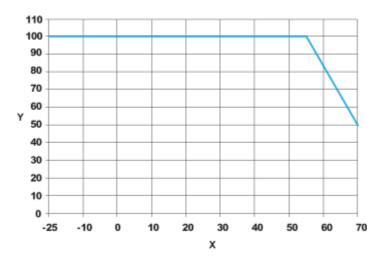


#### Mounting Position B and C

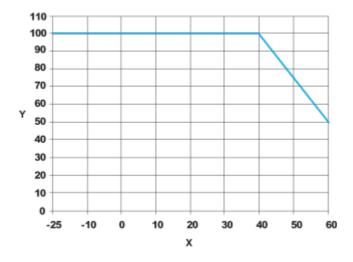

X: Surrounding Air Temperature (°C)
Y: Percentage of Maximum Load (%)

#### **Overvoltage Protection Behavior**

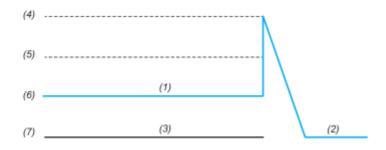

Overvoltage range: 26...36 VDC, Latch Mode

- (1): Variable output voltage range
- (2): Latch
- (3): Typical overvoltage condition as seen at the output
- (4): Maximum overvoltage protection level

#### ABLU3A24100

(5) : Overvoltage protection(6) : Norminal output voltage

(7): Zero output