**REAR CONNECT PLATE**

Two standard 1/4" phone jacks and two Speakon™ connectors are featured. See other side for hookup diagrams.

**SPEAKER CABLES**

Our standard cable for speaker hookups is the PH50. This cable features 1/4" plugs and 16 gauge copper wire. The PH50 is adequate for lengths up to 50' under normal use. You can DAISY-CHAIN up to one additional speaker per cable by using the unused 1/4" OUTPUT" jack (right side) on your speaker jack plate. Be sure to note the total impedance to the amp so it is not lower than it's recommended impedance. See *Typical Loudspeaker Impedance Configurations*.

Our professional SPK25, SPK50 & SPK100 cables feature Speakon™ lock-on connectors with heavy 4 conductor 12 gauge copper wire. These cables are to be connected in the same way as the PH50 with compatible amps.

**PRECAUTIONS**

1) DO NOT EXCEED THE POWER RATING marked on the rear connect plate. Excessive power will destroy drivers. 2) DISTORTION from power amps will destroy drivers much faster than clean power. 3) WATER, MOISTURE, and DUST are harmful to drivers causing failure which is not covered under warranty.

**WARRANTY**

CARVIN loudspeakers are covered by a ONE year limited warranty unless otherwise stated. Warranty coverage is limited to original manufactures defects only. **WARRANTY DOES NOT COVER:** 1) Opened or burned voice coils. 2) Torn cones caused by improper packing or abuse. 3) Damage from rain, moisture, ETC. When returning defective driver(s), remove them from the enclosure to reduce shipping costs. **DO NOT** stuff paper into the driver(s). Return pre-paid by UPS. Include your address and description of the problem. Your driver(s) will be returned COD for the cost of shipping and reconditioning if not covered under warranty.

Congratulations on your selection of the 1502 loudspeaker. As one of the finest speaker systems made, the TR1502 will reproduce your music with the purest, most natural sound available. The high powered titanium horn and 15" woofer response even under the most stressful, intense power levels. The computer-aided tuned-ported enclosures offer the best frequency response possible from the heavy-duty cast frame 15" woofer. The featured Trapezoid enclosure offers a 15° angle off-set on each side for you to stack or hang the enclosures together creating full, gapless coverage. Hookups are easy too, with either 1/4" jacks or professional Speakon™ connectors as a Bi-amped or full-range system. We recommend our 18' TR1801 sub-woofer system if you require more bass.

**RECEIVING INSPECTION**

INSPECT YOUR SPEAKER FOR ANY DAMAGE which may have occurred during shipping. If any damage is found, please notify the shipping company & CARVIN.

SAVE THE CARTON & ALL PACKING MATERIALS. In the event you have to re-ship your unit, always use the original carton and packing material. This will provide the best possible protection during shipment. CARVIN and the shipping company are not liable for any damage caused by improper packing.

SAVE YOUR INVOICE. It will be required for warranty service if needed in the future.

SHIPMENT SHORTAGE. If you find items missing, they may have been shipped separately. Please allow several days for the rest of your order to arrive before inquiring.


RECORD THE SERIAL NUMBER on the enclosed warranty card or below on this manual for your records. Keep your portion of the card and return the portion with your name and comments to us.

**SUGGESTIONS FOR OPTIMAL PERFORMANCE**

Raise the enclosure to the ear level of your audience for greater coverage. To help control feedback, use a graphic equalizer. Keep the speakers in front of the microphone. Never direct the microphone towards the speaker. For greater coverage, add a second speaker system 20° to 30° off axis.


**TYPICAL LOUDSPEAKER IMPEDANCE CONFIGURATIONS**

Individual speaker or speaker cabinet wiring examples for total impedance.

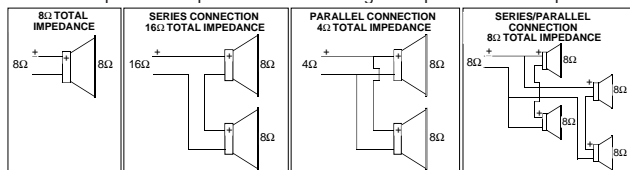

For your records, you may wish to record the following information.

Serial No. \_\_\_\_\_ Invoice Date \_\_\_\_\_

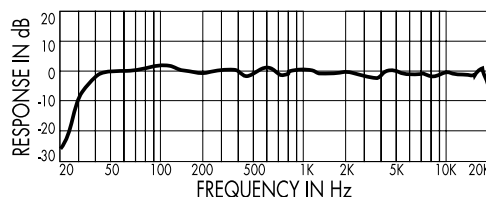**TR1502 FREQUENCY RESPONSE****MODEL TR1502 SPEAKER SYSTEM SPECS:**


Frequency Response:	48 Hz to 19 kHz $\pm 3$ dB
Useable Low Frequency:	36 Hz (-10 dB)
Power Handling:	600w Continuous Program Pw
Recommended Amp:	100 to 1200 watts
Sensitivity:	103 dB SPL, 1 Watt @ 1 meter
Coverage Angles:	90° Horizontal, 45° Vertical
Nominal Impedance:	8Ω
Crossover Type:	C1502 Constant Voltage
Inputs/Outputs:	Two 1/4", two Speakon™
Bi-Amp Support:	Yes—Panel Switch
Horn Driver Protection:	Yes—Maintenance Free
Woofer Enclosure Type:	Vented Box
Enclosure Covering:	Black Duratuff II™
Dim/Wt:	20.25"W x 18.75"D x 30"H, 65lbs.
Optional Cables:	PH50, SPK25, SPK50, SPK100
Optional Vinyl Cover:	CVS1502

# CARVIN

12340 World Trade Drive, San Diego, CA 92128  
(619) 487-1600 (800) 854-2235  
www.carvin.com

## HOOKUP DIAGRAMS

### NORMAL FULL RANGE HOOKUP

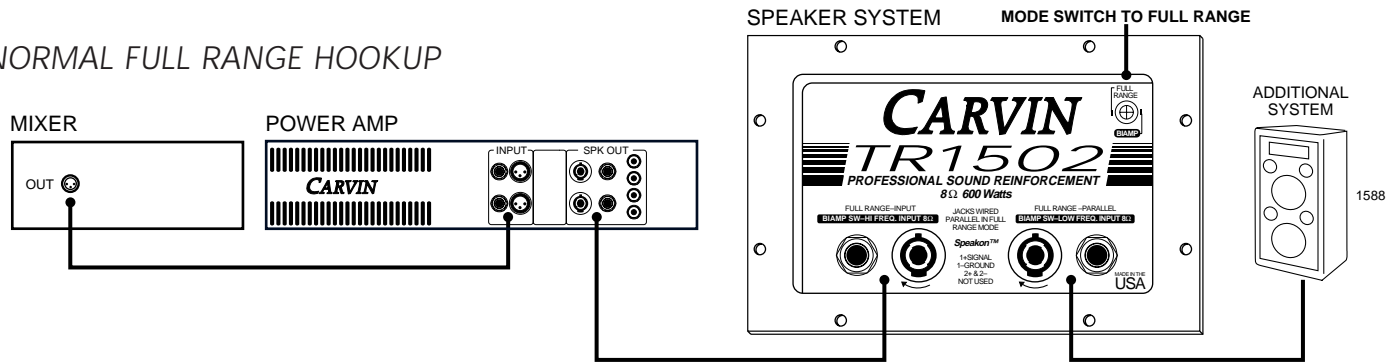

### BI-AMP HOOKUP

