



G A M I N G C A S E

2025


contents

Mid Tower

REAYER	04	PSAZ-1000W 80+ Gold	
SENTINEL	06	Power Supply	17
SOURCE	08	PSAZ-1000W 80+ Platinum	
		Power Supply	18

Power Supply

AZZA 650W 80+ Bronze	
Power Supply	10
AZZA 750W 80+ Bronze	
Power Supply	11
AZZA 850W 80+ Bronze	
Power Supply	12
AZZA 750W 80+ Gold	
Power Supply	13
AZZA 750W 80+ Gold	
Power Supply	14
AZZA 850W 80+ Gold	
Power Supply	15
AZZA 850W 80+ Gold	
Power Supply	16

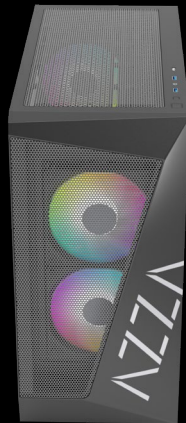

Model	
Model Name:	Reaver
Model Number:	CSAZ-225K-01
Specifications	
Type:	ATX Mid Tower (Support EATX)
Color:	Black/Black(interior)
Side Panel Window:	Left side panel: Tempered glass with rubber mounts
Max Cpu Color Height:	Up to 170mm
Max Video Card Lenght:	Up to 400mm long video card
Power Supply:	Not included
Motherboard Compatibility:	ATX 、 Micro ATX 、 ITX 、 EATX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 4
Internal 3.5" Drive Bays:	Up to 2
Expansion Slots:	7
Top ports:	Power button, LED button, HD Audio, USB 3.0 x 2, Type C x1
Physical Specifications	
Case Dimension (HxWxD):	475x225x475mm/ 18.7x8.8x18.7 inches
Weight:	-Kg /-lbs
Features	
Tenpered Glass Sides Window:	High-quality tempered glass side window allows for clear visuals to inner components
Addressable RGB Light Effects:	ARGB fans are controlled using the LED button. All addressable RGB devices can sync with the motherboard, allowing the motherboard software to control lighting directly.
Available Fan Ports:	2x140mm fan ports in the front (2x140mm LFO-5914D addressable ARGB fan included) 1x140mm fan port in the rear (1x140mm LFO-5914D addressable ARGB fan included) 2x120mm fan ports Top of PSU Shroud (2x120mm LFO-5912D black fan included) 3x120mm or 2x140mm fan ports on the top
Water Cooling:	Supports radiators up to 280/360mm on the top
Dust Filters:	Removable (magnetic) dustproof net on the top ,removable dust filter on bottom of chassis.
Power Supply Support:	Front mounted ATX power supply



Model	
Model Name:	Sentinel
Model Number:	CSAZ-203A01B / CSAZ-203A01W
Specifications	
Type:	ATX Mid Tower
Color:	Black/Black(interior) / White/White(interior)
Side Panel Window:	Left side panel: Tempered glass with rubber mounts
Max Cpu Color Height:	Up to 160mm
Max Video Card Lenght:	Up to 320mm long video card
Power Supply:	Not included
Motherboard Compatibility:	ATX 、 Micro ATX 、 ITX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 4
Internal 3.5" Drive Bays:	Up to 1
Expansion Slots:	7
Top ports:	Power button / LED button / HD Audio / Type-C x 1 / USB3.0 x 1 / USB2.0 x 1
Physical Specifications	
Case Dimension (HxWxD):	454x203.5x415.5mm/ 17.8x8x16.3 inches
Weight:	5.66Kg /12.47lbs
Features	
Tenpered Glass Sides Window:	High-quality tempered glass side window allows for clear visuals to inner components
Addressable RGB Light Effects:	ARGB fans are controlled using the LED button. All addressable RGB devices can sync with the motherboard, allowing the motherboard software to control lighting directly.
Available Fan Ports:	3x120mm fan ports in the front (2x120mm LFO-5812D addressable ARGB fan included) 2x120mm or 2x140 fan ports on the top 1x120mm fan port in the rear (1x120mm LFO-5812D addressable ARGB fan included)
Water Cooling:	Supports radiators up to 360mm in the front
Dust Filters:	Removable (magnetic) dustproof net on the top , removable dust filter on bottom of chassis.
Power Supply Support:	Bottom mounted ATX Power Supply



Model	
Model Name:	Source
Model Number:	CSAZ-203A02
Specifications	
Type:	ATX Mid Tower
Color:	Black/Black(interior) / White/White(interior)
Side Panel Window:	Left side panel: Tempered glass with rubber mounts
Max Cpu Cooler Height:	Up to 160mm
Max Video Card Length:	Up to 320mm long video card
Power Supply:	Not included
Motherboard Compatibility:	ATX · Micro ATX · ITX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 4
Internal 3.5" Drive Bays:	Up to 1
Expansion Slots:	7
Top ports:	Power button / LED button / HD Audio / Type-C x 1 / USB3.0 x 1 / USB2.0 x 1
Physical Specifications	
Case Dimension (HxWxD):	454x203.5x415.5mm/ 17.8x8x16.3 inches
Weight:	5.66Kg /12.47lbs
Features	
Tempered Glass Sides Window:	High-quality tempered glass side window allows for clear visuals to inner components
Addressable RGB Light Effects:	ARGB fans are controlled using the LED button. All addressable RGB devices can sync with the motherboard, allowing the motherboard software to control lighting directly.
Available Fan Ports:	3x120mm fan ports in the front (3x120mm LFO-5812D addressable ARGB fan included) 2x120mm or 2x140 fan ports on the top 1x120mm fan port in the rear (1x120mm LFO-5812D addressable ARGB fan included)
Water Cooling:	Supports radiators up to 360mm in the front
Dust Filters:	Removable (magnetic) dustproof net on the top, removable dust filter on bottom of chassis.
Power Supply Support:	Bottom mounted ATX Power Supply

AZZA 650W 80+ BRONZE
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~8-4A 50-60Hz					Total Power	Model	AC Input	200-240V~4A 50-60Hz					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb			DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-650B	Max. Output Current	54A	15A	15A	0.3A	3.0A	650W	PSAZ-650B	Max. Output Current	54A	15A	15A	0.3A	3.0A	650W
	Combined Power	648W	100W	3.6W	15W				Combined Power	648W	100W	3.6W	15W		

AZZA 750W 80+ BRONZE
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~9-5A 50-60Hz					Total Power	Model	AC Input	200-240V~5A 50-60Hz					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb			DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-750G	Max. Output Current	62A	20A	20A	0.3A	2.5A	750W	PSAZ-750G	Max. Output Current	62A	20A	20A	0.3A	2.5A	750W
	Combined Power	744W	100W	3.5W	12.5W				Combined Power	744W	100W	3.5W	12.5W		

AZZA 850W 80+ BRONZE
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~10-6A,50-60Hz					Total Power	Model	AC Input	200-240V~6A 50-60Hz					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb			DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-850W	Max. Output Current	70.8A	15A	15A	0.3A	3.0A	850W	PSAZ-850W	Max. Output Current	70.8A	15A	15A	0.3A	3.0A	850W
	Combined Power	850W	100W		3.6W	15W			Combined Power	850W	100W		3.6W	15W	

AZZA 750W 80+ GOLD
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~9-5A,50-60Hz					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-750W	Max. Output Current	62.5A	15A	15A	0.3A	3.0A	750W
	Combined Power	750W	100W		3.6W	15W	

AZZA 750W 80+GOLD
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~ 50-60Hz 10A Max.					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-750G	Max. Output Current	62A	20A	20A	0.3A	2.5A	750W
	Combined Power	744W	100W		3.6W	12.5W	

AZZA 850W 80+GOLD
ATX3.1 POWER SUPPLY



Model	AC Input	100-240V~ 50-60Hz 10A Max.					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-850G	Max. Output Current	70A	20A	20A	0.3A	2.5A	850W
	Combined Power	840W	100W		3.6W	12.5W	

AZZA 850W 80+GOLD ATX3.1 POWER SUPPLY




Model	AC Input	100-240V~ 50-60Hz 10A Max.					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-850G	Max. Output Current	70A	20A	20A	0.3A	2.5A	850W
	Combined Power	840W	100W		3.6W	12.5W	

AZZA 1000W 80+GOLD ATX3.1 POWER SUPPLY



Model	AC Input	100-240Vac 50-60Hz 12-6A					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-1000G	Max. Output Current	83A	20A	20A	0.3A	3.0A	1000W
	Combined Power	996W	120W		3.6W	15W	

AZZA 1000W 80+ PLATINUM
ATX3.1 POWER SUPPLY

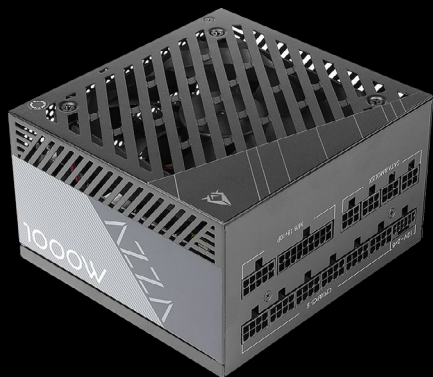

Model	AC Input	100-240Vac 50-60Hz 12-6A					Total Power
	DC Output Voltage	+12V	+5V	+3.3V	-12V	+5Vsb	
PSAZ-1000P	Max. Output Current	83A	20A	20A	0.3A	3.0A	1000W
	Combined Power	996W	120W		3.6W	15W	



Americas

U.S.A
AZZA (USA) Technology Inc.
4115 Schaefer Ave. Chino CA, 91710, U.S.A.
Tel: 909-517-1746
E-mail: service@azzatek.com

PAN AMERICAS
Linkworld Electronic LLC.
4115 Schaefer Ave. Chino CA, 91710, U.S.A.
Tel: 1-714-993-2888
E-mail: guan@linkworld8.com

CANADA
Link Computer Canada Ltd.
2600 John Street, Unit 122, Markham Ontario L3R 3W3 Canada
Toll Free: 1-877-477-3610
Fax: 905-477-4223
E-mail: techsupport@linkcanada.ca, sales@linkcanada.ca

Europe

GERMANY
Linkworld Computer GmbH
Otto-Schott-Str. 4, 41542 Dormagen, Germany
Tel: +49-2133-97906-0
Fax: +49-2133-97906-89

E-mail: info@linkworldcomputer.de
service@linkworldcomputer.de
Facebook: LinkworldComputer

Asia

TAIWAN
Linkworld Electronic Co., Ltd.
9FL., No.13, Lane 35, Jihu Rd., Neihs Dist., Taipei, Taiwan
Tel: 886-2-87515789
Fax: 886-2-87515788 886-2-87515768
E-mail: service@azzatek.com

SINGAPORE
Linkworld Technology (S) Pte Ltd.
Blk 2024, #02-48 Bukit Batok Street 23 Singapore 659529
Tel: 65-9688-3281
Fax: 65- 67224141
E-mail: support@linkworld.com.sg

THAILAND
Linkworld Electronic (Thailand) Co., Ltd.
700/60 Moo 1 Amata Nakorn Industrial Bangna-Trad KM 57 Tambol
Bankao Amphur Phanthong Chonburi 20160 Thailand
Tel: 66-38-214078
E-mail: support@linkworld.co.th