



1. Take power from the cigarette lighter in the rear tailgate side trim panel to the access panel in the front trunk using the supplied 6-meter power cord.



2. Open the front trunk lid and remove the red trim panel

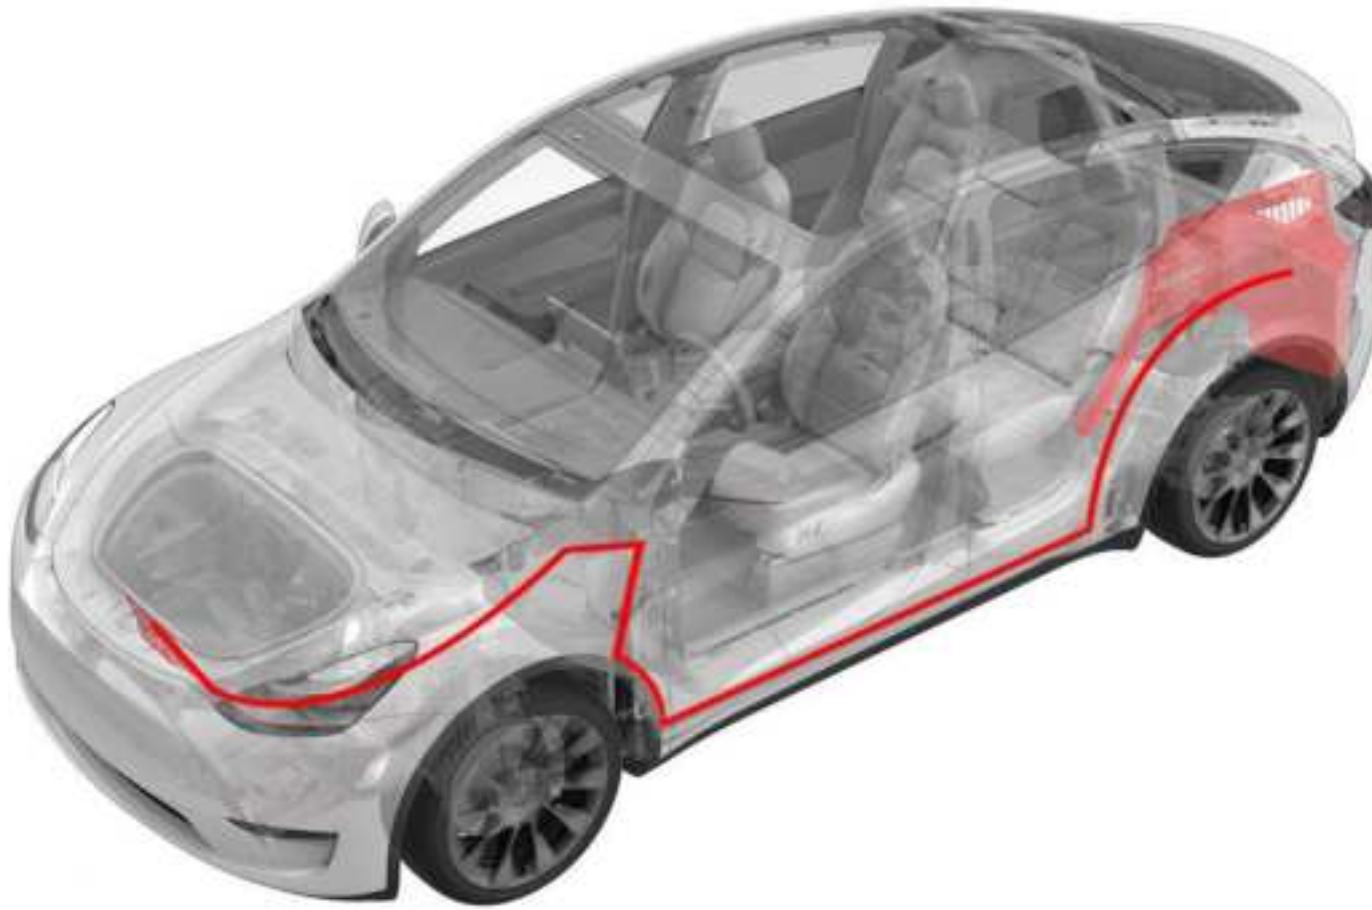

### 3. Remove access panel

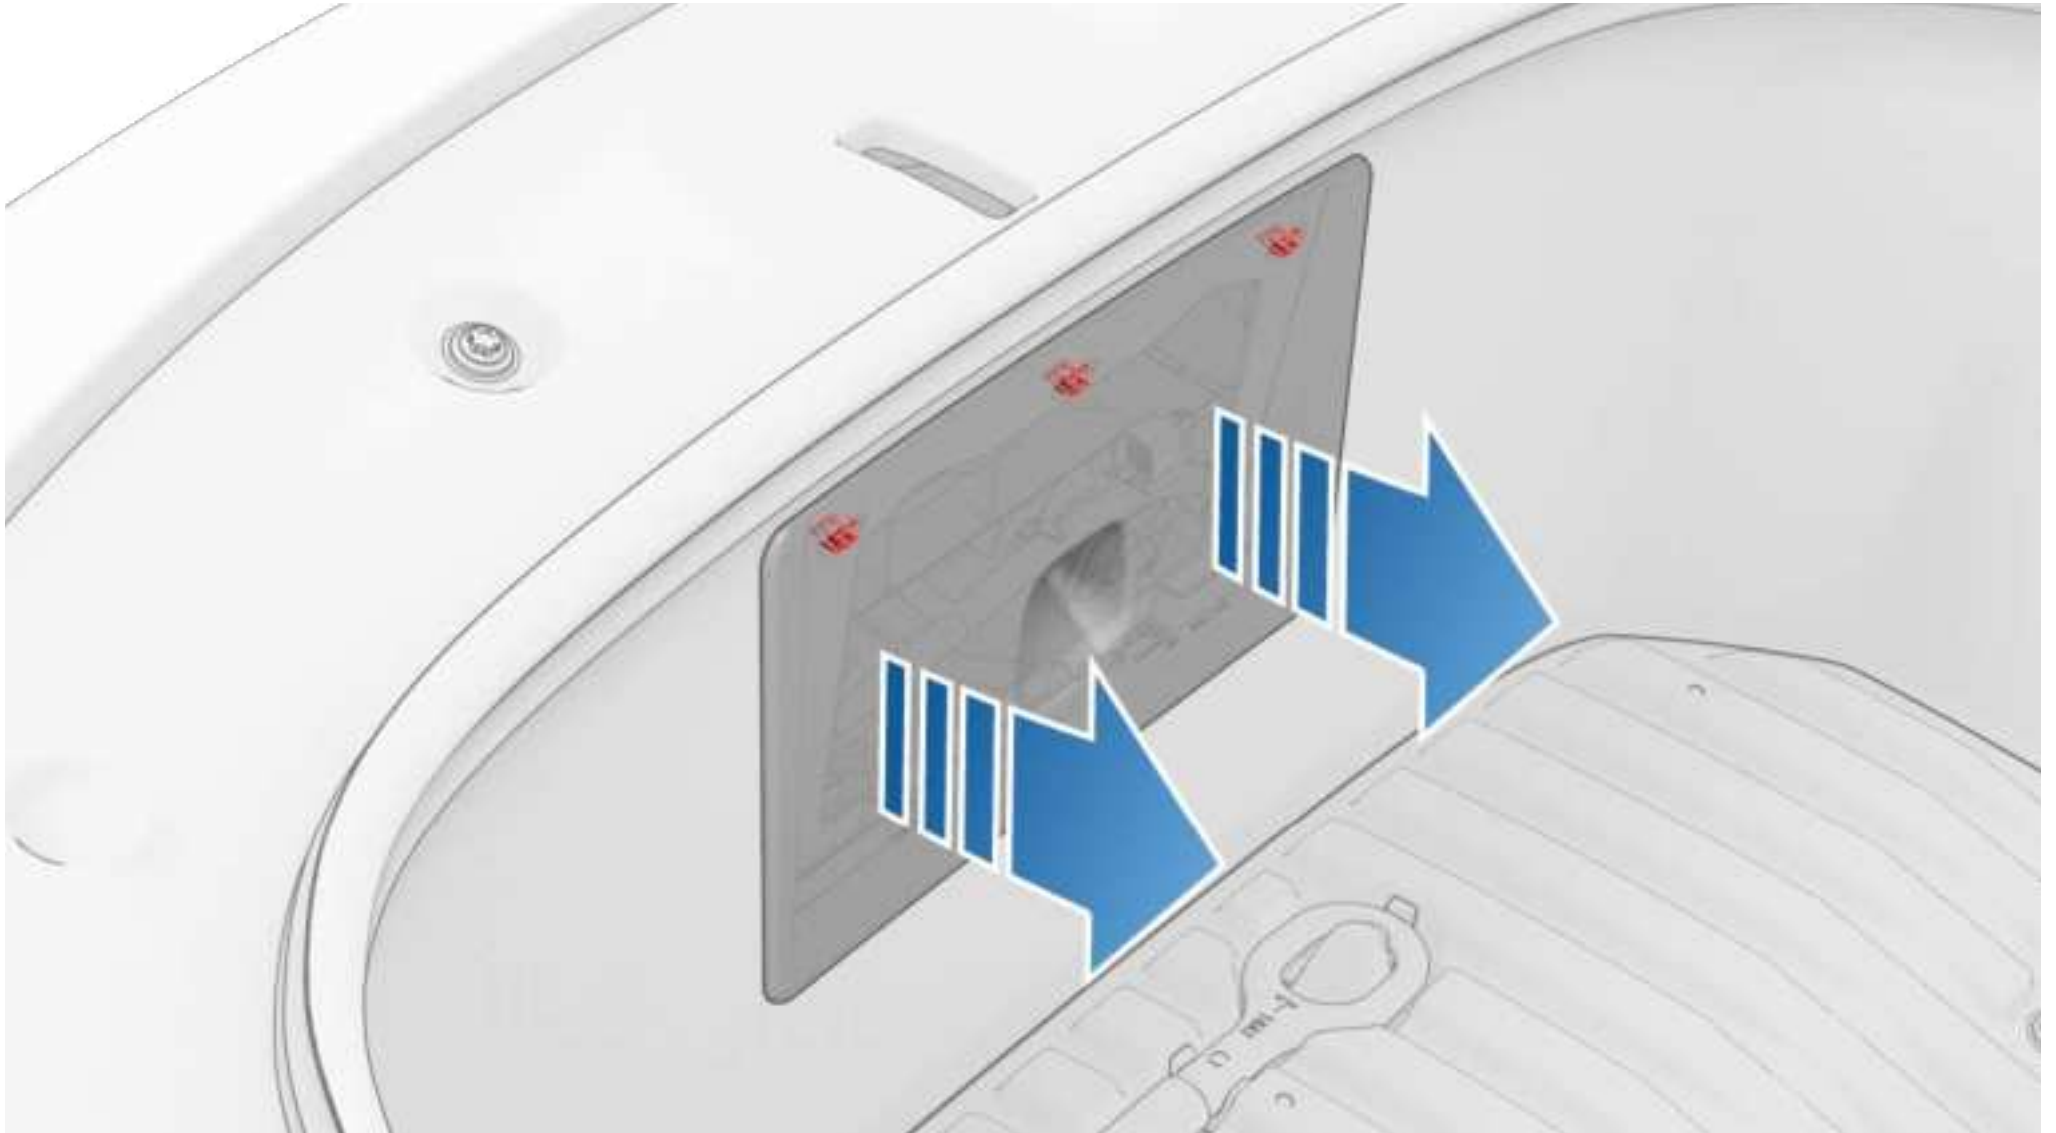

4. Unplug the access panel light wire




5. Remove the screws at the red markings







6. Open the red marked buckles and remove the front trunk

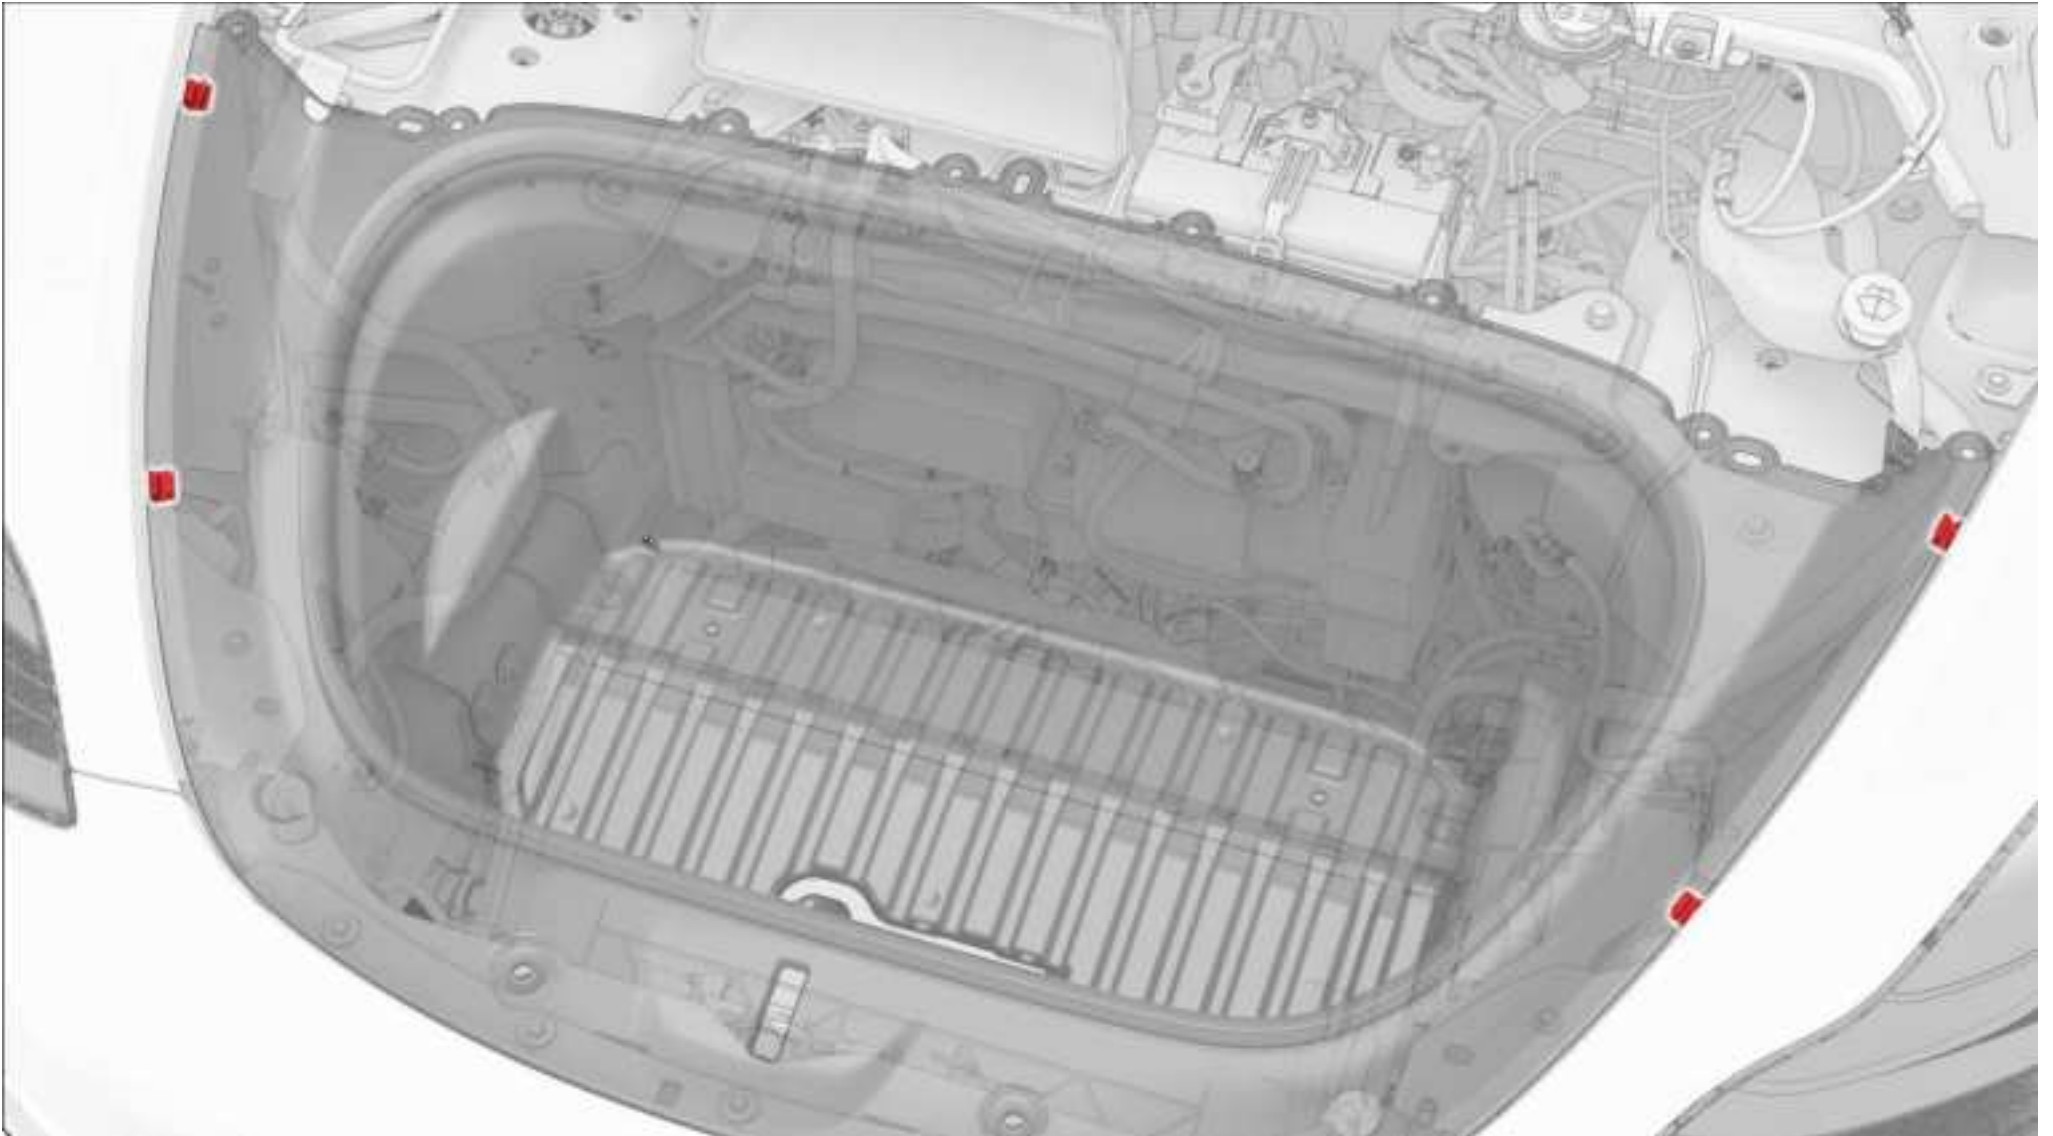

7. Route the 6 meter power cord from the rear tailgate cigarette lighter (do not connect the power first) through the hole shown in the picture to the front trunk and secure the power cord.

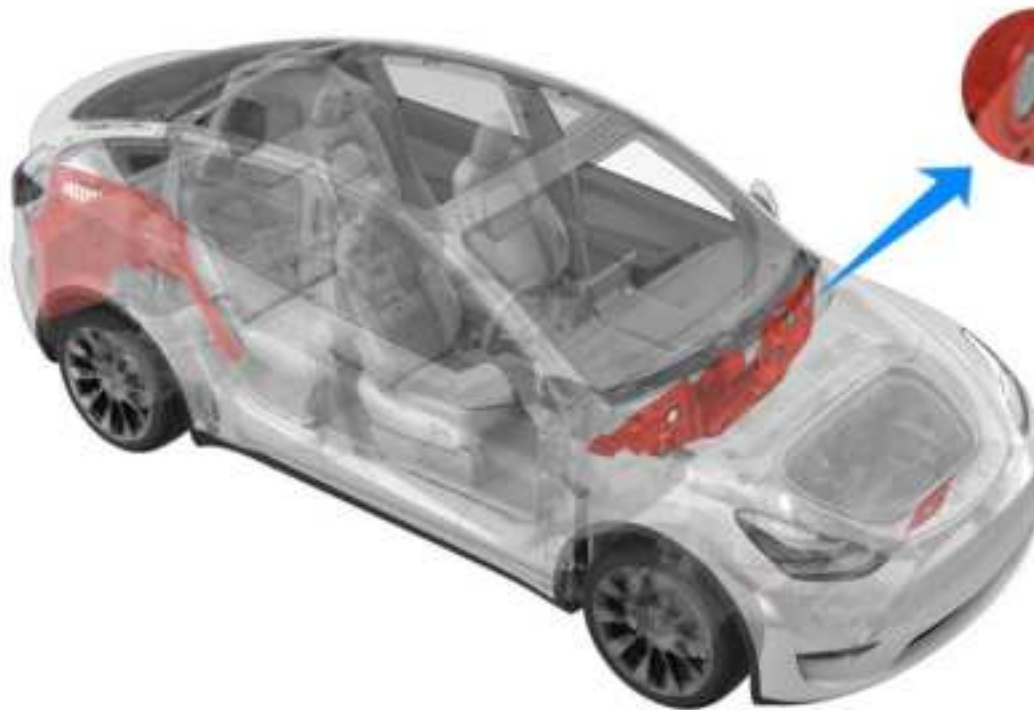

As shown in the figure, cut off 50%

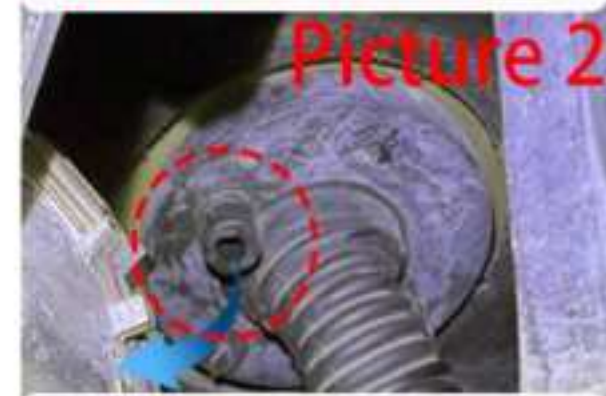

The connecting line emerges from the hole.

## 8. Recovering the front trunk






9. Connect the original access panel light wires, the standard power cord positive and negative poles and the ventilation pipe to the ventilation and cooling panel sockets respectively.

**Light power cord plug  
on the original vehicle  
inspection panel**

**Install the ven-  
tilation pipe  
and secure it  
with cable ties**

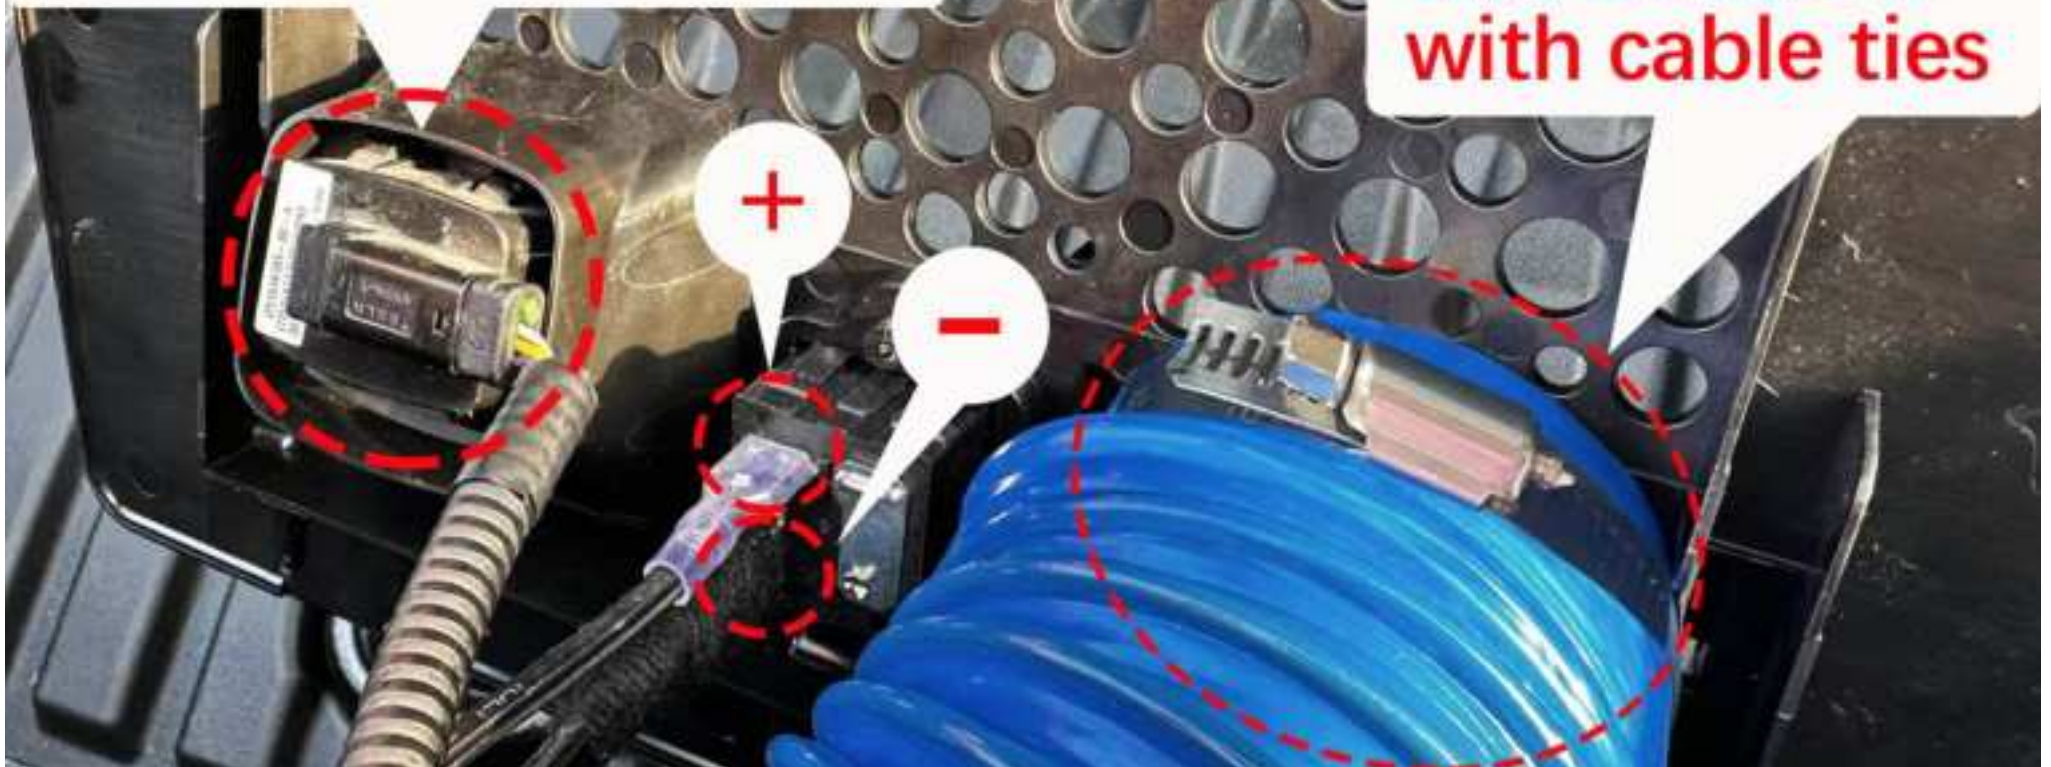

10. Replace the stock access panel with a venting and cooling panel with the power cord connected to it, and install it in place





11. Connect the refrigerator power cord to the power outlet of the installed ventilation and cooling panel



12. Smoothly place the refrigerator into the trunk and the installation is complete

