




IdentiQuik2 8621403 RFID reader module

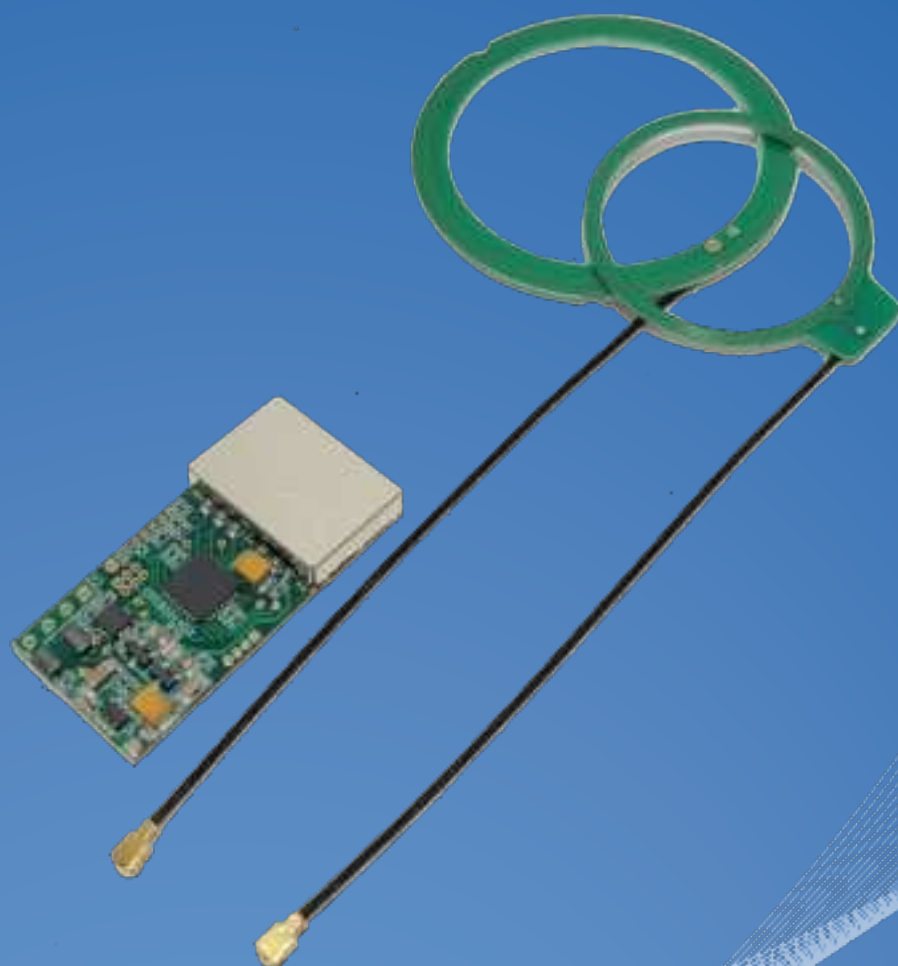

Version: 1.0
Date: October 21, 2024
Colder Products Company
4200 W. Round Lake Road
Arden Hills, Minnesota 55112
USA
Phone: 651-645-0091
Fax: 651-645-5404
www.cpcworldwide.com
Follow us:
YouTube | Twitter | Facebook | LinkedIn

Smart fluid handling to take you forward, faster.

Module

The IdentiQuik2 8621403 RFID reader module is a compact module for reading from and writing to ISO 15693, ISO 18000-3, and Tag-it™ intelligent RFID transponder tags via an external antenna. It can both read and write up to 64 bytes of data in addition to reading the unique identifier (UID/SID). All of the IdentiQuik2 8621403 RFID reader module's electronics reside on a single compact PCB, and all operational power is taken from a single supply. An external antenna can be connected via a standard UMCC connector.

Application

Demonstration application is available (upon purchase) that demonstrates the communications protocol as developed for the module.

CPC is available to assist you with every step.

Sample Interrogators (aka RFID Readers) with Various Enclosures



Sample Tags (CPC Smart Couplings with RFID: Cap and Insert)



Pin Definition

Pin	Name	I/O Type	Function
1	TX	Output	RS23 outgoing data
2	RX	Input	RS23 Incoming data
3	GND	Ground	Communication and power ground
4	PWR	Power	Power input

Electrical Parameters

General Operation Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Voltage	Vdd	8	12	24	V
Current	Idd	60	120	250	mA

Regulatory agency considerations

Your consumable has unique data needs. Sample types of data include: date/time, part ID, text, volume, price and color. Aside from the tag's unique serial number, what is written and updated in an RFID tag is entirely up to you. Any type of data is recordable. RFID tags have 3 main functional features: a supplied unique serial number, re-writable memory and the ability to make irrevocably read-only select portions of memory. Use this RFID memory to store product data, current status/history and authentication codes.

Agency Identification Numbers

Compliance with the appropriate regulatory agencies is essential in the deployment of all transceiver devices. CPC is in the process of obtaining modular approval for this RF product such that an OEM need only meet a few basic requirements to utilize their end product under this approval. Corresponding labels are shown below:



External Antennas

The IdentiQuik2 8621403 RFID reader module is approved for use with 2 external antennas.

FCC/IC Requirements For Modular Approval

Any changes or modifications to the IdentiQuik2 8621403 RFID reader module's printed circuit board could void the user's authority to operate the equipment. Operation of an unapproved antenna could void the user's authority to operate the equipment.

Warnings

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesirable operation.

This device is intended for use under the following conditions:

1. The transmitter module may not be co-located with any other transmitter or antenna.
2. The module is approved using the FCC "unlicensed modular transmitter approval" method.

As long as these two conditions are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end product for any additional compliance measures necessitated by the installation of this module (i.e. digital device emissions, PC peripheral requirements, etc.).

Note: In the event that these conditions cannot be met (i.e. co-location with another transmitter), then the FCC authorization is no longer valid and the corresponding FCC ID may not be used on the final product. Under these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

OEM Product Labeling

The final end product must be labeled in a visible area with the following text:

“Contains FCC ID: U9C-IDENTIQUIK2”

RF Exposure

To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Additional Information For OEM Integrators

The end user should NOT be provided with any instructions on how to remove or install the IdentiQuik2 8621403 RFID reader module.

Disclaimer

Neither the whole nor any part of the information contained herein nor the product described in this datasheet may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder.

This product and its documentation are supplied on an as-is basis, and no warranty as to their suitability for any particular purpose is either made or implied. CPC will not accept any claim for damages whatsoever arising as a result of use or failure of this product. Your statutory rights are not affected.

This product or any variant of it is not intended for use in any medical appliance, device, or system in which the failure of the product might reasonably be expected to result in personal injury.

This document provides preliminary information that may be subject to change without notice.



CPC (Colder Products Company)
4200 W. ROUND LAKE ROAD
ARDEN HILLS, MN 55112
U.S.A.

PHONE: +1 651-645-0091
FAX: +1 651-645-5404
TOLL FREE: 800-444-2474
info@cpcworldwide.com
cpcworldwide.com

CPC (Colder Products Company GMBH)
Kurhessenstrasse 15
64546 Mörfelden-Walldorf
GERMANY

PHONE: +49-6105-9743-003
FAX: +49-6026-9973-173
cpcgmbh@cpcworldwide.com
cpcworldwide.com

CPC (Colder Products Company Limited)
ROOM 1802, BUILDING A, IBC, 391
GUIPING ROAD, XUHUI DISTRICT,
SHANGHAI, CHINA 200233

PHONE: +86 21 2411 266
FAX: +1 651-645-5404
TOLL FREE: +86 400 990 1978
asiapacific@cpcworldwide.com
cpcworldwide.com

CPC (Colder Products Company)

CPC WARRANTY STATEMENT: CPC (Colder Products Company) warrants its products against defects in workmanship and materials for a period of 12 months from the date of sale by CPC to its initial customer (regardless of any subsequent sale of the products). This warranty is void if the product is misused, altered, tampered with or is installed or used in a manner that is inconsistent with CPC's written recommendations, specifications and/or instructions, or fails to perform due to normal wear and tear. CPC does not warrant the suitability of the product for any particular application. Determining product application suitability is solely the customer's responsibility. CPC is not liable for special, indirect, incidental, consequential or other damages including, but not limited to, loss, damage, personal injury, or any other expense directly or indirectly arising from the use of or inability to use its products either separately or in combination with other products. ALL OTHER WARRANTIES EXPRESS OR IMPLIED, WHETHER ORAL, WRITTEN OR IN ANY OTHER FORM, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED. The sole and exclusive remedy under this warranty is limited, at the option of CPC, to replacement of the defective product or an account credit in the amount of the original selling price. All allegedly defective CPC products must be returned prepaid transportation to CPC, together with information describing the product's application and performance, unless otherwise authorized in writing by CPC.

CPC PATENT STATEMENT: CPC takes pride in its innovative quick disconnect coupling and fittings solutions, many of which have been awarded United States and international patents. CPC has a strong tradition of leadership in the quick disconnect market, and aggressively pursues and protects its proprietary information and intellectual property. In cases where it is practical and has a benefit to its customers, CPC has licensed its proprietary technology. Please contact CPC to discuss your unique needs.

CPC TRADEMARK STATEMENT: AseptiQuik®, BottleQuik®, BreakAway®, ChemQuik®, DrumQuik®, FitQuik®, IdentiQuik®, Nu-Seal®, SnapQuik®, Steam-Thru®, Softube® are registered trademarks with the U.S. Patent & Trademark Office. All other trademarks or service marks are property of their respective owners. WARNING: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

WARNING: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

To comply with RF exposure requirements, a minimum separation distance of 20mm must be maintained between the user's body and the handset, including the antenna.

IC STATEMENT

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences

et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

IC Radiation Exposure Statement

This modular complies with IC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

If the IC number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains IC: 7038A-IDENTIQUIK2"

when the module is installed inside another device, the user manual of this device must contain below warning statements;

1. This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic

Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

2. Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation,

Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.