



PRIMO[®]
Deluxe
Bottom-
Loading
Water
Dispenser
with
Self-Sanitization

CLEAN, MODERN,
COMPLEMENTS YOUR LIFESTYLE

B264

Deluxe Bottom-Loading Water Dispenser #601256SO B264

with Self-Sanitization

FEATURES



WATER DISPENSING CONTROLS

Dark Blue - Cold
Light Blue - Cool
Red - Hot

INDICATOR LIGHTS


Green light on ON icon indicates the dispenser is plugged in.
Green flashing ON icon indicates the self-sanitization cycle is in process.
Green light on snowflake indicates the dispenser is cooling water.
Green light on wavy lines indicates the dispenser is heating water.
Blinking red light on the bottle icon indicates the bottle is empty.

SPOUTS – Right dispenses cold water, left dispenses hot water and center dispenses cool water.

- LED NIGHTLIGHT** – Helps in low light situations.
- DRIP TRAY WITH FULL INDICATOR** – Removable and dishwasher-safe. Red indicator rises when it's time to empty.
- PROBE ASSEMBLY** – Probe pumps water from the bottle into the hot and cold reservoirs.
- PROBE HANGER** – Rest probe assembly on the hanger (located inside the cabinet door) to keep it clean while replacing bottles.
- BOTTOM LOADING DESIGN** – Bottles fit inside bottom of cabinet for easy use.
- WATER BOTTLE** – Sold separately. Uses 3 and 5-gallon bottles. Visit PrimoWater.com to find Primo® water at the store nearest you.

WHAT YOU'LL NEED TO HAVE HANDY

1. Primo® Water Dispenser
2. Drip tray (included)
3. 3- or 5-gallon bottle of Primo® water (sold separately)
4. Damp cloth (not included)
5. Dish soap (not included)

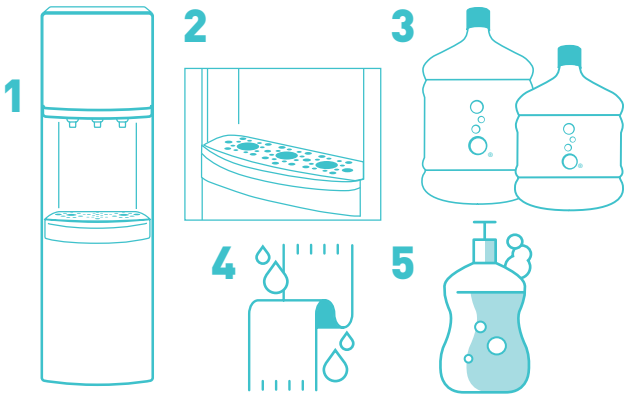

QUICK START GUIDE

1. Place the dispenser on a level floor surface in the desired location in your home. Product is intended for indoor use only. [Note: Do NOT plug power cord into wall outlet until instructed.]
2. Position dispenser so the back is at least 4 inches from wall and there are at least 4 inches of clearance on both sides.
3. Slide drip tray into place.
4. Clean probe with a damp cloth and dish soap. (Visit PrimoWater.com for detailed cleaning instructions.) Place probe assembly on hanger inside door to keep it clean.
5. Grab a bottle of Primo® water (sold separately) and fully remove the cap. Insert probe assembly into bottle. Press firmly to secure assembly over bottle opening. For 11.3-liter bottles, squeeze the tabs on the top of the probe assembly to separate the probe cap from the collar and press the collar securely over the bottle opening.
6. Slide bottle inside the cabinet and close cabinet door. [Note: Water will not pump from bottle unless door is fully closed.]
7. Plug dispenser into a ground fault circuit interrupting (GFCI) outlet. You will hear the dispenser begin to pump water to fill the internal hot and cold reservoirs.
8. Turn on desired functions by flipping the switches on the back of the dispenser to the ON position.

Green – chills water
Red – heats water
Blue – night light
Black – runs a self-sanitization cycle (press and hold for 3 seconds)
9. Once the dispenser has stopped filling the internal reservoirs, dispense and dispose at least 1 quart (approximately 2 pint glasses) of water from the cold, cool, and hot spouts.
10. Your water will be ready to dispense fully chilled in approximately 1 hour or piping – hot in approximately 12 minutes.
11. Register your dispenser on our customer support page at PrimoWater.com to activate your warranty, which runs for 1 year from date of purchase.



Join our community by following us on social and signing up for our emails.
We share tips for healthy living, important news about water, new product announcements and special offers.

Primo® Pre-Filled Exchange Water or Self-Service Refill Water from Primo® (sold separately)

Available at thousands of locations nationwide.
Learn more at PrimoWater.com/locations.

Deluxe Bottom-Loading Water Dispenser

with Self-Sanitization

OPERATING INSTRUCTIONS

DISPENSING COLD WATER

1. Water will take approximately 1 hour after initial set up to become completely chilled. Cooling light will turn off once the water has been fully chilled.
2. Press and hold the blue cold water button from the water dispensing controls to dispense cold water. Release to stop dispensing. NOTE: Water will dispense from the right spout.

DISPENSING COOL WATER

1. Press and hold the light blue cold water button from the water dispensing controls to dispense cool water. Release to stop dispensing. NOTE: Water will dispense from the center spout.

DISPENSING HOT WATER

1. Water will take approximately 12 minutes after initial set up to reach its hottest temperature. Heating light will turn off once the water has been fully heated.
2. Slide the red child lock back, then press down and hold the button from the water dispensing controls to dispense hot water. Release to stop dispensing. NOTE: Water will dispense from the left spout.

CAUTION: This unit dispenses water at temperatures that can cause severe burns. Avoid direct contact with hot water. Keep children and pets away from the unit while dispensing. Never allow children to dispense hot water without proper and direct supervision. Disable the heating feature by switching the heating convenience switch on the back of the unit to the off position or unplug the unit. Product is intended for water dispensing only. Do not use with other liquids.

REPLACING THE BOTTLE

When your bottle is empty, the empty bottle light will flash. To prevent freeze-up or over-heating, the dispenser will not heat or cool water when the bottle light is flashing. Replace

LIMITED WARRANTY

Primo Water Corporation, ("Vendor") warrants to the original purchaser of this dispenser, and to no other person, that if this dispenser is assembled and operated in accordance with the printed instructions accompanying it, then for a period of one (1) year from the date of purchase, all parts in such dispenser shall be free from defects in material and workmanship. Vendor may require reasonable proof of your date of purchase from an authorized retailer or distributor. Therefore, you should retain your sales slip or invoice. The Limited Warranty shall be limited to repair or replacement of parts which prove defective under normal use and service and which Vendor shall determine in its reasonable discretion upon examination to be defective. Before returning any parts, you should contact Vendor's Customer Service Department using the contact information listed below. If Vendor confirms, after examination, a defect covered by this Limited Warranty in any returned part, and if Vendor approves claim, Vendor will replace such defective part without charge. If you return defective parts, transportation charges must be prepaid by you. Vendor will return replacement parts to original purchaser, freight or postage prepaid. For units purchased outside of the continental US (limited to Hawaii, Alaska, and Puerto Rico), dispensers determined to be defective by the Vendor should be returned or exchanged at the original point of purchase within the warranty period.

For warranty information, additional assistance, or instructional videos for maintaining or operating your dispenser, visit our customer support page at **PrimoWater.com** or call us at 1-844-23-PRIMO. Our US-based customer service team would be happy to help!

Primo Water Corporation, 101 N. Cherry St. Suite 501, Winston-Salem, NC 27101

© 2019 Primo Water Corporation

the bottle as soon as possible to re-enable cooling and heating.

1. Open dispenser cabinet door and slide empty bottle out of cabinet.
2. Remove probe assembly from the empty bottle and place it on the probe hanger.
3. Set empty bottle aside.
4. Remove the entire plastic cap from the new bottle.
5. Place probe into the new bottle and slide the collar down until it clicks into place. Press on the top of the probe until the tube touches the bottom of the bottle. For 11.3-liter bottles, squeeze the tabs on the top of the probe assembly to separate the probe cap from the collar and press the collar securely over the bottle opening.
6. Slide the bottle into the cabinet and close the door.

CLEANING & MAINTENANCE

For best taste, performance, and hygiene, clean your cabinet, controls, bottle probe and spouts regularly. Use a clean, soft cloth and food grade sanitizer or bleach. Empty and clean drip tray as needed. We recommend running a self-sanitization cycle regularly to sanitize the water reservoirs and lines. To run a self-sanitization cycle, press and hold the black switch on the back of the dispenser for 3 seconds.

NOTE: The self-sanitization cycle takes 90 minutes to complete. We do not recommend dispensing or drinking water during this cycle as it may have a slight odor from the harmless ozone. This odor will completely dissipate a couple of minutes after the cycle is complete. We recommend setting the sanitization cycle to begin during a period when the dispenser will not be in use, such as overnight or when staff will not be in the office.

Visit **PrimoWater.com** for detailed cleaning instructions.

The Limited Warranty does not cover any failures or operating difficulties due to accident, abuse, misuse, alteration, misapplication, improper installation or improper maintenance or service by you or any third party, or failure to perform normal and routine maintenance on the dispenser, as set out in the User's Manual. In addition, the Limited Warranty does not cover damage to the finish after purchase, including without limitation scratches, dents, discoloration or rust.

The Limited Warranty is in lieu of all other express warranties. Vendor disclaims all warranties for products that are purchased from sellers other than authorized retailers or distributors. AFTER THE PERIOD OF THE ONE (1) YEAR EXPRESS WARRANTY, VENDOR DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. FURTHER, VENDOR SHALL HAVE NO LIABILITY WHATSOEVER TO PURCHASER OR ANY THIRD PARTY FOR ANY SPECIAL, INDIRECT, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL DAMAGES. Vendor assumes no responsibility for any defects caused by third parties. This Limited Warranty gives the purchaser specific legal rights; a purchaser may have other rights depending upon where he or she lives. Some jurisdictions do not allow exclusions or limitation of special, incidental or consequential damages, or limitations on how long a warranty lasts, so the above exclusion and limitations may not apply to you.

© 2019 Primo Water Corporation

Primo Water Corporation, 101 N. Cherry St. Suite 501, Winston-Salem, NC 27101

atención al cliente ubicado en EE. UU. gustosamente le brindará asistencia.

Para obtener información de la garantía, asistencia adicional o videos de instrucciones para mantener u operar su dispensador, visite nuestra página de servicio al cliente en PrimoWater.com o llámenos al 1-847-73-PRIMO. Nuestro equipo de

[illegible]

GARANTIA LIMITADA

Quando el botellón esté vacío, la luz de botellón vacío
sempresará a parpadear. Para prevenir el congelamiento
o sobrecalentamiento, el dispensador no calentará ni
enfriará agua cuando la luz de botellón sea parpadearo.
Reemplace el botellón tan pronto como sea posible para
permitir nuevamente el enfriamiento y calentamiento.

PARA REEMPLAZAR EL BOTELLÓN

PRECAUCIÓN: Esta unidad dispensa agua a temperaturas que pueden causar quemaduras graves. Evite el contacto directo con el agua caliente. Manténgala a los niños y mascotas alejados de la unidad mientras está dispensando. Nunca permita que los niños dispensen agua caliente sin la adecuada supervisión. Desactive la función de calentamiento de agua colocando en la posición OFF (desactivado) el conveniente interruptor de calentamiento situado en la parte trasera de la unidad o desenchufar la unidad. Este producto está diseñado para dispensar agua solamente. No lo use con otros líquidos.

dispensar agua caliente. Suelte el agua para parar de dispensar
NOTA: El agua saldrá por el surtidor izquierdo.

2. Deslice hacia atrás el mecanismo rojo de seguridad para niños; luego, en el panel de controles dispense agua; presione y mantenga presionado el botón para

1. El agua demorará aproximadamente 12 minutos después de la instalación inicial para alcanzar la temperatura más caliente | a luz de calentamiento se apagará una

PARA DISPENSAR AGUA CALIENTE

fresca. Suéltelo para parar de dispensar. NOTA: El agua saldrá por el surtidor del centro.

1. En el panel de controles dispensadores de agua, presione mantenga presionado el botón celeste para dispensar agua

PARA DISPENSAR AGUA FRESCA

fria. Suéltelo para parar de dispensar. NOTA: El agua saldrá por el surtidor derecho.

2. En el panel de controles dispensadores de agua, presione y mantenga presionado el botón azul para dispensar agua esté totalmente fría.

1. El agua demorará aproximadamente 1 hora después de la instalación inicial para que esté completamente fría.

PARA DISPENSAR AGUA FRÍA

INSTRUCCIONES DE OPERACIÓN

Dispensador De Agua Con Carga Inferior de Injuo con auto-sanitización

Dispensador De Agua Con Carga Inferior de lujo

con auto-sanitización #601256SO B264

CARACTERÍSTICAS

CONTROLES DISPENSADORES DE AGUA
Azul oscuro - Fria
Celeste - Fresca
Rojo - Caliente

LUCES INDICADORAS
El icono de ON de color verde indica que el dispensador está enchufado.
El icono de ON parpadeando de color verde indica que el ciclo de auto-sanitización está en proceso.
El símbolo de copo de nieve de color verde indica que el dispensador está enfriando el agua.
El símbolo de líneas ondeadas de color verde indica que el dispensador está calentando agua.
El icono de botellón de color rojo indica que el botellón está vacío.

SURTIDORES DE AGUA - Derecho para agua fría, izquierdo para agua caliente y central para agua fresca.
INDICADOR LED DE LUZ NOCTURNA - Para situaciones de poca iluminación.
BANDEJA DE GOTEO CON INDICADOR DE QUE ESTÁ LLENA - Puede desmontarse y lavarse en la máquina lavaplatos. El indicador rojo se eleva cuando es tiempo de vaciarla.

TUBO DE AGUA - El tubo bombea agua desde el botellón hacia los tanques de agua caliente y fría.
COLGADOR DEL TUBO DE AGUA - Al cambiar el botellón, coloque el tubo en el colgador (ubicado en el lado interior de la puerta del gabinete) para mantenerlo limpio.
DISEÑO DE CARGA POR LA PARTE INFERIOR - Los botellones caben en la parte inferior del armario y son fáciles de manipular.

BOTELLÓN DE AGUA - Se vende separadamente. La unidad usa botellones de 3 y 5 galones. Visite PrimoWater.com para encontrar agua Primo® en la tienda más cercana a usted.


Síguenos en las redes sociales para unirse a nuestra comunidad y suscribirse a nuestros correos electrónicos. Compartimos consejos para una vida saludable, noticias importantes acerca del agua, anuncios de productos nuevos y ofertas especiales.



LO QUE NECESITARÁ TENER A MANO


- 1. Dispensador de agua Primo®
- 2. Bandeja de goteo (incluida)
- 3. Botellón de 3 o 5 galones de agua Primo® (se vende por separado)
- 4. Paño húmedo (no incluido)
- 5. Jabón para platos (no incluido)

GUÍA PARA INICIO RÁPIDO

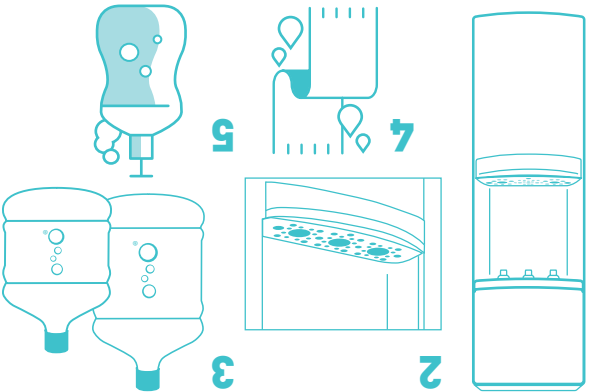


1. Coloque el dispensador sobre el piso nivelado en el lugar seleccionado de su casa. El producto fue diseñado solo para uso en interiores. [Nota: NO enchufe el cable de alimentación en la toma eléctrica de pared hasta recibir instrucciones].


2. Posicione el dispensador de modo que la parte posterior tenga al menos una distancia de 4 pulgadas (10 cm) de la pared y al menos 4 pulgadas de distancia a ambos lados




3. Deslice la bandeja de goteo hasta su posición.




4. Limpie el tubo surtidor con un paño empapado y jabón para platos. Visite PrimoWater.com para leer las instrucciones detalladas sobre la limpieza. Coloque el conjunto del tubo surtidor sobre el colgador dentro de la puerta para mantenerlo limpio.



5. Tome un botellón de agua Primo® (se vende separadamente) y retire completamente la tapa. Inserte el tubo surtidor dentro del botellón. Presione firmemente para asegurar el tubo surtidor sobre la abertura del botellón. Para botellones de 3 galones, apriete las lengüetas situadas en la parte superior del tubo surtidor para separar la tapa del collarín y presione el collarín con firmeza sobre la abertura del botellón.



6. Deslice el botellón dentro del gabinete y cierre la puerta del mismo. [Nota: El agua no bombeará desde el botellón a menos que la puerta esté completamente cerrada].





7. Enchufe el dispensador en un tomacorriente con agua para llenar los tanques internos de agua caliente y fría.



Botellón de 5 galones o autoservicio de recarga de agua Primo® (se venden por separado)

Disponble en muchos locales. Encuentre la tienda más cercana en PrimoWater.com.



Azul: luz nocturna
Verde: enfría el agua
Rojo: calienta el agua
Negro: corre el ciclo de sanitación (presión y sostenga durante 3 segundos)

Nota: Para iniciar el primer ciclo, presione y sostenga el interruptor negro en la parte posterior del dispensador durante 5 segundos. El ciclo de autolimpieza tarda 90 minutos. No recomendamos servir agua durante ese ciclo, ya que el ozono generado, si bien es inocuo, puede emanar un ligero olor. El olor se disipará completamente unos minutos después de que se termine el ciclo.

9. Después que el dispensador haya terminado de llenar los tanques internos, dispense y deséche por lo menos 1 cuarto de galón (aproximadamente 2 pintas o 946 ml) de agua por los surtidores de agua fría, fresca y caliente.

10. El agua estará lista para dispensar completamente 1 hora o en aproximadamente 12 minutos.

11. Registre su dispensador en la página de servicio al consumidor en PrimoWater.com para activar su garantía de un año a partir de la fecha de compra.

PRIMO[®]
Dispensador
De Agua
Con Carga
Interior
De Lujo
con auto-
sanitización



AGUA DE LA FORMA QUE QUIERAS AL
ALCANCE DE TU MANO

B264