


Important: Read All Instructions Prior to Installation


Function introduction

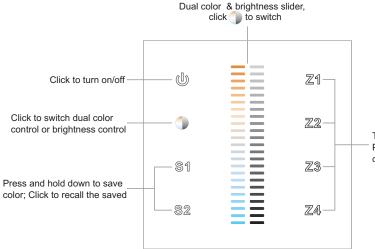

Total 4 zones, click to choose zone,

Press and hold down to turn on/off
corresponding zone

Front side

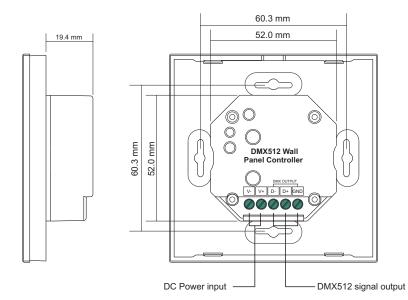


Product Data

| Output Signal | DMX512 signal |
|-----------------------|---------------|
| Power Supply | 12-24VDC |
| Power consumption | < 20 mA |
| Operating temperature | 0-40°C |
| Relative humidity | 8% to 80% |
| Dimensions | 86x86x29.1mm |

- Touch sensitive
- Glass interface(white & black)
- Standard DMX512 Signal output
- Control CCT color
- · Control 4 zones synchronously and separately
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

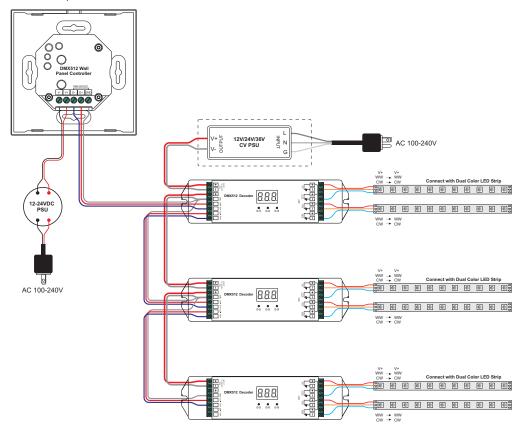

Set DMX Address

This DMX master controller controls 4 zones of DMX decoders by setting DMX decoders' address as follows:

- DMX decoders with address 001 will be controlled by zone 1,
- DMX decoders with address 005 will be controlled by zone 2,
- DMX decoders with address 009 will be controlled by zone 3,
- DMX decoders with address 013 will be controlled by zone 4.



Installation