

RAPID SET™ SYSTEM

INSTALLATION INSTRUCTIONS

Do not remove side wood stabilizers until anchored to concrete.



Attach rigging with spreader bar to lifting eyes

 **CAUTION**

**STAY CLEAR FROM
SUSPENDED LOAD**

LIFTING EYE CAPACITY: 700lbs combined max

Place Rapid Set on concrete pad.




WARNING!

Tip Over Hazard


Anchor Rapid Set to the concrete pad

Only use specified anchor bolts, 4 bolts required



- 0.5 DIAMETER WEDGE ANCHOR, ICC APPROVED, MINIMUM TENSION CAPACITY OF 3000 LBS

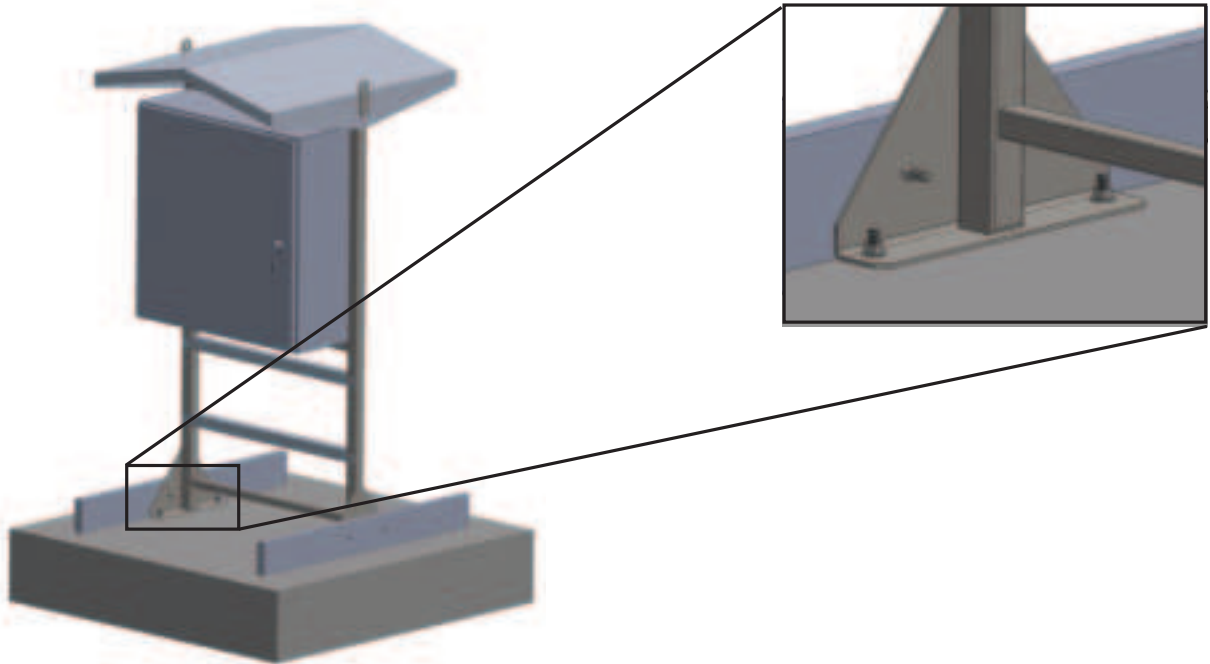

Remove side wood stabilizers

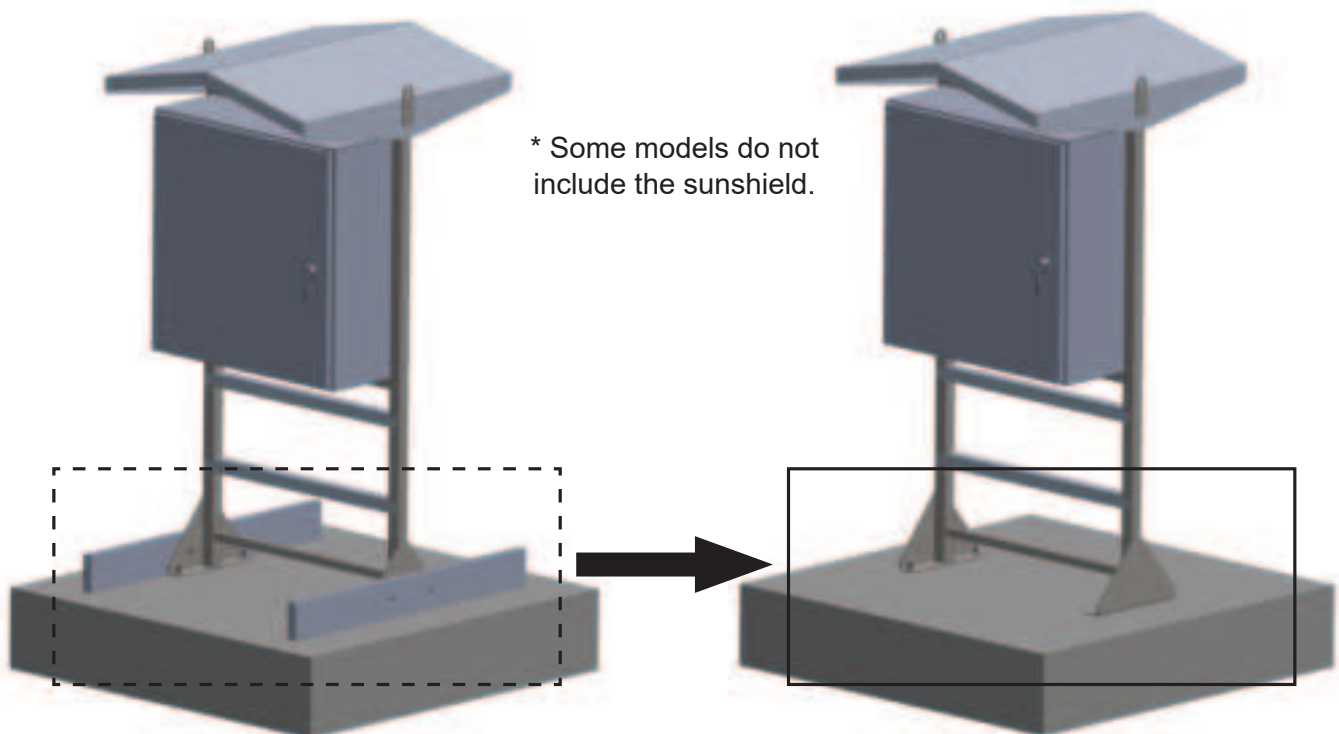

* Some models do not include the sunshield.

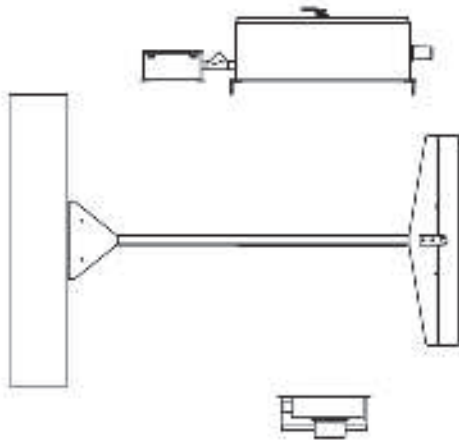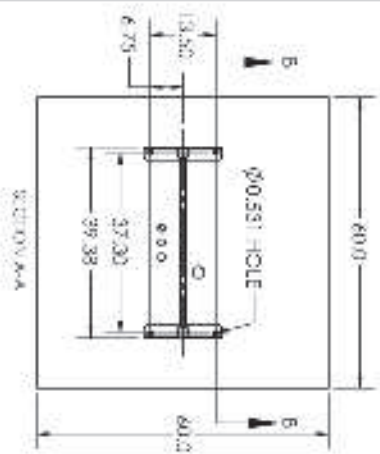[illegible]

Manufactured by: SJE Inc.
Technical support: +1-800-746-6287
techsupport@sjeinc.com

www.csicontrols.com

www.primexcontrols.com

www.sjerhombus.com

© 2020 SJE, Inc. All Rights Reserved. PN 1067842C 11/24