

NVS-11560060PS
60W PENDANT SPEAKER(WHITE)
User Manual



Contents

Product Overview.....	3
• Product Description.....	3
• Features.....	3
Dimensions.....	4
Installation Method.....	4
Specifications.....	6

Product Overview


Product Description

The NVS-11560060PS is a suspension-style spherical speaker renowned for its sleek design and straightforward construction. Its ABS shell offers excellent impact resistance and outstanding material stability. This high-quality speaker delivers exceptional sound performance, producing clear and well-balanced audio. It is ideal for use in a variety of settings, including airport lobbies, shopping centres, school classrooms, meeting rooms, restaurants, offices, and other public or commercial spaces.


Features

- ABS shell
- High impact strength
- Clear and powerful sound
- Stylish and simple design


Dimension

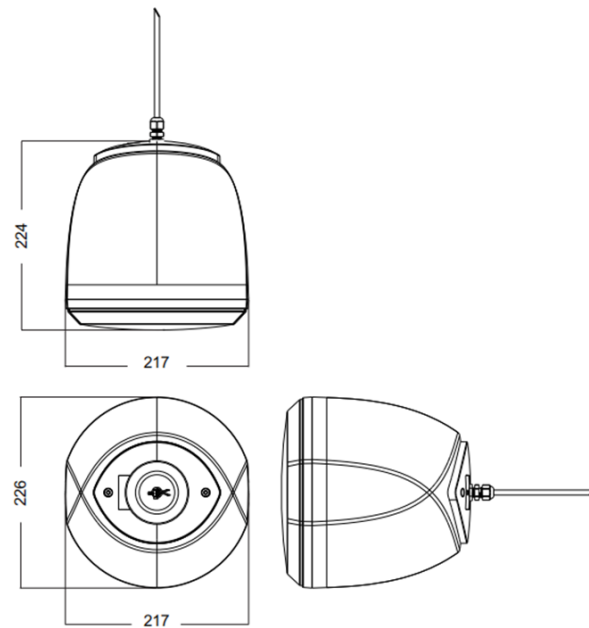


Installation Method

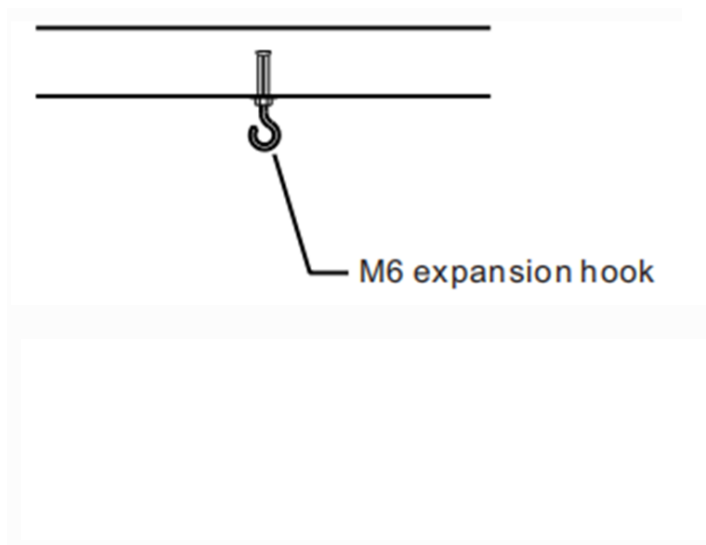

1

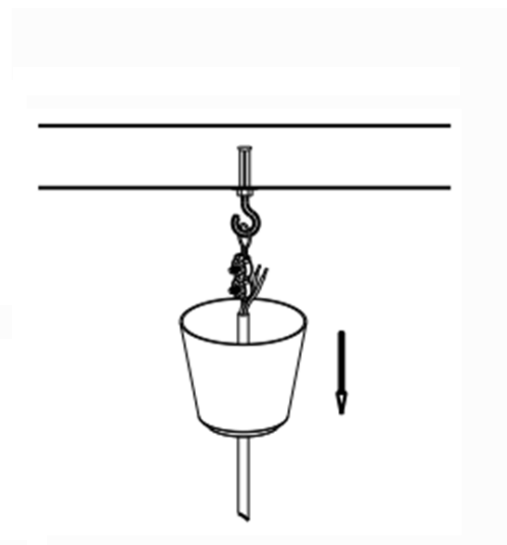

2

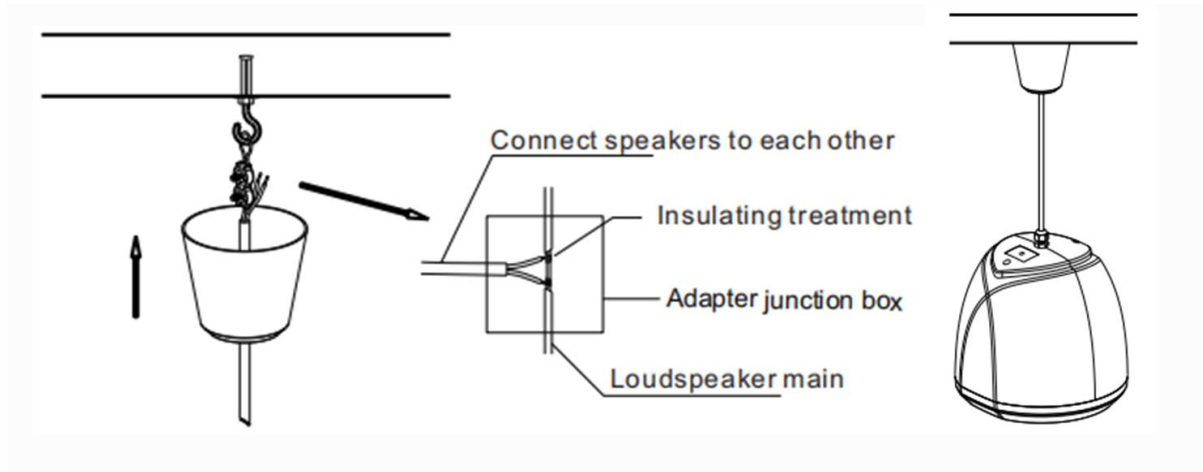

3

4

1. Install an M6 expansion hook to the ceiling.
2. Take out the speaker and push down the wire cup. Hang the wire ring on the hook.
3. Connect the audio cable and push the cable cup close to the ceiling. Cover where the hook meets the audio cable.
4. Installation complete.

Specifications

Model	NVS-11560060PS
Rated Power	60W
Input power(100V)	7.5W/15W/30W/60W
Input Power(70V)	3.8W/7.5W/15W/30W/60W
Rated Impedance(100V)	1.33k Ω /667 Ω /333 Ω /167 Ω /8 Ω
Rated Impedance(70V)	2.63k Ω /1.33k Ω /667 Ω /333 Ω /167 Ω /8 Ω
Sensitivity(1m/1W)	89 \pm 3dB
Frequency Response	90Hz - 20KHz
Driver Unit	6.5"x 1 + 0.5" x 1
Dispersion Angle at 1kHz (HxV)	140°X140°
Dispersion Angle at 2kHz (HxV)	110°x80°
Connector type	Two core sheathed wire
Mounting Hole Size	Mpa 8 Hook
Mounting Method	Ceiling-suspended installation
Operating Temperature	-25°C to ~+55°C
Material	ABS+ Aluminium Mesh
Weight	3.12Kg
Dimension	Φ226*224mm