



Emulex[®] Host Bus Adapters

Installation Guide
Release 14.4

Copyright © 2020–2025 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Table of Contents

Chapter 1: Introduction	5
1.1 LPe38100-Series and LPe37100-Series SecureHBAs	5
1.1.1 Major Features	5
1.1.2 Compatibility	6
1.1.3 Prerequisites	6
1.2 LPe36000-Series HBAs and LPe35000-Series HBAs	6
1.2.1 Major Features	6
1.2.2 Compatibility	7
1.2.3 Prerequisites	7
1.3 LPe32000-Series HBAs and LPe31000-Series HBAs	8
1.3.1 Major Features	8
1.3.2 Compatibility	8
1.3.3 Prerequisites	8
1.4 HBA Identification	9
1.5 Abbreviations	9
Chapter 2: Installation	10
2.1 Preparing the HBA for Installation	10
2.2 Installing the HBA	13
2.3 Attaching Media	13
2.4 Applying Power	17
2.4.1 Viewing the LEDs	17
2.4.2 POST Conditions and Results	18
2.5 Changing the Speed of the HBA	19
2.6 Setting the Secure Firmware Jumper	19
Chapter 3: References	21
3.1 Specifications	21
3.1.1 LPe38100-Series and LPe37100-Series SecureHBAs	21
3.1.2 LPe36000-Series HBAs and LPe35000-Series HBAs	22
3.1.3 LPe32000-Series HBAs and LPe31000-Series HBAs	23
3.2 FCC and Regulatory Notices	25
3.2.1 FCC Supplier's Declarations of Confirmation (LPe38100-Series and LPe37100-Series SecureHBAs)	25
3.2.1.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs	25
3.2.2 FCC Supplier's Declarations of Confirmation (LPe36000-Series and LPe35000-Series HBAs)	26
3.2.2.1 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs	26
3.2.2.2 LPe35004 HBAs	27

3.2.3 Regulatory Notices.....	28
3.2.3.1 Notice for North America (FCC and ICES)	28
3.2.3.2 Notice for Japan and Translations (VCCI)	28
3.2.3.3 Notice for Taiwan and Translations (BSMI)	28
3.2.3.4 Notice for South Korea and Translations (MSIP).....	29
3.2.4 Laser Safety Notice.....	29
3.3 Declarations of Conformity	30
3.3.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs.....	30
3.3.2 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs.....	32
3.3.3 LPe35004 HBAs	34
3.3.4 LPe32000 HBAs, LPe32002 HBAs, LPe31000 HBAs, and LPe31002 HBAs.....	36
3.4 Taiwan RoHS Notices	38
3.4.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs.....	38
3.4.2 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs.....	39
3.4.3 LPe35004 HBAs	40
3.4.4 LPe32000-Series HBAs and LPe31000-Series HBAs	41

Chapter 1: Introduction

This document supports the following Emulex® HBAs:

- LPe38100-series SecureHBAs
- LPe37100-series SecureHBAs
- LPe36000-series HBAs
- LPe35000-series HBAs
- LPe32000-series HBAs
- LPe31000-series HBAs

NOTE: Illustrations in this document are examples only. The actual hardware can vary.

1.1 LPe38100-Series and LPe37100-Series SecureHBAs

This section describes the following FC-to-PCIe Emulex LPe38100-series and LPe37100-series SecureHBAs:

- LPe38100-series SecureHBAs (64Gb/s, 32Gb/s, or 16Gb/s):
 - LPe38100 (one port)
 - LPe38102 (two ports)
- LPe37100-series SecureHBAs (32Gb/s, 16Gb/s, or 8Gb/s):
 - LPe37100 (one port)
 - LPe37102 (two ports)

1.1.1 Major Features

LPe38100-series and LPe37100-series SecureHBAs have the following major features:

- Post-quantum cryptography (PQC) algorithms to meet USA CNSA 2.0 and European DORA and NIS 2 mandates
- PQC autonomous in-flight encryption between host servers and target devices with simplified session-based key management based on emerging ANSI/INCITS FC-SP-3 standard
- Zero Trust features: PQC Security Protocol and Data Model (SPDM) authentication of endpoints; PQC Silicon root-of-trust, hardware-based firmware authentication per NIST SP 800-193; Secure Boot; digitally signed drivers, T10-DIF
- Supports NVMe over FC and SCSI FC (that is FCP) concurrently
- Autonegotiation between 32Gb/s, 16Gb/s, or 8Gb/s (LPe37100-series HBAs) or between 64Gb/s, 32Gb/s, or 16Gb/s (LPe38100-series SecureHBAs) FC link speeds using factory-shipped installed optics
- Multifunction PCIe Gen4 interface controller that is compliant with the PCI Express Base Specification Rev 4.0 (backwards compatible with Rev 3.0) and the PCI Express Card Electromechanical (CEM) Specification Rev 4.0 (backwards compatible with Rev 3.0)
- ECC protection of high-density RAM (single-bit correction, double-bit detection)
- SFP+ interface supporting optics with LC connections and digital diagnostics capability
- Host interface support provided through Emulex standard drivers
- Supports AMD, Intel x64; AMD, Intel x86; and ARMv8 64-bit server environments
- Short, low-profile PCIe card
- Parts and construction compliant to the European Union (EU) RoHS, China RoHS, and Taiwan BSMI RoHS
- Speed changeable from 32Gb/s to 64Gb/s or from 64Gb/s to 32Gb/s through hardware on some adapters (see [Section 2.5, Changing the Speed of the HBA](#), for more information)

1.1.2 Compatibility

Table 1: Software and Hardware Environments

Software environments	Refer to the Broadcom® website at www.broadcom.com for compatible operating systems.
Hardware environments	LPe38100 and LPe38102 SecureHBAs: PCIe 4.0 and PCIe 3.0 support x8, x4, and x1 bus slots. LPe37100 and LPe37102 SecureHBAs: PCIe 4.0 and PCIe 3.0 support x8, x4, and x1 bus slots. LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs are backwards compatible with PCIe Rev. 1.0a, 1.1, 2.0, and 3.0-compliant computers.

1.1.3 Prerequisites

For LPe38100, LPe37100, and LPe37102 SecureHBAs, use PCIe Gen4-compliant or Gen3-compliant computers that have x8 or x16 lanes at up to 16GT/s per lane.

For LPe38102 SecureHBAs, use PCI Gen4-compliant computers that have x8 lanes at 16GT/s per lane.

1.2 LPe36000-Series HBAs and LPe35000-Series HBAs

This section describes the following FC-to-PCIe Emulex LPe36000-series HBAs and LPe35000-series HBAs:

- LPe36000-series HBAs (64Gb/s, 32Gb/s, or 16Gb/s):
 - LPe36000 (one port)
 - LPe36002 (two ports)
- LPe35000-series HBAs (32Gb/s, 16Gb/s, or 8Gb/s):
 - LPe35000 (one port)
 - LPe35002 (two ports)
 - LPe35004 (four ports)

1.2.1 Major Features

LPe36000-series HBAs and LPe35000-series HBAs have the following major features:

- Trunking (also called FC port aggregation) with Brocade® switches, which provides the ability to trunk up to four physical ports per HBA to present a single port with aggregate performance (up to 128 Gb)
- Autonegotiation between 32Gb/s, 16Gb/s, or 8Gb/s (LPe35000-series HBAs) or between 64Gb/s, 32Gb/s, or 16Gb/s (LPe36000-series HBAs) FC link speeds using factory-shipped optics
- Industry seventh-generation FC controller core technology
- ECC protection of high-density RAM (single-bit correction, double-bit detection)
- SFP+ interface supporting optics with LC connections and digital diagnostics capability
- Host interface support provided through Emulex standard drivers
- Parts and construction compliant to the European Union Directive of RoHS
- Fully featured FC ports compliant to various International Committee for Information Technology Standards (INCITS) FC standards
- Speed changeable from 32Gb/s to 64Gb/s or from 64Gb/s to 32Gb/s through hardware on some adapters (see [Section 2.5, Changing the Speed of the HBA](#), for more information)

LPe36000 HBAs and LPe36002 HBAs have the following major features:

- Multifunction PCIe Gen4 interface controller that is compliant to the PCI Express Base Specification Rev 4.0 (backwards compatible with Rev 3.0) and the PCI Express CEM Specification Rev 4.0 (backwards compatible with Rev 3.0)
- Packet transfers at 2.5GT/s, 5GT/s, 8GT/s, and 16GT/s on the PCIe link (autonegotiated with the system), x1 to x8 lane
- An x8 bus slot physical PCIe connector

LPe35000 HBAs and LPe35002 HBAs have the following major features:

- Multifunction PCIe Gen4 interface controller that is compliant to the PCI Express Base Specification Rev 4.0 (backwards compatible with Rev 3.0) and the PCI Express CEM Specification Rev 4.0 (backwards compatible with Rev 3.0)
- Packet transfers at 2.5GT/s, 5GT/s, 8GT/s, and 16GT/s on the PCIe link (autonegotiated with the system), x1 to x8 lane
- An x8 bus slot physical PCIe connector

LPe35004 HBAs have the following major features:

- Multifunction PCIe Gen3 interface controller that is compliant to the PCI Express Base Specification Rev 3.0 and the PCI Express CEM Specification Rev 3.0
- Packet transfers at 2.5GT/s, 5GT/s, 8GT/s on the PCIe link (autonegotiated with the system), x1 to x16 lane
- An x16 bus slot physical PCIe connector

1.2.2 Compatibility

Table 2: Software and Hardware Environments

Software environments	Refer to the Broadcom website at www.broadcom.com for compatible operating systems.
Hardware environments	LPe36000 HBAs and LPe36002 HBAs: PCIe 4.0 and PCIe 3.0 support x8, x4, and x1 bus slots. LPe35000 HBAs and LPe35002 HBAs: PCIe 4.0 and PCIe 3.0 support x8, x4, x2, and x1 bus slots. LPe35004 HBAs: PCIe 3.0 supports x16, x8, x4, x2, and x1 bus slots. NOTE: LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs are backwards compatible with PCIe Rev. 1.0a, 1.1, 2.0, and 3.0-compliant computers. NOTE: LPe35004 HBAs are backwards compatible with PCIe Rev. 1.0a, 1.1, and 2.0-compliant computers.

1.2.3 Prerequisites

For LPe36000 HBAs, LPe35000 HBAs, and LPe35002 HBAs, use PCIe Gen4-compliant or Gen3-compliant computers that have x8 or x16 lanes at up to 16GT/s per lane.

For LPe36002 HBAs, use PCI Gen4-compliant computers that have x8 lanes at 16GT/s per lane.

For LPe35004 HBAs, use PCIe Gen3-compliant computers that have x16 lanes at up to 8GT/s per lane.

1.3 LPe32000-Series HBAs and LPe31000-Series HBAs

This section describes the following FC-to-PCIe Emulex LPe32000-series HBAs and LPe31000-series HBAs:

- LPe32000-series HBAs (32Gb/s, 16Gb/s, or 8Gb/s):
 - LPe32000 (one port)
 - LPe32002 (two ports)
- LPe31000-series HBAs (16Gb/s or 8Gb/s):
 - LPe31000 (one port)
 - LPe31002 (two ports)

1.3.1 Major Features

LPe32000-series HBAs and LPe31000-series HBAs have the following major features:

- Support for FEC using IEEE 802.3-2008 and later (applies to 16Gb/s and faster units)
- Autonegotiation between 4Gb/s, 8Gb/s, or 16Gb/s (LPe31000-series HBAs) or between 8Gb/s, 16Gb/s, or 32Gb/s (LPe32000-series HBAs) FC link speeds using factory-shipped optics
- Multifunction PCIe Gen3 interface controller that is compliant to the PCI Express Base Specification Rev 3.0 and PCI Express CEM Specification Rev 3.0
- Packet transfers at 2.5GT/s, 5GT/s, and 8GT/s on the PCIe link (autonegotiated with the system), x1 to x8 lane
- An x8 bus slot physical PCIe connector
- Industry sixth-generation FC controller core technology
- ECC protection of high-density RAM (single-bit correction, double-bit detection)
- SFP+ interface supporting optics with LC connections and digital diagnostics capability
- Host interface support provided through Emulex standard drivers
- Parts and construction compliant to the European Union Directive of RoHS
- Fully featured FC ports compliant to various ANSI FC standards
- Speed changeable from 16Gb/s to 32Gb/s, or from 32Gb/s to 16Gb/s, through hardware (see [Section 2.5, Changing the Speed of the HBA](#), for more information)
- Secure firmware enabled or disabled through a jumper (see [Section 2.6, Setting the Secure Firmware Jumper](#), for more information)

1.3.2 Compatibility

Table 3: Software and Hardware Environments

Software environments	Refer to the Broadcom website at www.broadcom.com for compatible operating systems.
Hardware environments	LPe32000-series HBAs: PCIe 3.0 supports x8, x4, and x1 bus slots. LPe31000-series HBAs: PCIe 3.0 supports x8, x4, x2, and x1 bus slots. NOTE: HBAs are compatible with PCIe 3.0 and CEM 3.0-compliant computers and are backwards compatible with 1.0a, 1.1, and 2.0-compliant computers.

1.3.3 Prerequisites

Use PCIe Gen3-compliant computers that have x8 or x16 lanes at up to 8GT/s per lane.

1.4 HBA Identification

Each HBA ships with several numbers clearly marked on the board. Record these numbers before installation.

- **Serial number** – Assigned by Emulex. Use this number when communicating with Broadcom Technical Support.
- **IEEE address** – An IEEE unique 48-bit identifier used for system configuration.
- **WWN** – Derived from the IEEE address; the FC industry uses the WWN for FC connectivity.

NOTE: IEEE addresses and WWNs are assigned in sequential order. For example, if an HBA has four ports, it has four IEEE addresses and four WWNs, one for each port. The second, third, and fourth IEEE addresses and WWNs are the next successive numbers after the first.

1.5 Abbreviations

Table 4: Acronyms and Abbreviations

Acronym/Abbreviation	Description
CEM	card electromechanical
FCP	Fibre Channel Protocol
FEC	forward error correction
Gb/s	gigabits per second
GT/s	giga-transfers per second
ID	identification
INCITS	International Committee for Information Technology Standards
mVpp	millivolt peak-to-peak
PQC	Post-quantum cryptography
RMN	regulatory model number
SFP+	enhanced small form-factor pluggable
SPDM Specification	Security Protocol and Data Model Specification

Chapter 2: Installation

The standard HBAs can be connected to fiber-optic cables.

If you do not need to change the HBA's bracket, skip to [Section 2.2, Installing the HBA](#). Otherwise, continue to [Section 2.1, Preparing the HBA for Installation](#).

2.1 Preparing the HBA for Installation

Most HBAs ship from the factory with a standard full-height PCIe mounting bracket installed, which you can remove and replace with a low-profile bracket. Other HBAs ship from the factory with a low-profile PCIe mounting bracket installed, which you can replace with a full-height bracket.

Some HBAs have removable optical transceivers, whereas others have fixed optical transceivers. If you are replacing the mounting bracket, and the HBA has removable optical transceivers, you must first remove all installed optical transceivers from the housing (cage).

See the following table to determine the type of optical transceivers and the type of mounting bracket that are factory-installed on each HBA model.

Table 5: Optical Transceiver and Mounting Bracket Types


Series	HBA	Optical Transceiver Type	Factory-Installed Mounting Bracket Type
LPe38100	LPe38100	Removable	Full height
	LPe38102	Removable	Full height
LPe37100	LPe37100	Removable	Full height
	LPe37102	Removable	Full height
LPe36000	LPe36000	Removable	Full height
	LPe36002	Removable	Full height
LPe35000	LPe35000	Removable	Full height
	LPe35002	Removable	Full height
	LPe35004	Removable	Full height
LPe32000	LPe32000	Removable	Full height
	LPe32002	Removable	Full height
LPe31000	LPe31000	Removable	Full height
	LPe31002	Removable	Full height

Perform the following steps:

1. Remove the transceivers from their cage assemblies.

The HBA uses various types of optical transceivers. [Figure 1](#) shows an example of one type with the bail (handle) extended.

Figure 1: Typical Optical Transceiver

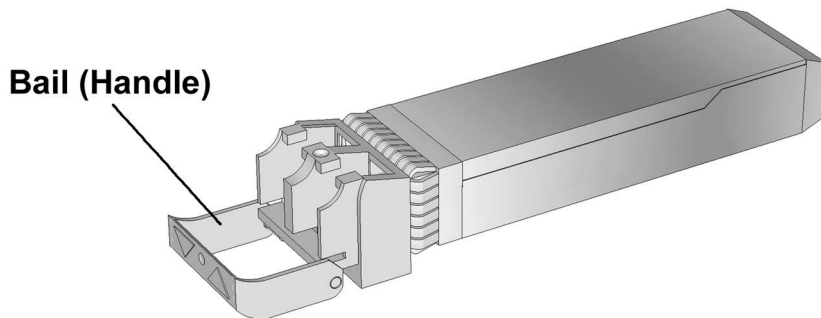


CAUTION! This is a delicate operation. Take care not to damage the optical transceiver.


To remove a transceiver, pull the bail (handle) out and down to release the latch, and gently pull out the transceiver. Do not force it. After the latch is released, the transceiver slides out easily.

[Figure 2](#) shows a transceiver with the latch released (bail extended) and another transceiver latched in place.


Figure 2: Releasing the Latch on an Optical Transceiver

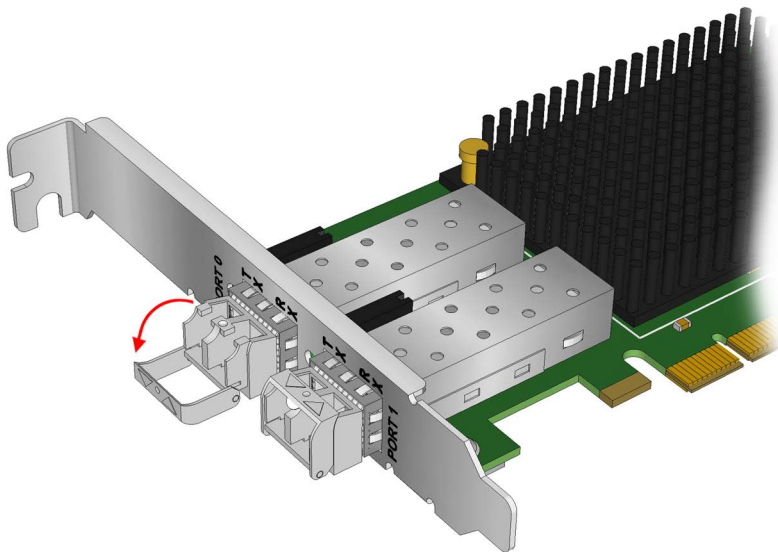

[Figure 3](#) shows an extracted transceiver and another transceiver latched in place.

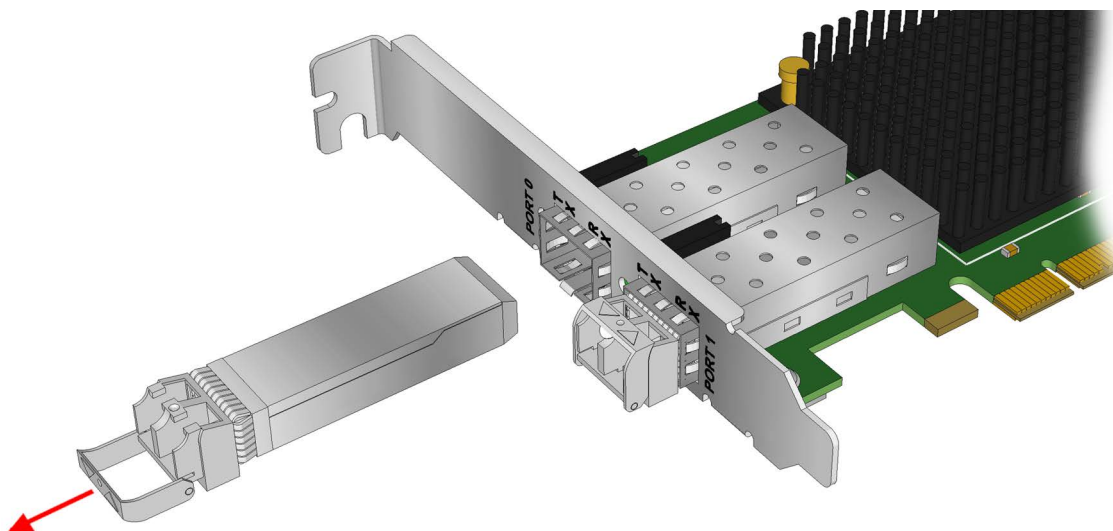Figure 3: Removing an Optical Transceiver

2. Observing ESD precautions, store the transceiver in an ESD-safe place.
3. Remove the mounting bracket screws and washers from the top of the HBA. [Figure 4](#) shows the screws that are removed from the mounting bracket.

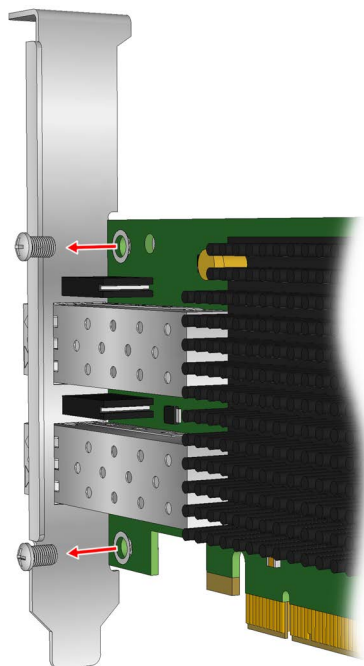Figure 4: Removing the Mounting Bracket

4. Remove the mounting bracket, and store it for future use.
5. Align the new mounting bracket tabs with the holes in the HBA.

CAUTION! Be careful not to push the mounting bracket past the grounding tabs on the transceiver housing. Make sure that the LEDs are properly aligned with the holes in the mounting bracket.

6. Reinstall the screws and washers that attach the HBA to the mounting bracket. If you did not remove optical transceivers, skip to [Section 2.2, Installing the HBA](#).
7. Reinstall the transceiver by sliding it into the housing. When the latch engages, it clicks.
8. Push the bail back into place.

2.2 Installing the HBA

To install the HBA, follow these steps:

1. Turn off the computer if hot-plug installation is not supported on the computer.
2. Remove the computer case.
3. Remove the blank panel from an empty PCIe bus slot. All Emulex HBAs can use x16 PCIe bus slots. All Emulex HBAs except LPe35004 HBAs can use x8 PCIe bus slots.
4. Insert the HBA into the empty slot. Press firmly until the HBA is seated.

NOTE: Make sure that the HBA is in an appropriate PCIe slot that does not interfere with other components or with the case to prevent damage to the HBA.

5. Secure the HBA mounting bracket to the case with a panel screw or clip.
6. Replace the computer case and tighten the case screws.

The HBA is now installed in the server and is ready for an FC device.

2.3 Attaching Media

NOTE: The HBA does not allow normal data transmission on an optical link unless it is connected to another similar or compatible laser product (that is, multimode to multimode, or single-mode to single-mode).

The HBA does not automatically downgrade to the required FC speed based on the cable length. You must downgrade the speed with the appropriate utility, or link errors might occur.

Use a multimode fiber-optic cable with short-wave lasers, or use a single-mode fiber-optic cable with long-wave lasers. The cable must adhere to the specifications in the following tables. See the table that includes your HBA.

Table 6: Media Specifications (LPe38100-Series SecureHBAs, LPe37100-Series SecureHBAs, LPe36000-Series HBAs, and LPe35000-Series HBAs)

Fiber-Optic Cable	Maximum Length	Minimum Length	Connector
OM4 and OM5 – Multimode 50/125 micrometer fiber (4700 MHz × km bandwidth cable)	8GFC: 0.5m to 190m 16GFC: 0.5m to 125m 32GFC: 0.5m to 100m 64GFC: 0.5m to 100m	0.5 meters	LC
OM3 – Multimode 50/125 micrometer fiber (2000 MHz × km bandwidth cable)	8GFC: 0.5m to 150m 16GFC: 0.5m to 100m 32GFC: 0.5m to 70m 64GFC: 0.5m to 70m	0.5 meters	LC

Table 6: Media Specifications (LPe38100-Series SecureHBAs, LPe37100-Series SecureHBAs, LPe36000-Series HBAs, and LPe35000-Series HBAs) (Continued)

Fiber-Optic Cable	Maximum Length	Minimum Length	Connector
OM2 – Multimode 50/125 micrometer fiber (500 MHz × km bandwidth cable)	8GFC: 0.5m to 50m 16GFC: 0.5m to 35m 32GFC: 0.5m to 20m 64GFC: N/A	0.5 meters	LC
OM1 – Multimode 62.5/125 micrometer fiber (200 MHz × km bandwidth cable)	8GFC: 0.5m to 21m 16GFC: 0.5m to 15m 32GFC: N/A 64GFC: N/A	0.5 meters	LC
OS2 – Single-mode 9/125 micrometer fiber (0.4 dB/km attenuation, type B1.3)	8GFC: 0.5m to 10 km 16GFC: 0.5m to 10 km 32GFC: 0.5m to 10 km 64GFC: 0.5m to 10 km	0.5 meters	LC
OS1 – Single-mode 9/125 micrometer fiber (1.0 dB/km attenuation, type B1.1)	8GFC: 0.5m to 10 km 16GFC: 0.5m to 10 km 32GFC: 0.5m to 10 km 64GFC: N/A	0.5 meters	LC

Table 7: Media Specifications (LPe32000-Series HBAs and LPe31000-Series HBAs)

Fiber-Optic Cable	Maximum Length	Minimum Length	Connector
OM4 – Multimode 50/125 micrometer fiber (4700 MHz × km bandwidth cable)	4GFC: 0.5m to 400m 8GFC: 0.5m to 190m 16GFC: 0.5m to 125m 32GFC: 0.5m to 100m	0.5 meters	LC
OM3 – Multimode 50/125 micrometer fiber (2000 MHz × km bandwidth cable)	4GFC: 0.5m to 380m 8GFC: 0.5m to 150m 16GFC: 0.5m to 100m 32GFC: 0.5m to 70m	0.5 meters	LC
OM2 – Multimode 50/125 micrometer fiber (500 MHz × km bandwidth cable)	4GFC: 0.5m to 150m 8GFC: 0.5m to 50m 16GFC: 0.5m to 35m 32GFC: 0.5m to 20m	0.5 meters	LC
OM1 – Multimode 62.5/125 micrometer fiber (200 MHz × km bandwidth cable)	4GFC: 0.5m to 70m 8GFC: 0.5m to 21m 16GFC: 0.5m to 15m 32GFC: N/A	0.5 meters	LC
OS2 – Single-mode 9/125 micrometer fiber (0.4 dB/km attenuation, type B1.3)	4GFC: 0.5m to 10 km 8GFC: 0.5m to 10 km 16GFC: 0.5m to 10 km 32GFC: 0.5m to 10 km	0.5 meters	LC
OS1 – Single-mode 9/125 micrometer fiber (1.0 dB/km attenuation, type B1.1)	4GFC: 0.5m to 10 km 8GFC: 0.5m to 10 km 16GFC: 0.5m to 10 km 32GFC: 0.5m to 10 km	0.5 meters	LC

To attach media to the HBA, follow these steps:

1. Ensure that the cages have optical transceivers installed in them. If necessary, insert an optical transceiver into each cage.

The following table provides a list of approved optics.

Table 8: Approved Optics


HBA	Model Number	Description	Quantity in Pack	Interface	Comments
LPe38100-series LPe37100-series	LP64-LW-OPT-1	64GFC optic (long-wave laser)	1	SFP+	For LPe38100-series and LPe37100-series SecureHBAs, can be used for longwave, singlemode cable support. Allows upgrade from LPe37100-series to LPe38100-series.
LPe38100-series LPe37100-series	LP64-SW-OPT-1	64GFC optic (short-wave laser)	1	SFP+	For LPe38100-series and LPe37100-series SecureHBAs, can be used as an onsite spare. Allows upgrade from LPe37100-series to LPe38100-series.
LPe38100-series LPe37100-series	LP64-SW-OPT-2	64GFC optic (short-wave laser)	2	SFP+	For LPe38100-series SecureHBAs and LPe35000-series HBAs, can be used as an onsite spare. Allows upgrade from LPe37100-series to LPe38100-series.
LPe36000-series LPe35000-series	LP64-LW-OPT-1	64GFC optic (long-wave laser)	1	SFP+	For LPe36000-series and LPe35000-series HBAs, can be used for longwave, singlemode cable support. Allows upgrade from LPe35000-series to LPe36000-series.
LPe36000-series LPe35000-series	LP64-SW-OPT-1	64GFC optic (short-wave laser)	1	SFP+	For LPe36000-series and LPe35000-series HBAs, can be used as an onsite spare. Allows upgrade from LPe35000-series to LPe36000-series.
LPe36000-series LPe35000-series	LP64-SW-OPT-2	64GFC optic (short-wave laser)	2	SFP+	For LPe36000-series and LPe35000-series HBAs, can be used as an onsite spare. Allows upgrade from LPe35000-series to LPe36000-series.

Table 8: Approved Optics (Continued)

HBA	Model Number	Description	Quantity in Pack	Interface	Comments
LPe37100-series LPe35000-series LPe32000-series LPe31000-series	LP32-LW-OPT-1	32GFC optic (long-wave laser)	1	SFP+	For LPe37100-series, LPe35000-series, and LPe32000-series HBAs, can be used for longwave, singlemode cable support. Allows upgrade from LPe31000-series to LPe32000-series.
LPe37100-series LPe35000-series LPe32000-series LPe31000-series	LP32-LW-OPT-2	32GFC optic (long-wave laser)	2	SFP+	For LPe37100-series, LPe35000-series, and LPe32000-series HBAs, can be used for longwave, singlemode cable support.. Allows upgrade from LPe31000-series to LPe32000-series.
LPe35000-series LPe32000-series LPe31000-series	LP32-SW-OPT-1	32GFC optic (short-wave laser)	1	SFP+	For LPe37100-series, LPe35000-series, and LPe32000-series HBAs, can be used as an onsite spare. Allows upgrade from LPe31000-series to LPe32000-series.
LPe35000-series LPe32000-series LPe31000-series	LP32-SW-OPT-2	32GFC optic (short-wave laser)	2	SFP+	For LPe37100-series, LPe35000-series, and LPe32000-series HBAs, can be used as an onsite spare. Allows upgrade from LPe31000-series to LPe32000-series.


NOTE: Only Emulex accessories are warranted and fully supported by Broadcom Technical Support.

Figure 5: Installing an Optical Transceiver

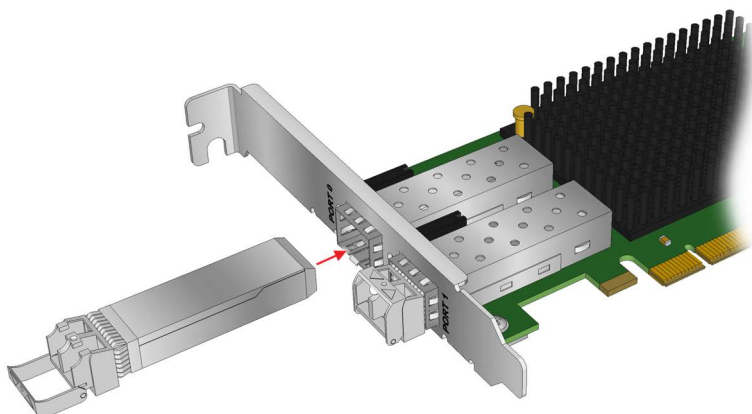

2. Insert an appropriate optical cable into the LC connectors on the HBA.

Figure 6: Connecting a Fiber-Optic Cable

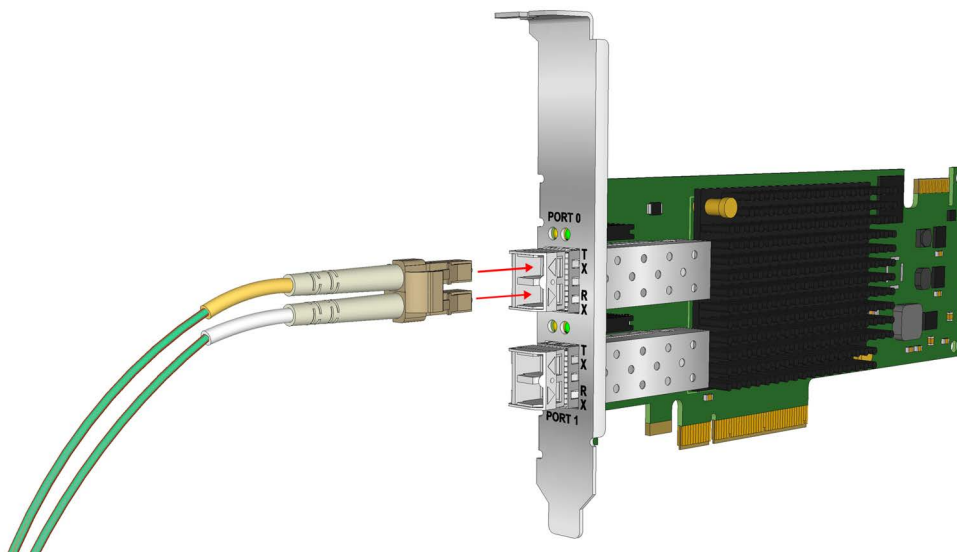

3. Connect the other end to the FC device.

You are ready to apply power to the computer.

2.4 Applying Power


To apply power, follow these steps:

1. Verify that the HBA is securely installed in the computer.
2. Verify that the correct media is attached.
3. Plug in the computer, and turn it on.
4. Watch the LEDs for POST results.

2.4.1 Viewing the LEDs

You can view the yellow and green LEDs through openings in the HBA's mounting bracket. The yellow LED indicates port activity or link speed, and the green LED indicates firmware operation. Each port has a corresponding set of yellow and green LEDs.

Figure 7: Optical HBA LED Indicators

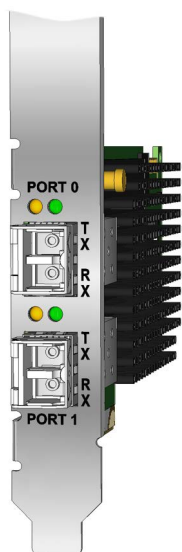

2.4.2 POST Conditions and Results

POST is the default mode of self-test for Emulex HBAs. No jumpers or connectors are necessary for this test to run. This test performs a quick confidence level check of the HBA when it is powered on, and before it runs the operational software.

At a minimum, the following tests are performed by POST:

- Flash boot image checksum test
- Internal ASIC RAM tests for proper ECC parity operation
- Loopback test

The following table summarizes POST conditions and results.

NOTE: For the link rate conditions, a 1 second pause occurs when the yellow LED is off between each group of fast blinks (2, 3, 4, or 5, depending on the HBA). Observe the LED sequence for several seconds to be sure you have correctly identified the pattern.

Table 9: POST Conditions and Results

HBAs	Yellow LED	Green LED	State
All	Off	Off	No SFP module is installed, or a boot failure occurred (dead board)
All	On	Off	POST failure (dead board)
All	Slow blink	Off	Boot failure after POST
All	Flashing	Off	POST processing is in progress
All	Off	On	Failure in the common code module
All	On	On	Failure in the common code module
LPe38100-series	3 fast blinks	On	Normal (link up at 8GFC) (LPe37100-series and LPe35000-series only)
LPe37100-series	4 fast blinks	On	Normal (link up at 16GFC)
LPe36000-series	5 fast blinks	On	Normal (link up at 32GFC)
LPe35000-series	6 fast blinks	On	Normal (link up at 64GFC) (LPe38100-series and LPe36000-series only)
	Fast blink	Fast blink	Beaconing

Table 9: POST Conditions and Results (Continued)

HBA	Yellow LED	Green LED	State
LPe32000-series and LPe31000-series	2 fast blinks	On	Normal (link up at 4GFC) (LPe31000-series only)
	3 fast blinks	On	Normal (link up at 8GFC)
	4 fast blinks	On	Normal (link up at 16GFC)
	5 fast blinks	On	Normal (link up at 32GFC) (LPe32000-series only)
	Fast blink	Fast blink	Beaconing
All	Off	Slow blink	Normal (link down)

2.5 Changing the Speed of the HBA

You can change the speed of the link on the following HBAs by replacing the optical transceivers:

- The transmission speed of the LPe37100-series and LPe38100-series adapters can be changed from 32GFC to 64GFC or from 64GFC to 32GFC.
- The transmission speed of the LPe35000-series and LPe36000-series adapters can be changed from 32GFC to 64GFC or from 64GFC to 32GFC.
- The transmission speed of the LPe31000-series and LPe32000-series HBAs can be changed from 16GFC to 32GFC or from 32GFC to 16GFC.

2.6 Setting the Secure Firmware Jumper


LPe31000-series HBAs and LPe32000-series HBAs have a jumper that enables or disables the Secure Firmware feature as required.

To update the firmware using a tool, such as the Emulex HBA Manager application (formerly the OneCommand™ Manager application), boot utilities, or Elxflash utilities, there is no need to remove the jumper. The Secure Firmware feature can remain enabled as long as the update is from one secure firmware version to another secure firmware version. To change the firmware version from a secure firmware version to an unsecured firmware version, you must first remove the jumper before updating the firmware.

Replace the jumper after the firmware update is complete.

The following figure provides an examples of common locations of the Secure Firmware jumper.

Figure 8: Secure Firmware Jumper Location J2 on LPe32000, LPe32002, LPe31000, and LPe31002 HBAs

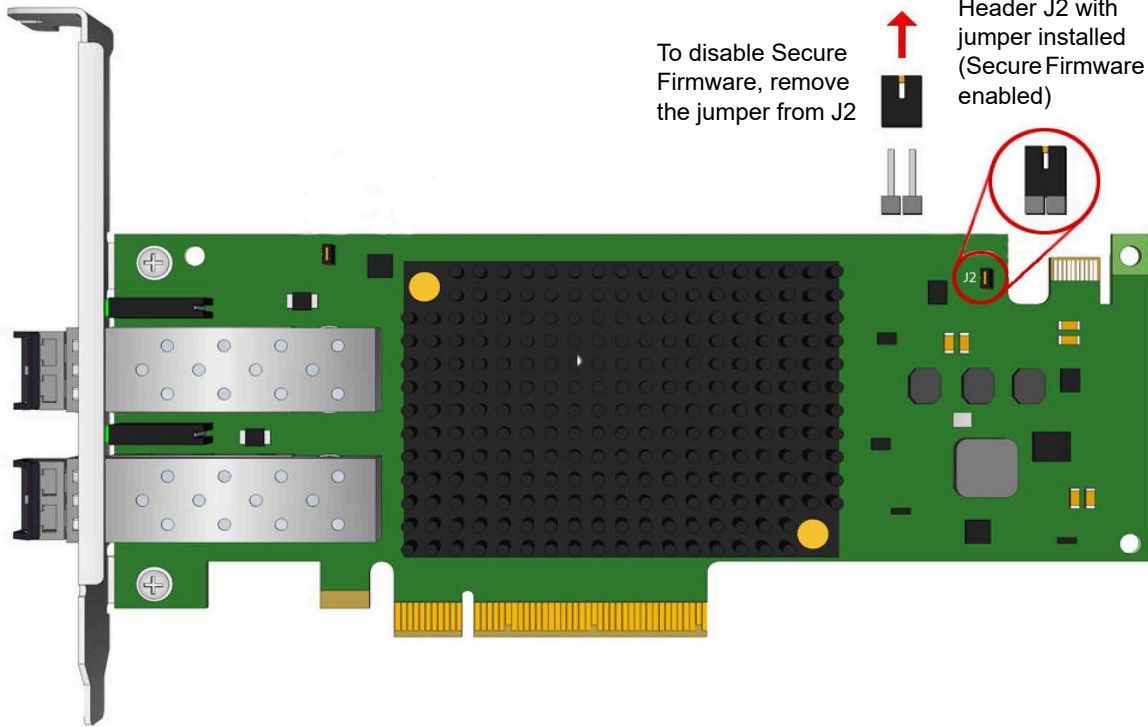

Chapter 3: References

3.1 Specifications

3.1.1 LPe38100-Series and LPe37100-Series SecureHBAs

Table 10: LPe38100-Series and LPe37100-Series SecureHBAs Specifications

Parameter	Range
Physical dimensions	LPe38100 and LPe38102 SecureHBAs: low-profile form factor, 6.600 in. by 2.713 in. LPe37100 and LPe37102 SecureHBAs: low-profile form factor, 6.600 in. by 2.713 in.
Power requirements	Multimode optics (PCIe 4.0): ■ Single-channel LPe38100 SecureHBAs: 10.4W (typical), 11.5W (maximum) ■ Dual-channel LPe38102 SecureHBAs: 12.2W (typical), 13.3W (maximum) ■ Single-channel LPe37100 SecureHBAs: 9.7W (typical), 10.8W (maximum) ■ Dual-channel LPe37102 SecureHBAs: 10.7W (typical), 11.8W (maximum) Single-mode optics (PCIe 4.0): ■ Single-channel LPe38100 SecureHBAs: 10.4W (typical), 11.7W (maximum) ■ Dual-channel LPe38102 SecureHBAs: 12.2W (typical), 13.6W (maximum) ■ Single-channel LPe37100 SecureHBAs: 9.7W (typical), 10.8W (maximum) ■ Dual-channel LPe37102 SecureHBAs: 10.7W (typical), 11.8W (maximum)
Power susceptibility	The HBAs can operate within the following voltage ranges: PCIe 12V: 12V $\pm$ 8% Power supply noise susceptibility: 100 mVpp at frequencies 100 kHz or less
Airflow	PCIe CEM Rev. 4.0 Thermal Level 4 (150 linear feet per minute minimum airflow, 55°C maximum inlet temperature)
Temperature	0°C to 55°C (operating) –20°C to 85°C (storage) NOTE: Operating HBAs in higher temperature conditions might result in early failure.
Humidity	5% to 95% (noncondensing, 22°C wet bulb) for storage 10% to 90% (noncondensing, 22°C wet bulb) for operation
Agency approvals	■ Class 1 Laser Product per DHHS 21CFR (J) and EN60825-1 when equipped with approved optical devices ■ UL recognized to 62368-1:2014 ■ cUR recognized to CAN/CSA 22.2, No. 62368-1-14 ■ FCC Rules, Part 15, Class A ■ Industry Canada, ICES-003, Class A ■ EU (CE Mark) ■ UKCA ■ EN55035:2017/A11 :2020 ■ EN55032:2015/A11 :2020, Class A ■ Australian EMC Framework (RCM) ■ AS/NZS CISPR32:2015, Class A ■ Japan VCCI, Class A ■ Taiwan BSMI (CNS 13438), RoHS (CNS 15663), Class A ■ Korea KS C 9832, KS C 9835 ■ RoHS compliant (Directive 2011/65/EU) ■ China RoHS compliant

3.1.2 LPe36000-Series HBAs and LPe35000-Series HBAs

Table 11: LPe36000-Series HBAs and LPe35000-Series HBAs Specifications

Parameter	Range
Physical dimensions	LPe36000 HBAs and LPe36002 HBAs: low-profile form factor, 6.600 in. by 2.708 in. LPe35000 HBAs and LPe35002 HBAs: low-profile form factor, 6.600 in. by 2.708 in. LPe35004 HBAs: standard height, half-length form factor, 6.600 in. by 4.376 in.
Power requirements	Multimode optics (PCIe 3.0): ■ Single-channel LPe35000 HBAs: 8.8W (typical), 9.9W (maximum) ■ Dual-channel LPe35002 HBAs: 9.9W (typical), 11.0W (maximum) ■ Quad-channel LPe35004 HBAs: 14.4W (typical), 15.9W (maximum) Single-mode optics (PCIe 3.0): ■ Single-channel LPe35000 HBAs: 8.9W (typical), 10.1W (maximum) ■ Dual-channel LPe35002 HBAs: 10.2W (typical), 11.3W (maximum) ■ Quad-channel LPe35004 HBAs: 15.0W (typical), 16.4W (maximum) Multimode optics (PCIe 4.0): ■ Single-channel LPe36000 HBAs: 10.6W (typical), 11.9W (maximum) ■ Dual-channel LPe36002 HBAs: 12.4W (typical), 13.7W (maximum) ■ Single-channel LPe35000 HBAs: 9.6W (typical), 10.7W (maximum) ■ Dual-channel LPe35002 HBAs: 10.7W (typical), 11.8W (maximum) Single-mode optics (PCIe 4.0): ■ Single-channel LPe36000 HBAs: 11.1W (typical), 12.6W (maximum) ■ Dual-channel LPe36002 HBAs: 13.4W (typical), 15.1W (maximum) ■ Single-channel LPe35000 HBAs: 9.7W (typical), 10.9W (maximum) ■ Dual-channel LPe35002 HBAs: 11.0W (typical), 12.1W (maximum)
Power susceptibility	The HBAs can operate within the following voltage ranges: PCIe 12V: 12V $\pm$ 8% Power supply noise susceptibility: 100 mVpp at frequencies 100 kHz or less
Airflow	LPe36000 HBAs and LPe36002 HBAs: 250 linear feet per minute (minimum) LPe35000 HBAs and LPe35002 HBAs: 200 linear feet per minute (minimum) LPe35004 HBAs: 275 linear feet per minute (minimum)
Temperature	0°C to 55°C (operating) –20°C to 85°C (storage) NOTE: Operating HBAs in higher temperature conditions might result in early failure.
Humidity	5% to 95% (noncondensing, 22°C wet bulb) for storage 10% to 90% (noncondensing, 22°C wet bulb) for operation

Table 11: LPe36000-Series HBAs and LPe35000-Series HBAs Specifications (Continued)

Parameter	Range
Agency approvals	■ Class 1 Laser Product per DHHS 21CFR (J) and EN60825-1 when equipped with approved optical devices ■ UL recognized to 62368-1:2014 ■ cUR recognized to CAN/CSA 22.2, No. 62368-1-14 ■ FCC Rules, Part 15, Class A ■ Industry Canada, ICES-003, Class A ■ EU (CE Mark) ■ UKCA ■ EN55035:2017 ■ EN55032:2012, Class A ■ Australian EMC Framework (RCM) ■ AS/NZS CISPR32:2015, Class A ■ Japan VCCI, Class A ■ Taiwan BSMI (CNS 13438), RoHS (CNS 15663), Class A ■ Korea MSIP, Class A ■ RoHS compliant (Directive 2011/65/EU) ■ China RoHS compliant

3.1.3 LPe32000-Series HBAs and LPe31000-Series HBAs

Table 12: LPe32000-Series HBA and LPe31000-Series HBA Specifications

Parameter	Range
Physical dimensions	Low-profile form factor, 6.600 in. by 2.713 in.
Power requirements	Single-channel LPe31000 HBAs: 8.6W (typical), 9.6W (maximum) Single-channel LPe32000 HBAs: 8.8W (typical), 9.8W (maximum) Dual-channel LPe31002 HBAs: 9.3W (typical), 10.3W (maximum) Dual-channel LPe32002 HBAs: 9.6W (typical), 10.6W (maximum)
Power susceptibility	The HBAs can operate within the following voltage ranges: PCIe 3.3V: 3.3V $\pm$ 9% PCIe 12V: 12V $\pm$ 8% Power supply noise susceptibility: 100 mVpp at frequencies 100 kHz or less
Airflow	200 linear feet per minute (minimum)
Temperature	0°C to 55°C (operating) –20°C to 85°C (storage) NOTE: Operating HBAs in higher temperature conditions might result in early failure.
Humidity	5% to 95% (noncondensing, 22°C wet bulb) for storage 10% to 90% (noncondensing, 22°C wet bulb) for operation

Table 12: LPe32000-Series HBA and LPe31000-Series HBA Specifications (Continued)

Parameter	Range
Agency approvals	■ Class 1 Laser Product per DHHS 21CFR (J) and EN60825-1 when equipped with approved optical devices ■ UL recognized to 62368-1:2014 ■ cUR recognized to CAN/CSA 22.2, No. 62368-1-14 ■ FCC Rules, Part 15, Class A ■ Industry Canada, ICES-003, Class A ■ EU (CE Mark) ■ UKCA ■ EN55035:2017 ■ EN55032:2012, Class A ■ Australian EMC Framework (RCM) ■ AS/NZS CISPR32:2015, Class A ■ Japan VCCI, Class A ■ Taiwan BSMI (CNS 13438), RoHS (CNS 15663), Class A ■ Korea MSIP, Class A ■ RoHS compliant (Directive 2011/65/EU) ■ China RoHS compliant

3.2 FCC and Regulatory Notices

You can download the regulatory notices and certificates for Emulex HBAs at www.broadcom.com/emulex-regulatory.

3.2.1 FCC Supplier's Declarations of Confirmation (LPe38100-Series and LPe37100-Series SecureHBAs)

3.2.1.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs

Supplier's Declaration of Confirmation (SDoC) for North America (FCC & ICES):

Product Name	Emulex ® HBA
Regulatory Model	P012001
Testing Laboratory	Element Materials Technology (Irvine CA) NVLAP 200676-0, A2LA.3310.04, ISED 2834B
Compliance Report #	EMUL0106, EMUL0137
Compliance Report Date	9/21/2021, 3/29/2024

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party: Jeff Hoogenboom, VP and General Manager of ECD
Broadcom Inc. (408) 433-8000
1320 Ridder Park Drive, San Jose, CA 95131 USA

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Shielded cables must be used between this equipment and attached peripheral devices. The reader is cautioned that changes or modifications made to the equipment not expressly approved by Broadcom could void the user's authority to operate this equipment.

May 20, 2024
San Jose, CA



Jeff Hoogenboom
VP and General Manager of ECD

This class A digital apparatus meets all requirements of the ISED (formerly Industry Canada) Interference - Causing Equipment Standard (ICES-003). **CAN ICES-3 (A)/ NMB-3 (A)**

3.2.2 FCC Supplier's Declarations of Confirmation (LPe36000-Series and LPe35000-Series HBAs)

3.2.2.1 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs

Supplier's Declaration of Confirmation (SDoC) for North America (FCC & ICES):

Product Name	Emulex ® HBA
Regulatory Model	P011814
Testing Laboratory	Element Materials Technology (Irvine CA) NVLAP 200676-0, ISED 2834B-1, 2834B-3
Compliance Report #	EMUL0092, EMUL0103 and EMUL0104
Compliance Report Date	6/8/2018, 12/30/2020 and 11/18/2020

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party: Jeff Hoogenboom, VP and General Manager of ECD
Broadcom Inc. (408) 433-8000
1320 Ridder Park Drive, San Jose, CA 95131 USA

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Shielded cables must be used between this equipment and attached peripheral devices. The reader is cautioned that changes or modifications made to the equipment not expressly approved by Broadcom could void the user's authority to operate this equipment.

August 30, 2021
San Jose, CA



Jeff Hoogenboom
VP and General Manager of ECD

This class A digital apparatus meets all requirements of the ISED (formerly Industry Canada) Interference - Causing Equipment Standard (ICES-003). **CAN ICES-3 (A)/ NMB-3 (A)**

3.2.2.2 LPe35004 HBAs

Supplier's Declaration of Confirmation (SDoC) for North America (FCC & ICES):

Product Name	Emulex ® HBA
Regulatory Model	P011836
Testing Laboratory	Element Materials Technology (Irvine CA) NVLAP 200676-0, ISED 2834B-1, 2834B-3
Compliance Report #	EMUL0091 Rev. 1
Compliance Report Date	May 25, 2018

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party: Jeff Hoogenboom, VP and General Manager of ECD
Broadcom Inc. (408) 433-8000
1320 Ridder Park Drive, San Jose, CA 95131 USA

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Shielded cables must be used between this equipment and attached peripheral devices. The reader is cautioned that changes or modifications made to the equipment not expressly approved by Broadcom could void the user's authority to operate this equipment.

August 30, 2021
San Jose, CA



Jeff Hoogenboom
VP and General Manager of ECD

This class A digital apparatus meets all requirements of the ISED (formerly Industry Canada) Interference - Causing Equipment Standard (ICES-003). **CAN ICES-3 (A)/ NMB-3 (A)**

3.2.3 Regulatory Notices

3.2.3.1 Notice for North America (FCC and ICES)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party:

Jeff Hoogenboom, VP and General Manager of ECD
Broadcom Inc. (408) 433-8000
1320 Ridder Park Drive, San Jose, CA 95131 USA

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Shielded cables must be used between this equipment and attached peripheral devices. The reader is cautioned that changes or modifications made to the equipment not expressly approved by Emulex could void the user's authority to operate this equipment.

This class A digital apparatus meets all requirements of the ISSED (formerly Industry Canada) Interference-Causing Equipment Standard (ICES-003). **CAN ICES-3 (A)/ NMB-3 (A)**

3.2.3.2 Notice for Japan and Translations (VCCI)

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用する
と電波妨害を引き起こすことがあります。この場合には使用者が適切な対策
を講ずるよう要求されることがあります。 **VCCI—A**

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures. VCCI—A.

3.2.3.3 Notice for Taiwan and Translations (BSMI)

警告使用者：
這是甲類的資訊產品，在居住的環境中使用時，
可能會造成射頻干擾，在這種情況下，使用者會
被要求採取某些適當的對策。

This equipment is a Class A ITE, and operation of this equipment in a residential area is likely to cause harmful interference, in which case users will be required to correct the interference at their own expense.

3.2.3.4 Notice for South Korea and Translations (MSIP)

이 기기는 업무용(A급) 전자파적합기기로서 판매사 또는 사용자는 이 점을 주의하시기 바라며, 가정 외
의 지역에서 사용하는 것을 목적으로 합니다.

Class A Equipment: Sellers and users of this equipment take note that this equipment is EMC approved for Class A industrial use, and as such is not intended for residential use.

3.2.4 Laser Safety Notice

Broadcom products incorporating optical laser transceivers contain Class 1 laser devices that comply with DHHS/CDRH 21CFR Sub-chapter J, and the international laser safety standard EN/IEC 60825-1. Class 1 laser devices are not considered to be hazardous.

The use of non-Broadcom approved optical transceivers, or transceivers that do not comply with the Class 1 radiation performance requirements defined in DHHS/CDRH 21CFR Sub-chapter J and IEC 60825-1, may expose the user to hazardous laser radiation, and such devices should not be used with Broadcom products

CLASS 1 LASER PRODUCT
LASER KLASSE 1
LUOKAN 1 LASERLAITE
APPAREIL A LASER DE CLASSE 1

3.3 Declarations of Conformity

3.3.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs

Notice for European Union (CE-Mark):

DECLARATION OF CONFORMITY	
Manufacturer:	Broadcom Inc. 1320 Ridder Park Drive San Jose, CA 95131 USA
declares under sole responsibility that the product:	
Product Name:	Emulex® HBA
Regulatory Model:	P012001
Assembly Number:	P012001-xxx
To which this Declaration relates is in conformity with the following standards or other documents for Information Technology Equipment (ITE):	
Product Safety:	Electromagnetic Compatibility (Class A):
UL Recognized to UL 62368-1:2014	FCC Rules, CFR Title 47, Part 15, Subpart B / ANS C63.4:2014
cUR Recognized to CAN/CSA 22.2, No. 62368-1-14	Industry Canada, ICES-003:2020 (Issue 7)
IEC 62368-1:2014 (CB Scheme)	EN 55035: 2017/A11 :2020 / IEC 61000-4, S.I. 2016 No. 1091
EN 62368-1:2014 / A11:2017, S.I. 2016 No. 1101	EN 55032: 2015/A11 :2020 / CISPR 32:2015
EN 60825-1:2014*	AS/NZS CISPR 32:2015
CFR Title 21, Laser AEL Class 1, FDA/CDRH*	VCCI-CISPR 32:2016 / CISPR 32:2015
* when equipped with approved optical transceivers	CNS 13438:2006, KS C 9832, KS C 9835
Hazardous Substances:	
The object of this declaration described above is in conformity with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment, and has been validated per IEC63000: 2018, S.I. 2012 No. 3032.	
Supplementary Information:	1. The product was tested in a typical configuration. 2. The product is in compliance with the following directives: ☒ European Union Low Voltage Directive 2014/35/EU ☒ European Union EMC Directive 2014/30/EU and EU RoHS Directive 2011/65/EU ☒ Australian RCM framework ☒ Taiwan BSMI RoHS CNS 15663:2013.7
May 20,2024 San Jose, CA	 Jeff Hoogenboom VP and General Manager of ECD
European Contact:	Avago Technologies Fiber GmbH, Wernerwerkstraße 2, 93049 Regensburg

Notice for UKCA:

Broadcom Inc.
1320 Ridder Park Drive
San Jose, CA 95131 USA
www.broadcom.com



DECLARATION OF CONFORMITY for UKCA

Supplier: Broadcom UK Ltd.
Address: 910 Hempton Court, Aztec West
Almondsbury, Bristol
BS32 4SR United Kingdom

Product Name: Emulex® HBA
Regulatory Model: P012001
Assembly Number: P012001-xxx

The product described above is in conformity with the relevant statutory requirements and standards listed below:

The Electrical Equipment (Safety) Regulations 2016 (S.I. 2016 No. 1101)
EN 62368-1: 2014/AC: 2015

Electromagnetic Compatibility Regulations 2016 (S.I. 2016 No. 1091)
EN 55032:2015/A11:2020
EN 55035:2017/A11:2020

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations (S.I. 2012 No. 3032)
IEC 63000:2018

Additional Information

Report Number: EMUL0106
Test Laboratory: Element Materials Technology (NVLAP Lab Code: 200676-0)

Ben Chu

Ben Chu
Engineering Manager
Broadcom Inc.
15101 Alton Parkway
Irvine, CA 92618
(949) 926-1109
ben.chu@broadcom.com

Date: March, 11 2022

3.3.2 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs

Notice for European Union (CE-Mark):

DECLARATION OF CONFORMITY	
Manufacturer:	Broadcom Inc. 1320 Ridder Park Drive San Jose, CA 95131 USA
declares under sole responsibility that the product:	
Product Name:	Emulex® HBA
Regulatory Model:	P011814
Assembly Number:	P011814-xxx
To which this Declaration relates is in conformity with the following standards or other documents for Information Technology Equipment (ITE):	
Product Safety:	Electromagnetic Compatibility (Class A):
UL Recognized to UL 62368-1:2014	FCC Rules, CFR Title 47, Part 15, Subpart B / ANS C63.4:2014
cUR Recognized to CAN/CSA 22.2, No. 62368-1-14	Industry Canada, ICES-003:2020 (Issue 7)
IEC 62368-1:2014 (CB Scheme)	EN 55035: 2015/A11 :2020 / IEC 61000-4
EN 62368-1:2014 / A11:2017	EN 55032: 2017/A11 :2020 / CISPR 32:2015
EN 60825-1:2014*	AS/NZS CISPR 32:2015
CFR Title 21, Laser AEL Class 1, FDA/CDRH*	VCCI 32-1 / CISPR 32:2015
* when equipped with approved optical transceivers	CNS 13438:2006, KN32, KN35
Hazardous Substances:	
The object of this declaration described above is in conformity with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment, and has been validated per IEC63000: 2018.	
Supplementary Information:	1. The product was tested in a typical configuration. 2. The product is in compliance with the following directives: • European Union Low Voltage Directive 2014/35/EU • European Union EMC Directive 2014/30/EU and EU RoHS Directive 2011/65/EU • Australian RCM framework • Taiwan BSMI RoHS CNS 15663:2013.7
August 30, 2021 San Jose, CA	 Jeff Hoogenboom VP and General Manager of ECD
European Contact:	Avago Technologies Fiber GmbH, Wernerwerkstraße 2, 93049 Regensburg

Notice for UKCA:

Broadcom Inc.
1320 Ridder Park Drive
San Jose, CA 95131 USA
www.broadcom.com



DECLARATION OF CONFORMITY for UKCA

Supplier: Broadcom UK Ltd.
Address: 910 Hempton Court, Aztec West
Almondsbury, Bristol
BS32 4SR United Kingdom

Product Name: Emulex® HBA
Regulatory Model: P011814
Assembly Number: P011814-xxx

The product described above is in conformity with the relevant statutory requirements and standards listed below:

The Electrical Equipment (Safety) Regulations 2016 (S.I. 2016 No. 1101)
EN 62368-1: 2014/AC: 2015

Electromagnetic Compatibility Regulations 2016 (S.I. 2016 No. 1091)
EN 55032:2015/A11:2020
EN55035:2017/A11:2020

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations (S.I. 2012 No. 3032)
IEC 63000:2018

Additional Information

Report Number: EMUL0092
Test Laboratory: Element Materials Technology (NVLAP Lab Code: 200676-0)

A handwritten signature in black ink, appearing to read "Ben Chu".

Ben Chu
Engineering Manager
Broadcom Inc.
15101 Alton Parkway
Irvine, CA 92618

Date: May 16, 2022

3.3.3 LPe35004 HBAs

Notice for European Union (CE-Mark):

DECLARATION OF CONFORMITY	
Manufacturer:	Broadcom Inc. 1320 Ridder Park Drive San Jose, CA 95131 USA
declares under sole responsibility that the product:	
Product Name:	Emulex® HBA
Regulatory Model:	P011836
Assembly Number:	P011836-xxx
To which this Declaration relates is in conformity with the following standards or other documents for Information Technology Equipment (ITE):	
Product Safety:	Electromagnetic Compatibility (Class A):
UL Recognized to UL 62368-1:2014	FCC Rules, CFR Title 47, Part 15, Subpart B / ANS C63.4:2014
cUR Recognized to CAN/CSA 22.2, No. 62368-1-14	Industry Canada, ICES-003:2020 (Issue 7)
IEC 62368-1:2014 (CB Scheme)	EN 55035: 2015/A11 :2020 / IEC 61000-4
EN 62368-1:2014 / A11:2017	EN 55032: 2017/A11 :2020 / CISPR 32:2015
EN 60825-1:2014*	AS/NZS CISPR 32:2015
CFR Title 21, Laser AEL Class 1, FDA/CDRH*	VCCI 32-1 / CISPR 32:2015
* when equipped with approved optical transceivers	CNS 13438:2006, KN32, KN35
Hazardous Substances:	
The object of this declaration described above is in conformity with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment, and has been validated per IEC63000: 2018.	
Supplementary Information:	1. The product was tested in a typical configuration. 2. The product is in compliance with the following directives: • European Union Low Voltage Directive 2014/35/EU • European Union EMC Directive 2014/30/EU and EU RoHS Directive 2011/65/EU • Australian RCM framework • Taiwan BSMI RoHS CNS 15663:2013.7
August 30, 2021 San Jose, CA	 Jeff Hoogenboom VP and General Manager of ECD
European Contact:	Avago Technologies Fiber GmbH, Wernerwerkstraße 2, 93049 Regensburg

Notice for UKCA:

Broadcom Inc.
1320 Ridder Park Drive
San Jose, CA 95131 USA
www.broadcom.com



UK DECLARATION OF CONFORMITY

Supplier: Broadcom UK Ltd.
Address: 910 Hempton Court, Aztec West
Almondsbury, Bristol
BS32 4SR United Kingdom

Product Name: Emulex® HBA
Regulatory Model: P011836
Assembly Number: P011836-xxx

The product described above is in conformity with the relevant statutory requirements and standards listed below:

The Electrical Equipment (Safety) Regulations 2016 (S.I. 2016 No. 1101)
EN 62368-1: 2014/AC: 2015

Electromagnetic Compatibility Regulations 2016 (S.I. 2016 No. 1091)
EN 55032:2015/A11:2020
EN55035:2017/A11:2020

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations (S.I. 2012 No. 3032)
IEC 63000:2018

Additional Information

Report Number: EMUL0091.1
Test Laboratory: Element Materials Technology (NVLAP Lab Code: 200676-0)

A handwritten signature in black ink, appearing to read "Ben Chu".

Ben Chu
Engineering Manager
Broadcom Inc.
15101 Alton Parkway
Irvine, CA 92618

Date: May 16, 2022

3.3.4 LPe32000 HBAs, LPe32002 HBAs, LPe31000 HBAs, and LPe31002 HBAs

Notice for European Union (CE-Mark):

DECLARATION OF CONFORMITY	
Manufacturer:	Broadcom Inc. 1320 Ridder Park Drive San Jose, CA, 95131 USA
declares under sole responsibility that the product:	
Product Name:	Emulex® HBA
Regulatory Model:	P011324
Assembly Number:	P011324-xxx (x=alphanumeric or blank)
To which this Declaration relates is in conformity with the following standards or other documents for Information Technology Equipment (ITE):	
Product Safety:	Electromagnetic Compatibility (Class A):
UL Recognized to UL 62368-1:2014	FCC Rules, CFR Title 47, Part 15, Subpart B
cUR Recognized to CAN/CSA 22.2, No. 62368-1-14	Industry Canada, ICES-003:2012 (Issue 5) +2014 update
IEC 62368-1:2014 (CB Scheme)	Industry Canada, ICES-003:2020 (Issue 7)
EN 62368-1:2014 / A11:2017	EN 55035: 2015/A11 :2020 / IEC 61000-4
EN 60825-1:2014*	EN 55032: 2017/A11 :2020 / CISPR 32:2015
CFR Title 21, Laser AEL Class 1, FDA/CDRH*	AS/NZS CISPR 32:2015
* when equipped with approved optical transceivers	VCCI 32-1 / CISPR 32:2015
	CNS 13438:2006, KN32, KN35
Hazardous Substances:	
The object of this declaration described above is in conformity with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment, and has been validated per IEC63000: 2018.	
Supplementary Information:	1. The product was tested in a typical configuration. 2. The product is in compliance with the following directives: • European Union Low Voltage Directives 2014/35/EU • European Union EMC Directives 2014/30/EU and EU RoHS Directives 2011/65/EU • Australian RCM framework • Taiwan BSMI RoHS CNS 15663:2013.7
August 30, 2021 San Jose, CA	 Jeff Hoogenboom VP and General Manager of ECD
European Contact:	Avago Technologies Fiber GmbH, Wernerwerkstraße 2, 93049 Regensburg

Notice for UKCA:

Broadcom Inc.
1320 Ridder Park Drive
San Jose, CA 95131 USA
www.broadcom.com



UK DECLARATION OF CONFORMITY

Supplier: Broadcom UK Ltd.
Address: 910 Hempton Court, Aztec West
Almondsbury, Bristol
BS32 4SR United Kingdom

Product Name: Emulex® HBA
Regulatory Model: P011324
Assembly Number: P011324-xxx

The product described above is in conformity with the relevant statutory requirements and standards listed below:

The Electrical Equipment (Safety) Regulations 2016 (S.I. 2016 No. 1101)
EN 62368-1: 2014/AC: 2015

Electromagnetic Compatibility Regulations 2016 (S.I. 2016 No. 1091)
EN 55032:2015/A11:2020
EN 55035:2017/A11:2020

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations (S.I. 2012 No. 3032)
IEC 63000:2018

Additional Information

Report Number: EMUL0075.0
Test Laboratory: Northwest EMC (NVLAP Lab Code: 200676-0)

A handwritten signature in black ink, appearing to read "Ben Chu".

Ben Chu
Engineering Manager
Broadcom Inc.
15101 Alton Parkway
Irvine, CA 92618

Date: May 16, 2022

3.4 Taiwan RoHS Notices

3.4.1 LPe38100, LPe38102, LPe37100, and LPe37102 SecureHBAs

The following illustration provides the Taiwan RoHS notice for the P012001 RMN.

限用物質含有情況標示聲明書
Declaration of the Presence Condition of the Restricted Substances Marking

證書號碼／受理編號：符合性聲明商品
Certificate No./ Application No.

商品標籤及商品檢驗標識：(Picture)
Product Label and Commodity Inspection Mark.

樣張及其標示位置：(Description and Picture)
Sample and its location

設備名稱: LPe3710x/LPe3810x, 1 or 2 Port FC HBA ; 型號(型式): P012001 Equipment name Type designation (Type)						
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻Hexavalent chromium (Cr ⁺⁶)	多溴聯苯Polybrominated biphenyls (PBB)	多溴二苯醚Polybrominated diphenyl ethers (PBDE)
電子被動元件 Passive Components	—	○	○	○	○	○
電路板 Printed Circuit Board	○	○	○	○	○	○
集成電路 Active Devices	○	○	○	○	○	○
連接器 Connector/ Mechanical	○	○	○	○	○	○

備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。
Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—”係指該項限用物質為排除項目。
Note 3: The “—” indicates that the restricted substance corresponds to the exemption.

茲切結保證所提供之商品限用物質含有情況標示內容係經執行測試作業或採適當之品質管理措施，並備置前述相關文件，確認正確無誤後提供貴局。並同意配合貴局執行後市場管理作業所需，依商品檢驗法第49條之規定，於限期28個工作天內提供相關證明文件以供審查。

I hereby ensure that “the presence conditions of the restricted substance” provided above have been proved by testing or appropriate quality control measures, and make sure the relevant documents provided are correct and ready. Also, I agree to cooperate with BSMI, as the Article 49 of the Commodity Inspection Act stipulates, to provide the relevant documents, if needed, for verification within 28 working days when BSMI carries out the market surveillance activities.

此致 to

經濟部標準檢驗局 The Bureau of Standards, Metrology and Inspection

申請人：精訊電子科技有限公司
Applicant

負責人：林冠宏
Person in charge

(簽章)
(Signature)

中華民國 110 年 10 月 28 日
DATE (year) (month) (day)

3.4.2 LPe36000 HBAs, LPe36002 HBAs, LPe35000 HBAs, and LPe35002 HBAs

The following illustration provides the Taiwan RoHS notice for the P011814 RMN.

限用物質含有情況標示聲明書
Declaration of the Presence Condition of the Restricted Substances Marking

證書號碼／受理編號：符合性聲明商品
Certificate No./Application No.

商品標籤及商品檢驗標識：(Picture)
Product Label and Commodity Inspection Mark.

樣張及其標示位置：(Description and Picture)
Sample and its location

設備名稱: LPe35000/2-M2, 1 or 2 Port 32G FC HBA ; 型號 (型式) : P011814 Equipment name Type designation (Type)						
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁺⁶)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
電子被動元件 Passive Components	—	○	○	○	○	○
電路板 Printed Circuit Board	○	○	○	○	○	○
連接器 Connector/ Mechanical	○	○	○	○	○	○
集成電路 Active Devices	○	○	○	○	○	○
備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。 Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition. 備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。 Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence. 備考3. “—”係指該項限用物質為排除項目。 Note 3: The “—” indicates that the restricted substance corresponds to the exemption.						

茲切結保證所提供之商品限用物質含有情況標示內容係經執行測試作業或採適當之品質管理措施，並備置前述相關文件，確認正確無誤後提供貴局。並同意配合貴局執行後市場管理作業所需，依商品檢驗法第49條之規定，於限期28個工作天內提供相關證明文件以供審查。

I hereby ensure that “the presence conditions of the restricted substance” provided above have been proved by testing or appropriate quality control measures, and make sure the relevant documents provided are correct and ready. Also, I agree to cooperate with BSMI, as the Article 49 of the Commodity Inspection Act stipulates, to provide the relevant documents, if needed, for verification within 28 working days when BSMI carries out the market surveillance activities.

此致 to

經濟部標準檢驗局 The Bureau of Standards, Metrology and Inspection

申請人：精訊電子科技有限公司
Applicant

負責人：林冠宏
Person in charge

(簽章)
(Signature)

中 華 民 國 107 年 07 月 09 日
DATE (year) (month) (day)

3.4.3 LPe35004 HBAs

The following illustration provides the Taiwan RoHS notice for the P011836 RMN.

限用物質含有情況標示聲明書

Declaration of the Presence Condition of the Restricted Substances Marking

證書號碼／受理編號： 符合性聲明商品
Certificate No./Application No.

商品標籤及商品檢驗標識：(Picture)
Product Label and Commodity Inspection Mark.

樣張及其標示位置：(Description and Picture)
Sample and its location

設備名稱: LPe35004-S3, 4 Port 32G FC HBA; 型號 (型式): P011836 Equipment name Type designation (Type)						
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻Hexavalent chromium (Cr ⁺⁶)	多溴聯苯Polybrominated biphenyls (PBB)	多溴二苯醚Polybrominated diphenyl ethers (PBDE)
電子被動元件 Passive Components	—	○	○	○	○	○
電路板 Printed Circuit Board	○	○	○	○	○	○
連接器 Connector/ Mechanical	○	○	○	○	○	○
集成電路 Active Devices	○	○	○	○	○	○

備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。
Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—”係指該項限用物質為排除項目。
Note 3: The “—” indicates that the restricted substance corresponds to the exemption.

茲切結保證所提供之商品限用物質含有情況標示內容係經執行測試作業或採適當之品質管理措施，並備置前述相關文件，確認正確無誤後提供貴局。並同意配合貴局執行後市場管理作業所需，依商品檢驗法第49條之規定，於限期28個工作天內提供相關證明文件以供審查。

I hereby ensure that “the presence conditions of the restricted substance” provided above have been proved by testing or appropriate quality control measures, and make sure the relevant documents provided are correct and ready. Also, I agree to cooperate with BSMI, as the Article 49 of the Commodity Inspection Act stipulates, to provide the relevant documents, if needed, for verification within 28 working days when BSMI carries out the market surveillance activities.

此致 to

經濟部標準檢驗局 The Bureau of Standards, Metrology and Inspection

申請人：精訊電子科技有限公司
Applicant

負責人：林冠宏
Person in charge

(簽章)
(Signature)

中華民國 107 年 05 月 30 日
DATE (year) (month) (day)

3.4.4 LPe32000-Series HBAs and LPe31000-Series HBAs

The following table provides the Taiwan RoHS notice for the following RMNs:

- 5189-1403
- P011324
- P011687
- P011712

設備名稱:

Equipment name : LightPulse Fibre Channel Adapter Card

型號 (型式)

Type designation (Type) : Board Assemblies

單元Unit	限用物質及其化學符號 Restricted substances and their chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr+6)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
电子被动元件- Passive Components	—	○	○	○	○	○
电路板- Printed Circuit Board	○	○	○	○	○	○
集成电路- Active Devices	○	○	○	○	○	○
连接器 - Connector/Mechanical	○	○	○	○	○	○

備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。

NOTE: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。

NOTE: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—”係指該項限用物質為排除項目。

NOTE: The “—” indicates that the restricted substance corresponds to the exemption.

The following table provides the Taiwan RoHS notice for the 5067-5396 RMN.

設備名稱:

Equipment name : LightPulse Fibre Channel Adapter Card

型號 (型式)

Type designation (Type) : Board Assemblies

單元Unit	限用物質及其化學符號 Restricted substances and their chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr+6)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
电子被动元件- Passive Components	—	○	○	○	○	○
電路板- Printed Circuit Board	○	○	○	○	○	○
連接器 - Connector/Mechanical	○	○	○	○	○	○
集成电路- Active Devices	○	○	○	○	○	○
光纖收發器- Optical Transceiver	—	○	○	○	○	○

備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。

NOTE: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。

NOTE: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—”係指該項限用物質為排除項目。

NOTE: The “—” indicates that the restricted substance corresponds to the exemption.

