Model AP0821CR1W



- · Low Noise Cooling System
- Long Distance and Centralized Air Flow
- Cool, Dehumidify, and Fan Functions
- Remote Control is Included
- 2-year Warranty



3 Modes - Cool, Dehumidify, and Fan



Quiet Operation



Drain-free Operation (Cooling mode)



Easy Snap-Together Window Kit

Cool Comfort - Quiet, Convenient, and Quick Installation

The Hisense AP0821CR1W Portable Air Conditioner provides convenient performance. Long-distance airflow is strong, cool, and quiet because of the new air flow design. Additionally, the air louver automatically opens to a preset position after the unit is powered on and can be adjusted with the included remote. The easy-to-install snap-together window kit fits windows 18" to 50" wide, helping preserve the external appearance of your home.

Model AP0821CR1W

Model #	AP0821CR1W
Performance	
Maximum Cooling space	350 sq.ft.
Cooling Capacity - SACC (BTU)	8.000
CEER	7.2
Dehumidification Pint / 24 hr	74.4
(at 26.7 / 19.4 C)	
Refrigerant	R-32
Airflow (CFM)	160 – 230
Noise Level in dB(A)	47 - 50
Electrical	
Voltage / Freq / Amps	115V / 60Hz, 12A* / 9.2A
Plug Type / NEMA#	A / 5-15P
Power Cord Length (feet)	4.9
Control Features	
Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	61 - 86°F
Display Type	Dimmable LED
Sleep Mode	Yes (on remote)
Dehumidifier Mode	Yes
Cooling Speeds	3 Speeds
Temp Display Units	∘ c/∘ F
Timer	1 Hr - 24Hr On/Off
Auto Restart	Yes (after power is restored)
General Features	
Removable Filter	Yes
Washable PPFilter	Yes
Oscillating Air Vent Louvers	Yes (on remote)
Vent System	Single Hose. 5.9"0 x 59"L
Accessories	
Remote Control	Yes
AAA Batteries	Yes
Air Hose	Yes
Window Kit	Yes
Approvals	
Safety	ETL
Energy Star	No


Product Dimensions		
Unit Dimension W x H x D (mm)	442 x 738 x 318	
Net Weight (Kg)	30	
Unit Dimension WxHxD (inch)	17.4 x 29.1 x 12.5	
Net Weight (lbs)	66.1	
Product		
Parts & Labor	2 years	
UPC	819130027371	

Note:

Control Panel



Window Size

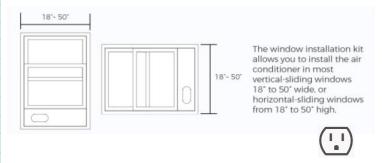

All product. product specifications. and data are subject to change without notice to improve reliability. function. design or otherwise. ©2021HisenseUSA. All rights reserved

Hisense USA Corporation 7310 McGinnis Ferry Road. Suwanee. GA. 30024 I ·877-465-3566 www.hisense-usa.com

^{*:} Rated Amps(A) / accorded UL 60335 Safety