


1CH-WiFi Smart Switch

Model: TH-16
Model: TH-16RF



Parameters:




Input voltage: AC 85V~250V
Max. Current: 3000W/16A Gang
Total Power: 3000W
Wi-Fi Standard: Wi-Fi 2.4ghz b/g/n
Working temperature: -20°C~70°C
Working humidity: ≤80%
Material: ABS
Size: 93*55*31mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP store, Google play.
- Your router is MAC-open.

User Guide

- 1 Start with "EWelink" APP.




- 2 Register an EWlink account.
- 3 If you have EWelink account, just login.
- 4 Power up.

Add device flow to mobile APP


- 1 Once it's powered, please check the status of blue lights carefully, usually there are 2 different status.

A. If it continually blink quickly 3 times and stay on 1 second, please open your ewelink app and tap to next step, no need to long press the Manual switch.
B. If it continually blink slowly (flash once every 3 seconds), please long press the Manual switch until it blink rapidly as A, then open your ewelink app and tap to next step.

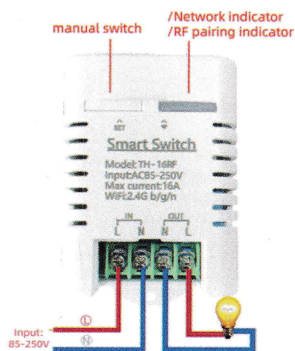

- 2 Tap on EWelink app.

- 3 Select Quick Pairing.
special cases You can try compatibility Model (AP)



1 Input your WiFi password.




2 Name your device.





3 When the WiFi LED is on, the device is online.

4 Click the on/off buttons on the APP can control device. Manual control switch also can be display real-time on the APP.

APP Function



Tip here to enter the full function operation interface.




Remote control matches the code

Matching:
① hold the manual switch for 3 seconds, the RF pairing indicator (red light) is on.
② then long press the remote control buttons.
③ loosen the remote control buttons, matching success



Clear code:
Long press the manual switch for 15 seconds (RF pairing indicator is always on), loosen the manual switch until the RF pairing indicator (red light) is off, and the RF pairing indicator flashes rapidly for 5 times.
* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING
Solutions for the failure of product matching and offline:
Enter the homepage of App, click the icon in the lower right corner of the interface to enter.
"Message" > "hits" Guide". "Profile" > "hits" Ewelink support"

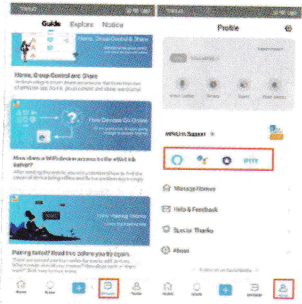

If none of the above is resolved, please open it with another phone. Personal hotspot, try to read.