



FCC SAR Compliance Test Report

For

ITEL MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI

STREET FOTAN NT HONGKONG

Model: A669L

Test Engineer: Zeng Longhao *Zeng Longhao*

Report Number: WSCT-A2LA-R&E240300016A-SAR

Report Date: 05 June 2024

FCC ID: 2AJMN-A669L

Check By: Wei Liangmei *Wei Liangmei*

Approved By: Liu Fuxin *Liu Fuxin*

World Standardization Certification & Testing Group
(Shenzhen) Co., Ltd.
Prepared By: Building A-B, Baoshi Science & Technology Park,
Baoshi Road, Bao'an District, Shenzhen, Guangdong,
China
Tel: +86-755-26996192
Fax: +86-755-86376605





Table of contents

1	General information	5
1.1	Notes	5
1.2	Application details	5
1.3	Statement of Compliance	6
1.4	EUT Information	8
2	Testing laboratory	10
3	ACCREDITATIONS	10
4	Test Environment	10
5	Applicant and Manufacturer	10
6	Test standard/s:	11
6.1	RF exposure limits	12
6.2	SAR Definition	12
7	SAR Measurement System	13
7.1	The Measurement System	13
7.2	Robot	14
7.3	Probe	14
7.4	Measurement procedure	15
7.5	Description of interpolation/extrapolation scheme	16
7.6	Phantom	17
7.7	Device Holder	18
7.8	Video Positioning System	19
7.9	Tissue simulating liquids: dielectric properties	20
7.10	Tissue simulating liquids: parameters	21
8	System Check	23
8.1	System check procedure	23
8.2	System check results	24





9	SAR Test Configuration	25
9.1	GSM Test Configurations.....	25
9.2	UMTS Test Configuration.....	25
9.3	LTE Test Configuration	27
9.4	Wi-Fi Test Configuration	29
9.5	WiFi 2.4G SAR Test Procedures.....	29
10	Detailed Test Results	30
10.1	Conducted Power measurements.....	30
10.1.1	Conducted Power of GSM.....	31
10.1.2	Conducted Power of ECDMA.....	32
10.1.3	Conducted Power of LTE Band 2	33
10.1.4	Conducted Power of LTE Band 4.....	35
10.1.5	Conducted Power of LTE Band 5	37
10.1.6	Conducted Power of LTE Band 7	39
10.1.7	Conducted Power of LTE Band 12	41
10.1.8	Conducted Power of LTE Band 17	43
10.1.9	Conducted Power of LTE Band 26	44
10.1.10	Conducted Power of LTE Band 38	47
10.1.11	Conducted Power of LTE Band 40	49
10.1.12	Conducted Power of LTE Band 41	50
10.1.13	Conducted Power of LTE Band 66	52
10.1.14	Conducted Power of Wi-Fi 2.4G	54
10.1.15	Conducted Power of BT	54
10.1.16	Tune-up power tolerance	55
10.2	SAR test results	56
10.3	Test Result.....	59
10.3.1	Results overview of GSM.....	59





10.3.2	Results overview of WCDMA	60
10.3.3	Results overview of LTE	61
10.3.4	Results overview of Wifi	68
11	Multiple Transmitter Information.....	69
11.1.1	Stand-alone SAR test exclusion.....	70
11.1.2	Simultaneous Transmission Possibilities.....	71
11.1.3	SAR Summation Scenario	72
12	Measurement uncertainty evaluation	78
12.1	Measurement uncertainty evaluation for SAR test	78
12.2	Measurement uncertainty evaluation for system check.....	80
13	Test equipment and ancillaries used for tests	81
Annex A:	System performance verification	82
Annex B:	Measurement results	82
Annex C:	Calibration reports	82





Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Released	05 June 2024	Liu Fuxin

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. Shenzhen Timeway Testing Laboratories does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item: 2024-03-21
Start of test: 2024-03-25
End of test: 2024-05-20





1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for A669L is as below:

Band	Position	MAX Reported SAR _{1g} (W/kg)
GSM850	Head	0.582
	Body & Hotspot 10mm	0.397
GSM1900	Head	0.589
	Body & Hotspot 10mm	0.457
UMTS Band 2	Head	0.494
	Body & Hotspot 10mm	0.200
UMTS Band 4	Head	0.666
	Body & Hotspot 10mm	0.254
UMTS Band 5	Head	0.247
	Body & Hotspot 10mm	0.102
LTE Band 2	Head	0.320
	Body & Hotspot 10mm	0.179
LTE Band 4	Head	0.410
	Body & Hotspot 10mm	0.252
LTE Band 5	Head	0.140
	Body & Hotspot 10mm	0.130
LTE Band 7	Head	0.385
	Body & Hotspot 10mm	0.210
LTE Band 12	Head	0.257
	Body & Hotspot 10mm	0.131
LTE Band 17	Head	0.313
	Body & Hotspot 10mm	0.134



LTE Band 26	Head	0.399
	Body & Hotspot 10mm	0.156
LTE Band 26	Head	0.420
	Body & Hotspot 10mm	0.325
LTE Band 38	Head	0.415
	Body & Hotspot 10mm	0.236
LTE Band 40	Head	0.457
	Body & Hotspot 10mm	0.259
LTE Band 40	Head	0.616
	Body & Hotspot 10mm	0.229
LTE Band 41	Head	0.352
	Body & Hotspot 10mm	0.245
LTE Band 66	Head	0.408
	Body & Hotspot 10mm	0.201
Wi-Fi 2.4G	Head	0.662
	Body & Hotspot 10mm	0.222
The highest simultaneous SAR is 0.666W/kg per KDB690783 D01		

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:2005, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.



1.4 EUT Information

Device Information:			
Product Type:	Mobile Phone		
Model:	A669L		
Trade Name:	itel		
Device Type:	Portable device		
Exposure Category:	uncontrolled environment / general population		
Production Unit or Identical Prototype:	Production Unit		
Software version :	A669L-SQ375ABDE-UGo-OP-240327V114DevT		
Hardware version:	V1.1		
Antenna Type :	Integrated antenna		
Device Operating Configurations:			
Supporting Mode(s) :	GSM850,PCS1900, UMTS Band 2, UMTS Band 4 ,UMTS Band 5, LTE Band 2/ LTE Band4/LTE Band5/ LTE Band7 LTE Band12/LTE Band17/LTE Band26/ LTE Band38 LTE Band40/ LTE Band41/ LTE Band66, Wi-Fi , BT		
Modulation:	GSM(GMSK),UMTS(QPSK/16QAM),LTE(QPSK/16QAM), WiFi(OFDM/CCK),BT(GFSK/π/4-DQPSK/ 8-DPSK)		
Device Class :	Class B, No DTM Mode		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	UMTS Band 2	1850~1910	1930~1990
	UMTS Band 4	1710~1755	2110~2155
	UMTS Band 5	824~849	869~894
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 17	704~716	734~746
	LTE Band 26	814~824	859~869
	LTE Band 26	824~849	869~894
	LTE Band38	2570~2620	2570~2620
	LTE Band 40	2305~2315	2305~2315
	LTE Band 40	2350~2360	2350~2360
	LTE Band 41	2335~2655	2535~2655
	LTE Band 66	1710~1780	2110~2200
	Wi-Fi (2.4G)	2412~2462	
BT	2402~2480		



GPRS class level:	GPRS class 12
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band 2)
	1312-1413-1513(UMTS Band 4)
	4132-4182-4233(UMTS Band 5)
	18700-18900-19100(LTE Band 2)
	20050-20175-20300(LTE Band 4)
	20450-20525-20600(LTE Band 5)
	20850-21100-21350(LTE Band 7)
	23060-23095-23130(LTE Band 12)
	23780-23790-23800(LTE Band 17)
	26765-26865-26965(LTE Band 26)
	37850-38000-38150(LTE Band 38)
	38750-39150-39550(LTE Band 40)
	40140-40340-40640-40940-41140(LTE Band 41)
	132072-132322-132572(LTE Band 66)
	1-6-11 (Wi-Fi 2.4G)
Antenna gain:	0-39-78(BT)
	0-19-39(BLE)
Power Source:	GSM 850/WCDMA B5/LTE B5/26: -4.42dbi
	PCS 1900/WCDMA B2/LTE B2: -2.69dbi
	WCDMA B4/LTE B4/B66: -2.97dbi
	LTE B7: -1.18dBi; LTE B40: -2.78dbi ;
	LTE B41(&38): -2.17dbi LTE B12/B17: -5.53dbi
Power Source:	Rechargeable Li-ion Polymer Battery Model: BL-38Cl
	Rated Voltage: 3.85V
	Rated Capacity: 3850mAh/14.82Wh
	Typical Capacity: 4000mAh/15.40Wh
Power Source:	Limited Charge Voltage: 4.4V

Note:The test results of this test report relate exclusively to the test item specified in this test report. World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.





2 Testing laboratory

Test Site	World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Test Location	Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
Telephone	+86-755-26996192
Fax	+86-755-86376605

3 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

China	CNAS (Registration Number: L3732)
USA	A2LA (Certificate Number: 5768.01)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

4 Test Environment

	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2 °C
Tissue Simulating liquid:	22 ± 2 °C	22 ± 2 °C
Relative humidity content:	30 – 70 %	30 – 70 %

5 Applicant and Manufacturer

Applicant/Client Name:	ITEL MOBILE LIMITED
Applicant Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer Name:	ITEL MOBILE LIMITED
Manufacturer Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG



6 Test standard/s:

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEC/IEEE 62209-1528	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB447498 D01	General RF Exposure Guidance v06
4	KDB447498 D04	Interim General RF Exposure Guidance v01
5	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB865664 D02	RF Exposure Reporting v01r02
7	KDB941225 D01	3G SAR Procedures v03r01
8	KDB941225 D05	SAR for LTE Devices v02r05
9	KDB248227 D01	802.11 Wi-Fi SAR v02r02
10	KDB941225 D06	Hotspot Mode v02r01
11	KDB648474 D04	Handset SAR v01r03
12	KDB690783 D01	SAR Listings on Grant v01r03



6.1 RF exposure limits

Position,
Please Contact with WSCT
www.wsct-cert.com

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Heads/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

6.2 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)



7 SAR Measurement System

7.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Device holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.



7.2 Robot

The COMOSAR system uses the high precision robots KR 6 R900 sixx type out of the newer series from Satimo SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used. The KR 6 R900 sixx robot series have many features that are important for

our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller
-

7.3 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE 5 with following specifications is used



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

- Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe	2.7 mm

- Calibration range: 300MHz to 3GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 2 – MVG COMOSAR Dosimetric E field Dipole

Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe	1 mm

- Calibration range: 5GHz to 6GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



7.4 Measurement procedure

The following steps are used for each test position

Position,
Please Contact with WSCT
www.wsct-cert.com

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g





SAR Averaged Methods

In SATIMO, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

7.5 Description of interpolation/extrapolation scheme

- The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.
- An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.
- The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR average over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.





7.6 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



7.7 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

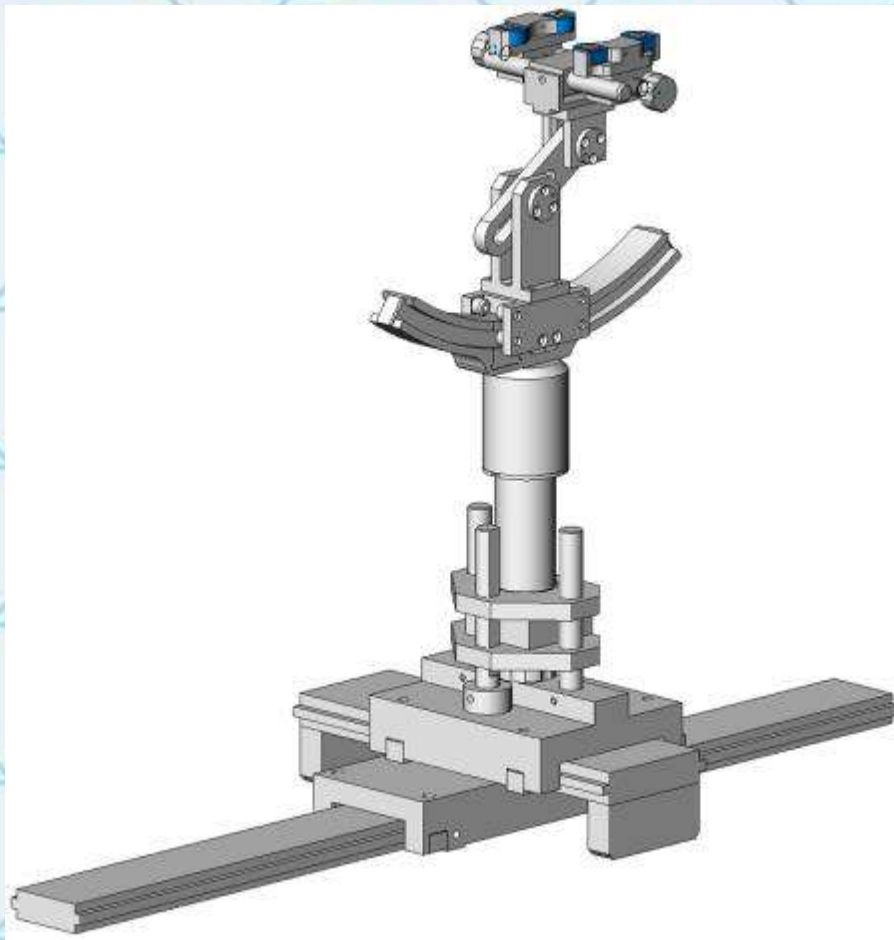

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



7.8 Video Positioning System

- The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.
- During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.
- The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.





7.9 Tissue simulating liquids: dielectric properties

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with ☒):

Ingredients(% of weight)	Frequency (MHz)					
frequency band	☒ 750	☒ 835	☒ 1800	☒ 1900	☒ 2450	☒ 2600
Tissue Type	Head	Head	Head	Head	Head	Head
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	47.0	44.542	0.0	44.452
Ingredients(% of weight)	Frequency (MHz)					
frequency band	☒ 750	☒ 835	☒ 1800	☒ 1900	☒ 2450	☒ 2600
Tissue Type	Body	Body	Body	Body	Body	Body
Water	50.30	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether



**7.10 Tissue simulating liquids: parameters**

Tissue Type	Measured Frequency (MHz)	Target Tissue				Measured Tissue		Liquid Temp.	Test Date
		Target Permittivity ϵ_r	Range of $\pm 5\%$	Target Conductivity σ (S/m)	Range of $\pm 5\%$	ϵ_r	σ (S/m)		
835MHz Head	825	41.60	39.52~43.68	0.90	0.86~0.95	40.34	0.91	21.6°C	2024-03-25
	835	41.50	39.43~43.58	0.90	0.86~0.95	40.33	0.92		
	850	41.50	39.43~43.58	0.92	0.87~0.97	40.11	0.94		
835MHz Body	825	55.20	52.44~57.96	0.97	0.92~1.02	54.04	0.98		
	835	55.20	52.44~57.96	0.97	0.92~1.02	53.93	0.99		
	850	55.20	52.44~57.96	0.99	0.94~1.04	53.69	1.01		
1800MHz Head	1710	40.10	38.10~42.10	1.35	1.28~1.42	39.95	1.34	21.6°C	2024-03-28
	1730	40.10	38.10~42.10	1.35	1.29~1.43	39.87	1.36		
	1750	40.10	38.10~42.10	1.37	1.30~1.44	39.69	1.39		
	1800	40.00	38.00~42.00	1.40	1.33~1.47	39.48	1.44		
1800MHz Body	1710	53.50	50.83~56.18	1.46	1.39~1.53	53.24	1.45		
	1730	53.50	50.83~56.18	1.48	1.41~1.55	53.39	1.47		
	1750	53.40	50.73~56.07	1.49	1.42~1.56	53.19	1.49		
	1800	53.30	50.64~55.97	1.52	1.44~1.60	52.97	1.54		
1900MHz Head	1850	40.00	38.00~42.00	1.40	1.33~1.47	39.93	1.37	21.6°C	2024-04-01
	1880	40.00	38.00~42.00	1.40	1.33~1.47	39.91	1.40		
	1900	40.00	38.00~42.00	1.40	1.33~1.47	39.98	1.41		
	1910	40.00	38.00~42.00	1.40	1.33~1.47	39.97	1.42		
1900MHz Body	1850	53.30	50.64~55.97	1.52	1.44~1.60	53.23	1.49		
	1880	53.30	50.64~55.97	1.52	1.44~1.60	53.36	1.53		
	1900	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.56		
	1910	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.57		





2450MHz Head	2410	39.30	37.34~41.26	1.76	1.67~1.85	39.22	1.78	21.6°C	2024-04-03
	2435	39.20	37.24~41.16	1.79	1.70~1.88	39.25	1.77		
	2450	39.20	37.24~41.16	1.80	1.71~1.89	39.24	1.76		
	2460	39.20	37.24~41.16	1.81	1.72~1.90	39.20	1.76		
2450MHz Body	2410	52.80	50.16~55.44	1.91	1.81~2.00	52.72	1.92		
	2435	52.70	50.07~55.34	1.94	1.84~2.04	52.75	1.92		
	2450	52.70	50.07~55.34	1.95	1.85~2.05	52.74	1.91		
	2460	52.70	50.07~55.34	1.96	1.86~2.06	52.70	1.91		
2600MHz Head	2510	39.00	37.05~40.95	1.96	1.86~2.06	38.87	1.93	21.6°C	2024-04-08
	2535	39.00	37.05~40.95	1.96	1.86~2.06	38.58	1.93		
	2560	39.00	37.05~40.95	1.96	1.86~2.06	38.98	2.02		
	2600	39.00	37.05~40.95	1.96	1.86~2.06	52.50	2.02		
2600MHz Body	2510	52.50	49.90~55.11	2.16	2.05~2.27	52.21	2.05		
	2535	52.50	49.90~55.11	2.16	2.05~2.27	51.92	2.06		
	2560	52.50	49.90~55.11	2.16	2.05~2.27	52.01	2.09		
	2600	52.50	49.90~55.11	2.16	2.05~2.27	38.87	1.93		
ε _r = Relative permittivity, σ= Conductivity									






8 System Check

8.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

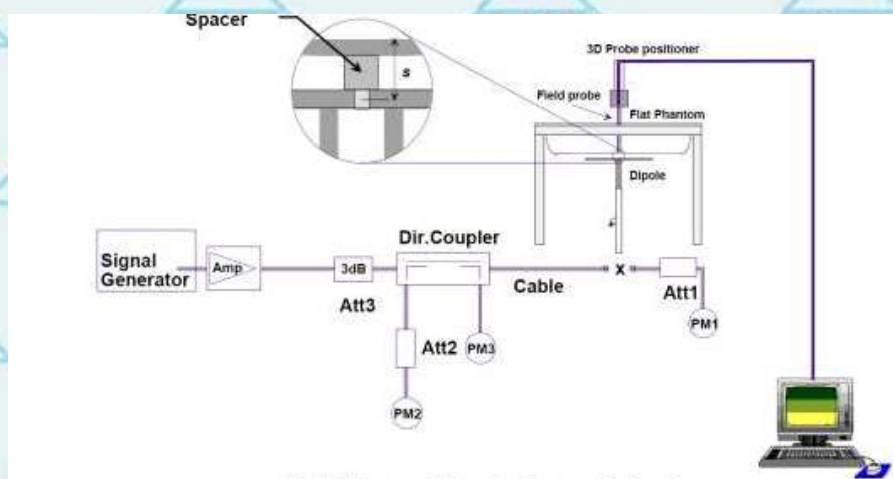



8.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check	Target SAR (1W) (+/-10%)				Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/g)	Range of $\pm 10\%$ 1-g (W/g)	10-g (W/g)	Range of $\pm 10\%$ 10-g (W/g)	1-g (W/g)	10-g (W/g)		
D835V2 Head	9.82	8.84~10.80	6.35	5.72~6.99	9.700	6.150	21.6°C	2024-03-25
D1800V2 Head	37.09	33.38~40.80	19.77	17.93~21.75	39.980	20.600	21.6°C	2024-03-28
D1900V2 Head	38.93	35.04~42.82	20.27	18.45~22.55	39.980	21.070	21.6°C	2024-04-01
D2450V2 Head	53.41	48.07~58.75	23.95	21.56~26.35	53.930	24.530	21.6°C	2024-04-03
D2600V2 Head	56.88	51.20~62.56	24.92	22.43~27.41	53.180	23.430	21.6°C	2024-04-08
D835V2 Body	9.41	8.47~10.35	6.22	5.99~6.84	10.150	6.450	21.6°C	2024-03-25
D1800V2 Body	38.03	34.23~41.83	20.69	18.62~22.76	41.560	21.720	21.6°C	2024-03-28
D1900V2 Body	38.73	34.86~42.60	20.48	18.43~22.53	39.330	20.940	21.6°C	2024-04-01
D2450V2 Body	51.39	46.25~56.53	23.63	21.27~25.99	54.330	23.330	21.6°C	2024-04-03
D2600V2 Body	54.54	49.09~59.99	24.37	21.94~26.80	57.860	25.600	21.6°C	2024-04-08
Note: All SAR values are normalized to 1W forward power.								

Note: 5G band system check USES standard waveguide, so the test results are standard en62209-2 table B2





9 SAR Test Test Configuration

9.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

9.2 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1”s for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the Headset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1”s. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1”s. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the Headset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in





Report No.: WSCT-A2LA-R&E240300016A-SAR SAR Evaluation Report

the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HSDPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.:

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5



4)HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

9.3 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.



**4) LTE procedures for SAR testing****A) Largest channel bandwidth standalone SAR test requirements****i) QPSK with 1 RB allocation**

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.





9.4 Wi-Fi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for Wi-Fi mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. 802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2412	1#	√	△
		2437	6	√	△
		2462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

9.5 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.





B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

10 Detailed Test Results

10.1 Conducted Power measurements

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.





10.1.1 Conducted Power of GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM(CS)		33.00	32.49	32.47	32.68	-9.03	23.46	23.44	23.65
GPRS (GMSK)	1Tx slot	31.00	30.54	29.93	30.25	-9.03	21.51	20.90	21.22
	2Tx slots	30.00	29.74	29.91	29.68	-9.03	23.72	23.89	23.66
	3Tx slots	31.50	30.23	31.04	30.00	-6.02	25.97	26.78	25.74
	4Tx slots	30.50	29.71	30.19	30.07	-4.26	26.70	27.18	27.06
EGPRS (8PSK)	1Tx slot	26.50	25.57	26.25	25.76	-3.01	16.54	17.22	16.73
	2Tx slots	26.50	26.24	26.3	25.64	-9.03	20.22	20.28	19.62
	3Tx slots	27.50	26.04	27.07	26.38	-6.02	21.78	22.81	22.12
	4Tx slots	26.50	25.93	26.12	25.73	-4.26	22.92	23.11	22.72
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM(CS)		30.00	29.15	29.79	29.15	-9.03	20.12	20.76	20.12
GPRS (GMSK)	1Tx slot	29.50	29.13	26.33	25.78	-9.03	20.10	17.30	16.75
	2Tx slots	27.00	26.06	25.57	26.8	-9.03	20.04	19.55	20.78
	3Tx slots	27.00	25.84	26.89	26.42	-6.02	21.58	22.63	22.16
	4Tx slots	26.50	25.72	25.81	26.39	-4.26	22.71	22.80	23.38
EGPRS (8PSK)	1Tx slot	26.50	26.04	24.88	24.82	-3.01	17.01	15.85	15.79
	2Tx slots	25.50	24.94	24.8	25.33	-9.03	18.92	18.78	19.31
	3Tx slots	25.00	24.82	25	24.88	-6.02	20.56	20.74	20.62
	4Tx slots	26.00	25.30	25.62	24.85	-4.26	22.29	22.61	21.84

Note:

Division Factors

To average the power, the division factor is as follows:

1Tx-slots = 1 transmit time slots out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB



10.1.2 Conducted Power of ECDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band 2		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880.0	1907.6
RMC 12.2K		23.00	22.69	21.52	22.69
HSDPA	Subtest-1	23.00	22.09	22.71	21.49
	Subtest-2	23.00	21.84	22.93	21.8
	Subtest-3	22.00	21.26	21.71	21.75
	Subtest-4	22.50	21.96	21.62	22.46
HSUPA	Subtest-1	23.50	21.69	23.00	22.38
	Subtest-2	22.50	22.11	21.86	22.12
	Subtest-3	22.50	21.42	22.46	22.21
	Subtest-4	23.00	22.54	22.34	21.28
	Subtest-5	23.00	22.10	22.64	21.94
Mode		Maximum Tune-up(dBm)	WCDMA Band 4		
			Conducted Power (dBm)		
			CH1312	CH1413	CH1513
			1712.4	1732.6	1752.6
RMC 12.2K		22.50	22.21	22.36	21.84
HSDPA	Subtest-1	22.50	21.81	22.06	22.14
	Subtest-2	22.50	22.09	22.12	22.14
	Subtest-3	23.00	22.53	22.52	21.91
	Subtest-4	22.00	21.96	21.58	21.6
HSUPA	Subtest-1	22.50	22.5	21.66	21.79
	Subtest-2	23.00	22.60	22.03	21.85
	Subtest-3	22.00	21.93	21.6	21.8
	Subtest-4	22.50	22.43	21.75	21.17
	Subtest-5	22.00	21.34	22.00	21.46
Mode		Maximum Tune-up(dBm)	WCDMA Band 5		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
			826.4	836.6	846.6
RMC 12.2K		23.00	22.73	22.74	21.43
HSDPA	Subtest-1	22.00	21.93	21.78	21.44
	Subtest-2	22.50	21.57	21.54	22.48
	Subtest-3	22.50	22.16	21.95	22.06
	Subtest-4	22.50	22.31	22.38	22.48
HSUPA	Subtest-1	22.50	22.3	22.4	21.89
	Subtest-2	22.50	22.08	21.88	21.57
	Subtest-3	22.50	22.29	22.36	22.1
	Subtest-4	22.50	22.33	21.75	22.48
	Subtest-5	22.50	22.05	21.76	21.81
Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.					



10.1.3 Conducted Power of LTE Band 2

LTE-FDD Band 2				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18607 1850.7MHz	18900 1880.0MHz	19193 1909.3MHz
1.4MHz	QPSK	1	0	23.00	22.98	22.85	22.95
			2	23.50	23.00	22.86	23.03
			5	23.50	23.02	22.88	23.06
		3	0	23.50	22.86	23.02	23.04
			2	23.00	22.98	22.95	22.97
			3	23.50	22.97	22.99	23.00
	16QAM	6	0	23.00	22.50	22.49	22.63
		1	0	23.50	23.40	22.47	22.75
			2	23.50	23.39	22.54	22.87
			5	23.50	23.45	22.57	22.78
3MHz	QPSK	3	0	23.00	22.15	21.94	22.50
			2	22.50	22.17	21.95	22.44
			3	22.50	22.16	21.99	22.43
		6	0	21.50	21.10	20.98	21.32
	16QAM	1	0	23.00	22.77	22.85	22.90
			7	23.50	22.82	22.88	23.05
			14	23.50	22.79	22.86	23.08
		8	0	23.00	22.50	22.55	22.50
			4	23.00	22.52	22.36	22.53
			7	23.00	22.45	22.53	22.47
5MHz	QPSK	15	0	23.00	22.46	22.54	22.51
		1	0	24.00	23.51	22.47	22.79
			7	23.50	23.51	22.52	22.86
			14	21.50	23.47	22.57	22.87
	16QAM	8	0	21.50	20.90	21.10	21.13
			4	21.50	20.93	21.12	21.19
			7	21.50	20.91	21.06	21.16
		15	0	21.50	21.06	21.06	21.23
10MHz	QPSK	1	0	23.00	22.73	22.86	22.89
			13	23.00	22.73	22.87	22.95
			24	23.00	22.69	22.94	22.95
		12	0	23.00	22.39	22.50	22.49
			6	23.00	22.31	22.50	22.45
			13	23.00	22.42	22.44	22.63
	16QAM	25	0	23.00	22.43	22.47	22.63
		1	0	23.00	22.62	22.16	22.39
			13	23.00	22.54	22.11	22.49
			24	23.00	22.83	22.14	22.49
15MHz	QPSK	12	0	21.50	20.89	20.90	21.14
			6	21.50	20.85	20.84	21.13
			13	21.50	20.87	20.84	21.08
		25	0	21.50	21.03	21.06	21.08



LTE-FDD Band 2				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		18650	18900	19150	
					1855.0MHz	1880.0MHz	1905.0MHz	
10MHz	QPSK	1	0	23.00	22.92	22.94	22.94	
			25	23.50	22.84	23.01	22.93	
			49	23.50	22.76	23.01	23.06	
		25	0	23.00	22.36	22.43	22.50	
			13	22.50	22.28	22.46	22.46	
			25	23.00	22.35	22.36	22.50	
	16QAM	50	0	22.50	22.39	22.37	22.47	
			1	0	24.00	23.57	22.46	22.54
				25	24.00	23.95	22.47	22.57
		25		49	23.50	23.41	22.49	22.56
			0	21.50	20.87	21.08	21.36	
			13	21.50	21.15	21.00	21.02	
50	25	21.50	21.14	21.01	21.16			
	0	21.50	21.25	21.07	21.00			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	18675	18900	19125
1857.5MHz						1880.0MHz	1902.5MHz	
15MHz	QPSK	1	0	23.50	22.92	23.00	23.01	
			38	23.00	22.77	22.99	22.88	
			74	23.50	22.76	23.00	23.03	
		36	0	22.50	22.40	22.44	22.39	
			18	23.00	22.30	22.46	22.51	
			39	22.50	22.37	22.44	22.49	
	16QAM	75	0	22.50	22.39	22.50	22.46	
			1	0	24.00	23.63	22.43	23.11
				38	24.00	23.77	22.45	23.08
		74		24.00	23.53	22.50	23.23	
		36	0	21.50	21.16	21.13	21.03	
			18	21.50	21.22	21.18	21.36	
39	21.50		20.88	21.12	21.11			
75	0	21.50	21.29	21.00	21.41			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	18700	18900	19100
						1860.0MHz	1880.0MHz	1900.0MHz
20MHz	QPSK	1	0	23.50	22.83	22.99	23.10	
			50	23.50	22.78	23.03	23.05	
			99	23.50	22.83	23.17	23.23	
		50	0	22.50	22.34	22.45	22.49	
			25	22.50	22.34	22.49	22.50	
			50	22.50	22.40	22.43	22.49	
	16QAM	100	0	22.50	22.26	22.33	22.39	
			1	0	22.50	22.12	22.13	22.38
				50	22.50	21.99	22.13	22.39
		99		22.50	22.02	22.25	22.49	
		50	0	21.50	21.33	20.99	21.23	
			25	21.50	21.33	20.96	21.02	
50	21.50		20.94	20.85	21.01			
100	0	21.50	21.21	20.96	21.03			



10.1.4 Conducted Power of LTE Band 4

LTE-FDD Band 4				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393	
					1710.7MHz	1732.5MHz	1754.3MHz	
1.4MHz	QPSK	1	0	23.00	22.78	22.53	22.95	
			2	23.50	22.78	22.54	23.03	
			5	23.00	22.79	22.55	22.95	
		3	0	23.00	22.73	22.65	22.76	
			2	23.00	22.71	22.58	22.81	
			3	23.00	22.66	22.51	22.74	
	16QAM	6	0	22.50	22.22	22.10	22.39	
			0	23.50	23.08	22.72	22.90	
			2	23.50	23.07	22.87	22.77	
		3	5	23.50	23.15	22.82	22.83	
			0	22.50	21.79	21.72	22.30	
			2	22.50	21.80	21.70	22.23	
6	3	22.50	21.78	21.74	22.20			
	0	21.50	21.13	20.88	20.95			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	19965	20175	20385
1711.5MHz						1732.5MHz	1753.5MHz	
3MHz	QPSK	1	0	23.50	22.62	22.56	23.06	
			7	23.50	22.51	22.52	23.04	
			14	23.00	22.48	22.55	22.99	
		8	0	22.50	22.08	22.13	22.41	
			4	22.50	22.18	22.18	22.33	
			7	22.50	22.07	22.14	22.29	
	16QAM	15	0	22.50	22.04	22.14	22.43	
			0	23.50	23.16	22.71	22.94	
			7	23.50	23.15	22.84	22.89	
		8	14	23.50	23.06	22.80	22.91	
			0	21.00	20.97	20.81	20.90	
			4	21.50	20.90	21.21	20.86	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	19976	20175	20375	
					1712.5MHz	1732.5MHz	1752.5MHz	
5MHz	QPSK	1	0	23.00	22.58	22.59	22.67	
			13	23.00	22.41	22.50	22.63	
			24	23.00	22.49	22.62	22.71	
		12	0	22.50	22.15	22.04	22.27	
			6	22.50	22.13	22.06	22.37	
			13	22.50	22.02	22.09	22.37	
	16QAM	25	0	22.50	22.00	22.08	22.36	
			0	22.50	22.28	21.65	22.48	
			13	23.00	22.17	21.84	22.60	
		1	24	23.00	22.27	21.84	22.53	
			12	0	21.00	20.88	20.47	20.84
				6	21.00	20.92	20.88	20.94
25	13	21.00		20.83	20.92	20.90		
	0	21.50	21.03	21.04	20.88			



LTE-FDD Band 4				Maximum Tune- up(dBm)	Conducted Power(dBm)					
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350			
					1715.0MHz	1732.5MHz	1750.0MHz			
10MHz	QPSK	1	0	23.00	22.65	22.82	22.88			
			25	23.00	22.59	22.73	22.93			
			49	23.00	22.64	22.76	22.89			
		25	0	22.50	22.00	22.14	22.30			
			13	22.50	22.18	22.12	22.38			
			25	22.50	22.09	22.12	22.35			
		50	0	22.50	22.07	22.18	22.33			
			0	23.50	23.23	22.20	22.54			
			16QAM	1	25	23.50	23.23	22.21	22.57	
	49	23.50			23.20	22.26	22.64			
	0	21.00			20.85	20.71	20.89			
	25	13		21.50	20.86	21.02	20.90			
		25		21.00	20.62	20.72	21.00			
		50		0	21.50	20.95	21.14	20.93		
	Bandwidth	Modulation		RB allocation	RB offset	Maximum Tune- up(dBm)	20025	20175	20325	
							1717.5MHz	1732.5MHz	1747.5MHz	
	15MHz	QPSK		1	0	23.50	22.66	22.87	23.02	
			38		23.00	22.72	22.81	22.95		
74			23.00		22.74	22.73	22.94			
36			0	22.50	22.11	22.10	22.26			
			18	22.50	22.12	22.12	22.35			
			39	22.50	22.19	22.24	22.46			
75			0	22.50	22.14	22.15	22.28			
			16QAM	1	0	23.50	23.24	22.22	23.12	
					38	23.50	23.20	22.16	23.04	
74		23.50			23.31	22.36	23.04			
36		0		21.00	20.94	20.74	20.92			
		18		21.50	20.67	21.15	20.91			
		39		21.50	20.69	21.08	20.81			
75		0		21.50	20.70	21.12	20.94			
		Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	20050	20175	20300
								1720.0MHz	1732.5MHz	1745.0MHz
20MHz		QPSK	1	0	23.00	22.65	22.76	22.88		
				50	23.00	22.57	22.72	22.88		
	99			23.00	22.49	22.74	22.90			
	50		0	22.50	22.20	22.00	22.27			
			25	22.50	22.12	22.20	22.34			
			50	22.50	22.15	22.22	22.41			
	100		0	22.50	22.16	22.14	22.38			
			16QAM	1	0	22.50	21.78	22.28	22.39	
					50	23.00	21.79	22.26	22.52	
	99	23.00			21.79	22.64	22.63			
	50	0		21.50	21.08	20.95	21.10			
		25		21.50	21.09	20.97	20.88			
		50		21.50	20.74	21.02	20.84			
	100	0		21.50	21.03	21.07	20.90			



10.1.5 Conducted Power of LTE Band 5

LTE-FDD Band 5				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	23.50	22.88	22.89	23.08
			2	23.50	22.93	23.02	23.14
			5	23.50	22.97	23.05	23.08
		3	0	23.50	22.80	23.06	23.06
			2	23.50	22.87	23.09	23.09
			3	23.50	22.80	23.10	23.06
		6	0	23.00	22.31	22.62	22.64
	16QAM	1	0	23.50	23.20	23.13	23.48
			2	23.50	23.14	23.10	23.48
			5	23.50	23.14	23.18	23.42
		3	0	22.50	21.96	22.05	22.36
			2	22.50	21.88	21.96	22.38
			3	22.50	21.97	22.00	22.42
		6	0	21.50	21.43	20.99	21.23
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	20415
825.5MHz	836.5MHz						847.5MHz
3MHz	QPSK	1	0	23.50	22.75	22.88	23.09
			7	23.50	22.79	23.00	23.08
			14	23.50	22.73	23.09	23.11
		8	0	23.00	22.31	22.46	22.55
			4	23.00	22.32	22.46	22.51
			7	23.00	22.25	22.60	22.60
		15	0	23.00	22.27	22.66	22.54
	16QAM	1	0	23.50	23.15	23.09	23.44
			7	23.50	23.10	23.08	23.43
			14	23.50	23.08	23.10	23.40
		8	0	22.00	21.15	21.61	21.46
			4	21.50	21.16	21.18	21.45
			7	21.50	20.64	21.22	21.02
		15	0	21.50	21.32	21.08	21.50



LTE-FDD Band 5				Maximum Tune- up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625		
					826.5MHz	836.5MHz	846.5MHz		
5MHz	QPSK	1	0	23.00	22.72	22.85	22.99		
			13	23.50	22.69	23.00	22.98		
			24	23.50	22.81	23.04	22.98		
		12	0	23.00	22.37	22.39	22.61		
			6	22.50	22.18	22.46	22.48		
			13	23.00	22.40	22.62	22.60		
		25	0	23.00	22.33	22.58	22.69		
			16QAM	1	0	23.00	22.31	22.05	22.71
					13	23.00	22.32	22.19	22.54
	24	23.00			22.47	22.21	22.56		
	12	0		21.50	21.19	21.29	21.43		
		6		21.50	20.67	20.89	21.46		
		13		21.50	20.63	20.87	21.43		
	25	0		21.50	20.83	21.16	21.43		
	Bandwidth	Modulation		RB allocation	RB offset	Maximum Tune- up(dBm)	20450	20525	20600
829.0MHz							836.5MHz	844.0MHz	
10MHz	QPSK	1	0	23.50	22.77	23.02	23.03		
			25	23.50	22.78	23.21	23.05		
			49	23.50	22.99	23.29	23.14		
		25	0	23.00	22.24	22.38	22.60		
			13	23.00	22.38	22.52	22.50		
			25	23.00	22.59	22.57	22.48		
		50	0	23.00	22.44	22.54	22.54		
			16QAM	1	0	23.50	23.19	22.40	22.46
					25	23.50	23.36	22.44	22.55
	49	24.00			23.79	22.55	22.48		
	25	0		21.50	20.69	21.36	21.48		
		13		21.50	20.75	21.03	21.08		
		25		21.50	20.82	21.18	21.50		
	50	0		21.50	20.76	21.06	21.11		





10.1.6 Conducted Power of LTE Band 7

LTE-FDD Band 7				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20775 2502.5MHz	21100 2535.0MHz	21425 2567.5MHz
5MHz	QPSK	1	0	22.50	22.07	21.61	21.48
			13	22.50	22.02	21.66	21.60
			24	22.50	22.14	21.69	21.59
		12	0	22.00	21.61	21.14	21.10
			6	22.00	21.57	21.31	21.09
			13	22.00	21.71	21.21	21.19
	16QAM	25	0	22.00	21.63	21.22	21.19
			0	22.00	21.66	20.95	21.21
			13	22.00	21.72	20.93	21.23
		1	24	22.00	21.77	20.98	21.25
			0	20.00	19.96	19.71	19.72
			6	20.50	20.09	19.66	19.70
		12	13	20.50	20.00	19.67	19.65
			0	20.50	20.32	19.85	19.68
			25	20.50	20.32	19.85	19.68
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	20800	21100	21400
10MHz	QPSK	1	0	22.50	22.12	21.88	21.77
			25	22.50	22.05	21.85	21.69
			49	22.50	22.19	21.88	21.70
		25	0	22.00	21.60	21.15	21.26
			13	22.00	21.67	21.29	21.21
			25	22.00	21.81	21.23	21.21
	16QAM	50	0	22.00	21.69	21.19	21.15
			0	23.00	22.75	21.29	21.35
			25	23.00	22.82	21.29	21.23
		1	49	23.00	22.92	21.42	21.24
			0	20.50	20.09	19.89	20.34
			13	20.50	20.20	19.87	19.77
		25	25	20.50	20.18	19.93	19.81
			0	20.50	20.23	19.95	19.74
			25	20.50	20.23	19.95	19.74



Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20825	21100	21375			
					2057.5MHz	2535.0MHz	2562.5MHz			
15MHz	QPSK	1	0	22.50	22.00	21.98	21.91			
			38	22.50	22.12	21.81	21.71			
			74	22.50	22.24	21.92	21.67			
		36	0	22.00	21.72	21.28	21.30			
			18	22.00	21.73	21.26	21.25			
			39	22.00	21.82	21.36	21.11			
		75	0	22.00	21.81	21.26	21.24			
			16QAM	1	0	23.00	22.76	21.48	22.28	
					38	23.00	22.88	21.29	22.08	
	74	23.00			22.99	21.46	22.01			
	36	0		20.50	20.31	19.96	19.97			
		18		20.50	20.35	19.95	20.26			
		39		20.50	20.33	20.03	19.84			
	75	0		20.50	20.30	19.83	20.34			
		Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	21350	21100	21350
								2560.0MHz	2535.0MHz	2560.0MHz
20MHz	QPSK	1	0	22.50	21.96	20.36	22.26			
			50	22.50	22.10	21.96	22.03			
			99	22.50	22.06	21.83	21.91			
		50	0	22.50	21.80	22.06	21.46			
			25	22.00	21.80	21.41	21.35			
			50	22.00	21.81	21.35	21.24			
		100	0	22.00	21.75	21.25	21.45			
			16QAM	1	0	22.00	21.34	21.32	21.51	
					50	22.00	21.49	21.64	21.27	
	99	22.00			21.53	21.45	21.12			
	50	0		22.00	20.36	21.66	20.07			
		25		20.50	20.47	19.78	20.01			
		50		21.00	20.57	19.86	19.81			
	100	0		21.00	20.57	19.95	19.98			



10.1.7 Conducted Power of LTE Band 12

LTE-FDD Band 12				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23017 699.7MHz	23095 707.5MHz	23173 715.5MHz
1.4MHz	QPSK	1	0	23.00	22.92	22.90	22.74
			2	23.50	22.99	23.25	22.96
			5	23.50	22.99	23.26	22.94
		3	0	23.50	22.84	23.36	22.77
			2	23.50	22.90	23.33	22.86
			3	23.50	22.87	23.28	22.87
	16QAM	6	0	23.00	22.32	22.85	22.48
			0	23.50	23.24	23.14	23.21
			2	23.50	23.36	23.47	23.31
		1	5	23.50	23.32	23.48	23.20
			0	22.50	22.14	22.41	22.28
			2	22.50	22.08	22.40	22.35
		3	3	22.50	22.03	22.36	22.26
			0	21.50	21.00	21.27	21.41
			0	21.50	21.00	21.27	21.41
3MHz	QPSK	1	0	23.00	23.025	23.095	23.165
			7	23.50	700.5MHz	707.5MHz	714.5MHz
			14	23.50	22.74	22.92	22.83
		8	0	22.50	22.79	23.29	22.82
			4	23.00	22.77	23.29	23.01
			7	23.00	22.40	22.36	22.27
	16QAM	15	0	23.00	22.34	22.94	22.24
			0	23.00	22.40	22.92	22.33
			0	23.00	22.37	22.90	22.32
		1	0	23.50	22.34	22.98	23.27
			7	23.50	23.34	23.48	23.27
			14	23.50	23.34	23.44	23.24
		8	0	21.50	20.88	20.98	21.25
			4	22.00	20.78	21.56	21.19
			7	21.50	20.83	21.50	21.21
		15	0	21.50	20.89	21.32	21.20



Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	23.00	22.74	22.85	22.78
			13	23.50	22.67	23.14	22.82
			24	23.00	22.70	22.90	22.97
		12	0	22.50	22.31	22.33	22.38
			6	23.00	22.32	22.85	22.39
			13	23.00	22.33	22.76	22.33
		25	0	23.00	22.30	22.80	22.31
	16QAM	1	0	22.50	22.45	22.11	22.40
			13	23.00	22.40	22.55	22.35
			24	23.00	22.53	22.41	22.32
		12	0	21.50	20.79	20.69	21.18
			6	21.50	20.83	21.16	21.25
			13	21.50	20.80	21.22	21.18
		25	0	21.50	20.94	21.35	21.22
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23060	23095	23130
					704.0MHz	707.5MHz	711.0MHz
10MHz	QPSK	1	0	23.00	22.79	22.99	23.00
			25	23.50	22.85	23.44	23.09
			49	23.50	23.28	23.02	23.08
		25	0	23.00	22.29	22.53	22.77
			13	23.00	22.39	22.86	22.39
			25	22.50	22.48	22.38	22.42
		50	0	23.00	22.32	22.88	22.50
	16QAM	1	0	23.50	23.41	22.48	22.34
			25	23.50	23.48	22.81	22.67
			49	24.00	23.84	22.45	22.28
		25	0	21.50	20.86	21.00	21.42
			13	21.50	21.23	21.37	21.37
			25	21.50	20.88	21.38	21.36
		50	0	21.50	21.29	21.43	21.36



10.1.8 Conducted Power of LTE Band 17

LTE-FDD Band 17				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
5MHz	QPSK	1	0	23.50	22.66	23.11	22.83
			13	23.00	22.83	22.85	22.76
			24	23.50	23.18	22.63	22.86
		12	0	23.00	22.53	22.81	22.40
			6	23.00	22.53	22.45	22.40
			13	23.00	22.73	22.41	22.32
		25	0	23.00	22.56	22.48	22.32
	16QAM	1	0	23.00	22.09	22.95	22.66
			13	23.00	22.06	22.85	22.53
			24	23.00	22.49	22.54	22.58
		12	0	21.50	20.78	21.25	21.16
			6	21.50	20.72	21.26	21.18
			13	21.50	21.10	21.21	21.18
		25	0	21.50	20.89	21.15	21.40
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
10MHz	QPSK	1	0	23.50	22.87	23.17	22.97
			25	23.50	23.22	23.09	23.05
			49	23.50	22.89	22.93	23.06
		25	0	23.00	22.50	22.87	22.75
			13	23.00	22.85	22.46	22.43
			25	22.50	22.41	22.40	22.44
		50	0	23.00	22.83	22.42	22.48
	16QAM	1	0	23.50	23.38	22.33	22.32
			25	24.00	23.76	22.79	22.65
			49	23.50	23.37	22.40	22.41
		25	0	21.50	20.78	21.32	21.26
			13	21.50	21.21	21.30	21.36
			25	21.50	21.20	21.25	21.33
		50	0	21.50	21.22	21.40	21.35



10.1.9 Conducted Power of LTE Band 26

LTE-FDD Band 26(814-824)				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		26697 814.7MHz	26740 819.0MHz	26783 823.3MHz
1.4MHz	QPSK	1	0	22.00	21.87	21.90	21.73
			2	22.00	21.92	21.89	21.93
			5	22.00	21.89	21.89	21.69
		3	0	22.00	21.74	21.95	21.77
			2	22.00	21.86	21.93	21.82
			3	22.00	21.81	21.88	21.75
	16QAM	6	0	21.50	21.31	21.39	21.36
			0	22.50	22.26	21.92	21.59
			2	22.50	22.20	21.92	21.61
		3	5	22.50	22.26	21.88	21.63
			0	21.50	21.05	20.88	21.12
			2	21.50	20.95	20.93	21.08
3MHz	QPSK	1	3	21.50	20.97	20.88	21.03
			0	20.50	19.88	20.16	19.81
		6	0	20.50	19.88	20.16	19.81
			0	22.50	22.31	21.79	21.63
			7	22.50	22.29	21.85	21.78
			14	22.50	22.26	21.80	21.71
	16QAM	8	0	20.50	19.75	20.39	20.19
			4	20.50	19.65	20.41	19.76
			7	20.50	19.99	20.39	19.71
		15	0	20.50	19.90	20.26	19.80
			0	22.50	22.31	21.79	21.63
			7	22.50	22.29	21.85	21.78
5MHz	QPSK	1	14	22.00	21.76	21.91	21.71
			0	21.50	21.35	21.43	21.30
			4	21.50	21.38	21.44	21.34
		8	7	21.50	21.32	21.28	21.28
			0	21.50	21.31	21.31	21.30
			0	22.50	22.31	21.79	21.63
	16QAM	1	7	22.50	22.29	21.85	21.78
			14	22.50	22.26	21.80	21.71
			0	20.50	19.75	20.39	20.19
		8	4	20.50	19.65	20.41	19.76
			7	20.50	19.99	20.39	19.71
			15	20.50	19.90	20.26	19.80
5MHz	QPSK	1	0	22.00	21.54	21.71	21.78
			13	22.00	21.53	21.79	21.75
			24	22.00	21.67	21.75	21.78
		12	0	21.50	21.26	21.27	21.31
			6	21.50	21.29	21.39	21.34
			13	21.50	21.18	21.24	21.33
	16QAM	25	0	21.50	21.17	21.27	21.27
			0	21.50	21.50	20.95	21.29
			13	22.00	21.54	20.96	21.26
		1	24	21.50	21.45	20.97	21.23
			0	20.50	19.72	20.00	20.20
			6	20.50	20.02	20.05	20.19
5MHz	QPSK	12	13	20.50	20.08	20.13	19.67
			0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
	16QAM	1	0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
	16QAM	12	0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
	16QAM	25	0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15
			0	20.50	20.20	20.25	20.15



LTE-FDD Band 26(824-849)				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		26697	26915	27033	
					824.7MHz	836.5MHz	848.3MHz	
1.4MHz	QPSK	1	0	22.00	21.91	21.57	21.52	
			2	22.00	21.95	21.56	21.62	
			5	22.00	21.98	21.54	21.52	
		3	0	22.00	21.90	21.61	21.64	
			2	22.00	21.85	21.64	21.51	
			3	22.00	21.89	21.52	21.56	
	6	0	21.50	21.40	21.07	21.12		
		16QAM	1	0	22.50	22.26	21.69	21.94
				2	22.50	22.22	21.72	21.98
	5			22.50	22.25	21.74	21.94	
	3		0	21.50	21.01	20.52	20.70	
			2	21.50	21.04	20.54	20.77	
3			21.50	21.01	20.51	20.74		
		6	0	20.00	19.86	19.46	19.71	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	26805	26915	27025	
					825.5MHz	836.5MHz	847.5MHz	
3MHz	QPSK	1	0	22.00	21.79	21.58	21.59	
			7	22.00	21.78	21.61	21.56	
			14	22.00	21.82	21.62	21.53	
		8	0	21.50	21.37	21.03	21.05	
			4	21.50	21.40	21.01	20.97	
			7	21.50	21.36	21.14	21.02	
	16QAM	15	0	21.50	21.35	21.21	21.15	
		1	0	22.50	22.30	21.65	21.86	
			7	22.50	22.22	21.69	21.82	
			14	22.50	22.30	21.70	21.82	
		8	0	20.50	19.73	20.21	19.60	
			4	20.00	19.74	19.74	19.55	
7	20.50		20.16	19.65	19.53			
15	0	20.00	19.89	19.59	19.60			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	26815	26915	27015	
					826.5MHz	836.5MHz	846.5MHz	
5MHz	QPSK	1	0	22.00	21.66	21.59	21.50	
			13	22.00	21.72	21.49	21.47	
			24	22.00	21.82	21.62	21.51	
		12	0	21.50	21.41	21.14	21.12	
			6	21.50	21.31	21.19	21.12	
			13	21.50	21.31	21.08	21.04	
	16QAM	25	0	21.50	21.29	21.09	21.17	
		1	0	21.50	21.46	20.77	21.02	
			13	21.50	21.41	20.74	20.93	
			24	21.50	21.46	20.75	21.04	
		12	0	20.00	19.57	19.95	19.49	
			6	20.50	20.07	19.40	19.51	
13	20.50		20.13	19.47	19.54			
25	0	20.50	20.23	19.57	19.51			



LTE-FDD Band 26				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		26840 829.0MHz	26915 836.5MHz	26990 844.0MHz
10MHz	QPSK	1	0	22.00	21.69	21.77	21.79
			25	22.00	21.84	21.79	21.75
			49	22.00	21.84	21.63	21.69
		25	0	21.50	21.23	21.31	21.30
			13	21.50	21.41	21.36	21.19
			25	21.50	21.39	21.31	21.24
	16QAM	50	0	21.50	21.40	21.36	21.27
			0	22.50	22.23	22.33	21.07
			25	22.50	22.26	22.35	21.04
		1	49	22.50	22.20	22.16	21.04
			0	20.50	20.07	20.03	20.11
			13	20.50	20.05	19.80	19.63
15MHz	QPSK	25	25	20.50	20.12	19.60	19.69
			0	20.50	20.13	19.80	19.64
			0	20.50	20.13	19.80	19.64
	16QAM	50	0	20.50	20.13	19.80	19.64
			0	20.50	20.13	19.80	19.64
			0	20.50	20.13	19.80	19.64
	QPSK	1	0	22.00	21.62	21.80	21.88
			38	22.00	21.58	21.79	21.74
			74	22.00	21.71	21.66	21.71
		36	0	21.50	21.08	21.36	21.18
			18	21.50	21.07	21.22	21.18
			39	21.50	20.96	21.27	21.09
	16QAM	75	0	21.50	21.02	21.28	21.30
			0	22.50	20.91	22.46	21.17
			38	22.50	21.03	22.18	21.05
		1	74	22.50	20.96	22.14	21.04
			0	20.00	19.51	19.83	19.76
			18	20.00	19.99	19.59	19.69
15MHz	QPSK	36	39	20.50	19.60	20.10	19.71
			0	20.50	20.05	19.69	19.55
			0	20.50	20.05	19.69	19.55
	16QAM	75	0	20.50	20.05	19.69	19.55
			0	20.50	20.05	19.69	19.55
			0	20.50	20.05	19.69	19.55



10.1.10 Conducted Power of LTE Band 38

LTE-TDD Band 38				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		40065 2537.5MHz	40640 2605.0MHz	41215 2652.5MHz
5MHz	QPSK	1	0	22.50	21.74	22.09	21.86
			13	22.50	21.86	22.09	21.87
			24	22.00	21.83	21.94	21.91
		12	0	22.00	21.29	21.64	21.63
			6	22.00	21.29	21.61	21.54
			13	22.00	21.41	21.51	21.59
	16QAM	25	0	22.00	21.40	21.62	21.59
			0	22.00	21.22	21.38	21.83
			13	22.00	21.14	21.29	21.88
		12	24	22.00	21.26	21.16	21.85
			0	20.50	19.90	20.04	20.12
			6	20.50	19.91	20.09	20.16
10MHz	QPSK	1	13	20.50	19.91	19.96	20.15
			25	20.50	19.98	20.25	20.28
			0	20.50	19.98	20.25	20.28
		25	0	22.50	21.98	22.37	21.85
			25	22.50	22.07	22.09	21.95
			49	22.50	22.20	22.17	22.12
		50	0	22.00	21.33	21.58	21.42
			13	21.50	21.36	21.45	21.50
			25	22.00	21.53	21.49	21.70
	16QAM	1	0	22.00	21.59	21.53	21.54
			0	22.00	21.72	21.45	21.68
			25	22.50	22.08	21.21	21.85
		25	49	22.50	22.13	21.24	22.02
			0	20.50	19.95	20.27	20.17
			13	20.50	19.94	20.20	20.22
		50	25	20.50	20.03	20.14	20.31
			0	20.50	20.10	20.22	20.11
			0	20.50	20.10	20.22	20.11



Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40115	40640	41165
					2542.5MHz	2605.0MHz	2647.5MHz
15MHz	QPSK	1	0	22.50	22.01	22.38	21.73
			38	22.50	22.20	22.12	21.92
			74	22.50	22.35	22.08	22.17
		36	0	22.00	21.32	21.76	21.39
			18	22.00	21.57	21.55	21.44
			39	22.00	21.67	21.39	21.52
	16QAM	75	0	22.00	21.43	21.65	21.52
			0	22.00	21.77	21.47	21.52
			38	22.50	22.06	21.32	21.71
		36	74	22.50	22.08	21.12	21.92
			0	20.50	20.07	20.24	19.94
			18	20.50	20.10	20.11	20.14
20MHz	QPSK	39	20.50	20.18	20.11	20.11	20.22
			75	0	20.50	20.08	20.17
			0	20.50	20.08	20.17	20.16
	16QAM	1	0	22.50	21.82	22.07	21.81
			50	22.50	22.08	21.87	22.09
			99	22.50	22.21	21.64	22.30
	16QAM	50	0	22.00	21.50	21.75	21.16
			25	22.00	21.63	21.57	21.33
			50	22.00	21.79	21.41	21.46
	16QAM	100	0	22.00	21.51	21.55	21.36
			0	22.00	21.02	21.03	21.54
			50	22.00	21.32	20.71	21.80
	16QAM	1	99	22.50	21.31	20.69	22.16
			0	20.50	20.09	20.32	19.83
			25	20.50	20.30	20.18	19.94
	16QAM	50	50	20.50	20.48	20.12	20.14
			0	20.50	20.07	20.02	19.85
			100	0	20.50	20.07	20.02



10.1.11 Conducted Power of LTE Band 40

LTE-FDD Band 40				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		38725	38750	38775	
					2307.5MHz	2310.0MHz	2312.5MHz	
5MHz	QPSK	1	0	22.50	22.07	22.08	21.87	
			13	22.50	22.10	22.01	21.82	
			24	22.50	22.08	21.96	21.84	
		12	0	21.50	21.47	21.48	21.47	
			6	22.00	21.52	21.56	21.47	
			13	21.50	21.40	21.46	21.40	
	25	0	21.50	21.45	21.44	21.34		
		16QAM	1	0	22.00	21.16	21.19	21.76
				13	22.00	21.15	21.11	21.76
	24			22.00	21.13	21.17	21.81	
	12		0	20.50	19.94	19.88	20.01	
			6	20.00	19.94	19.87	19.93	
			13	20.00	19.96	19.84	19.91	
	25	0	20.50	20.24	20.04	20.09		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	39175	39200	39225
2352.5MHz						2355.0MHz	2357.5MHz	
5MHz	QPSK	1	0	22.00	21.62	21.48	21.77	
			25	22.00	21.59	21.47	21.74	
			49	22.00	21.64	21.51	21.76	
		25	0	21.50	21.26	21.16	21.09	
			13	21.50	21.20	21.12	21.21	
			25	21.50	21.18	21.11	21.13	
	50	0	21.50	21.24	21.14	21.18		
		16QAM	1	0	21.50	20.87	21.37	20.86
				25	21.50	20.90	21.40	20.87
	49			21.50	21.01	21.43	20.89	
	25		0	20.00	19.65	19.61	19.53	
			13	20.00	19.64	19.61	19.66	
			25	20.00	19.58	19.55	19.69	
	50	0	20.00	19.93	19.78	19.90		

**10.1.12 Conducted Power of LTE Band 41**

LTE-TDD Band 41				Maximum Tune- up(dBm)	Conducted Power(dBm)					
Bandwidth	Modulation	RB allocation	RB offset		40065	40265	40640	41015	41215	
					2537.5MHz	2557.5 MHz	2595.0MHz	2632.5 MHz	2652.5MHz	
5MHz	QPSK	1	0	22.50	21.74	21.90	22.09	21.98	21.86	
			13	22.50	21.86	21.89	22.09	21.95	21.87	
			24	22.00	21.83	21.44	21.94	21.92	21.91	
		12	0	22.00	21.29	21.77	21.64	21.20	21.63	
			6	22.00	21.29	21.74	21.61	21.80	21.54	
			13	22.00	21.41	21.77	21.51	21.48	21.59	
	16QAM	25	0	22.00	21.40	21.82	21.62	21.93	21.59	
			1	0	22.00	21.22	21.02	21.38	21.47	21.83
				13	22.00	21.14	21.81	21.29	21.78	21.88
		24		22.00	21.26	21.82	21.16	21.81	21.85	
		12	0	20.50	19.90	22.14	20.04	21.80	20.12	
			6	20.50	19.91	20.01	20.09	20.41	20.16	
13	20.50		19.91	20.04	19.96	20.40	20.15			
25	0	20.50	19.98	21.36	20.25	22.07	20.28			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	40090	40290	40640	40990	41190	
					2540.0MHz	2560.0MHz	2595.0MHz	2630.0MHz	2650.0MHz	
10MHz	QPSK	1	0	22.50	21.98	22.15	22.37	21.74	21.85	
			25	22.50	22.07	22.23	22.09	21.73	21.95	
			49	22.50	22.20	21.31	22.17	21.70	22.12	
		25	0	22.00	21.33	21.42	21.58	21.67	21.42	
			13	21.50	21.36	21.31	21.45	22.29	21.50	
			25	22.00	21.53	21.72	21.49	21.52	21.70	
	16QAM	50	0	22.00	21.59	21.57	21.53	21.80	21.54	
			1	0	22.00	21.72	21.62	21.45	21.75	21.68
				25	22.50	22.08	21.32	21.21	22.28	21.85
		25		49	22.50	22.13	22.25	21.24	21.67	22.02
			0	20.50	19.95	21.35	20.27	22.21	20.17	
			13	20.50	19.94	19.73	20.20	20.00	20.22	
50	25	20.50	20.03	21.87	20.14	22.25	20.31			
50	0	20.50	20.10	21.92	20.22	22.04	20.11			



Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40115	40315	40640	40965	41165
					2542.5MHz	2562.5MHz	2595.0MHz	2627.5MHz	2647.5MHz
15MHz	QPSK	1	0	22.50	22.01	22.12	22.38	21.97	21.73
			38	22.50	22.20	21.44	22.12	21.94	21.92
			74	22.50	22.35	22.20	22.08	22.12	22.17
		36	0	22.00	21.32	21.80	21.76	21.82	21.39
			18	22.00	21.57	21.79	21.55	21.93	21.44
			39	22.00	21.67	21.73	21.39	21.75	21.52
	16QAM	75	0	22.00	21.43	21.81	21.65	21.69	21.52
			0	22.00	21.77	21.42	21.47	21.26	21.52
			38	22.50	22.06	21.72	21.32	21.86	21.71
		1	74	22.50	22.08	21.48	21.12	22.09	21.92
			0	20.50	20.07	22.06	20.24	21.35	19.94
			18	20.50	20.10	20.28	20.11	20.15	20.14
		36	39	20.50	20.18	20.20	20.11	20.43	20.22
			75	20.50	20.08	22.26	20.17	22.18	20.16
					40140	40340	40640	40940	41140
					2545.0MHz	2565.0MHz	2595.0MHz	2625.0MHz	2645.0MHz
	QPSK	1	0	22.50	21.82	21.92	22.07	21.88	21.81
			50	22.50	22.08	22.11	21.87	21.33	22.09
			99	22.50	22.21	22.20	21.64	22.25	22.30
		50	0	22.00	21.50	21.37	21.75	21.79	21.16
			25	22.00	21.63	21.51	21.57	21.38	21.33
			50	22.00	21.79	21.76	21.41	21.83	21.46
20MHz	16QAM	100	0	22.00	21.51	21.23	21.55	21.35	21.36
			0	22.00	21.02	21.86	21.03	21.76	21.54
			50	22.00	21.32	21.52	20.71	21.88	21.80
		1	99	22.50	21.31	21.58	20.69	21.65	22.16
			0	20.50	20.09	20.21	20.32	20.20	19.83
			25	20.50	20.30	21.38	20.18	20.15	19.94
		50	50	20.50	20.48	21.69	20.12	20.24	20.14
			100	20.50	20.07	20.17	20.02	20.23	19.85



10.1.13 Conducted Power of LTE Band 66

LTE-FDD Band 66				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		131979 1710.7MHz	132322 1755.0MHz	132665 1779.3MHz
1.4MHz	QPSK	1	0	23.50	22.73	23.22	23.00
			2	23.50	22.73	23.18	23.01
			5	23.50	22.77	23.23	22.97
		3	0	23.50	22.73	22.93	23.11
			2	23.00	22.66	22.99	23.00
			3	23.50	22.71	22.94	23.01
	16QAM	6	0	23.00	22.33	22.57	22.53
			0	24.00	22.61	23.59	23.31
			2	24.00	22.66	23.62	23.40
		1	5	24.00	22.57	23.60	23.31
			0	23.00	22.29	22.66	22.20
			2	23.00	22.22	22.64	22.16
3MHz	QPSK	3	3	23.00	22.24	22.66	22.17
			0	21.50	21.01	21.27	21.04
		6	0	21.50	21.01	21.27	21.04
	16QAM	1	0	23.00	22.79	22.87	22.95
			7	23.00	22.63	22.90	22.97
			14	23.50	22.82	23.03	23.01
	16QAM	8	0	23.00	22.10	22.54	22.50
			4	23.00	22.18	22.59	22.59
			7	23.00	22.13	22.57	22.59
5MHz	QPSK	15	0	23.00	22.23	22.56	22.56
			0	23.50	23.35	23.10	22.86
			7	23.50	23.36	23.16	22.87
	16QAM	1	14	23.50	23.40	23.10	23.02
			0	21.50	20.71	21.24	20.94
			4	21.50	20.66	21.28	21.16
10MHz	QPSK	8	7	21.50	21.10	21.24	21.16
			0	21.50	20.92	21.11	21.19
		15	0	21.50	20.92	21.11	21.19
	16QAM	1	0	23.00	22.56	22.98	22.88
			13	23.00	22.59	22.92	22.91
			24	23.50	22.71	23.07	22.96
15MHz	QPSK	12	0	23.00	22.21	22.48	22.52
			6	22.50	22.29	22.38	22.46
			13	23.00	22.26	22.52	22.47
	16QAM	25	0	22.50	22.25	22.40	22.48
			0	22.50	22.46	22.50	22.44
			13	22.50	22.44	22.48	22.41
20MHz	QPSK	1	24	23.00	22.49	22.48	22.56
			0	21.00	20.67	20.88	20.87
			6	21.50	21.06	20.79	20.96
	16QAM	12	13	21.50	20.96	20.80	21.08
			0	21.50	21.17	20.98	20.88
			0	21.50	21.17	20.98	20.88



LTE-FDD Band 66				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		132022	132322	132622	
					1715.0MHz	1755.0MHz	1775.0MHz	
10MHz	QPSK	1	0	23.50	22.68	23.00	22.91	
			25	23.00	22.77	22.99	22.91	
			49	23.50	22.75	23.01	23.02	
		25	0	22.50	22.23	22.50	22.42	
			13	22.50	22.36	22.50	22.38	
			25	23.00	22.34	22.51	22.55	
	50	0	23.00	22.44	22.45	22.54		
		16QAM	1	0	23.50	23.38	22.41	22.54
				25	23.50	23.42	22.41	22.47
	49			23.50	23.41	22.46	22.58	
	25		0	21.50	21.02	21.07	20.95	
			13	21.50	20.74	21.06	20.96	
			25	21.50	21.09	21.07	20.90	
	50	0	21.50	20.83	21.04	21.00		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	132047	132322	132597
						1717.5MHz	1755.0MHz	1772.5MHz
15MHz	QPSK	1	0	23.50	22.72	23.13	22.85	
			38	23.50	22.81	23.00	22.83	
			74	23.50	22.77	23.14	22.91	
		36	0	22.50	22.27	22.41	22.33	
			18	22.50	22.35	22.39	22.47	
			39	23.00	22.17	22.51	22.39	
	75	0	22.50	22.24	22.44	22.49		
		16QAM	1	0	23.50	23.39	22.39	22.98
				38	23.50	23.35	22.38	23.05
	74			23.50	23.46	22.48	23.14	
	36		0	21.50	20.78	21.11	20.92	
			18	21.50	21.11	21.11	20.86	
			39	21.50	21.11	21.12	20.87	
	75	0	21.50	21.18	20.97	21.02		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	132072	132322	132572
						1720.0MHz	1755.0MHz	1770.0MHz
20MHz	QPSK	1	0	23.50	22.68	23.08	22.99	
			50	23.50	22.70	23.08	22.92	
			99	23.50	22.79	23.01	23.10	
		50	0	22.50	22.30	22.44	22.32	
			25	22.50	22.25	22.48	22.30	
			50	22.50	22.31	22.40	22.50	
	100	0	23.00	22.23	22.51	22.38		
		16QAM	1	0	23.00	21.90	22.73	22.32
				50	23.00	21.88	22.75	22.38
	99			23.00	21.92	22.66	22.44	
	50		0	21.50	20.91	21.01	20.91	
			25	21.00	20.91	20.88	20.92	
			50	21.50	21.16	20.96	20.93	
	100	0	21.00	20.81	20.91	20.92		



10.1.14 Conducted Power of Wi-Fi 2.4G

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4g Wifi (2.4~2.4835)	802.11b	1	2412	17.64	18.00	No
		6	2437	20.88	21.00	No
		11	2462	18.11	18.50	No
	802.11g	1	2412	20.66	21.00	No
		6	2437	23.63	24.00	Yes
		11	2462	21.09	21.50	No
	802.11n(HT20)	1	2412	19.33	19.50	No
		6	2437	22.27	22.50	No
		11	2462	19.80	20.00	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

10.1.15 Conducted Power of BT

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)			
			0		39	78
			2402MHz		2441MHz	2480MHz
	GFSK	7.00	4.94	6.51	6.31	
	π/4QPSK	7.00	5.22	6.86	6.87	
8DPSK	7.50	5.15	7.42	6.72		
BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)			
			0		20	39
			2402MHz		2440MHz	2480MHz
	1Mbps	-1.00	-1.96	-1.33	-2.26	
Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Exclusion thresholds for 1-g SAR(mW)	RF exposure evaluation required
39	2.402	7.50	5.62	0	10	Yes
20	2.440	-1.00	0.79	0	10	No

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances $\leq 40\text{ cm}$ are determined by:

$$P_{th}(\text{mW}) = ERP_{20\text{ cm}}(\text{mW}) = \begin{cases} 2040f & 0.3\text{ GHz} \leq f < 1.5\text{ GHz} \\ 3060 & 1.5\text{ GHz} \leq f \leq 6\text{ GHz} \end{cases} \quad (\text{B.1})$$

$$P_{th}(\text{mW}) = \begin{cases} ERP_{20\text{ cm}}(d/20\text{ cm})^2 & d \leq 20\text{ cm} \\ ERP_{20\text{ cm}} & 20\text{ cm} < d \leq 40\text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10}\left(\frac{60}{ERP_{20\text{ cm}}(d/20\text{ cm})^2}\right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20\text{ cm}}$ is per Formula (B.1).

*When the minimum test separation distance is $< 5\text{ mm}$, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.



10.1.16 Tune-up power tolerance

Band	Tune-up power tolerance(dBm)		
GSM850	GSM/GPRS (GMSK)	GSM	Max output power =33.00±0.5dBm
		1TXslots	Max output power =31.00±0.5dBm
		2TXslots	Max output power =30.00±0.5dBm
		3TXslots	Max output power =31.50±0.5dBm
		4TXslots	Max output power =30.50±0.5dBm
GSM850	EGPRS (8-PSK)	1TXslots	Max output power =26.50±0.5dBm
		2TXslots	Max output power =26.50±0.5dBm
		3TXslots	Max output power =27.50±0.5dBm
		4TXslots	Max output power =26.50±0.5dBm
GSM1900	GSM/GPRS (GMSK)	GSM	Max output power =30.00±0.5dBm
		1TXslots	Max output power =29.50±0.5dBm
		2TXslots	Max output power =27.00±0.5dBm
		3TXslots	Max output power =27.00±0.5dBm
		4TXslots	Max output power =26.50±0.5dBm
GSM1900	EGPRS (8-PSK)	1TXslots	Max output power =26.50±0.5dBm
		2TXslots	Max output power =25.50±0.5dBm
		3TXslots	Max output power =25.00±0.5dBm
		4TXslots	Max output power =26.00±0.5dBm
WCDMA 2	Max output power =23.5dbm±0.5dbm		
WCDMA 4	Max output power =23.0dbm±0.5dbm		
WCDMA 5	Max output power =23.0dbm±0.5dbm		
LTE B2	Max output power =24.0dbm±0.5dbm		
LTE B4	Max output power =23.5dbm±0.5dbm		
LTE B5	Max output power =24.0dbm±0.5dbm		
LTE B7	Max output power =23.0dbm±0.5dbm		
LTE B12	Max output power =24.0dbm±0.5dbm		
LTE B17	Max output power =23.5dbm±0.5dbm		
LTE B26	Max output power =22.5dbm±0.5dbm		
LTE B38	Max output power =22.5dbm±0.5dbm		
LTE B40	Max output power =22.5dbm±0.5dbm		
LTE B41	Max output power =22.5dbm±0.5dbm		
LTE B66	Max output power =24.0dbm±0.5dbm		
2.4G Wi-Fi	802.11b	Max output power =21.0±0.5dbm	
	802.11g	Max output power =24.0±0.5dbm	
	802.11n (HT20)	Max output power =22.5 ±0.5dbm	
BT	GFSK	Max output power =7.0dBm±0.5dbm	
	π/4QPSK	Max output power =7.0dBm±0.5dbm	
	8DPSK	Max output power =7.5dBm±0.5dbm	
BLE	1Mbps	Max output power =-1.0dBm±0.5dbm	





10.2 SAR test results

Notes:

1) Per KDB447498 D01v05 r02, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the scaled SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8 \text{ W/kg}$), testing at the high and low channels is optional.

2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.

3) Per KDB447498 D01v05r02, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

4) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn with headset SAR.

5) Per KDB248227 D01v01r02, the procedures required to establish specific device operating configurations for testing the SAR of 802.11 a/b/g transmitters.

(1) For Headsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is $\leq 0.4 \text{ W/kg}$, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.

(2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is $\leq 1.2 \text{ W/kg}$.





(3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

6) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

7) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

8) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

9) Per KDB 941225 D01, 3G SAR Measurement Procedures, The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

10) Per KDB 941225 D05, SAR Evaluation Considerations for LTE Devices

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.





(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be

tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.





10.3 Test Result

10.3.1 Results overview of GSM

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GSM 850 (voice)	Left Cheek	251	848.8	4.240	0.262	100	1.000	32.68	33.00	1.076	0.282
	Left Tilt	251	848.8	0.900	0.471	100	1.000	32.68	33.00	1.076	0.507
	Right Cheek	251	848.8	1.770	0.493	100	1.000	32.68	33.00	1.076	0.531
	Right Tilt	251	848.8	3.060	0.541	100	1.000	32.68	33.00	1.076	0.582
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GPRS 850+4slots	Front	251	848.8	1.770	0.224	100	1.000	32.68	33.00	1.076	0.241
	Back	251	848.8	0.470	0.369	100	1.000	32.68	33.00	1.076	0.397
	Left	251	848.8	-0.500	0.104	100	1.000	32.68	33.00	1.076	0.112
	Top	251	848.8	-4.980	0.081	100	1.000	32.68	33.00	1.076	0.087

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GSM 1900 (voice)	Left Cheek	810	1909.8	1.970	0.289	100	1.000	29.79	30.00	1.050	0.303
	Left Tilt	810	1909.8	0.280	0.394	100	1.000	29.79	30.00	1.050	0.414
	Right Cheek	810	1909.8	2.780	0.275	100	1.000	29.79	30.00	1.050	0.289
	Right Tilt	810	1909.8	4.650	0.561	100	1.000	29.79	30.00	1.050	0.589
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GPRS 1900+4slots	Front	810	1909.8	1.660	0.194	100	1.000	29.79	30.00	1.050	0.204
	Back	810	1909.8	3.270	0.435	100	1.000	29.79	30.00	1.050	0.457
	Left	810	1909.8	3.070	0.136	100	1.000	29.79	30.00	1.050	0.143
	Top	810	1909.8	0.660	0.075	100	1.000	29.79	30.00	1.050	0.079



10.3.2 Results overview of WCDMA

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Left Cheek	9538	1907.6	0.072	0.143	100	1.000	23.00	23.50	1.122	0.160
	Left Tilt	9538	1907.6	0.164	0.352	100	1.000	23.00	23.50	1.122	0.395
	Right Cheek	9538	1907.6	0.138	0.295	100	1.000	23.00	23.50	1.122	0.331
	Right Tilt	9538	1907.6	0.206	0.440	100	1.000	23.00	23.50	1.122	0.494
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Front	9538	1907.6	0.068	0.133	100	1.000	23.00	23.50	1.122	0.149
	Back	9538	1907.6	0.096	0.178	100	1.000	23.00	23.50	1.122	0.200
	Left	9538	1907.6	0.054	0.117	100	1.000	23.00	23.50	1.122	0.131
	Top	9538	1907.6	0.041	0.072	100	1.000	23.00	23.50	1.122	0.081

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Left Cheek	1513	1752.6	3.280	0.279	100	1.000	22.60	23.00	1.096	0.306
	Left Tilt	1513	1752.6	-4.170	0.413	100	1.000	22.60	23.00	1.096	0.453
	Right Cheek	1513	1752.6	0.940	0.357	100	1.000	22.60	23.00	1.096	0.391
	Right Tilt	1513	1752.6	4.550	0.607	100	1.000	22.60	23.00	1.096	0.666
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Front	1513	1752.6	1.030	0.157	100	1.000	22.60	23.00	1.096	0.172
	Back	1513	1752.6	-1.460	0.232	100	1.000	22.60	23.00	1.096	0.254
	Left	1513	1752.6	4.360	0.095	100	1.000	22.60	23.00	1.096	0.104
	Top	1513	1752.6	-2.830	0.048	100	1.000	22.60	23.00	1.096	0.053

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Left Cheek	4233	846.6	3.660	0.145	100	1.000	22.74	23.00	1.062	0.154
	Left Tilt	4233	846.6	2.730	0.180	100	1.000	22.74	23.00	1.062	0.191
	Right Cheek	4233	846.6	-0.390	0.189	100	1.000	22.74	23.00	1.062	0.201
	Right Tilt	4233	846.6	3.280	0.233	100	1.000	22.74	23.00	1.062	0.247
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Front	4233	846.6	-4.020	0.072	100	1.000	22.74	23.00	1.062	0.076
	Back	4233	846.6	0.010	0.096	100	1.000	22.74	23.00	1.062	0.102
	Left	4233	846.6	-4.660	0.029	100	1.000	22.74	23.00	1.062	0.031
	Top	4233	846.6	3.690	0.015	100	1.000	22.74	23.00	1.062	0.016





10.3.3 Results overview of LTE

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Left Cheek	19100	1900.0	-2.14	0.147	100	1.000	23.95	24.00	1.012	0.149
		Left Tilt	19100	1900.0	-4.71	0.267	100	1.000	23.95	24.00	1.012	0.270
		Right Cheek	19100	1900.0	4.77	0.229	100	1.000	23.95	24.00	1.012	0.232
		Right Tilt	19100	1900.0	2.71	0.316	100	1.000	23.95	24.00	1.012	0.320
	50%RB	Left Cheek	18700	1860.0	4.96	0.275	100	1.000	23.95	24.00	1.012	0.278
		Left Tilt	18700	1860.0	4.63	0.264	100	1.000	23.95	24.00	1.012	0.267
		Right Cheek	18700	1860.0	4.94	0.237	100	1.000	23.95	24.00	1.012	0.240
		Right Tilt	18700	1860.0	2.98	0.266	100	1.000	23.95	24.00	1.012	0.269
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Front	19100	1900.0	-1.43	0.098	100	1.000	23.95	24.00	1.012	0.099
		Back	19100	1900.0	-1.37	0.177	100	1.000	23.95	24.00	1.012	0.179
		Left	19100	1900.0	-4.02	0.034	100	1.000	23.95	24.00	1.012	0.034
		Top	19100	1900.0	-4.69	0.026	100	1.000	23.95	24.00	1.012	0.026
	50%RB	Front	18700	1860.0	0.77	0.048	100	1.000	23.95	24.00	1.012	0.049
		Back	18700	1860.0	1.75	0.015	100	1.000	23.95	24.00	1.012	0.015
		Left	18700	1860.0	-1.57	0.139	100	1.000	23.95	24.00	1.012	0.141
		Top	18700	1860.0	1.92	0.103	100	1.000	23.95	24.00	1.012	0.104

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Left Cheek	20300	1745.0	-2.780	0.153	100	1.000	23.31	23.50	1.045	0.160
		Left Tilt	20300	1745.0	-1.550	0.316	100	1.000	23.31	23.50	1.045	0.330
		Right Cheek	20300	1745.0	2.530	0.284	100	1.000	23.31	23.50	1.045	0.297
		Right Tilt	20300	1745.0	2.370	0.392	100	1.000	23.31	23.50	1.045	0.410
	50%RB	Left Cheek	20050	1720.0	-2.620	0.356	100	1.000	23.31	23.50	1.045	0.372
		Left Tilt	20050	1720.0	4.780	0.331	100	1.000	23.31	23.50	1.045	0.346
		Right Cheek	20050	1720.0	0.600	0.304	100	1.000	23.31	23.50	1.045	0.318
		Right Tilt	20050	1720.0	3.770	0.346	100	1.000	23.31	23.50	1.045	0.361
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Front	20300	1745.0	-3.640	0.132	100	1.000	23.31	23.50	1.045	0.138
		Back	20300	1745.0	1.960	0.241	100	1.000	23.31	23.50	1.045	0.252
		Left	20300	1745.0	3.840	0.035	100	1.000	23.31	23.50	1.045	0.037
		Top	20300	1745.0	-0.540	0.026	100	1.000	23.31	23.50	1.045	0.027
	50%RB	Front	20050	1720.0	0.060	0.030	100	1.000	23.31	23.50	1.045	0.031
		Back	20050	1720.0	-2.850	0.013	100	1.000	23.31	23.50	1.045	0.014
		Left	20050	1720.0	3.260	0.192	100	1.000	23.31	23.50	1.045	0.201
		Top	20050	1720.0	-0.730	0.154	100	1.000	23.31	23.50	1.045	0.161





Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Left Cheek	20600	844.0	-0.990	0.071	100	1.000	23.79	24.00	1.050	0.075
		Left Tilt	20600	844.0	-1.380	0.115	100	1.000	23.79	24.00	1.050	0.121
		Right Cheek	20600	844.0	-1.080	0.095	100	1.000	23.79	24.00	1.050	0.100
		Right Tilt	20600	844.0	-1.980	0.133	100	1.000	23.79	24.00	1.050	0.140
	50%RB	Left Cheek	20450	829.0	4.490	0.096	100	1.000	23.79	24.00	1.050	0.101
		Left Tilt	20450	829.0	2.440	0.079	100	1.000	23.79	24.00	1.050	0.083
		Right Cheek	20450	829.0	2.420	0.048	100	1.000	23.79	24.00	1.050	0.050
		Right Tilt	20450	829.0	3.150	0.087	100	1.000	23.79	24.00	1.050	0.091
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Front	20600	844.0	-4.730	0.082	100	1.000	23.79	24.00	1.050	0.086
		Back	20600	844.0	-0.210	0.124	100	1.000	23.79	24.00	1.050	0.130
		Left	20600	844.0	1.410	0.047	100	1.000	23.79	24.00	1.050	0.049
		Top	20600	844.0	0.370	0.058	100	1.000	23.79	24.00	1.050	0.061
	50%RB	Front	20450	829.0	4.990	0.071	100	1.000	23.79	24.00	1.050	0.075
		Back	20450	829.0	-0.970	0.014	100	1.000	23.79	24.00	1.050	0.015
		Left	20450	829.0	-4.750	0.086	100	1.000	23.79	24.00	1.050	0.090
		Top	20450	829.0	2.550	0.034	100	1.000	23.79	24.00	1.050	0.036

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Left Cheek	21100	2535.0	-2.97	0.217	100	1.000	22.99	23.00	1.002	0.218
		Left Tilt	21100	2535.0	-2.35	0.278	100	1.000	22.99	23.00	1.002	0.279
		Right Cheek	21100	2535.0	-1.18	0.329	100	1.000	22.99	23.00	1.002	0.330
		Right Tilt	21100	2535.0	-2.2	0.384	100	1.000	22.99	23.00	1.002	0.385
	50%RB	Left Cheek	20850	2510.0	-3.9	0.341	100	1.000	22.99	23.00	1.002	0.342
		Left Tilt	20850	2510.0	-0.68	0.318	100	1.000	22.99	23.00	1.002	0.319
		Right Cheek	20850	2510.0	2.51	0.302	100	1.000	22.99	23.00	1.002	0.303
		Right Tilt	20850	2510.0	-0.91	0.341	100	1.000	22.99	23.00	1.002	0.342
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Front	21100	2535.0	3.06	0.127	100	1.000	22.99	23.00	1.002	0.127
		Back	21100	2535.0	-2.85	0.21	100	1.000	22.99	23.00	1.002	0.210
		Left	21100	2535.0	-4.21	0.116	100	1.000	22.99	23.00	1.002	0.116
		Top	21100	2535.0	-0.48	0.083	100	1.000	22.99	23.00	1.002	0.083
	50%RB	Front	20850	2510.0	-0.92	0.136	100	1.000	22.99	23.00	1.002	0.136
		Back	20850	2510.0	-0.25	0.029	100	1.000	22.99	23.00	1.002	0.029
		Left	20850	2510.0	-2.92	0.172	100	1.000	22.99	23.00	1.002	0.172
		Top	20850	2510.0	-1.88	0.123	100	1.000	22.99	23.00	1.002	0.123



Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Left Cheek	23130	711.0	3.69	0.215	100	1.000	23.84	24.00	1.038	0.223
		Left Tilt	23130	711.0	-1.50	0.183	100	1.000	23.84	24.00	1.038	0.190
		Right Cheek	23130	711.0	-3.57	0.263	100	1.000	23.84	24.00	1.038	0.273
		Right Tilt	23130	711.0	-3.80	0.248	100	1.000	23.84	24.00	1.038	0.257
	50%RB	Left Cheek	23060	704.0	-3.46	0.208	100	1.000	23.84	24.00	1.038	0.216
		Left Tilt	23060	704.0	-3.64	0.183	100	1.000	23.84	24.00	1.038	0.190
		Right Cheek	23060	704.0	-0.74	0.169	100	1.000	23.84	24.00	1.038	0.175
		Right Tilt	23060	704.0	4.88	0.201	100	1.000	23.84	24.00	1.038	0.209
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Front	23130	711.0	1.05	0.083	100	1.000	23.84	24.00	1.038	0.086
		Back	23130	711.0	-1.57	0.126	100	1.000	23.84	24.00	1.038	0.131
		Left	23130	711.0	1.39	0.037	100	1.000	23.84	24.00	1.038	0.038
		Top	23130	711.0	4.06	0.021	100	1.000	23.84	24.00	1.038	0.022
	50%RB	Front	23060	704.0	3.83	0.032	100	1.000	23.84	24.00	1.038	0.033
		Back	23060	704.0	0.74	0.017	100	1.000	23.84	24.00	1.038	0.018
		Left	23060	704.0	4.38	0.092	100	1.000	23.84	24.00	1.038	0.095
		Top	23060	704.0	2.64	0.048	100	1.000	23.84	24.00	1.038	0.050

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Left Cheek	23800	711.0	1.350	0.225	100	1.000	23.76	24.00	1.057	0.238
		Left Tilt	23800	711.0	1.230	0.232	100	1.000	23.76	24.00	1.057	0.245
		Right Cheek	23800	711.0	4.630	0.288	100	1.000	23.76	24.00	1.057	0.304
		Right Tilt	23800	711.0	2.270	0.296	100	1.000	23.76	24.00	1.057	0.313
	50%RB	Left Cheek	23780	709.0	2.470	0.257	100	1.000	23.76	24.00	1.057	0.272
		Left Tilt	23780	709.0	4.210	0.235	100	1.000	23.76	24.00	1.057	0.248
		Right Cheek	23780	709.0	4.260	0.213	100	1.000	23.76	24.00	1.057	0.225
		Right Tilt	23780	709.0	2.050	0.245	100	1.000	23.76	24.00	1.057	0.259
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Front	23800	711.0	4.300	0.105	100	1.000	23.76	24.00	1.057	0.111
		Back	23800	711.0	1.740	0.127	100	1.000	23.76	24.00	1.057	0.134
		Left	23800	711.0	0.290	0.031	100	1.000	23.76	24.00	1.057	0.033
		Top	23800	711.0	1.270	0.027	100	1.000	23.76	24.00	1.057	0.029
	50%RB	Front	23780	709.0	0.310	0.043	100	1.000	23.76	24.00	1.057	0.045
		Back	23780	709.0	1.690	0.009	100	1.000	23.76	24.00	1.057	0.010
		Left	23780	709.0	1.290	0.078	100	1.000	23.76	24.00	1.057	0.082
		Top	23780	709.0	3.970	0.047	100	1.000	23.76	24.00	1.057	0.050



Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 26 (BW: 10MHz)	1RB	Left Cheek	26740	819.0	-0.47	0.238	100	1	22.31	22.5	1.045	0.249
		Left Tilt	26740	819.0	-2.55	0.275	100	1	22.31	22.5	1.045	0.287
		Right Cheek	26740	819.0	-2.37	0.311	100	1	22.31	22.5	1.045	0.325
		Right Tilt	26740	819.0	0.69	0.382	100	1	22.31	22.5	1.045	0.399
	50%RB	Left Cheek	26740	819.0	-4.11	0.344	100	1	22.31	22.5	1.045	0.359
		Left Tilt	26740	819.0	-3.59	0.286	100	1	22.31	22.5	1.045	0.299
		Right Cheek	26740	819.0	-4.85	0.328	100	1	22.31	22.5	1.045	0.343
		Right Tilt	26740	819.0	4.75	0.268	100	1	22.31	22.5	1.045	0.280
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 26 (BW: 10MHz)	1RB	Front	26740	819.0	3.4	0.073	100	1	22.31	22.5	1.045	0.076
		Back	26740	819.0	-4.04	0.149	100	1	22.31	22.5	1.045	0.156
		Left	26740	819.0	4.89	0.046	100	1	22.31	22.5	1.045	0.048
		Top	26740	819.0	1.52	0.039	100	1	22.31	22.5	1.045	0.041
	50%RB	Front	26740	819.0	-1.92	0.098	100	1	22.31	22.5	1.045	0.102
		Back	26740	819.0	-1.02	0.134	100	1	22.31	22.5	1.045	0.140
		Left	26740	819.0	-2.33	0.102	100	1	22.31	22.5	1.045	0.107
		Top	26740	819.0	-4.96	0.1	100	1	22.31	22.5	1.045	0.104

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 26 (BW: 15MHz)	1RB	Left Cheek	26965	841.5	2.710	0.246	100	1.000	22.35	22.50	1.035	0.255
		Left Tilt	26965	841.5	0.440	0.349	100	1.000	22.35	22.50	1.035	0.361
		Right Cheek	26965	841.5	2.190	0.320	100	1.000	22.35	22.50	1.035	0.331
		Right Tilt	26965	841.5	0.250	0.406	100	1.000	22.35	22.50	1.035	0.420
	50%RB	Left Cheek	26865	831.5	1.710	0.369	100	1.000	22.35	22.50	1.035	0.382
		Left Tilt	26865	831.5	1.840	0.344	100	1.000	22.35	22.50	1.035	0.356
		Right Cheek	26865	831.5	-2.450	0.318	100	1.000	22.35	22.50	1.035	0.329
		Right Tilt	26865	831.5	-0.310	0.354	100	1.000	22.35	22.50	1.035	0.366
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 26 (BW: 15MHz)	1RB	Front	26965	841.5	-1.740	0.162	100	1.000	22.35	22.50	1.035	0.168
		Back	26965	841.5	1.360	0.314	100	1.000	22.35	22.50	1.035	0.325
		Left	26965	841.5	1.790	0.113	100	1.000	22.35	22.50	1.035	0.117
		Top	26965	841.5	0.480	0.071	100	1.000	22.35	22.50	1.035	0.073
	50%RB	Front	26865	831.5	-3.680	0.140	100	1.000	22.35	22.50	1.035	0.145
		Back	26865	831.5	2.870	0.019	100	1.000	22.35	22.50	1.035	0.020
		Left	26865	831.5	3.880	0.269	100	1.000	22.35	22.50	1.035	0.278
		Top	26865	831.5	-1.360	0.232	100	1.000	22.35	22.50	1.035	0.240



Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Left Cheek	37850	2580.0	-3.110	0.215	100	1.000	22.38	23.00	1.153	0.248
		Left Tilt	37850	2580.0	-4.600	0.247	100	1.000	22.38	23.00	1.153	0.285
		Right Cheek	37850	2580.0	3.380	0.305	100	1.000	22.38	23.00	1.153	0.352
		Right Tilt	37850	2580.0	2.240	0.360	100	1.000	22.38	23.00	1.153	0.415
	50%RB	Left Cheek	38000	2595.0	-3.030	0.317	100	1.000	22.38	23.00	1.153	0.366
		Left Tilt	38000	2595.0	4.430	0.296	100	1.000	22.38	23.00	1.153	0.341
		Right Cheek	38000	2595.0	2.420	0.281	100	1.000	22.38	23.00	1.153	0.324
		Right Tilt	38000	2595.0	-0.890	0.310	100	1.000	22.38	23.00	1.153	0.358
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Front	37850	2580.0	3.210	0.116	100	1.000	22.38	23.00	1.153	0.134
		Back	37850	2580.0	-1.110	0.205	100	1.000	22.38	23.00	1.153	0.236
		Left	37850	2580.0	-4.500	0.128	100	1.000	22.38	23.00	1.153	0.148
		Top	37850	2580.0	1.400	0.087	100	1.000	22.38	23.00	1.153	0.100
	50%RB	Front	38000	2595.0	0.040	0.103	100	1.000	22.38	23.00	1.153	0.119
		Back	38000	2595.0	3.400	0.019	100	1.000	22.38	23.00	1.153	0.022
		Left	38000	2595.0	-0.150	0.168	100	1.000	22.38	23.00	1.153	0.194
		Top	38000	2595.0	1.460	0.123	100	1.000	22.38	23.00	1.153	0.142



Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 40 (BW: 5MHz)	1RB	Left Cheek	38775	2312.5	4.470	0.212	100	1.000	22.13	22.50	1.089	0.231
		Left Tilt	38775	2312.5	-4.080	0.260	100	1.000	22.13	22.50	1.089	0.283
		Right Cheek	38775	2312.5	1.590	0.364	100	1.000	22.13	22.50	1.089	0.396
		Right Tilt	38775	2312.5	4.340	0.420	100	1.000	22.13	22.50	1.089	0.457
	50%RB	Left Cheek	38725	2307.5	0.370	0.375	100	1.000	22.13	22.50	1.089	0.408
		Left Tilt	38725	2307.5	-2.570	0.323	100	1.000	22.13	22.50	1.089	0.352
		Right Cheek	38725	2307.5	3.970	0.361	100	1.000	22.13	22.50	1.089	0.393
		Right Tilt	38725	2307.5	3.850	0.303	100	1.000	22.13	22.50	1.089	0.330
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 40 (BW: 5MHz)	1RB	Front	38775	2312.5	-2.020	0.118	100	1.000	22.13	22.50	1.089	0.128
		Back	38775	2312.5	-4.930	0.238	100	1.000	22.13	22.50	1.089	0.259
		Left	38775	2312.5	-0.190	0.137	100	1.000	22.13	22.50	1.089	0.149
		Top	38775	2312.5	0.970	0.079	100	1.000	22.13	22.50	1.089	0.086
	50%RB	Front	38725	2307.5	-4.630	0.169	100	1.000	22.13	22.50	1.089	0.184
		Back	38725	2307.5	-3.840	0.224	100	1.000	22.13	22.50	1.089	0.244
		Left	38725	2307.5	4.750	0.190	100	1.000	22.13	22.50	1.089	0.207
		Top	38725	2307.5	3.580	0.198	100	1.000	22.13	22.50	1.089	0.216

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 40 (BW: 5MHz)	1RB	Left Cheek	39225	2357.5	-0.100	0.295	100	1.000	21.84	22.00	1.038	0.306
		Left Tilt	39225	2357.5	-0.890	0.451	100	1.000	21.84	22.00	1.038	0.468
		Right Cheek	39225	2357.5	2.700	0.427	100	1.000	21.84	22.00	1.038	0.443
		Right Tilt	39225	2357.5	-2.280	0.594	100	1.000	21.84	22.00	1.038	0.616
	50%RB	Left Cheek	39175	2352.5	-4.140	0.545	100	1.000	21.84	22.00	1.038	0.565
		Left Tilt	39175	2352.5	1.670	0.532	100	1.000	21.84	22.00	1.038	0.552
		Right Cheek	39175	2352.5	-3.610	0.511	100	1.000	21.84	22.00	1.038	0.530
		Right Tilt	39175	2352.5	2.200	0.551	100	1.000	21.84	22.00	1.038	0.572
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 40 (BW: 5MHz)	1RB	Front	39225	2357.5	4.890	0.142	100	1.000	21.84	22.00	1.038	0.147
		Back	3925	2357.5	-3.700	0.221	100	1.000	21.84	22.00	1.038	0.229
		Left	39225	2357.5	4.720	0.135	100	1.000	21.84	22.00	1.038	0.140
		Top	39225	2357.5	-0.470	0.032	100	1.000	21.84	22.00	1.038	0.033
	50%RB	Front	39175	2352.5	-4.950	0.094	100	1.000	21.84	22.00	1.038	0.098
		Back	39175	2352.5	2.620	0.014	100	1.000	21.84	22.00	1.038	0.015
		Left	39175	2352.5	-1.900	0.189	100	1.000	21.84	22.00	1.038	0.196
		Top	39175	2352.5	1.910	0.145	100	1.000	21.84	22.00	1.038	0.150



Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Left Cheek	41140	2645.0	-4.560	0.195	100	1.000	22.38	22.50	1.028	0.200
		Left Tilt	41140	2645.0	2.860	0.236	100	1.000	22.38	22.50	1.028	0.243
		Right Cheek	41140	2645.0	-3.610	0.293	100	1.000	22.38	22.50	1.028	0.301
		Right Tilt	41140	2645.0	4.800	0.342	100	1.000	22.38	22.50	1.028	0.352
	50%RB	Left Cheek	40140	2545.0	-1.880	0.301	100	1.000	22.38	22.50	1.028	0.309
		Left Tilt	40140	2545.0	2.560	0.286	100	1.000	22.38	22.50	1.028	0.294
		Right Cheek	40140	2545.0	4.250	0.256	100	1.000	22.38	22.50	1.028	0.263
		Right Tilt	40140	2545.0	2.670	0.287	100	1.000	22.38	22.50	1.028	0.295
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Front	41140	2645.0	2.230	0.145	100	1.000	22.38	22.50	1.028	0.149
		Back	41140	2645.0	-4.010	0.238	100	1.000	22.38	22.50	1.028	0.245
		Left	41140	2645.0	0.030	0.120	100	1.000	22.38	22.50	1.028	0.123
		Top	41140	2645.0	1.690	0.092	100	1.000	22.38	22.50	1.028	0.095
	50%RB	Front	40140	2545.0	3.040	0.126	100	1.000	22.38	22.50	1.028	0.130
		Back	40140	2545.0	1.260	0.015	100	1.000	22.38	22.50	1.028	0.015
		Left	40140	2545.0	-1.210	0.201	100	1.000	22.38	22.50	1.028	0.207
		Top	40140	2545.0	-1.060	0.163	100	1.000	22.38	22.50	1.028	0.168

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Left Cheek	132572	1770.0	-2.070	0.216	100	1.000	23.62	24.00	1.091	0.236
		Left Tilt	132572	1770.0	-4.040	0.327	100	1.000	23.62	24.00	1.091	0.357
		Right Cheek	132572	1770.0	0.760	0.295	100	1.000	23.62	24.00	1.091	0.322
		Right Tilt	132572	1770.0	-4.560	0.374	100	1.000	23.62	24.00	1.091	0.408
	50%RB	Left Cheek	132322	1720.0	3.600	0.327	100	1.000	23.62	24.00	1.091	0.357
		Left Tilt	132322	1720.0	4.980	0.306	100	1.000	23.62	24.00	1.091	0.334
		Right Cheek	132322	1720.0	0.490	0.294	100	1.000	23.62	24.00	1.091	0.321
		Right Tilt	132322	1720.0	-2.370	0.330	100	1.000	23.62	24.00	1.091	0.360
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Front	132572	1770.0	-1.840	0.113	100	1.000	23.62	24.00	1.091	0.123
		Back	132572	1770.0	1.250	0.184	100	1.000	23.62	24.00	1.091	0.201
		Left	132572	1770.0	-2.240	0.092	100	1.000	23.62	24.00	1.091	0.100
		Top	132572	1770.0	-3.680	0.031	100	1.000	23.62	24.00	1.091	0.034
	50%RB	Front	132322	1720.0	-1.280	0.070	100	1.000	23.62	24.00	1.091	0.076
		Back	132322	1720.0	4.020	0.020	100	1.000	23.62	24.00	1.091	0.022
		Left	132322	1720.0	4.210	0.148	100	1.000	23.62	24.00	1.091	0.162
		Top	132322	1720.0	2.120	0.105	100	1.000	23.62	24.00	1.091	0.115



10.3.4 Results overview of Wifi

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11b	Left Cheek	3	2422	2.500	0.552	100	1.000	23.63	24.00	1.089	0.601
	Left Tilt	3	2422	-4.920	0.608	100	1.000	23.63	24.00	1.089	0.662
	Right Cheek	3	2422	1.720	0.359	100	1.000	23.63	24.00	1.089	0.391
	Right Tilt	3	2422	4.210	0.353	100	1.000	23.63	24.00	1.089	0.384
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11b	Front	3	2422	1.450	0.164	100	1.000	23.63	24.00	1.089	0.179
	Back	3	2422	-4.930	0.204	100	1.000	23.63	24.00	1.089	0.222
	Right	3	2422	-0.240	0.072	100	1.000	23.63	24.00	1.089	0.078
	Bottom	3	2422	-1.100	0.115	100	1.000	23.63	24.00	1.089	0.125

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Left Cheek	0	2402	0.200	0.150	100	1.000	7.42	7.50	1.019	0.153
	Left Tilt	0	2402	0.310	0.120	100	1.000	7.42	7.50	1.019	0.122
	Right Cheek	0	2402	1.220	0.113	100	1.000	7.42	7.50	1.019	0.115
	Right Tilt	0	2402	-0.400	0.097	100	1.000	7.42	7.50	1.019	0.099
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Front	0	2402	-0.310	0.087	100	1.000	7.42	7.50	1.019	0.089
	Back	0	2402	0.510	0.125	100	1.000	7.42	7.50	1.019	0.127
	Right	0	2402	0.500	0.080	100	1.000	7.42	7.50	1.019	0.081
	Bottom	0	2402	-3.350	0.067	100	1.000	7.42	7.50	1.019	0.068

Note:

- 1.The maximum SAR Value of each test band is marked bold.
- 2.SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- 3.Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
- 4.Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- 5.Per KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- 6.Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
- 7.Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.



11 Multiple Transmitter Information

The SAR measurement positions of each side are as below:



< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Top side	Bottom side
2G/3G/4G Antenna	Yes	Yes	No	Yes	Yes	No
Wi-Fi/BT Antenna	Yes	Yes	Yes	No	No	Yes

1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



11.1.1 Stand-alone SAR test exclusion

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances $\leq$ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	7.42	5.52	5.00	2.45	1.73	3.00	Yes

Body-Worn position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	7.42	5.52	10.00	2.45	0.86	3.00	Yes

When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm, where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Head	7.42	5.52	5.00	2.45	7.50	0.230
BT	Body	7.42	5.52	10.00	2.45	7.50	0.115

11.1.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS/LTE +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS/LTE +BT	YES	NO	NO

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.



11.1.3 SAR Summation Scenario

Head

Band	Test Position	Scaled SAR			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	BT				
GSM850 (voice)	Left Cheek	0.282	0.601	0.153	0.883	0.435	N/A	N/A
	Left Tilt	0.507	0.662	0.122	1.169	0.629	N/A	N/A
	Right Cheek	0.531	0.391	0.115	0.922	0.646	N/A	N/A
	Right Tilt	0.582	0.384	0.099	0.966	0.681	N/A	N/A
GSM1900 (voice)	Left Cheek	0.303	0.601	0.153	0.904	0.456	N/A	N/A
	Left Tilt	0.414	0.662	0.122	1.076	0.536	N/A	N/A
	Right Cheek	0.289	0.391	0.115	0.680	0.404	N/A	N/A
	Right Tilt	0.589	0.384	0.099	0.973	0.688	N/A	N/A
WCDMA Band 2	Left Cheek	0.160	0.601	0.153	0.761	0.313	N/A	N/A
	Left Tilt	0.395	0.662	0.122	1.057	0.517	N/A	N/A
	Right Cheek	0.331	0.391	0.115	0.722	0.446	N/A	N/A
	Right Tilt	0.494	0.384	0.099	0.878	0.593	N/A	N/A
WCDMA Band 4	Left Cheek	0.306	0.601	0.153	0.907	0.459	N/A	N/A
	Left Tilt	0.453	0.662	0.122	1.115	0.575	N/A	N/A
	Right Cheek	0.391	0.391	0.115	0.782	0.506	N/A	N/A
	Right Tilt	0.666	0.384	0.099	1.050	0.765	N/A	N/A
WCDMA Band 5	Left Cheek	0.154	0.601	0.153	0.755	0.307	N/A	N/A
	Left Tilt	0.191	0.662	0.122	0.853	0.313	N/A	N/A
	Right Cheek	0.201	0.391	0.115	0.592	0.316	N/A	N/A
	Right Tilt	0.247	0.384	0.099	0.631	0.346	N/A	N/A



Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.149	0.601	0.153	0.750	0.302	N/A	N/A
	Left Tilt		0.270	0.662	0.122	0.932	0.392	N/A	N/A
	Right Cheek		0.232	0.391	0.115	0.623	0.347	N/A	N/A
	Right Tilt		0.320	0.384	0.099	0.704	0.419	N/A	N/A
	Left Cheek	50%RB	0.278	0.601	0.153	0.879	0.431	N/A	N/A
	Left Tilt		0.267	0.662	0.122	0.929	0.389	N/A	N/A
	Right Cheek		0.240	0.391	0.115	0.631	0.355	N/A	N/A
	Right Tilt		0.269	0.384	0.099	0.653	0.368	N/A	N/A
LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.160	0.601	0.153	0.761	0.313	N/A	N/A
	Left Tilt		0.330	0.662	0.122	0.992	0.452	N/A	N/A
	Right Cheek		0.297	0.391	0.115	0.688	0.412	N/A	N/A
	Right Tilt		0.410	0.384	0.099	0.794	0.509	N/A	N/A
	Left Cheek	50%RB	0.372	0.601	0.153	0.973	0.525	N/A	N/A
	Left Tilt		0.346	0.662	0.122	1.008	0.468	N/A	N/A
	Right Cheek		0.318	0.391	0.115	0.709	0.433	N/A	N/A
	Right Tilt		0.361	0.384	0.099	0.745	0.460	N/A	N/A
LTE Band 5 QPSK (10MHz)	Left Cheek	1RB	0.075	0.601	0.153	0.676	0.228	N/A	N/A
	Left Tilt		0.121	0.662	0.122	0.783	0.243	N/A	N/A
	Right Cheek		0.100	0.391	0.115	0.491	0.215	N/A	N/A
	Right Tilt		0.140	0.384	0.099	0.524	0.239	N/A	N/A
	Left Cheek	50%RB	0.101	0.601	0.153	0.702	0.254	N/A	N/A
	Left Tilt		0.083	0.662	0.122	0.745	0.205	N/A	N/A
	Right Cheek		0.050	0.391	0.115	0.441	0.165	N/A	N/A
	Right Tilt		0.091	0.384	0.099	0.475	0.190	N/A	N/A
LTE Band 7 QPSK (10MHz)	Left Cheek	1RB	0.218	0.601	0.153	0.819	0.371	N/A	N/A
	Left Tilt		0.279	0.662	0.122	0.941	0.401	N/A	N/A
	Right Cheek		0.330	0.391	0.115	0.721	0.445	N/A	N/A
	Right Tilt		0.385	0.384	0.099	0.769	0.484	N/A	N/A
	Left Cheek	50%RB	0.342	0.601	0.153	0.943	0.495	N/A	N/A
	Left Tilt		0.319	0.662	0.122	0.981	0.441	N/A	N/A
	Right Cheek		0.303	0.391	0.115	0.694	0.418	N/A	N/A
	Right Tilt		0.342	0.384	0.099	0.726	0.441	N/A	N/A
LTE Band 12 QPSK (10MHz)	Left Cheek	1RB	0.223	0.601	0.153	0.824	0.376	N/A	N/A
	Left Tilt		0.190	0.662	0.122	0.852	0.312	N/A	N/A
	Right Cheek		0.273	0.391	0.115	0.664	0.388	N/A	N/A
	Right Tilt		0.257	0.384	0.099	0.641	0.356	N/A	N/A
	Left Cheek	50%RB	0.216	0.601	0.153	0.817	0.369	N/A	N/A
	Left Tilt		0.190	0.662	0.122	0.852	0.312	N/A	N/A
	Right Cheek		0.175	0.391	0.115	0.566	0.290	N/A	N/A
	Right Tilt		0.209	0.384	0.099	0.593	0.308	N/A	N/A
LTE Band 17 QPSK (10MHz)	Left Cheek	1RB	0.238	0.601	0.153	0.839	0.391	N/A	N/A
	Left Tilt		0.245	0.662	0.122	0.907	0.367	N/A	N/A
	Right Cheek		0.304	0.391	0.115	0.695	0.419	N/A	N/A
	Right Tilt		0.313	0.384	0.099	0.697	0.412	N/A	N/A
	Left Cheek	50%RB	0.272	0.601	0.153	0.873	0.425	N/A	N/A
	Left Tilt		0.248	0.662	0.122	0.910	0.370	N/A	N/A
	Right Cheek		0.225	0.391	0.115	0.616	0.340	N/A	N/A
	Right Tilt		0.259	0.384	0.099	0.643	0.358	N/A	N/A
LTE Band 26 QPSK (10MHz)	Left Cheek	1RB	0.249	0.601	0.153	0.850	0.402	N/A	N/A
	Left Tilt		0.287	0.662	0.122	0.949	0.409	N/A	N/A
	Right Cheek		0.325	0.391	0.115	0.716	0.440	N/A	N/A
	Right Tilt		0.399	0.384	0.099	0.783	0.498	N/A	N/A
	Left Cheek	50%RB	0.359	0.601	0.153	0.960	0.512	N/A	N/A
	Left Tilt		0.299	0.662	0.122	0.961	0.421	N/A	N/A
	Right Cheek		0.343	0.391	0.115	0.734	0.458	N/A	N/A
	Right Tilt		0.280	0.384	0.099	0.664	0.379	N/A	N/A



LTE Band 26 QPSK (15MHz)	Left Cheek	1RB	0.255	0.601	0.153	0.856	0.408	N/A	N/A
	Left Tilt		0.361	0.662	0.122	1.023	0.483	N/A	N/A
	Right Cheek		0.331	0.391	0.115	0.722	0.446	N/A	N/A
	Right Tilt		0.420	0.384	0.099	0.804	0.519	N/A	N/A
	Left Cheek	50%RB	0.382	0.601	0.153	0.983	0.535	N/A	N/A
	Left Tilt		0.356	0.662	0.122	1.018	0.478	N/A	N/A
	Right Cheek		0.329	0.391	0.115	0.720	0.444	N/A	N/A
	Right Tilt		0.366	0.384	0.099	0.750	0.465	N/A	N/A
LTE Band 38 QPSK (20MHz)	Left Cheek	1RB	0.248	0.601	0.153	0.849	0.401	N/A	N/A
	Left Tilt		0.285	0.662	0.122	0.947	0.407	N/A	N/A
	Right Cheek		0.352	0.391	0.115	0.743	0.467	N/A	N/A
	Right Tilt		0.415	0.384	0.099	0.799	0.514	N/A	N/A
	Left Cheek	50%RB	0.366	0.601	0.153	0.967	0.519	N/A	N/A
	Left Tilt		0.341	0.662	0.122	1.003	0.463	N/A	N/A
	Right Cheek		0.324	0.391	0.115	0.715	0.439	N/A	N/A
	Right Tilt		0.358	0.384	0.099	0.742	0.457	N/A	N/A
LTE Band 40 QPSK (5MHz)	Left Cheek	1RB	0.231	0.601	0.153	0.832	0.384	N/A	N/A
	Left Tilt		0.283	0.662	0.122	0.945	0.405	N/A	N/A
	Right Cheek		0.396	0.391	0.115	0.787	0.511	N/A	N/A
	Right Tilt		0.457	0.384	0.099	0.841	0.556	N/A	N/A
	Left Cheek	50%RB	0.408	0.601	0.153	1.009	0.561	N/A	N/A
	Left Tilt		0.352	0.662	0.122	1.014	0.474	N/A	N/A
	Right Cheek		0.393	0.391	0.115	0.784	0.508	N/A	N/A
	Right Tilt		0.330	0.384	0.099	0.714	0.429	N/A	N/A
LTE Band 40 QPSK (5MHz)	Left Tilt	1RB	0.306	0.601	0.153	0.907	0.459	N/A	N/A
	Right Cheek		0.468	0.662	0.122	1.130	0.590	N/A	N/A
	Right Tilt		0.443	0.391	0.115	0.834	0.558	N/A	N/A
	Left Cheek		0.616	0.384	0.099	1.000	0.715	N/A	N/A
	Left Tilt	50%RB	0.565	0.601	0.153	1.166	0.718	N/A	N/A
	Right Cheek		0.552	0.662	0.122	1.214	0.674	N/A	N/A
	Right Tilt		0.530	0.391	0.115	0.921	0.645	N/A	N/A
	Right Tilt		0.572	0.384	0.099	0.956	0.671	N/A	N/A
LTE Band 41 QPSK (20MHz)	Right Cheek	1RB	0.200	0.601	0.153	0.801	0.353	N/A	N/A
	Right Tilt		0.243	0.662	0.122	0.905	0.365	N/A	N/A
	Left Cheek		0.301	0.391	0.115	0.692	0.416	N/A	N/A
	Left Tilt		0.352	0.384	0.099	0.736	0.451	N/A	N/A
	Right Cheek	50%RB	0.309	0.601	0.153	0.910	0.462	N/A	N/A
	Right Tilt		0.294	0.662	0.122	0.956	0.416	N/A	N/A
	Right Tilt		0.263	0.391	0.115	0.654	0.378	N/A	N/A
	Right Tilt		0.295	0.384	0.099	0.679	0.394	N/A	N/A
LTE Band 66 QPSK (20MHz)	Right Cheek	1RB	0.236	0.601	0.153	0.837	0.389	N/A	N/A
	Right Tilt		0.357	0.662	0.122	1.019	0.479	N/A	N/A
	Left Cheek		0.322	0.391	0.115	0.713	0.437	N/A	N/A
	Left Tilt		0.408	0.384	0.099	0.792	0.507	N/A	N/A
	Right Cheek	50%RB	0.357	0.601	0.153	0.958	0.510	N/A	N/A
	Right Tilt		0.334	0.662	0.122	0.996	0.456	N/A	N/A
	Right Tilt		0.321	0.391	0.115	0.712	0.436	N/A	N/A
	Right Tilt		0.360	0.384	0.099	0.744	0.459	N/A	N/A





Hotspot(body-worn)

Band	Test Position	Scaled SAR			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLS R	Rem ark
		WWAN	WIFI 2.4G	BT				
GSM850 (GPRS 4slots)	Front	0.241	0.179	0.089	0.420	0.330	N/A	N/A
	Back	0.397	0.222	0.127	0.619	0.524	N/A	N/A
	Left	0.112	0.078	0.081	0.190	0.193	N/A	N/A
	Right	0.087	0.125	0.068	0.212	0.155	N/A	N/A
GSM1900 (GPRS 4slots)	Front	0.204	0.179	0.089	0.383	0.293	N/A	N/A
	Back	0.457	0.222	0.127	0.679	0.584	N/A	N/A
	Left	0.143	0.078	0.081	0.221	0.224	N/A	N/A
	Right	0.079	0.125	0.068	0.204	0.147	N/A	N/A
WCDMA Band 2	Front	0.149	0.179	0.089	0.328	0.238	N/A	N/A
	Back	0.200	0.222	0.127	0.422	0.327	N/A	N/A
	Left	0.131	0.078	0.081	0.209	0.212	N/A	N/A
	Right	0.081	0.125	0.068	0.206	0.149	N/A	N/A
WCDMA Band 4	Front	0.172	0.179	0.089	0.351	0.261	N/A	N/A
	Back	0.254	0.222	0.127	0.476	0.381	N/A	N/A
	Left	0.104	0.078	0.081	0.182	0.185	N/A	N/A
	Right	0.053	0.125	0.068	0.178	0.121	N/A	N/A
WCDMA Band 5	Front	0.076	0.179	0.089	0.255	0.165	N/A	N/A
	Back	0.102	0.222	0.127	0.324	0.229	N/A	N/A
	Left	0.031	0.078	0.081	0.109	0.112	N/A	N/A
	Right	0.016	0.125	0.068	0.141	0.084	N/A	N/A



Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLS R	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Front	1RB	0.099	0.179	0.089	0.278	0.188	N/A	N/A
	Back		0.179	0.222	0.127	0.401	0.306	N/A	N/A
	Left		0.034	0.078	0.081	0.112	0.115	N/A	N/A
	Right		0.026	0.125	0.068	0.151	0.094	N/A	N/A
	Front	50%RB	0.049	0.179	0.089	0.228	0.138	N/A	N/A
	Back		0.015	0.222	0.127	0.237	0.142	N/A	N/A
	Left		0.141	0.078	0.081	0.219	0.222	N/A	N/A
LTE Band 4 QPSK (20MHz)	Right	1RB	0.104	0.125	0.068	0.229	0.172	N/A	N/A
	Front		0.138	0.179	0.089	0.317	0.227	N/A	N/A
	Back		0.252	0.222	0.127	0.474	0.379	N/A	N/A
	Left		0.037	0.078	0.081	0.115	0.118	N/A	N/A
	Right	50%RB	0.027	0.125	0.068	0.152	0.095	N/A	N/A
	Front		0.031	0.179	0.089	0.210	0.120	N/A	N/A
	Back		0.014	0.222	0.127	0.236	0.141	N/A	N/A
LTE Band 5 QPSK (10MHz)	Left	1RB	0.201	0.078	0.081	0.279	0.282	N/A	N/A
	Right		0.161	0.125	0.068	0.286	0.229	N/A	N/A
	Front		0.086	0.179	0.089	0.265	0.175	N/A	N/A
	Back		0.130	0.222	0.127	0.352	0.257	N/A	N/A
	Left	50%RB	0.049	0.078	0.081	0.127	0.130	N/A	N/A
	Right		0.061	0.125	0.068	0.186	0.129	N/A	N/A
	Front		0.075	0.179	0.089	0.254	0.164	N/A	N/A
LTE Band 7 QPSK (10MHz)	Back	1RB	0.015	0.222	0.127	0.237	0.142	N/A	N/A
	Left		0.090	0.078	0.081	0.168	0.171	N/A	N/A
	Right		0.036	0.125	0.068	0.161	0.104	N/A	N/A
	Front		0.127	0.179	0.089	0.306	0.216	N/A	N/A
	Back	50%RB	0.210	0.222	0.127	0.432	0.337	N/A	N/A
	Left		0.116	0.078	0.081	0.194	0.197	N/A	N/A
	Right		0.083	0.125	0.068	0.208	0.151	N/A	N/A
LTE Band 12 QPSK (10MHz)	Front	1RB	0.136	0.179	0.089	0.315	0.225	N/A	N/A
	Back		0.029	0.222	0.127	0.251	0.156	N/A	N/A
	Left		0.172	0.078	0.081	0.250	0.253	N/A	N/A
	Right		0.123	0.125	0.068	0.248	0.191	N/A	N/A
	Front	50%RB	0.086	0.179	0.089	0.265	0.175	N/A	N/A
	Back		0.131	0.222	0.127	0.353	0.258	N/A	N/A
	Left		0.038	0.078	0.081	0.116	0.119	N/A	N/A
LTE Band 17 QPSK (10MHz)	Right	1RB	0.022	0.125	0.068	0.147	0.090	N/A	N/A
	Front		0.033	0.179	0.089	0.212	0.122	N/A	N/A
	Back		0.018	0.222	0.127	0.240	0.145	N/A	N/A
	Left		0.095	0.078	0.081	0.173	0.176	N/A	N/A
	Right	50%RB	0.050	0.125	0.068	0.175	0.118	N/A	N/A
	Front		0.111	0.179	0.089	0.290	0.200	N/A	N/A
	Back		0.134	0.222	0.127	0.356	0.261	N/A	N/A
LTE Band 26 QPSK (10MHz)	Left	1RB	0.033	0.078	0.081	0.111	0.114	N/A	N/A
	Right		0.029	0.125	0.068	0.154	0.097	N/A	N/A
	Front		0.045	0.179	0.089	0.224	0.134	N/A	N/A
	Back		0.010	0.222	0.127	0.232	0.137	N/A	N/A
	Left	50%RB	0.082	0.078	0.081	0.160	0.163	N/A	N/A
	Right		0.050	0.125	0.068	0.175	0.118	N/A	N/A
	Front		0.076	0.179	0.089	0.255	0.165	N/A	N/A
LTE Band 26 QPSK (10MHz)	Back	1RB	0.156	0.222	0.127	0.378	0.283	N/A	N/A
	Left		0.048	0.078	0.081	0.126	0.129	N/A	N/A
	Right		0.041	0.125	0.068	0.166	0.109	N/A	N/A
	Front		0.102	0.179	0.089	0.281	0.191	N/A	N/A
	Back	50%RB	0.140	0.222	0.127	0.362	0.267	N/A	N/A
	Left		0.107	0.078	0.081	0.185	0.188	N/A	N/A
	Right		0.104	0.125	0.068	0.229	0.172	N/A	N/A



LTE Band 26 QPSK (15MHz)	Front	1RB	0.168	0.179	0.089	0.347	0.257	N/A	N/A
	Back		0.325	0.222	0.127	0.547	0.452	N/A	N/A
	Left		0.117	0.078	0.081	0.195	0.198	N/A	N/A
	Right		0.073	0.125	0.068	0.198	0.141	N/A	N/A
	Front	50%RB	0.145	0.179	0.089	0.324	0.234	N/A	N/A
	Back		0.020	0.222	0.127	0.242	0.147	N/A	N/A
	Left		0.278	0.078	0.081	0.356	0.359	N/A	N/A
	Right		0.240	0.125	0.068	0.365	0.308	N/A	N/A
LTE Band 38 QPSK (5MHz)	Front	1RB	0.134	0.179	0.089	0.313	0.223	N/A	N/A
	Back		0.236	0.222	0.127	0.458	0.363	N/A	N/A
	Left		0.148	0.078	0.081	0.226	0.229	N/A	N/A
	Right		0.100	0.125	0.068	0.225	0.168	N/A	N/A
	Front	50%RB	0.119	0.179	0.089	0.298	0.208	N/A	N/A
	Back		0.022	0.222	0.127	0.244	0.149	N/A	N/A
	Left		0.194	0.078	0.081	0.272	0.275	N/A	N/A
	Right		0.142	0.125	0.068	0.267	0.210	N/A	N/A
LTE Band40 QPSK (5MHz)	Front	1RB	0.128	0.179	0.089	0.307	0.217	N/A	N/A
	Back		0.259	0.222	0.127	0.481	0.386	N/A	N/A
	Left		0.149	0.078	0.081	0.227	0.230	N/A	N/A
	Right		0.086	0.125	0.068	0.211	0.154	N/A	N/A
	Front	50%RB	0.184	0.179	0.089	0.363	0.273	N/A	N/A
	Back		0.244	0.222	0.127	0.466	0.371	N/A	N/A
	Left		0.207	0.078	0.081	0.285	0.288	N/A	N/A
	Right		0.216	0.125	0.068	0.341	0.284	N/A	N/A
LTE Band40 QPSK (5MHz)	Front	1RB	0.147	0.179	0.089	0.326	0.236	N/A	N/A
	Back		0.229	0.222	0.127	0.451	0.356	N/A	N/A
	Left		0.140	0.078	0.081	0.218	0.221	N/A	N/A
	Top		0.033	0.125	0.068	0.158	0.101	N/A	N/A
	Back	50%RB	0.098	0.179	0.089	0.277	0.187	N/A	N/A
	Left		0.015	0.222	0.127	0.237	0.142	N/A	N/A
	Top		0.196	0.078	0.081	0.274	0.277	N/A	N/A
	Front		0.150	0.125	0.068	0.275	0.218	N/A	N/A
LTE Band 41 QPSK (20MHz)	Front	1RB	0.149	0.179	0.089	0.328	0.238	N/A	N/A
	Back		0.245	0.222	0.127	0.467	0.372	N/A	N/A
	Left		0.123	0.078	0.081	0.201	0.204	N/A	N/A
	Right		0.095	0.125	0.068	0.220	0.163	N/A	N/A
	Front	50%RB	0.130	0.179	0.089	0.309	0.219	N/A	N/A
	Back		0.015	0.222	0.127	0.237	0.142	N/A	N/A
	Left		0.207	0.078	0.081	0.285	0.288	N/A	N/A
	Right		0.168	0.125	0.068	0.293	0.236	N/A	N/A
LTE Band 66 QPSK (20MHz)	Front	1RB	0.123	0.179	0.089	0.302	0.212	N/A	N/A
	Back		0.201	0.222	0.127	0.423	0.328	N/A	N/A
	Left		0.100	0.078	0.081	0.178	0.181	N/A	N/A
	Right		0.034	0.125	0.068	0.159	0.102	N/A	N/A
	Front	50%RB	0.076	0.179	0.089	0.255	0.165	N/A	N/A
	Back		0.022	0.222	0.127	0.244	0.149	N/A	N/A
	Left		0.162	0.078	0.081	0.240	0.243	N/A	N/A
	Right		0.115	0.125	0.068	0.240	0.183	N/A	N/A



12 Measurement uncertainty evaluation

12.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Measurement Uncertainty evaluation for SAR test								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system Detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation-SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞





Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.42	∞
Combined Standard Uncertainty		Rss				10.63	10.54	
Expanded Uncertainty{95% CONFIDENCE INTERVAL}		k				21.26	21.08	

12.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Uncertainty For System Performance Check								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i 1g	C _i 10g	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions – Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid Distance	2	R	$\sqrt{3}$	1	1	1.16	1.16	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.41	∞
Combined Standard Uncertainty		Rss				10.28	9.98	
Expanded Uncertainty (95% Confidence interval)		k				20.57	19.95	



13 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufact urer	Device Type	Type(Model)	Serial number	calibration	
					Last Cal.	Due Date
☒	SATIMO	COMOSAR DOSIMETRIC E FIELD PROBE	SSE5	3323-EPGO-424	2023-07-09	2024-07-08
☒	SATIMO	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	SN 48/16 DIP0G750-444	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	SN 14/13 DIP0G835-235	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 900 MHz REFERENCE DIPOLE	SID900	SN 14/13 DIP0G900-231	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 1800 MHz REFERENCE DIPOLE	SID1800	SN 14/13 DIP1G800-232	2023-11-09	2026-11-08
☐	SATIMO	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	SN 14/13 DIP1G900-236	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 2000 MHz REFERENCE DIPOLE	SID2000	SN 14/13 DIP2G000-237	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	SN 14/13 DIP2G450-238	2023-11-09	2026-11-08
☒	SATIMO	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	SN 28/14 DIP2G600-327	2023-11-09	2026-11-08
☒	SATIMO	Software	OPENSAR	N/A	N/A	N/A
☒	SATIMO	Phantom	COMOSAR IEEE SAM PHANTOM	SN 14/13 SAM99	N/A	N/A
☒	R & S	Universal Radio Communication Tester	CMU 200	119733	2023-11-02	2024-11-01
☒	R & S	Universal Radio Communication Tester	CMW500	144459	2023-11-02	2024-11-01
☒	R & S	UXM5G Wireless Test Platform	E7515B	MY60192341	2023-11-02	2024-11-01
☒	HP	Network Analyser	8753D	3410A08889	2023-11-02	2024-11-01
☒	HP	Signal Generator	E4421B	GB39340770	2023-11-02	2024-11-01
☒	Keithley	Multimeter	Keithley 2000	4014539	2023-11-02	2024-11-01
☒	SATIMO	Amplifier	Power Amplifier	MODU-023-A- 0004	2023-11-02	2024-11-01
☒	Agilent	Power Meter	E4418B	GB43312909	2023-11-02	2024-11-01
☒	Agilent	Power Meter Sensor	E4412A	MY41500046	2023-11-02	2024-11-01





Annex A: System performance verification

(Please See the SAR Measurement Plots of annex A.)

Annex B: Measurement results

(Please See the SAR Measurement Plots of annex B.)

Annex C: Calibration reports

(Please See the Calibration reports of annex C.)

