




Sound Control Technologies




RemoteTableKit™ RTK-AM1™ Application Guide

Updated: 07/22/2024

RTK-AM1™ Transmitter Module

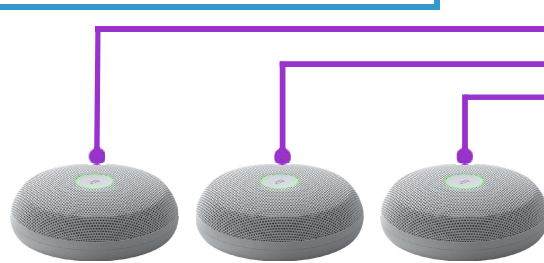

*Cables Included with Cisco Mic Pro and Navigator



RCC-M015-2.0M

USB-C to USB-C USB Cable

WPS-48V4A 48VDC
100-240V 47-63Hz
Power Supply



SCTLink2™ Cable*
Ethernet/POE; Cisco Mic Pro; HDMI;
Audio I/O & USB up to 100m CAT6A U/FTP
The **SCTLink™** cable must always be
a single, point-to-point CAT cable with
no couplers or interconnections.

RTK-AM1™ Receiver Module



WPS-12 30VDC
100-240V 47-63Hz
Power Supply




RCC-H016-1.0M
RJ45 to RJ45 UTP Cable

RCC-M015-1.0M
USB-C to USB-C USB Cable

RCC-M013-1.0M
3Pin to USB-A Cable

*SCTLink2™ Cable Specs
Integrator-Supplied CAT6A U/FTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

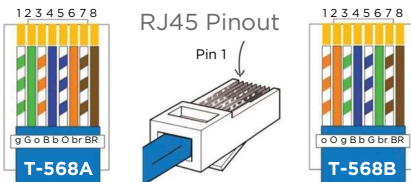

Cisco Codec EQ, Room Bar & Room Bar Pro

Module Weights & Dimensions

RTK-AM1™ TX: (18.5oz) H: 1.30" (33mm) x W: 10.5" (267mm) x D: 4.5" (115mm)

RTK-AM1™ RX: H: (16.5 oz) 1.30" (30mm) x W: 10.1" (257mm) x D: 4.5" (115mm)