




RF UB55 Vertical Mounting Bracket

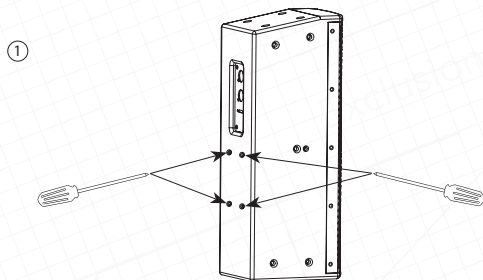


Unscrew four sockets on the back of loudspeaker. Do not use these removed screws for mounting - proper size screws for attaching bracket are included with RF UB55.

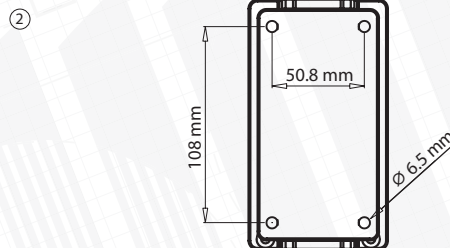

Attach mounting plate to the surface. Please leave required space from all sides for cables and loudspeaker angle adjustment.



Place loudspeaker with attached bracket onto mounting plate. Fix the two security screws on both sides of the bracket to prevent loudspeaker removal from the plate.

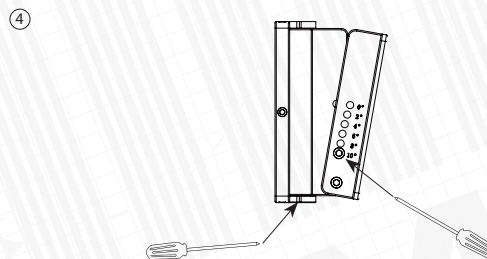

Plug audio cables and make final loudspeaker angle adjustments. Place the screws for fixing vertical and horizontal angles and tighten.

Please pay attention: Mount loudspeaker on the reliable base only.