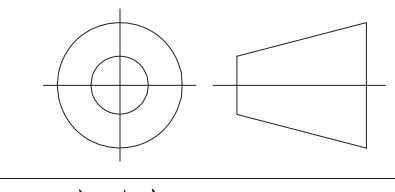
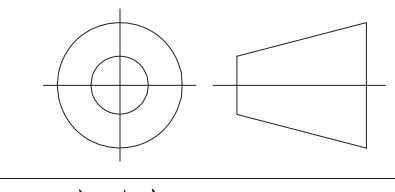
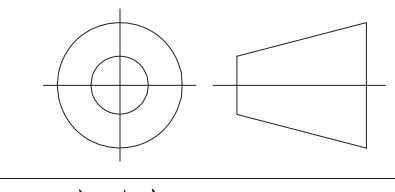


1	2	3	4	5	6																																
				<table><tr><td>版 本</td><td>更 改</td><td>审 核</td><td>日 期</td></tr><tr><td>A0</td><td>首版发布</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>	版 本	更 改	审 核	日 期	A0	首版发布											A																
版 本	更 改	审 核	日 期																																		
A0	首版发布																																				
A	封面 114mm 200mm  Model: PV350 User Guide Technical Details: <table><tr><td>Model:</td><td>PV350</td></tr><tr><td>Peak Power(Pm):</td><td>350W</td></tr><tr><td>Solar Cell Lamination:</td><td>ETFE</td></tr><tr><td>Cell Efficiency:</td><td>Up to 23.4%</td></tr><tr><td>Voltage at Max Power(Vmp):</td><td>37.5V</td></tr><tr><td>Current at Max Power(Imp):</td><td>9.2A</td></tr><tr><td>Open Circuit Voltage(Voc):</td><td>46.5V</td></tr><tr><td>Short Circuit Current(Isc):</td><td>10.8A</td></tr><tr><td>Operating Temperature:</td><td>-10°C ~ +65°C</td></tr><tr><td>Best Working Temperature:</td><td>+25°C</td></tr><tr><td>Folding Number:</td><td>4</td></tr><tr><td>Dimension(unfolded):</td><td>2400*905mm/94.4*35.6inch</td></tr><tr><td>Dimension(folded):</td><td>905*613*65mm/35.6*24.1*2.5inch</td></tr><tr><td>Weight:</td><td>13.8kg/30.6lbs</td></tr><tr><td>Warranty:</td><td>24 months</td></tr></table> Safety Tips: - Do not bend the solar panel. - Do not soak the solar panel into water or any other liquid. - Do not use or store this solar panel near fire or heater. - Do not scratch the solar panel with sharp objects. - Do not disassemble the solar panel by yourself. - Do not put corrosive substance on this solar panel. - Ensure shade from trees, buildings, and any other obstructions do not block sunlight while using the panels. - Do not use this product as a children's toy. - Please note that the solar panel may be damaged by falling or impact. - During recharging, keep your portable power station away from heat and direct sunlight to extend its life span.  Warranty: 24 months warranty and lifetime technical support. FAQ(Frequently Asked Questions) Q: The compatibility of the solar panel. Currently compatible with below models but not limit to: - EP500/EP500PRO(5120Wh, 2000W/3000W) - AC300/3072Wh/3000W) - AC200MAX(2048Wh/2200W) - AC200P(2000Wh/2000W) - EB120/EB150/EB180/EB240 ⓘ Tip: To confirm the solar panel's compatibility with 3rd-party devices, please consult the seller. Q: What factors may affect the solar conversion rate? 1. The weather condition. 2. Working environment temperature. 3. The length of solar panels. 4. The angle from the panels to sunlight. How to decide the number of panels required to recharge? 1. The output power of solar panels should fit the recommended voltage. 2. The max open circuit voltage is not able to exceed in the max input voltage of power station. 3. The gross output current of solar panels should be between the recommended working voltage. ⓘ When using multiple solar panels in series or parallel, please make sure that the accumulated maximum voltage and current of the solar panels does not exceed in the maximum voltage and current of the power station. Q: Is it waterproof? In order to maximize the lifespan of the solar panel, please try not to get it wet or soak the solar panel into water. Contact us If you have any questions, request a replacement or refund for defective product, please email us. We will get you back as soon as possible. For more information, please visit our website or E-mail: www.bluettipower.com service@bluettipower.com				Model:	PV350	Peak Power(Pm):	350W	Solar Cell Lamination:	ETFE	Cell Efficiency:	Up to 23.4%	Voltage at Max Power(Vmp):	37.5V	Current at Max Power(Imp):	9.2A	Open Circuit Voltage(Voc):	46.5V	Short Circuit Current(Isc):	10.8A	Operating Temperature:	-10°C ~ +65°C	Best Working Temperature:	+25°C	Folding Number:	4	Dimension(unfolded):	2400*905mm/94.4*35.6inch	Dimension(folded):	905*613*65mm/35.6*24.1*2.5inch	Weight:	13.8kg/30.6lbs	Warranty:	24 months	封底 封面 封底 折页示意图	B	
Model:	PV350																																				
Peak Power(Pm):	350W																																				
Solar Cell Lamination:	ETFE																																				
Cell Efficiency:	Up to 23.4%																																				
Voltage at Max Power(Vmp):	37.5V																																				
Current at Max Power(Imp):	9.2A																																				
Open Circuit Voltage(Voc):	46.5V																																				
Short Circuit Current(Isc):	10.8A																																				
Operating Temperature:	-10°C ~ +65°C																																				
Best Working Temperature:	+25°C																																				
Folding Number:	4																																				
Dimension(unfolded):	2400*905mm/94.4*35.6inch																																				
Dimension(folded):	905*613*65mm/35.6*24.1*2.5inch																																				
Weight:	13.8kg/30.6lbs																																				
Warranty:	24 months																																				
B					C																																
C	 型 番：PV350 取 扱 説 明 書 仕様 <table><tr><td>型番:</td><td>PV350</td></tr><tr><td>最大出力(Pm):</td><td>350W</td></tr><tr><td>太陽電池積層方式:</td><td>ETFE</td></tr><tr><td>セル変換効率:</td><td>Up to 23.4%</td></tr><tr><td>出力電圧(Max.):</td><td>37.5V</td></tr><tr><td>出力電流(Max.):</td><td>9.2A</td></tr><tr><td>開路電圧(Voc):</td><td>46.5V</td></tr><tr><td>短絡電流(Isc):</td><td>10.8A</td></tr><tr><td>作業環境温度:</td><td>-10°C ~ +65°C</td></tr><tr><td>ペタワットモジュール温度:</td><td>+25°C</td></tr><tr><td>折り畳み枚数:</td><td>4枚</td></tr><tr><td>サイズ(展開時):</td><td>2400*905mm/94.4*35.6inch</td></tr><tr><td>サイズ(収納時):</td><td>905*613*65mm/35.6*24.1*2.5inch</td></tr><tr><td>重さ:</td><td>13.8kg/30.6lbs</td></tr><tr><td>保証期間:</td><td>24ヶ月</td></tr></table> 使用上のご注意: - 本体を折らないでください。 - 本体の内部に水が入らないようにしてください。 - ヒーターや火などの熱源の近くに本製品を設置しないでください。 - 本体に鋭いもので触らないでください。 - 分解や改造は行わないでください。 - 清掃には洗剤系品類を使用しないでください。 - ソーラーパネルを目撃にならない場所に設置してください。 - 幼児、子供の手の届く範囲に設置しないでください。 - 落下や衝突などの衝撃などにより、けが・故障の原因になるおそれがあります。 - ポータブル電源に充電する場合、ポータブル電源に直射日光が直接あたらないように設置してください。また、ポータブル電源を火気の近くや高温になる場所に設置しないでください。  保証規定: 当社は、購入日から24ヶ月の保証をお客様に提供します。 FAQ(よくあるご質問) Q: 本製品に使えるBLUETTIのポータブル電源を教えてください。 A: 下記BLUETTIのポータブル電源が合いますが、これらに限定されません。 - EP500/EP500PRO(5120Wh, 2000W/3000W) - AC300/3072Wh/3000W) - AC200MAX(2048Wh/2200W) - AC200P(2000Wh/2000W) - EB120/EB150/EB180/EB240 ⓘ ご注意: 他社製品のポータブル電源に充電したい場合、該当ポータブル電源の販売先へお問い合わせください。 Q:ソーラーパネルの転換率に影響がある要因は何ですか? 1.太陽光の強さ 2.設置環境の温度 3.ソーラーパネルの設置角度 4.ソーラーパネル電線の長さ Q:ポータブル電源に複数のソーラーパネルを並列で使えますか? 1.ポータブル電源の最大入力電力を確認 2.ポータブル電源の最大入力電圧を確認 3.ソーラーパネルの最大出力を確認 ⓘ 複数のソーラーパネルを並列接続あるいは並列接続する時に、最大値は上記の仕様値未満を超えないでください。 Q:本製品は防水ですか? ソーラーパネルの寿命を長くするための、使用時温度及び水避けで、濡れないようにご注意ください。 お問い合わせ: 本製品に関するお問い合わせ、ご質問などがございましたら、当社のサイトまでにご連絡ください。万一不具合のあった場合、大変申し訳ございませんが、返品か、交換の返答は対応させていただきます。 製品についてもっと詳しい情報を知りたい方は 当社オフィシャルサイトをご利用ください: www.bluettip.jp お問い合わせ先: bluettip.jp@bluetti.com				型番:	PV350	最大出力(Pm):	350W	太陽電池積層方式:	ETFE	セル変換効率:	Up to 23.4%	出力電圧(Max.):	37.5V	出力電流(Max.):	9.2A	開路電圧(Voc):	46.5V	短絡電流(Isc):	10.8A	作業環境温度:	-10°C ~ +65°C	ペタワットモジュール温度:	+25°C	折り畳み枚数:	4枚	サイズ(展開時):	2400*905mm/94.4*35.6inch	サイズ(収納時):	905*613*65mm/35.6*24.1*2.5inch	重さ:	13.8kg/30.6lbs	保証期間:	24ヶ月		D	
型番:	PV350																																				
最大出力(Pm):	350W																																				
太陽電池積層方式:	ETFE																																				
セル変換効率:	Up to 23.4%																																				
出力電圧(Max.):	37.5V																																				
出力電流(Max.):	9.2A																																				
開路電圧(Voc):	46.5V																																				
短絡電流(Isc):	10.8A																																				
作業環境温度:	-10°C ~ +65°C																																				
ペタワットモジュール温度:	+25°C																																				
折り畳み枚数:	4枚																																				
サイズ(展開時):	2400*905mm/94.4*35.6inch																																				
サイズ(収納時):	905*613*65mm/35.6*24.1*2.5inch																																				
重さ:	13.8kg/30.6lbs																																				
保証期間:	24ヶ月																																				
1	2	3	4	5	6																																
				<table><tr><td colspan="4">深圳市德兰明海科技有限公司 Shenzhen PowerOak Newener Co., ltd</td></tr><tr><td>材 料</td><td></td><td></td><td>表面处理</td><td></td><td rowspan="2">无特殊说明，长度单位：mm 未标注尺寸公差按： x. （没有小数位）±0.2 x. x （一位小数位）±0.1 x. xx（两位小数位）±0.05 x° （角度） ±0.5° * 一重要尺寸 0一参照尺寸</td></tr><tr><td>型 号</td><td></td><td>比例： 1: 1 /A4</td><td>图纸编号</td><td></td></tr><tr><td>名 称</td><td colspan="3">英日说明书</td><td>版本</td><td>A0</td></tr><tr><td>设 计</td><td>审 核</td><td>批 准</td><td colspan="3">物料编号</td></tr><tr><td></td><td></td><td></td><td colspan="3">共 张/ 第 张</td></tr></table>	深圳市德兰明海科技有限公司 Shenzhen PowerOak Newener Co., ltd				材 料			表面处理		无特殊说明，长度单位：mm 未标注尺寸公差按： x. （没有小数位）±0.2 x. x （一位小数位）±0.1 x. xx（两位小数位）±0.05 x° （角度） ±0.5° * 一重要尺寸 0一参照尺寸	型 号		比例： 1: 1 /A4	图纸编号		名 称	英日说明书			版本	A0	设 计	审 核	批 准	物料编号						共 张/ 第 张		
深圳市德兰明海科技有限公司 Shenzhen PowerOak Newener Co., ltd																																					
材 料			表面处理		无特殊说明，长度单位：mm 未标注尺寸公差按： x. （没有小数位）±0.2 x. x （一位小数位）±0.1 x. xx（两位小数位）±0.05 x° （角度） ±0.5° * 一重要尺寸 0一参照尺寸																																
型 号		比例： 1: 1 /A4	图纸编号																																		
名 称	英日说明书			版本	A0																																
设 计	审 核	批 准	物料编号																																		
			共 张/ 第 张																																		