



Cordless 28mm D-handle combination hammer

Accessories

Dust extraction system

DX15 Maximum bit size attachable: ø28mm x 260mm
(Part No. 191X39-9)



Dust case set
Part No. 199586-0



Filter set
Part No. 199557-7



Filter set
Part No. 195173-3



Hook set
Part No. 191W90-3



Portable Power Pack

PDC01

Powered by up to four 18V
LXT batteries



PDC1200



Equipped with
built-in battery cells



Charger: DC4001
Charging time: 6hours

Adapter set (40Vmax)
Part No. 191N62-4



Charging Time

	Fast Charging	DC40RA	DC40RC
"BL4020 2.0Ah		22 min	30 min
"BL4025 2.5Ah		28 min	38 min
"BL4040 4.0Ah		45 min	67 min
BL4050F 5.0Ah		50 min	85 min

*1 Recommended battery

Cordless Combination Hammer

HR007G 28 mm (1-1/8") Adapted for SDS-PLUS bits

Variable Speed	Dust Collection	Impact Energy	EPTA-Procedure 05/2009: 3.0 J
Brake	Built-in Job Light	Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16")
Reversing	Carrying Case	Blows Per Minute (BPM)	0 - 5,000
SDS-PLUS Shank		No Load Speed (RPM)	0 - 980
Torque Limiter		Vibration Level	Hammer Drilling into Concrete: 7.5 m/s ² Chiselling Function w/ Side Grip: 8.6 m/s ² Drilling into Metal: 2.8 m/s ²
Constant Speed		Sound Pressure Level	94 dB(A)
		Sound Power Level	105 dB(A)
		Dimensions (L x W x H)	w/ BL4020 / BL4025: 458 x 101 x 234 mm (18 x 4 x 9-1/4") w/ BL4040: 473 x 101 x 240 mm (18-5/8 x 4 x 9-1/2")
		Net weight	3.8 - 4.8 kg (8.4 - 10.6 lbs.)

Standard Equipment : Side Grip, Depth Gauge, Battery, Charger, Cloth, Grease vessel

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Anti-Vibration Technology

Equipped with anti-vibration main handle and side handle to reduce vibration to operator's hands for less hand and arm fatigue from long continuous operation.

AVT Vibration level at main handle
8.6 m/s²



Work speed		
Drilled holes to a depth of 60mm (2-3/8") at 8kg pressing load Concrete with compressive strength of 40N/mm ² BL4040 / on full battery charge		
ø10.5mm (3/8")	ø12.5mm (1/2")	ø16.0mm (5/8")
6.1 sec	8.6 sec	12 sec


AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

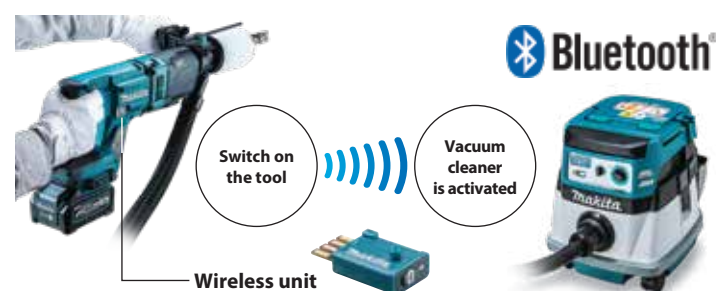

XPT eXtreme Protection Technology

