

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

MANUAL TRAILER MOVER USER MANUAL

MODEL:QYC1500

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®

TOUGH TOOLS, HALF PRICE

MANUAL TRAILER MOVER

MODEL:QYC1500



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

 CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

SAFETY INSTRUCTIONS



WARNING: Read and understand all instructions. Failure to follow all instructions listed below may result in serious injury.

1. Check whether the tire has enough gas before use. If the tire gas is not enough, please inflate the tire before use.
2. Check whether the screw part is loose, if yes, please tighten it.
3. Do not overload. The maximum load is 420lbs.



CAUTION: Please read the instructions for safe operation carefully.

Assembly Precautions

1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3. Keep assembly area clean and well lit.
4. Keep bystanders out of the area during assembly.
5. Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6. Weight capacity and other product capabilities apply to properly and completely assembled product only.
7. Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded boat trailer dolly.

Use Precautions

TO PREVENT SERIOUS INJURY AND DEATH FROM TIPPING:

1. Do not sit, stand or climb on this item.
2. This product is not a toy. Do not allow children to play with or near this item.
3. Do not lift while loaded.

4. To prevent tipping, push/pull using supplied handle only.
5. Use as intended only.
6. Inspect before every use; do not use if parts are loose or damaged.
7. After use, please dry before storage to avoid rusting of bolts affecting use.
8. This product can be pulled for people or cars. Please check it carefully before use.

Special Attention:


The small wheel must be straightened before use, and the accessories will bend after the force is not straightened !

SAVE THESE INSTRUCTIONS

MODEL AND PARAMETERS

Model	QYC1500
Maximum Load	1500lbs
Product Size	(Hand-pulling Mode) LxWxH=127x109x83.5 cm (Car-hanging Mode) LxWxH=138x109x83.5 cm
Wheel	16" Pneumatic Tire 8" Swivel Caster
Hitch Ball	Diameter:2"
Adjustable Height	60-90cm
Material	Steel

STRUCTURE DIAGRAM

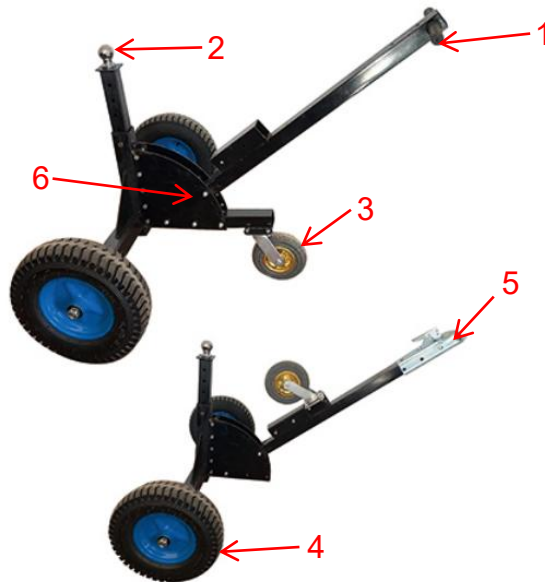

1. Handle 2.Hitch Ball 3.Swivel Caster 4.Pneumatic Tire
5.Hitch Ball Cover 6.Angle Adjustment

COMPONENTS



① ×2



② ×1



③ ×1



④ ×1



⑤ ×1



⑥ ×1



⑦ ×2



⑧ ×1



⑨ ×1



⑩ ×2



⑪ ×6

(M10*70)



⑫ ×10

(M8*20)



⑬ × 10

(M8)



⑭ × 2

(M20)



⑮ × 1



⑯ x4

(Φ20)



⑰ x10

(Φ8)



⑱ x10

(Φ10)



⑲ x4

(M10*20)



⑳ x10

(M10)


ASSEMBLY

Tools needed



Socket Wrench

Manual Installation Method

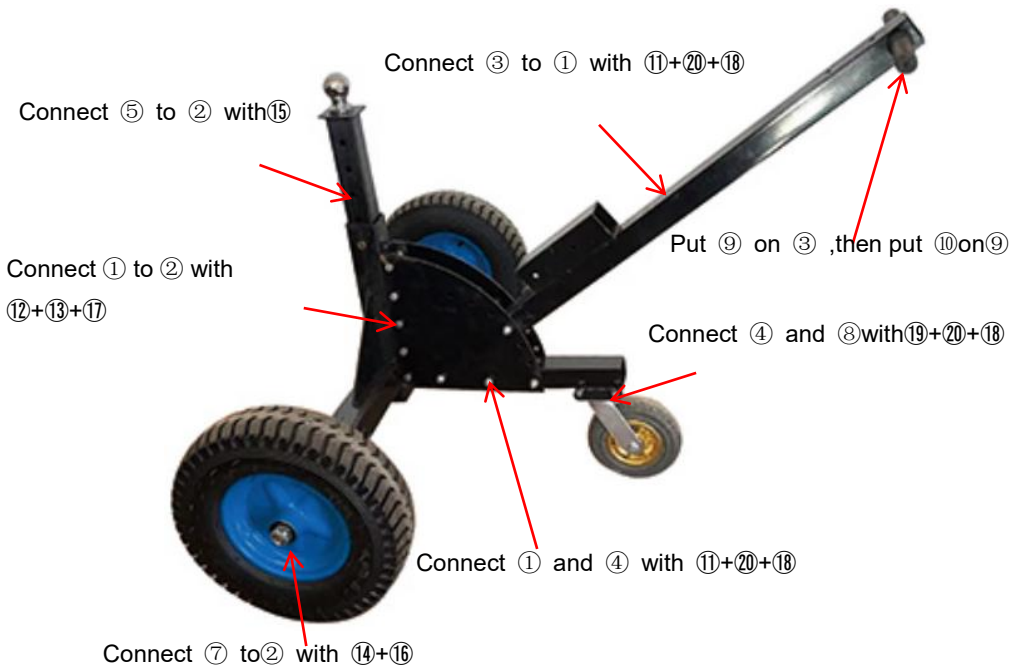


Re-confirm that all parts are locked, and then Inflate the tires to a pressure of 27KPa ,and it's ready to go.


NOTE that do not exceed the prescribed tire pressure to avoid bursting.

Vehicle Installation Method

Step 1: Connect ④ and ⑧ with ⑲+⑳+⑱

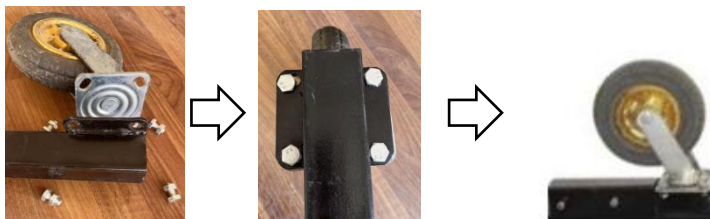

Step 2: Install the hitch ball cover, insert ④ into ③ and lock tightly.

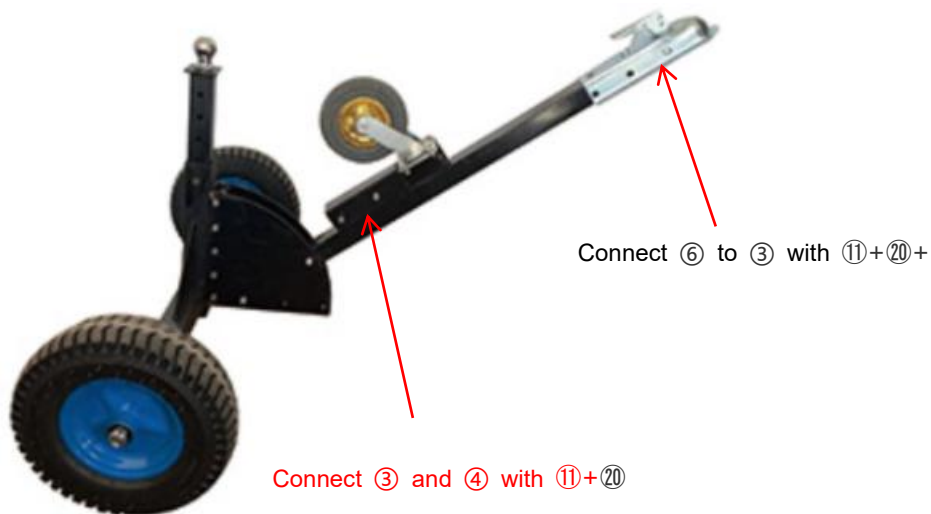

Re-confirm that all parts are locked, and then inflate the tires to a pressure of 27KPa, and it's ready to go.

NOTE that do not exceed the prescribed tire pressure to avoid bursting.

MAINTENANCE

- Do not overload.
- After use, please dry before storage to avoid rusting of bolts affecting use.
- Check bolts regularly for looseness.

Importer: WAITCHX

Address: 250 bis boulevard Saint-Germain 75007 Paris

Importer: FREE MOOD LTD

Address: 2 Holywell Lane, London, England, EC2A 3ET

Manufacturer: Wuqiang Xintianhong Tool Manufacturing Co., LTD

Address: Beiche Village, Wuqiang County, Hengshui City, Hebei Province

Made In China



EUREP UK LTD

UNIT 2264, 100 OCK STREET, ABINGDON

OXFORDSHIRE ENGLAND OX14 5DH



EUREP GmbH

Unterlettenweg 1a, 85051

Ingolstadt, Germany

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

www.vevor.com/support