

MARKET**PRO**

Stock Lighting Solutions

2021 LIGHTING & CONTROLS STOCK PRODUCT GUIDE



HALO



METALUX



GREENGATE



SURE-LITES



LUMARK

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

VOL. 1





COOPER

Lighting Solutions

At Cooper Lighting Solutions, we deliver industry leading indoor and outdoor lighting products, lighting controls, smart lighting systems, programs and services.

MARKETPRO

Stock Lighting Solutions

Readily-available solutions for all projects

The MarketPro program provides our distributor partners and contractors with our top selling lighting and controls products from our industry-leading brands. Designed for their trusted performance, reliability and quality, these products are in-stock and ready to ship.

Why MARKETPRO?



Proven Best Sellers

Our top selling lighting and controls products and smart lighting systems



Top Brands

Industry-leading brands satisfying customers for over 60 years



In-stock

Our essential products are in stock and readily-available



Innovation

State-of-the-art product innovation, reliability and quality



Utility Incentives

Products qualify for ENERGY STAR® and DLC®, saving money and adding value



Training & Education


Online and instructor-led classes to expand your lighting and controls knowledge

Find Everything You Need, When You Need It!

MARKETPRO ONLINE

Everything you need to know about the MarketPro Stock Program is conveniently located on one website.


[Cooperlighting.com/MarketPro](https://cooperlighting.com/MarketPro)

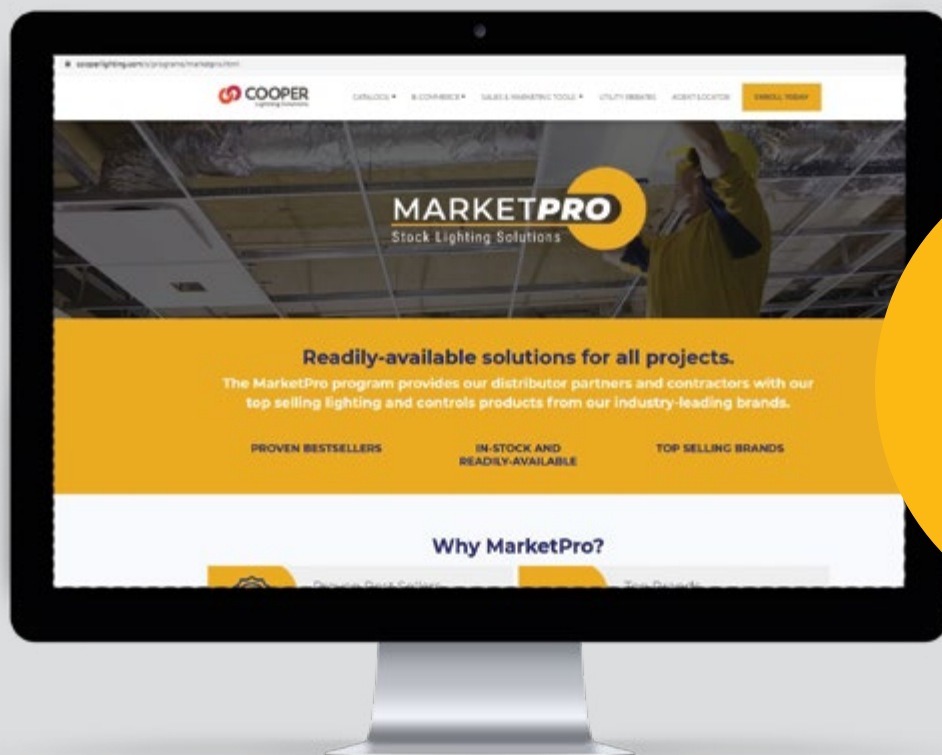

Visit the MarketPro website to learn more about the program; our products; and the valuable sales and marketing resources.

- ✓ Product Information
- ✓ Utility Rebate Incentive Finder
- ✓ Digital Catalogs & Product Selection Guides
- ✓ Links to Educational Training Resources
- ✓ Where to Buy

Our Brands and Markets We Serve

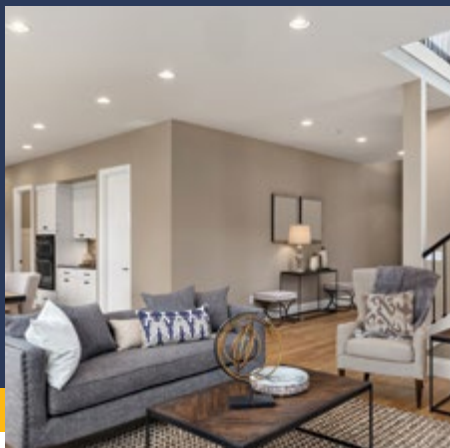

RESIDENTIAL



COMMERCIAL



INDUSTRIAL

We deliver a range of innovative and reliable indoor and outdoor lighting solutions, as well as controls products specifically designed to maximize performance, energy efficiency and cost savings.

PAGE 6



HALO Recessed & Surface Downlights

The brand leader of high-quality recessed downlights, surface and outdoor solutions featuring state-of-the-art engineering and performance.

PAGE 32



METALUX Ambient Commercial & Industrial

Commercial and industrial recessed, linear, surface and high bay solutions featuring the latest LED and driver technology for optimal performance.

PAGE 42



GREENGATE Controls Sensors & Switch

Complete offering of lighting control sensors, panels and switches designed to save energy and meet code compliances for many control strategies.

PAGE 48



SURE-LITES Exit & Emergency

Innovative and reliable emergency lighting fixtures, exit signs and battery packs for commercial and industrial applications.

PAGE 54



LUMARK Outdoor Commercial & Industrial

High-quality outdoor lighting for wall mount, floodlighting and area/site applications that provides ease of installation and superior area safety.

New Product Innovation and Technology

SeleCCTable Technology Puts Flexibility At Your Fingertips!

Field selectable fixtures offer adjustable lumen output, color temperature or both lumen and CCT.



Select between the preset lumen outputs to create your optimal lighting experience.

HALO/HALO HOME/HALO COMMERCIAL



METALUX



LUMARK



Choose from a range of color temperatures and set the perfect scene.

HALO RECESSED



METALUX



HALO OUTDOOR



Look for the selectable icons that identifies products with this innovative technology.

HALO RECESSED DOWNLIGHT



Direct Mount
p. 7-13



Surface Mount
p. 14-15



Downlight/Adjustable
p. 16-17



Undercabinet
p. 20-21



Housing/Trim
p. 21-23

HLB LED Direct Mount Downlight

HALO

- Ultra-thin downlight in 3, 4, 6, 8 and 12-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in as little as 3-1/2-inch plenum height
- Remote driver/junction box; Insulated ceiling (IC) and non-IC rated
- 120V or Universal 120-277V models available



HLB3059FS1EMWR



HLB4S069FS1EMWR



HLB8LS9FSE010MWR



HLB6099FS1EMWR



HLB4069FS1EMWR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB3059FS1EMWR	3" Module, Round	White	40W INC	2700K-5000K	120V	500	9	720	080083151301	N/A
HLB3S059FS1EMWR	3" Module, Square	White	40W INC	2700K-5000K	120V	500	9	720	080083151325	2336938
HLB4069FS1EMWR	4" Module, Round	White	65W INC	2700K-5000K	120V	752	12	864	080083848140	2322243
HLB4069FSE010MWR	4" Module, Round, UNV	White	60W INC	2700K-5000K	120-277V	750	11	756	080083912261	2351376
HLB4S069FS1EMWR	4" Module, Square	White	65W INC	2700K-5000K	120V	752	12	756	080083863303	2331662
HLB4S069FSE010MWR	4" Module, Square, UNV	White	60W INC	2700K-5000K	120-277V	725	11	432	080083912308	2351374
HLB6099FS1EMWR	6" Module, Round	White	65W INC	2700K-5000K	120V	1,103	16	648	080083848164	2322242
HLB6S099FS1EMWR	6" Module, Square	White	65W INC	2700K-5000K	120V	1,103	12	540	080083863389	2331663
HLB6099FSE010MWR	6" Module, Round, UNV	White	75W INC	2700K-5000K	120-277V	1061	15	450	080083912285	2351377
HLB6S099FSE010MWR	6" Module, Square, UNV	White	75W INC	2700K-5000K	120-277V	1050	15	360	080083912322	2351375
HLB8169FS1EMWR	8" Module, Round	White	90W INC	2700K-5000K	120V	1600	21	144	080083150601	2358047
HLB8LS9FSE010MWR	8" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	31	144	080083083367	2358045
HLB12LS9FSE010MWR	12" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	32	144	080083088782	N/A

HLB LED Lite Direct Mount Downlight

- Ultra-thin LED lens downlight in 4 and 6-inch sizes with remote driver / junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Features a round polymer trim and smooth lens
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in 3/8-inch to 5/8-inch thick ceilings



HLBSL6099FS231EMWR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLBSL4069FS231EMWR	4" Module, Round	White	60W INC	2700K - 3500K	120V	753	10	576	080083912346	2349484
HLBSL4069FS351EMWR	4" Module, Round	White	60W INC	3000K - 5000K	120V	716	10	576	080083916368	2349485
HLBSL6099FS231EMWR	6" Module, Round, UNV	White	75W INC	2700K - 3500K	120V	954	13	600	080083912360	2349475, 2349476, 2349477
HLBSL6099FS351EMWR	6" Module, Round, UNV	White	75W INC	3000K - 5000K	120V	940	13	600	080083916382	2349478, 2349479, 2349480



RL LED Baffle Trim Direct Mount

HALO

- 4 and 6-inch regressed LED lens downlights with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Can be installed in ½-inch to 1 ¼-inch thick ceilings
- Insulated ceiling (IC) and non-IC rated; Dimmable to 5% (120V dimmers); Airtight



RL4069S1EWHDM



RL6069S1EWHDM

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHDM	4" Retrofit Baffle-Trim, Remote Driver J-Box	White	65W INC	2700K-5000K	120V	652	9	300	080083858101	2325604
RL6069S1EWHDM	6" Retrofit Baffle-Trim, Remote Driver J-Box	White	65W INC	2700K-5000K	120V	719	9	240	080083858125	2325603

RA LED Baffle Trim Direct Mount Adjustable Gimbal

HALO

- 4 and 6-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 35° tilt; Dimmable to 5% (120V dimmers)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Insulated ceiling (IC) and non-IC rated; Airtight



RA4069S1EWHDMR

RA6069S1EWHDMR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHDMR	4" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	768	9	392	080083911325	2351865
RA6069S1EWHDMR	6" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	770	9	160	080083911349	2351876

SMD LED Direct Mount Module

HALO

- Ultra-low profile downlight in 4 and 6-inch sizes with integral junction box
- High performance and wide distribution for general areas
- Direct Mount with spring clips into drywall/suspended ceiling (no j-box or housing required)
- Modern look suitable for residential and commercial installations; 90 CRI
- Insulated ceiling (IC) and non-IC rated



SMD4R6930WHDM



SMD6R6930WHDM

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R6930WHDM	4" RD Direct Mount	White	65W INC	3000K	120V	700	10	300	080083766390	2281593
SMD6R6930WHDM	6" RD Direct Mount	White	65W INC	3000K	120V	750	10	192	080083767090	2281592

HLA LED Direct Mount Adjustable Gimbal


HALO

- 4-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 30° tilt; Distributions: 40° flood, 80° very wide flood
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Remote driver/junction box installs through the ceiling cutout and positioned remotely
- Insulated ceiling (IC) and non-IC rated; Dimmable down to 5% (120V dimmers); Airtight



HLA406FL9FS1EMWR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLA406FL9FS1EMWR	4" Round Adjustable Direct Mount	White	65W INC	2700K-5000K	120V	660	11	504	080083882960	2341271

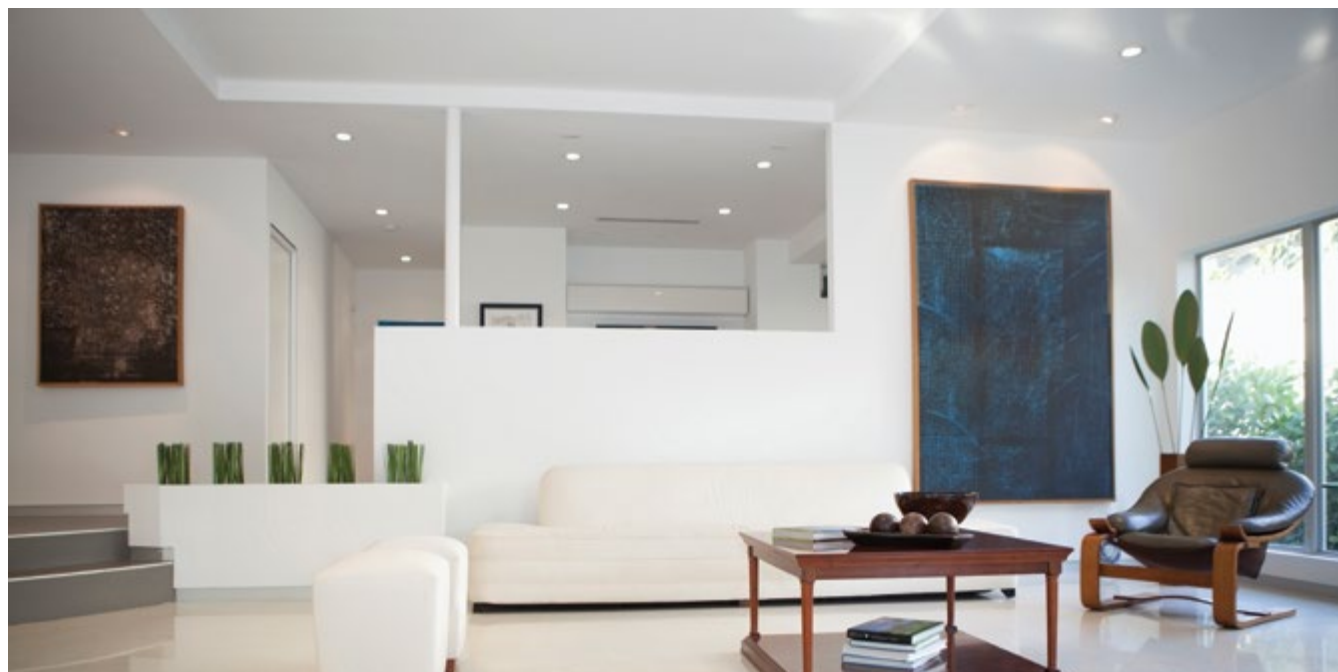

LCR Light Commercial LED Direct Mount Downlight

HALO

- Light commercial downlight in 2, 4, 6 and 8-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Regressed lens and smooth baffle provide high optical cutoff
- Wide distribution pattern is ideal for general area illumination; Airtight



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LCR2089FS1EMW	2" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083130061	2357903
LCR2089FSE010MW	2" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083889969	2351780
LCR4089FSE010MW	4" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	360	080083889983	2351828
LCR4129FSE010MW	4" LCR RD Retrofit Module	White	75W INC	2700K - 5000K	120-227V	1200	15	360	080083890002	2351827
LCR6159FSE010MW	6" LCR RD Direct Mount	White	72W INC	2700K - 5000K	120-277V	1604	16	120	080083890026	2351826
LCR6219FSE010MW	6" LCR RD Direct Mount	White	72W INC	2700K - 5000K	120-277V	2329	25	120	080083890040	2351825
LCR6309FSE010MW	6" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	2981	30	96	080083890064	2351824
LCR8309FSE010MW	8" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	3153	35	128	080083890088	2351823
LCR8509FSE010MW	8" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	4841	47	128	080083890101	2351822

Direct Mount Mounting Frame

HALO

- 4, 6 and 8-inch new construction frames for round and square products; Knock-outs allow square fittings
- Accepts fixtures including remodel housings and direct-mount downlights
- Use to reserve the ceiling location or install products that need bar hangers
- Provides routing guidance for the drywall contractor
- Bar hangers adjust up to 24-inches wide and can be shortened without removal
- Compatible with the HLB, RL, RA, HLA and LCR direct mount series



Catalog Number	Product Description	Pallet Quantity	UPC
HL4RSMF	4" Round/Square Mounting Frame	180	080083876167
HL6RSMF	6" Round/Square Mounting Frame	240	080083876181
HL8RSMF	8" Round/Square Mounting Frame	240	080083890460

Direct Mount Product Selection Guide




		HLB	RL-DM & RA-DM	SMD-DM	HLA	LCR
APPLICATION	Flush Lens	✓		✓		
	General Area Illumination	✓	✓	✓	✓	✓
	Wet Location	✓	✓	✓	✓	✓
	New Construction	✓	✓	✓	✓	✓
	Remodel	✓	✓	✓	✓	✓
	Adjustable		✓		✓	

FEATURES / PERFORMANCE	Size / Shape	3" & 4" & 6" Round & Square	4" & 6" Round	4" & 6" Round & Square	4" Round & Square	2", 4", 6" & 8" Round
	Lumens (Max)	1000	600	800	600	8 inch = 8000 6 inch = 5000 MAX
	Life (L70B50)	50K hours	50K hours	50K hours	50K hours	50K hours
	CRI	90 (min)	90 (min)	90 (min)	90 (min)	90 (min)
	CCT (K)	27/30/35/40/50	27/30/35/40	27/30/35/40/50	27/30/35/40/50	27/30/35/40/50
	Spacing Criteria	1.4	1.2	1.4	1.2	1.2
	Input Voltage	120	120	120	120	120-277

CONTROL	Field Select (5) CCT	✓	✓		✓	✓
	LE/TE Phase Cut	✓	✓	✓	✓	

Visit [Cooperlighting.com/MarketPro](https://www.cooperlighting.com/MarketPro) to download the Recessed Selection Guide.

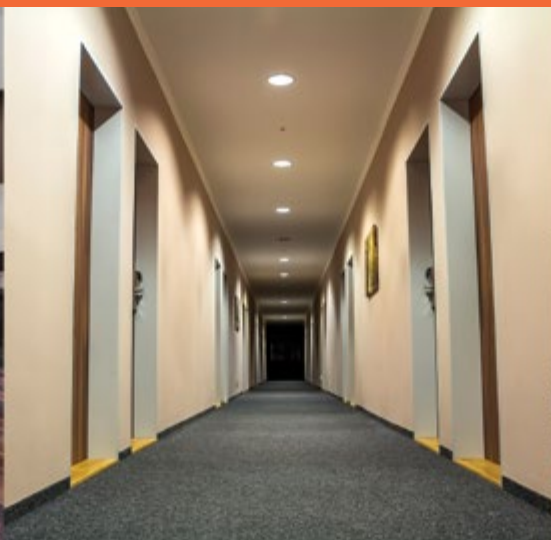

SURFACE MOUNT

SMD

Surface Mount Downlight

- Sizes 4, 6, 8, 12 with 1-1/4" profile
- SMD4 and SMD6 are transitioning from dedicated CCT to selectable CCT
- SMD4, SMD6, SMD12 have selectable CCT: 2700K-5000K
- Up to 2200 lumens
- Designed for new construction or retrofit and ideal for commercial and residential applications
- Universal voltage 120V – 277V options available



SMD4



SMD6



SMD12

THE HALO MINUTE

Video-Podcast Series

Join our resident **HALO** experts in the newly launched **HALO MINUTE** series to learn about new products, install tips, sales tools and more.

Visit halolighting.com to watch the latest episodes.




HLB

Ultra-thin Downlight


- Ultra-thin downlight in 3, 4, 6, 8 and 12-inch sizes
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Selectable lumens: up to 2400 lumens
- No housing required
- Installs in 1-1/2" plenum space
- New construction or retrofit
- Commercial and residential applications



HLB3

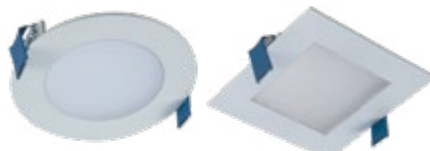

HLB4



HLB6



HLB8



HLB12

LCR

Light Commercial Downlight

- Ultra-thin downlight in 2, 4, 6, 8-inch sizes
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- High lumen levels (up to 8,000 lumens)
- No housing required
- Installs in 1-1/2" plenum space
- New construction or retrofit
- Commercial and residential applications



LCR2



LCR4



LCR6



LCR8

NO HOUSING NEEDED!

See product configurations for details.

SLD LED Surface Mount Module

HALO

- Ultra-low profile 4 and 6-inch surface luminaire with downlighting distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CR
- Ceiling or wall mounting in standard and fire-rated compatible junction boxes
- SLD6 retrofits in 5-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Suitable for residential or commercial installations



SLDSL4069S1EMWR



SLD606830WH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SLDSL4069S1EMWR	4" Surface LED Downlight	White	N/A	Selectable 2700K-5000K	120V	600	9	700	080083153107	2366149
SLDSL6069S1EMWR	6" Surface LED Downlight	White	N/A	Selectable 2700K-5000K	120V	600	9	400	080083153121	2366163
SLD606930WH	6" Surface Downlight	White	65W INC	3000K	120V	735	13	300	080083697625	2271068
SLD606930WHJB	6" Surface Downlight, J-Box	White	65W INC	3000K	120V	735	13	360	080083706037	2271068

See Pages 42-43 for California T20 Certified SKU's

HLC LED Surface Mount Closet Light

HALO

- 6-inch low-profile, lens surface-mount luminaire; Ceiling/wall mounting
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Supply wire adapter with LED quick wiring connector included; Sold as bulk packs only
- Meets NFPA requirements for use in closets



HLC6099301EWH-6BP

Catalog Number	Product Description	Finish	Replaces up to	CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLC6099301EWH-6BP	6" Closet Light (6-Pack)	White	65W INC	3000K	120V	925	16	100	080083896448	2338422
HLC6099301EWH-12BP	6" Closet Light (12-Pack)	White	65W INC	3000K	120V	900	16	60	080083884728	2338422

SMD LED Surface Mount Module

HALO

- 4, 6, and 12-inch high-performance, ½-inch low-profile, lens luminaire with wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch
- Ceiling/Wall mounting in many 3½- and 4-inch square, octagon or round junction boxes
- Retrofits 4-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Dimmable to 5% (120V dimmers); 90 CRI



SMD6R12927WH



SMD4R6930WH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R69SWH	4" RD Surface Mount	White	N/A	Selectable 2700K-5000K	120V	738	9	320	080083020904	2365919
SMD6R69SWH	6" RD Surface Mount	White	N/A	Selectable 2700K-5000K	120V	777	9	320	080083020942	2365923
SMD4R6930WH	4" RD Surface Mount	White	60W INC	3000K	120V	700	10	630	080083766352	2281593
SMD6R6930WH	6" RD Surface Mount	White	65W INC	3000K	120V	758	10	432	080083767052	2281592
SMD6R12930WH	6" RD Surface Mount	White	80W INC	3000K	120V	1,242	15	360	080083825424	2308976
SMD12R209SWHE	12" RD Surface Mount	White	N/A	Selectable 2700K - 5000K	120V	2,232	27	144	080083138005	N/A

See Pages 42-43 for California T20 Certified SKU's

BLD LED Surface Mount Module

HALO

- 4 and 6-inch low-profile, high-performance, backlit surface-mount luminaire
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Retrofits in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings



BLD4089SWH



BLD6089SWHR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089SWH	4" RD Surface, Direct Mount	White	65W INC	2700K-5000K	120V	802	10	560	080083826766	2319361
BLD6089SWHR	6" RD Surface, Direct Mount	White	65W INC	2700K-5000K	120V	812	10	320	080083826803	2319364

See Pages 42-43 for California T20 Certified SKU's

RL LED Baffle Trim Downlight

HALO

- LED baffle-trim module for 3, 4, 5 or 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed lens; Convex form and lamp-like appearance; Uniform illumination
- Field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RL3059FS1EWHR



RL56099S1EWHR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL3059FS1EWHR	3" Retrofit Downlight	White	60W INC	2700K-5000K	120V	587	8	504	080083130047	2353426
RL4069S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	621	9	768	080083818488	2354585
RL4099S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	576	080083818501	2321466
RL56069S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	712	8	300	080083818525	2356074
RL56099S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	360	080083818549	2354587
RL56129S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1272	14	240	080083818563	2321465

See Pages 42-43 for California T20 Certified SKU's

RA LED Adjustable Gimbal

HALO

- Adjustable gimbal LED module for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- 360° rotation and 35° tilt; Wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers
- Suitable for new construction, remodel and retrofit installation



RA4069S1EWHR



RA56069S1EWHR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR	4" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	615	7	420	080083817849	2319905
RA56069S1EWHR	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	630	7	240	080083817863	2319904

See Pages 42-43 for California T20 Certified SKU's

LT LED Retrofit Baffle Trim Downlight

HALO

- Baffle downlight trim retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- For use with HALO 4, 5 and 6-inch new construction and remodel housings
- Torsion springs or friction blades secure trim tightly
- Shallow, diffuse lens provides shielding to the source and a wet location listing; 90 CRI
- Suitable for use in showers or in outdoor covered ceiling applications; Airtight



LT460WH6927



LT560WH6927R

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6927R	4" Retrofit Baffle-Trim	White	60W INC	2700K	120V	544	8	576	080083762958	2309296
LT460WH6930R	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	554	8	576	080083746163	2309297
LT560WH6927R	5/6" Retrofit Baffle-Trim	White	60W INC	2700K	120V	700	10	240	080083763016	2309299
LT560WH6930R	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	683	10	240	080083746187	2309300
LT560WH6940R	5/6" Retrofit Baffle-Trim	White	60W INC	4000K	120V	737	10	240	080083763054	2294390
LT560WH12930	5/6" Retrofit Baffle-Trim	White	90W INC	3000K	120V	1140	12	240	080083798681	2333089

See Pages 42-43 for California T20 Certified SKU's

LA LED Adjustable Gimbal

HALO

- Adjustable LED retrofit modules for 4-inch and 5/6-inch aperture recessed housings
- Regressed lens; 360° rotation and 35° tilt; Dimmable to 10%
- Retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Torsion springs or friction blades secure trim tightly
- Precision construction and uniform illumination, 90 CRI; Airtight



LA4069301EWH



LA56069301EWH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LA4069301EWH	4" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	613	9	504	080083818143	2325616
LA56069301EWH	5/6" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	637	9	180	080083818242	2325606

See Pages 42-43 for California T20 Certified SKU's

RSQ All-Purpose Square LED Downlight

HALO

- Offered in 3 sizes for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed flat lens with step baffle provides visual comfort and glare control
- Wide distribution patterns work well in low to high ceilings for general
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RSQ4089FS1EMWWB



RSQ5089FS1EMWWB

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB	4" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	800	10	672	080083824496	2333094
RSQ5089FS1EMWWB	5" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	360	080083824595	2333267
RSQ6089FS1EMWWB	6" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	240	080083824694	2333093

See Pages 42-43 for California T20 Certified SKU's

HALO Title 20 California Certified Products

Downlight • Surface Mount • Adjustable Downlight

We offer a range of Title-20 recessed downlighting fixtures suitable for sale and installation in California. Code-compliance is our foundation. Rest assured we've got the products you need to get the job done on time and on budget.



RL LED Baffle Trim Downlight (For details, see pg. 8)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	570	7	768	080083888108	2326218
RL4099S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	941	10	576	080083888122	2321466
RL56069S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	665	8	300	080083888146	2326217
RL56099S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	900	10	360	080083888160	2326219
RL56129S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	1221	14	240	080083888184	2321465



RA LED Adjustable Gimbal (For details, see pg. 8)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR-CA	4" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	615	7	480	080083888504	2319905
RA56069S1EWHR-CA	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	630	7	240	080083888481	2319904



LT LED Retrofit Baffle Trim Downlight (For details, see pg. 17)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6927R-CA	4" Retrofit Baffle-Trim	White	60W INC	2700K	120V	651	7	504	080083888320	2277226
LT460WH6930R-CA	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	650	7	576	080083900893	2257770, 2277227
LT560WH6927R-CA	5/6" Retrofit Baffle-Trim	White	60W INC	2700K	120V	715	8	300	080083888368	2277231
LT560WH6930R-CA	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	729	8	240	080083900954	2252183, 2277232



RSQ All-Purpose Square LED Downlight (For details, see pg. 17)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB-CA	4" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	672	080083886425	2362695
RSQ5089FS1EMWWB-CA	5" Retrofit Square Baffle-trim	White	60W INC	2700K - 5000K	120V	830	10	360	080083886487	2333267
RSQ6089FS1EMWWB-CA	6" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	240	080083886548	2362697



SLD LED Surface Mount Module (For details, see pg. 14)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SLD606930WH-CA	6" Surface Downlight	White	65W INC	3000K	120V	780	13	300	080083833023	2271068



SMD LED Surface Mount Module (For details, see pg. 15)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R6930WH-CA	4" RD Surface Mount	White	60W INC	3000K	120V	700	10	360	080083886821	2281593
SMD6R6930WH-CA	6" RD Surface Mount	White	65W INC	3000K	120V	758	10	240	080083886906	2281592
SMD6R12930WH-CA	6" RD Surface Mount	White	80W INC	3000K	120V	1203	16	360	080083886982	2308976



BLD LED Surface Mount Module (For details, see pg. 15)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD6089SWHR-CA	6" RD Surface, Direct Mount	White	65W INC	2700K - 5000K	120V	812	10	320	080083888443	2319364



HU11 LED Undercabinet



Sleek and Seamless

Ideal undercabinet lighting for commercial and residential applications. The HALO Undercabinet low-profile design delivers maximum energy savings with easy installation.

HU11 LED undercabinet



PLUG-IN/DIRECT WIRE



LINKABLE



DIMMABLE



LOW GLARE OPTICS

- SeleCCTable™ color temperature for flexible lighting effects and applications (2700K, 3000K or 4000K)
- Sleek and seamless <1" profile
- Delivers up to 60 Lumens per Watt
- Dimmable down to 5% with select 120V dimmers

- Multiple wiring options including flexible conduit, romex or plugin
- 120V input
- Lasts for 50,000 hours
- 5-year warranty
- Damp location listed

HU11 LED Undercabinet

HALO

- Low-profile design delivers maximum energy savings and long life
- Ideal for task, accent, office, cove, utility and display lighting
- Field SeleCCTable™ CCT: 2700K, 3000K or 4000K
- Plug-in, direct-wire, easy-access mounts and linkable install features for easy installation



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HU1109D9SP	9" Dimming, Cord/Plug or Direct Wire	White	17W INC	2700K-4000K	120V	300	5	768	080083875788	2341224
HU1118D9SP	18" Dimming, Cord/Plug or Direct Wire	White	33W INC	2700K-4000K	120V	560	8	704	080083875863	2341217
HU1124D9SP	24" Dimming, Cord/Plug or Direct Wire	White	44W INC	2700K-4000K	120V	785	11	648	080083875948	2341218
HU1136D9SP	36" Dimming, Cord/Plug or Direct Wire	White	56W INC	2700K-4000K	120V	1125	16	320	080083876020	2341219
HU1148D9SP	48" Dimming, Cord/Plug or Direct Wire	White	84W INC	2700K-4000K	120V	1540	21	396	080083876105	2341216
HU115P	Individual 48" Power Cable	White	N/A	N/A	120V	N/A	N/A	3200	080083907083	2341216
HU1011P	Individual 48" Power Cable	White	N/A	N/A	N/A	N/A	N/A	4200	080083694396	2341224
HU101P	Individual 3" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	625	080083641659	2272162
HU102P	Individual 6" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	20000	080083641673	2289580
HU103P	Individual 24" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	480	080083641697	2272163
HU104P	Individual 120" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	960	080083641710	2272164
HU107P	Small Male-to-Male Connector	White	N/A	N/A	N/A	N/A	N/A	18000	080083641734	2341224
HU109P	Splice Box Bi-Directional Low Profile	White	N/A	N/A	N/A	N/A	N/A	1440	080083694358	2341224
HU10MSP	Master Switch Accessory	White	N/A	N/A	N/A	N/A	N/A	2700	080083694334	2341224

HALO Housings

HL3 New Construction Housings

HALO

- Suitable for 2x6 residential or shallow plenum commercial
- Broad range of trims; Distribution can easily be changed in the field
- Field-interchangeable optics: 15°, 25°, 40° and 55°
- Locking 365° rotation and 45° tilt holds any aiming position
- Got Nail!™ bar hangers; Insulated Ceiling (IC) rated




Catalog Number	Product Description	Socket	Lamp Source	Voltage	Pallet Quantity	UPC	ENERGY STAR Unique ID
HL36A20927ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185214	2332452
HL36A20930ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185207	2332452

Fire Rated Housings

HALO

- New construction housings preventing the passage of flames and toxic gases into ceiling plenums
- Fire rated for up to 2 hours in accordance to UL 263
- Suitable for use in multi-family and mixed-use applications
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight



H450FR2ICAT

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H450FR2ICAT	4" Fire Rated Housing	LED	LED	120V	80	080083134007
H450FR2ICATD010	4" Fire Rated Housing, 0-10V	LED	LED	120V	80	080083130504
H550FR2ICATD010	5" Fire Rated Housing, 0-10V	LED	LED	120V	40	080083130528
H750FR2ICAT	6" Fire Rated Housing	LED	LED	120V	80	080083134021

H Series Housings

HALO

- The standard in the industry for both commercial and residential applications
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings with airtight code compliant construction
- Use with a variety of trims and finishes for different lighting effects or match any decor
- Wide variety of trims available for desired lighting effect



H27RICAT



H27ICAT

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H245ICAT	4" New Construction Ultra Shallow	Quick Connect (No Socket)	LED Modules	120/277V	180	080083770717
H245RICAT	4" Remodel Ultra Shallow	Quick Connect (No Socket)	LED Modules	120-277V	540	080083756520
H2750ICAT	6" New Construction, Shallow, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083618163
H27ICAT	6" New Construction, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400605898
H27RICAT	6" Remodel, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	180	080083609253
H550ICAT	5" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	080083626533
H550RICAT	5" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083626557
H5ICAT	5" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609413
H5ICATNB	5" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	080083756063
H5RICAT	5" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	080083609444
H750ICAT	6" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	623961872655
H750RICAT	6" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	623961052248
H7ICAT	6" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609628
H7ICATNB	6" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400612032
H7ICT	6" New Construction, IC	E26	HAL., INC., LED, CFL	120V	120	080083609680
H7ICTNB	6" New Construction, IC, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400608523
H7RICAT	6" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400610588
H7RICT	6" Remodel, IC	E26	HAL., INC., LED, CFL	120V	144	662400600718
H995ICAT	4" New Construction, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	144	080083616930
H995RICAT	4" Remodel, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	162	080083616947
H99ICAT	4" New Construction, IC Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	144	080083582259
H99RTAT	4" Remodel, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	252	080083584369
H99TAT	4" New Construction, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	192	080083584260

E Series Housings

HALO

- Compact and efficient housings for new or retrofit residential or light commercial construction
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight code compliant
- Includes ultra-shallow housings for application with limited plenum space
- Use with a variety of trims and finishes for different lighting effects or match any decor



E27RICAT

E27ICAT

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
E27ICAT	6", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	192	080083737604
E27RICAT	6", IC, Shallow, Remodel	E26	HAL., INC., LED, CFL	120V	192	080083737482
E4ICATSB	4", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	108	080083751525
E4RTATSB	4" NON-IC Air-Tite, Remodel, w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	168	080083751501
E4TATSB	4" NON-IC, Air-Tite, New Construction w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	192	080083751488
E5ICAT	5" IC, Air-Tite, New Construction	E26	HAL., INC., LED, CFL	120V	144	080083737420
E5ICATNB	5" IC, Air-Tite, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737390
E5RICAT	5" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	180	080083737307
E750ICAT	6" IC, Air-Tite, LED New Construction	Quick Connect (No Socket)	LED Modules	120-277V	144	080083775040
E750RICAT	6" IC, Air-Tite, LED Remodel	Quick Connect (No Socket)	LED Modules	120-277V	144	080083778584
E7ICAT	6" IC, Air-Tite, New Construction Housing	E26	HAL., INC., LED, CFL	120V	144	080083737727
E7ICATNB	6" IC, AIRTITE, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737697
E7RICAT	6" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	144	080083737543

Note: Lamps not included.

4", 5" and 6" Trims

HALO

- Trims shape light to minimize aperture glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction and remodel housings
- Offered in a variety of styles and accept different lamp types



Catalog Number	Product Description	Finish	Lamp Source*	Pallet Quantity	UPC
4001WB	4" Step Baffle - Plastic	White	Halogen, INC, LED, CFL	576	080083745869
993W	4" Coilex Baffle	White	Halogen, INC, LED, CFL	840	080083628483
5001P	5" Metal Splay Baffle	White	Halogen, INC, LED, CFL	360	662400602729
5125WB	5" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083743162
300P	6" Open - Socket Supporting	White	Halogen, INC, LED, CFL	288	662400302421
30WAT	6" Air-Tite Baffle	White	Halogen, INC, LED, CFL	540	662400603320
310W	6" Coilex Baffle	White	Halogen, INC, LED, CFL	360	080083515882
456W	6" Baffle for Slope Ceiling	White	Halogen, INC, LED, CFL	360	662400676287
6100WB	6" Tapered Metal Baffle, 2-Rings Narrow & Wide	White	Halogen, INC, LED, CFL	900	080083743452
6125WB	6" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083742912

HALO HOME SMART LIGHTING SYSTEM



Downlight
p. 26-27



Outdoor
p. 27



Lamp
p. 27



Control/Accessory
p. 28-29

HALOHOME™

WHOLE HOME SMART LIGHTING SYSTEM



Grow your business with
affordable smart lighting,
controls and accessories.


Simple. Smart. Secure.



Learn more at

cooperlighting.com/halohome

The HALO Home Smart Lighting System offers a convenient way to control your home's lights with the flexibility of one light, individual room or whole house control from anywhere in the world.

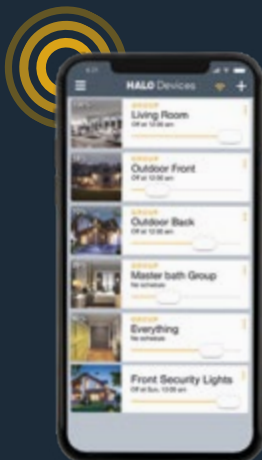

HALO Home Smart HLB Downlight

HALO Home

- Ultra-thin smart downlight that can install virtually anywhere; No housing needed
- Easy to install from below the ceiling in as little as 1 ½-inch plenum; Remote driver/junction box
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app
- No internet or bridge needed
- White tuning 2700K – 5000K via the HALO Home app; 90 CRI; Dimmable to 5%



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB4069BLE40AWH	4" Round LED Module, Remote Driver J-Box	60W INC	2700K-5000K	120V	Matte White	697	10	320	080083153022	2308008
HLB6099BLE40AWH	6" Round LED Module, Remote Driver J-Box	65W INC	2700K-5000K	120V	White	951	14	600	080083153008	2308006

HALO Home Smart Recessed Downlight

HALO Home

- Integrated LED modules with Bluetooth mesh connectivity for 4- and 5/6-inch recessed housings
- Pair with the HALO Home mobile app for wireless control and customization
- ON/OFF, grouping, color tuning, dimming, scheduling, scenes and more
- Add HALO Home wall controllers for expanded smart functionality
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069BLE40AWH	4" LED Module, Bluetooth	60W INC	2700K-5000K	120V	White	600	8	504	080083809257	2308008
RL56069BLE40AWH	5/6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	600	10	300	080083809233	2308006

HALO Home Lumen Select Smart Recessed Downlight

HALO Home

- Adjust lumen output for optimal lighting in any room and ceiling height
- 4-inch module: Choose 600 or 900 lumens for mounting heights up to 12 feet
- 5/6-inch module: Choose 600, 900 or 1200 lumens for mounting heights up to 15 feet
- Bluetooth-enabled; No internet or bridge needed
- Ready to pair with other HALO Home products via the Halo Home app



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4099BLE40AWH	4" LED Module, Bluetooth	75W INC	2700K-5000K	120V	White	600 or 900	11	576	080083887415	2341226
RL56129BLE40AWH	5/6" LED Module, Bluetooth	100W INC	2700K-5000K	120V	White	600, 900, or 1,200	15	240	080083887439	2341270

HALO Home Smart Surface Mount Downlight

HALO Home

- Sleek, versatile smart downlight; Surface mounting, no housing required
- Simple solution to replace existing light fixtures with smart, energy-saving LED
- Easy to install; Mounts to most junction boxes including pancake boxes
- Bluetooth-enabled; No internet or bridge needed
- ON/OFF, grouping, color tuning, dimming, scheduling,
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app



4-inch



6-inch

Smart Lighting
System

Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089BLE40AWH	4" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	600	080083897162	2346591
BLD6089BLE40AWH	6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	400	080083897186	2346688

HALO Home Smart Outdoor Security Flood and Motion Flood

HALO Home

- Motion-activated smart floodlight with 180° detection and 50-foot range
- Enhances security around the home; Bluetooth-enabled; No internet or bridge needed
- Adjust motion sensitivity, duration and standby light settings via HALO Home app
- Control one or multiple lights with grouping, scheduling, dimming and color tuning capabilities
- White tuning 3000K-5000K; Dimming down to 5%



FTS20CW



MST20C18W

Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC
MST20C18W	Twin LED Motion Flood, Bluetooth	2-Head PAR 38, 90W INC.	3000K-5000K	120-277V	White	2,034	23	150	080083810499
FTS20CW	Twin LED Flood, Bluetooth	2-Head PAR 38, 90W INC.	3000K-5000K	120-277V	White	2,034	23	180	080083810451

HALO Home Smart Bulb

HALO Home

- Enjoy smart lighting benefits in any fixture that accepts a standard light bulb (E26 base)
- Instantly transforms vanities, porch lights and more to smart, wireless-enabled fixtures
- Suitable for indoors and outdoors (damp location listed)
- Bluetooth-enabled; No internet or bridge needed
- White tuning 2700K – 5000K via the HALO Home app; 90 CRI; Dimmable to 5%



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique Code ID
HHA19089BLE40A	A19 Smart Lamp, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	1,536	080083885268	2344307

HALO Home Controllers and Accessories

These controls and accessories expand the convenience, reach and features of HALO Home. Add "Smart" devices to standard lights to bring them into the wireless network, enabling grouping and scheduling. Install HALO Home controls like the Scene Keypad, Anyplace and Accessory Dimmers to control HALO Home lights and lights connected to HALO Home "Smart" devices. Finally, extend the system's reach with the optional Bridge to enable voice control and secure lighting control from anywhere.

In-Wall Accessory Dimmer

- Remote control dimmer wirelessly commands any HALO Home device or group
- Use multiple Accessory Dimmers for multi-way control of HALO Home "Smart" Lights
- Bluetooth enabled; No internet or bridge needed
- Provides constant power for up to 300W HALO Home Smart Lights
- Neutral wire required; Includes an airgap switch to easily disconnect power



Controls
HALO Home
devices

Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWAC1BLE40AWH	In-Wall Accessory Dimmer, Bluetooth	120V	White	5	2,220	080083826544

*Wallplates not included

Anyplace Dimmer

- Battery operated, no wiring necessary; ON/OFF and dimming
- Place the remote dimmer anywhere in the home to control any HALO Home device or group
- Bluetooth-enabled; No internet or bridge needed
- Easy setup, re-wire without wires
- Wirelessly control a single or entire group such as a floor lamp or entire kitchen



Controls
HALO Home
devices

Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWAS1BLE40AWH	Anyplace Dimmer, Bluetooth	N/A	White	N/A	672	080083811182

Multi-Room Scene Keypad

- Commission each of the 4 buttons to control a device/group/scene
- Tap once to turn ON, twice for OFF along with dimming
- Bluetooth-enabled; No internet or bridge needed
- Available in either battery-powered or hardwired to be installed in existing bank of switches or placed in-wall wherever centralized lighting control is desired



Controls
HALO Home
devices

Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWSKB1BLE40AWH	Multi-Room Scene Keypad, Battery Powered, Bluetooth	N/A	White	N/A	1,728	080083859986
HIWSKA1BLE40AWH	Multi-Room Scene Keypad, Hardwired, Bluetooth	120V	White	5	1,920	080083859962

*Wallplates not included

In-Wall Smart Dimmer

- Add wireless control of standard non-smart lights
- Enable three or four-way control and wirelessly command using a Scene Keypad, Accessory or Anyplace Dimmer
- Bluetooth enabled; No internet or bridge needed
- LED Max Load: 300W; Inc./ELV/FLR/Halogen/MVL/CFL: 600W
- Neutral wire required; Includes an airgap switch to easily disconnect power



Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWMA1BLE40AWH	In-Wall Smart Dimmer, Bluetooth	120V	White	5	1,920	080083826520

*Wallplates not included

Smart Plug-In Lamp Dimmer

- Conveniently control dimming and ON/OFF of standard floor and table
- Add to groups or scenes and apply schedules using the HALO Home app
- Bluetooth-enabled; No internet or bridge needed
- Side button allows for manual ON/OFF and dimming control
- For use with 110/120V compatible sockets; Grounded 3-wire power connection




Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWP1BLE40AWH	Smart Plug-In Lamp Dimmer, Bluetooth	110/120V	White	N/A	1,920	080083826506

Smart Light Adapter

- Enable smart wireless Bluetooth control of LED recessed downlights; No rewiring
- Turn standard/non-smart recessed LED downlights into smart lights (15W max.)
- Enables mobile ON/OFF, dimming, groups, scenes and schedules via Bluetooth, even when switched
- 120V input
- Bluetooth-enabled; No internet or bridge needed



Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWAD1BLE40AWH	Smart Light Adapter, Bluetooth	N/A	White	N/A	1,920	080083826568

Smart Internet Access Bridge

- Access HALO Home lighting from anywhere by simply connecting the bridge to user's Wi-Fi
- Works with Amazon Alexa and Google Assistant for voice control
- Requires a router, internet connection and HALO Home compatible products
- Plugs into outlet receptacle between 5- and 45-feet from wireless router
- Wireless range up to 50 feet line-of-sight from first HALO Home device



Works With:



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWB1BLE40AWH	Smart Internet Access Bridge, Bluetooth	110/120V	White	N/A	576	080083811168

HALO COMMERCIAL RECESSED COMMERCIAL DOWNLIGHT




Downlight
p.31



PR4 LED SeleCCTable™ Downlight Series

HALO Commercial

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Exclusive medium / wide beam distribution reversible flip lens



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR4FS12D010	4" Housing	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	11	90	080083131839	2353549
PR4M12MD8FSMW	4" LED Module	Matte White	26W-32W	3000K/3500K/4000K	120-277V	1000/1500 /2000	22	144	080083060795	2353549
PR4RFS12D010	4" Retrofit Frame	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	22	72	080083132683	2353549
PR4SFS12D010MW	4" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120-277V	1000/1500 /2000	22	108	080083133581	2353549

Specify two parts: LED module and housing, retrofit or surface mount cylinder

PR6 LED SeleCCTable™ Downlight Series

HALO Commercial

- 6-inch LED self-flanged, lensed LED recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Medium and wide interchangeable lens option included
- Specify two parts: LED module and housing or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR6FS12D010	6" Housing	Raw Finish	26W-32W	N/A	120/277V 50/60 Hz	1000/1500/2000	21	72	080083892174	2328770
PR6M12MD8FSMW	6" LED Module	Matte White	26W-32W	3000K/3500K /4000K	N/A	1000/1500/2000	N/A	72	080083891122	2345484
PR6RFS12D010	6" Retrofit Kit	Raw Finish	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	22	72	080083891726	2345457, 2345484
PR6SFS12D010MW	6" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	21	72	080083891276	2328770

PR8 LED SeleCCTable™ Downlight Series

HALO Commercial

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable CCT: 3000K, 3500K, 4000K
- Universal input 120V-277V with 0-10V 1% dimming
- Specify two parts: LED module and housing, retrofit or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR830D010	8" Housing	Raw Finish	65W	N/A	120V-277V	3000	28	36	080083771790	2289674
PR8M34MDMW	8" LED Module	Matte Finish	65W-85W	3000K/3500K/4000K	Low Voltage	3000-4000		240	080083772940	2289767
PR8R30D010	8" Retrofit Kit	Raw Finish	65W	N/A	120V-277V	3000	28	480	080083772193	2289686
PR8S30D010MW	8" Cylinder, Surface Mount	Matte White	65W	N/A	120V-277V	3000	28	108	080083772599	2289685

METALUX AMBIENT COMMERCIAL



Troffer
p. 33-36



Strip
p. 36



Wrap
p. 37



Flushmount
p. 37

Cruze ST Recessed LED Luminaire

Metalux

- Architectural center basket lens troffer with aesthetic appeal
- Latch-less design provides clean architectural look; Ribbed, frosted acrylic lens
- High-performance LED system with advanced light distribution
- Refined finish; Unmatched value
- Ideal choice for commercial, institutional and healthcare facilities



Rapid Response



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22CZ2-32-UNV-L835-CD1-U	2'x2', Troffer	2-T5, 2-T8	3500K	120/277V	3,280	26	48	080083881185	PL057CFW (120V) , P15VC648 (277V)
22CZ2-32-UNV-L840-CD1-U	2'x2', Troffer	2-T5, 2-T8	4000K	120/277V	3,280	26	56	080083881208	P030DW27 (120V) , P8GWVUDUZ (277V)
22CZ2-34HE-UNV-L835-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	3500K	120/277V	3386	26	28	080083881222	P6ZEZIGY
22CZ2-34HE-UNV-L840-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	4000K	120/277V	3386	26	48	080083881260	PMRQB66T
22CZ2-39-UNV-L835-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	3500K	120/277V	3,943	34	48	080083881284	P0AXJUK1
22CZ2-39-UNV-L840-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	4000K	120/277V	3,943	34	48	080083881307	PU7UA6BJ
24CZ2-40-UNV-L835-CD1-U	2'x4', Troffer	2-T8, 3-T8	3500K	120/277V	4,196	36	26	080083881505	PUDYNMME
24CZ2-40-UNV-L840-CD1-U	2'x4', Troffer	2-T8, 3-T8	4000K	120/277V	4,196	36	28	080083881529	PWWGAYMY
24CZ2-50-UNV-L835-CD1-U	2'x4', Troffer	2-T8, 2-T5	3500K	120/277V	5,015	48	26	080083881628	POK3FN8Z
24CZ2-50-UNV-L840-CD1-U	2'x4', Troffer	2-T8, 2-T5	4000K	120/277V	5,015	48	26	080083881642	PI0YCHQ9

Note: DLC Premium items are noted in bold.

Features	Benefits
Latchless-design with no visible hinges	Improved aesthetic to delight specifiers
Standard matte white paint from corner to corner	Improved aesthetic to delight specifiers
Large J Box with standard access plate and trade size knockouts	Easier wiring access to delight contractors
Hemmed side flanges	Easier handling during installation to delight contractors
Linear disconnect included	Easier installation to delight contractors
Multiple sizes available (2'x2', 2'x4' in standard 3.25" depth & 1'x4' shallow 2.25" depth)	Enables fixture matching in spaces
Grid lock feature included in the endplate with available "earthquake clip" accessory	Helps meet building codes

Cruze LED Recessed Retrofit Kit

Metalux

- Upgrade 2' x 4' fluorescent luminaires to a high-performing LED system
- Engineered for simple and quick installation (less than 5 minutes); Labor savings
- Tool-less installation
- Uses the fluorescent luminaire's housing resulting in lower disposal costs
- Architectural style aesthetics for multiple applications



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
24CZRK-LD4-40-UNV-L840-CD1-U	2'x4' Center Basket Retrofit Kit	2-T8, 3-T8	4000K	120/277V	4,423	37	36	080083804610	P6J3B352

Note: Fixture housing not included; DLC Premium items are noted in bold.

Encounter LED Series

Metalux

- Leverages patented WaveStream™ Technology with AccuAim™ optics
- Contemporary styling; Advanced optical control
- Optimal light uniformity, resulting in soft, natural light for superior visual comfort
- Over 60% energy savings when compared to fluorescent troffers
- Ideal choice for commercial interiors

Rapid Response



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22EN-LD2-34-UNV-L835-CD1-U	2'x4', Recessed Troffer	3-T8, 4-T8, 2-T5HO	3500K	120/277V	3,471	29	40	080083752324	PUJBJAKE
22EN-LD2-34-UNV-L840-CD1-U	2'x4', Recessed Troffer	3-T8, 4-T8, 2-T5HO	4000K	120/277V	3,540	29	36	080083752317	PSRD33BV , PXJ7Q3QF
24EN-LD2-45-UNV-L835-CD1-U	2'x2', Recessed Troffer	2-T8, 3-T8	3500K	120/277V	4,656	38	18	080083752225	PYDG9S8N , PNGQ7GTA
24EN-LD2-45-UNV-L840-CD1-U	2'x2', Recessed Troffer	2-T8, 3-T8	4000K	120/277V	4,748	38	20	080083752218	PF2T7Y87 , PUGD2UQG

Note: DLC Premium items are noted in bold.

SkyRidge LED Series

Metalux

- Leverages patented WaveStream™ Technology with AccuAim™ optics
- Affordable, aesthetically pleasing alternative to fluorescent fixtures
- Advanced optical control with optimal illumination
- Over 60% energy savings when compared to fluorescent troffers
- Ideal choice for commercial interiors

Rapid Response



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22SR-LD2-29-C-UNV-L835-CD1-U	2'x2', Recessed Troffer	2-T5, 2-T8	3500K	120/277V	3,095	23	28	080083752584	PL2K2CYL(120V) , PURGNZ9E(277V)
22SR-LD2-29-C-UNV-L840-CD1-U	2'x2', Recessed Troffer	2-T5, 2-T8	4000K	120/277V	3,157	23	28	080083752577	PSRAE17C
24SR-LD2-48-C-UNV-L835-CD1-U	2'x4', Recessed Troffer	2-T8, 2-T5	3500K	120/277V	4,805	38	16	080083752492	P6V4CWNY
24SR-LD2-48-C-UNV-L840-CD1-U	2'x4', Recessed Troffer	2-T8, 2-T5	4000K	120/277V	4,901	38	16	080083752485	PDLK7ZMQ

Note: DLC Premium items are noted in bold.

RBG LED Series

Metalux

- Architectural elegant 6-inch grid, 4-inch aperture fixture
- Recessed, surface or suspension mounting
- Field-selectable CCT: 3000K, 3500K, 4000K via a switch
- 3 field-selectable lumens and watts via a switch; Flexibility to changing needs of a space
- Use for open and traditional offices, classrooms, coves, corridors, retail or anywhere stylish lines of light are desired



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts (HI)	Pallet Quantity	UPC	DLC Product ID
4RBG6-SL1-L8SCT3	4' Length	2-F32T8, 1-F54T5HO, 2-F28T5	3000K/3500K/4000K	120-227V	500/750/1,000*	36	75	080083866465	PUREBLSF, PSMWARPL, PW27GGE8

*Lumens per ft.

CGT LED Panel Series

Metalux

- Affordable panel that fits in shallow plenums with room to spare; Thin 2 1/8 inch height
- Robust die-formed steel housing is post-painted for maximum durability
- Acrylic micro optics provide uniform illumination from corner to corner
- Extruded aluminum bezel with mitered corners tightly sealed to housing for durability
- Ideal for office spaces, schools, healthcare and retail merchandising areas



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22CGT3535C	2'x2' Recessed Panel	3-T8	3500K	120/277V	3,449	32	72	080083880003	P6WE1HNZ
22CGT3540C	2'x2' Recessed Panel	3-T8	4000K	120/277V	3,582	32	72	080083880027	P0YGNM7S
24CGT4535C	2'x4' Recessed Panel	2-T8, 3-T8	3500K	120/277V	4,268	38	36	080083880089	P28JP113
24CGT4540C	2'x4' Recessed Panel	2-T8, 3-T8	4000K	120/277V	4,432	38	18	080083880102	PLTEVMIJ
24CGT5535C	2'x4' Recessed Panel	3-T8, 4-T8	3500K	120/277V	5,139	47	36	080083880164	PGQBATOL
24CGT5540C	2'x4' Recessed Panel	3-T8, 4-T8	4000K	120/277V	5,337	47	36	080083880188	P5F04P82

FPS LED Panel Series

Metalux

- Ultra-thin, high-performance flat panel; Less than 2-inches height for shallow plenums
- Up to 120 lm/W; Field-selectable CCT: 3000K, 3500K, 4000K via a switch
- 3 field-selectable lumens and watts via a switch; Flexibility to changing needs of a space
- Integrated grid retention clips provide installation speed and flexibility
- Solution for office spaces, schools, healthcare facilities and retail merchandising areas



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22FPSL2SCT3	2'x2' Recessed Panel	3-T8	3000K/3500K/4000K	120/277V	1,800-3,300	16	40	080083889402	PIBWK9P9, PB32RP9H, PJQG8V0T
24FPSL2SCT3	2'x4' Recessed Panel	2-T8, 3-T8	3000K/3500K/4000K	120/277V	3,400-6,400	30.2	20	080083889365	PK4M6K93, PZFJCMXS, PU0HKZ87

FPanel LED Panel Series

Metalux

- Ultra-thin flat panel; Less than 2-inches height for shallow plenums
- Easy to install, wire and wire nuts included
- Refined visual optics, superior acrylic light guide; uniform corner to corner illumination
- Integrated grid retention clips provide installation speed and flexibility
- Solution for office spaces, schools, healthcare facilities and retail merchandising areas



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
22FP3235C	2'x2' Recessed Panel	3-T8	3500K	120/277V	3307	29	44	080083833528	PQC9IUIC
22FP3240C	2'x2' Recessed Panel	3-T8	4000K	120/277V	3,560	30	44	080083833542	PUOIG6S2
22FP4235C	2'x2' Recessed Panel	2-U6T8	3500K	120/277V	4,641	39	44	080083833580	P8HIK308
22FP4240C	2'x2' Recessed Panel	3-U6T8	4000K	120/277V	4,567	39	44	080083833603	PELH4PNQ
24FP4735C	2'x4' Recessed Panel	2-T8, 3-T8	3500K	120/277V	4,990	40	22	080083833641	PRZ2RGDY
24FP4740C	2'x4' Recessed Panel	2-T8, 3-T9	4000K	120/277V	4,858	40	22	080083833665	PGY6ID6B
24FP6440C	2'x4' Recessed Panel	3-T8, 4-T9	4000K	120/277V	6,611	59	22	080083833726	PUQIRODO

GRLED Series

Metalux

- Built and designed for general purpose lighting applications
- Shallow, low-profile housing, makes it compatible with highly restrictive plenums
- Traditional prismatic A12 lens and door assembly; Insulated ceiling (IC) rated
- Easy to install; Fits most T-grid systems; Below the ceiling maintenance
- Great choice for commercial offices, schools, hospitals, retail and more applications



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
24GR-LD5-48-F1-UNV-L840-CD1-U	2'x4' A Lens Troffer	2-T8	4000K	120/277V	4,800	43	28	080083817153	PF64UQWQ

Note: DLC Premium items are noted in bold.

SLSTP LED Striplight Series

Metalux

- Low-profile, high-quality luminaire with latest LED and electronic driver technology
- Frost white polycarbonate lens with linear prisms for even illumination
- Single lens eliminates the tandem appearance
- Quick installation features; Ideal for single or continuous row applications
- Perfect solution for restricted spaces and for stock and design build application



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4SLSTP4040DD-UNV	4' Single Lens	2-T8 32W, 1-T5HO 54W	4000K	120/277V	4,000	43	72	080083705825	PXZQGN9C, PPA1YS12
8SLSTP11040DD-UNV	8' Single Lens	4-T8 32W, 2-T12 75W	4000K	120/277V	10,464	83	70	080083807680	PWA7BZM9, PU0OP0M3
8SLSTP8040DD-UNV	8' Single Lens	4T8 32W, 2-T12 75W	4000K	120/277V	8,176	71	70	080083814787	P0K8WFD1, PARMCVA1

ST LED Striplights

Metalux

- Full-width LED strip light; Ideal for replacing single or 2-lamp fluorescent strip lights
- Superior performance with lumens up to 9400 and 123 lm/W
- Tool-less channel cover; Unique single or dual lens tube design
- Surface or suspended mounting; Wireless access from below
- Continuous row mount aligner included to add-on length as needed regardless of application or layout



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
2ST1L1040R	2' Single Lens	1-T8 17W	4000K	120/277V	1,165	10	288	080083838165	PLYWPPTN5MXA
2ST2L2040R	2' Dual Lens	2-T8 17W	4000K	120/277V	2,298	19	180	080083838172	PLT3RHMTZ063
4ST1L2040R	4' Single Lens	1-T8 32W	4000K	120/277V	2,298	20	252	080083838189	PLALG17SBDJR
4ST2L4040R	4' Dual Lens	2-T8 32W, 1-T5HO 54W	4000K	120/277V	4,433	39	150	080083838196	PLT1KD8JM2VZ
8ST2L8040R	8' Dual Lens	4-T8 32W, 2-T12 75W	4000K	120/277V	8,867	78	150	080083838202	PL5RGM59H32E

WNLED Wraparound Series

Metalux

- Utility commercial LED wraparound; Single or continuous row applications
- Frosted lens offers best-in-class uniform illumination
- Use in a broad range of commercial, schools, institutional, retail and residential applications
- Provides long service life, eliminating re-lamping issues and minimizing maintenance common with traditional fluorescent



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4WNLED-LD4-40SL-F-UNV-L840-CD1-U	4' Linear Wrap	2-T12, 2-T8 32W	4000K	120/277V	4,062	36	85	080083756889	PK3W95DW

CWPLD LED Wraparound Series

Metalux

- Versatile, commercial model, low-profile LED wraparound
- Premium optical linear prisms provide even and wide distribution, minimizing fixtures required
- Surface, wall, suspended and row mounting; Quick row mounting channel
- Trade sized knock outs included for "hard pipe" wiring through ends
- Mounts over the most common junction boxes



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4CWPLD4040C	4' Commercial	2-T12, 2-T8	4000K	120/277V	4,700	43	60	080083749072	P5SLI38B, PER729JP

WPLD LED Wraparound Series

Metalux

- Streamlined, low-profile design
- Smooth lens provides soft, uniform, glare-free light output
- Providing up to 60% energy savings over fluorescent light sources
- Suitable for ceiling, wall or suspension mounting
- Mounting slots allow for installation directly into the junction box with 100° of rotational freedom



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4WPLD4035C	4' Low Profile	2-T8 32W	3500K	120/277V	4,000	45	84	080083750603	PZ4NNCFK
4WPLD4040C	4' Low Profile	2-T8 32W	4000K	120/277V	4,603	42	84	080083749676	PYGI6R4N

WP LED Wraparound Series

Metalux

- Compact LED wrap light delivers value and energy savings
- Perfect retrofit solution for replacing single or 2-lamp fluorescent wraparounds
- Low-profile, highly versatile design; Post-painted die-formed channel
- Prismatic lens ensures even, glare-free light distribution
- Ideal for commercial applications from schools and dorms to warehouses and retail areas



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4WP3040C	4' Linear Utility	2-T8 32W	4000K	120/277V	3,400	31	72	080083858361	PC1Y20YN

FM LED Dimming Flushmounts

Metalux

- Versatile ceiling- or wall-mount series for a broad range of residential and commercial applications
- Full frost, opal white lens provides optimal light output with no pixilation
- Even, uniform light distribution; Easy lens installation
- Ideal for offices, corridors, stairways, bedroom, closet and foyers applications where customers are replacing incandescent, circline or compact fluorescent lamps



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
FM11WRCCR	11" Flushmount, Round	22 W T9 Circline	3000K/4000K/5000K	120V	1,100	14	72	080083840151	2324855
FM15WRCCR	15" Flushmount, Round	100W INC or 32W T9 Circline	3000K/4000K/5000K	120V	1,800	22	32	080083845378	2324853

METALUX AMBIENT INDUSTRIAL



High Bay
p. 39-41



Vaportite
p. 40



OHB LED High Bay

Metalux

- Designed for a wide variety of applications and mounting heights
- Precision designed optical performance deliver even illumination
- Rugged design with rigid steel center channel
- Lensing provides LED protection and optical control
- Energy-efficient 1-for-1 replacement for linear fluorescent and HID high bay
- Ideal solution for industrial, manufacturing and gymnasium applications



Rapid Response

Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
OHB-18SE-MCL-UNV-L840-CD-U	Lensed, Wide Distribution	4-T5HO, 6-T8 320W MH	4000K	120-277V	18000	111	36	80083146925	P3F3AKYD
OHB-18SE-MCL-UNV-L850-CD-U	Clear Lens, Medium Distribution	4-T5HO, 6-T8 320W MH	5000K	120-277V	18000	111	36	80083902996	PX71TV2P
OHB-24SE-W-UNV-L840-CD-U	Lensed, Wide Distribution	6-T5HO, 8-T8, 400W MH	4000K	120-277V	24000	148	36	80083902972	PFO0QT12
OHB-24SE-W-UNV-L850-CD-U	Lensed, Wide Distribution	6-T5HO, 8-T8, 400W MH	5000K	120-277V	24000	148	36	080083902989	PBHX10S1

Note: DLC Premium items are noted in bold.

VHB LED High Bay

Metalux

- Designed for a wide variety of applications and mounting heights
- Precision designed optics; High impact polycarbonate optical lens
- Compact, lightweight design for ease of installation
- Energy-efficient LED solution for spaces that utilize traditional linear fluorescent and HID high bay
- Affordable solution for industrial, commercial, manufacturing and gymnasium applications



Rapid Response

Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
VHB-12-W-UNV-L840-CD-U	Compact Linear, WD Distr.	4-T8, 3-T5HO, 175W MH	4000K	120/277V	12,430	87	78	080083785971	P87DJGBP
VHB-12-W-UNV-L850-CD-U	Compact Linear, WD Distr.	4-T8, 3-T5HO, 175W MH	5000K	120/277V	12,773	87	78	080083785933	P6MXBQOS
VHB-18-W-UNV-L840-CD-U	Compact Linear, WD Distr.	4-T5HO, 6-T8 320W MH	5000K	120/277V	18,647	134	78	080083785919	P75UEXLK
VHB-18-W-UNV-L850-CD-U	Compact Linear, WD Distr.	4-T5HO, 6-T8 320W MH	4000K	120/277V	19,160	134	78	080083785902	PIIJDELY
VHB-24-W-UNV-L840-CD-U	Compact Linear, WD Distr.	6-T5HO, 8-T8, 400W MH	5000K	120/277V	23,057	174	78	080083815708	PJ92YFP9
VHB-24-W-UNV-L850-CD-U	Compact Linear, WD Distr.	6-T5HO, 8-T8, 400W MH	4000K	120/277V	23,692	174	78	080083818365	PH575GE1

Note: DLC Premium items are noted in bold.

LHB LED High Bay

Metalux

- Economical high bay/low bay LED linear industrial luminaire
- Designed for a wide variety of applications and mounting heights
- Standard diffused lens provides added protection and glare control
- Energy-efficient, one-for-one replacement of linear fluorescent and HID fixtures
- Perfect for industrial, manufacturing, gymnasium and warehouse applications



Rapid Response

Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
LHB-12-UNV-L840-CD-U	Lensed, Medium Distr.	4-T8, 3-T5HO, 175W MH	4000K	120/277V	11,455	87	44	080083859160	PLCCRS3FP14Q
LHB-12-UNV-L850-CD-U	Lensed, Medium Distr.	4-T8, 3-T5HO, 175W MH	5000K	120/277V	11,493	87	44	080083859184	PLFXQYAHETOA
LHB-18-UNV-L840-CD-U	Lensed, Medium Distr.	4-T5HO, 6-T8 320W MH	4000K	120/277V	17,075	132	44	080083859207	PLYPCB02RW1Y
LHB-18-UNV-L850-CD-U	Lensed, Medium Distr.	4-T5HO, 6-T8 320W MH	5000K	120/277V	17,129	132	44	080083859221	PLEM5HU7PSWK
LHB-24-UNV-L840-CD-U	Lensed, Medium Distr.	6-T5HO, 8-T8, 400W MH	4000K	120/277V	22,012	172	44	080083859245	PLWL6C907DI4
LHB-24-UNV-L850-CD-U	Lensed, Medium Distr.	6-T5HO, 8-T8, 400W MH	5000K	120/277V	22,050	172	44	080083859269	PLQ5XUSDH4JX

Note: DLC Premium items are noted in bold.

UHB LED High Bay

Metalux

- Designed for a variety of mounting heights and applications
- Traditional round form factor and compact design allow for easy installation
- Specialty designed lens provides optimal distribution and reduced high angle glare
- Universal mounting allows for quick retrofit installations



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
UHB-12-UNV-L840-CD-U	Round, Die Cast, MD Distr.	4-T8, 3-T5HO, 175W MH	4000K	120/277V	13,436	99	45	080083885862	PLSZJNKFXWRM
UHB-12-UNV-L850-CD-U	Round, Die Cast, MD Distr.	4-T8, 3-T5HO, 175W MH	5000K	120/277V	13,672	100	45	080083885886	PL625202A764
UHB-18-UNV-L840-CD-U	Round, Die Cast, MD Distr.	6-T8, 4-T5HO, 320W MH	4000K	120/277V	19,607	147	45	080083885909	PLIB2FPH8U2B
UHB-18-UNV-L850-CD-U	Round, Die Cast, MD Distr.	6-T8, 4-T5HO, 320W MH	5000K	120/277V	19,654	150	45	080083885923	PLTP5RQQLF89
UHB-24-UNV-L840-CD-U	Round, Die Cast, MD Distr.	6-T5HO, 8-T8, 400W MH	4000K	120/277V	26,600	197	20	080083885947	PLDTKQOEQCF8
UHB-24-UNV-L850-CD-U	Round, Die Cast, MD Distr.	6-T5HO, 8-T8, 400W MH	5000K	120/277V	26,664	197	20	080083885961	PLPWY41J5ISI
UHB-30-UNV-L840-CD-U	Round, Die Cast, MD Distr.	(6)T5HO 54W, 400W HID	4000K	120/277V	30000	137	20	080083885985	PLPDU641UFT8
UHB-30-UNV-L850-CD-U	Round, Die Cast, MD Distr.	6-T5HO, 8-T8, 400W MH	5000K	120/277V	32,725	239	20	080083886005	PLX5IWPVBKD0

Note: DLC Premium items are noted in bold.

VT LED Vaportite

Metalux

- Contemporary surface-mount fixture featuring rugged and durable construction
- Sealed and gasketed, reinforced fiberglass housing with a high impact lens
- Internal fasteners and tethers provide maximum protection and rigidity
- Optical performance for interior and exterior applications; IP65 certified; NSP Listed
- Ideal for parking garages, food processing, canopy, manufacturing and complex environments



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4VT3-LD5-4-G-UNV-L840-CD1-U	4' Fixed Output	2-T8, 1-T5HO	4000K	120/277V	4,428	32	40	080083851867	PA8HYRMS, P2K0S9SX, PMRYYISZ, PJRKZ2U5, PVS9Y9IF
4VT3-LD5-6-G-UNV-L840-CD1-U	4' Fixed Output	3-T8, 1-T5HO	4000K	120/277V	6,490	51	40	080083851447	P8U3H2QZ, PC8KZKBM, PDEVIYK6, P988IFAC

Note: DLC Premium items are noted in bold.

APVT LED Vaportite

Metalux

- Compact and durable vaportite fixture; Ideal for wet location environments
- Sealed and gasketed polycarbonate housing with a high impact polycarbonate lens
- Rated for -20°C to 30°C
- High-performance efficacy up to 132 lm/W
- Solution for interior and exterior applications including canopy, warehouse and light commercial environments



Catalog Number	Product Description	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
4APVTLD-40L840	4' Fixed Output	2-T8, 1-T5HO	4000K	120/277V	5,159	39	80	080083801305	PLR6T8MUGK5V, PLZRPONZA9RE
4APVTLD-54L840	4' Fixed Output	2-T8, 1-T5HO	4000K	120/277V	6,209	39	80	080083802166	PLTWAYKH8VFL, PLOQ00RWAVTW


Note: DLC Premium items are noted in bold.

Metalux Product Selection Guide

Good

Better

Best



		LHB	VHB	UHB	OHB
APPLICABILITY ¹	Big Box Retail	★	★	★★	★★★
	Sports / Recreation	★★	★★	★★	★★★
	Warehouses	★★★	★★★	★★	★★★
	Manufacturing	★★	★★	★★	★★★
	Cold Storage	★	★★★	★	★★★
	Large Indoor				★★★
	Complex Environments		★	★★	
FEATURES / PERFORMANCE	Lumen Range	12,000 - 36,000	9,000 - 24,000	12,000 - 30,000	12,000 - 60,000
	Efficacy (Max)	140 lm/W	147 lm/W	137 lm/W	207 lm/W
	CRI	80	70, 80, 90	80	70, 80, 90
	Distribution	M	N, W	M	N, M, W
	Sizes	13" x 2' & 4'	< 2'	12" Dia	Scalable
	Housing ²	CRS	CRS / Extruded	Diecast	CRS
	Lensing	Acrylic	Polycarbonate	Polycarbonate	Acrylic
	Uplight	None	None	None	None
	Life (@ 60K hrs)	L84	L83	L91	L96
	Ambient Range	-40C to 40C	-40C to 40C	-40C to 45C	-40C to 55C
	Emergency	None	Remote	None	Integrated
	Ratings	Damp	Damp	IP65	Damp
	DLC	Premium	Standard, Premium	Premium	Premium
INTEGRATED CONTROLS	Basic Occupancy		✓		✓
	Stand Alone Daylight / Occupancy		✓		✓
	WaveLinx		✓		✓
	LumaWatt Pro ³		✓		✓

Notes: 1. ★★★ = high applicability, ★★ = medium applicability, ★ = low applicability, blank = non-applicable

2. CRS=Cold-rolled Steel, Extruded=Extruded Aluminum, Diecast=Diecast Aluminum.

3. Location data for asset tracking.

For certification information and to download this guide, visit [Cooperlighting.com/MarketPro](https://www.cooperlighting.com/MarketPro)

High Bay



CONTROLS

GREENGATE



Dimmer Switch
p. 43



Sensor/Control
p. 44-47



0-10V WBSD Decorator Dimmer

Greengate

- Provides a full-range of linear-slide dimming control of 0-10V compatible light sources
- Allows user to return to previous light level when turning lights ON
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Neutral wire is not required for installation of device
- Ideal for light commercial applications; Compatible with decorator style devices and wallplates



Catalog Number	Product Description	Finish	Voltage	Pallet Quantity	UPC
WBSD-010DEC-C1	0-10V Decorator Dimmer	White, Ivory, Almond	120V/277V	1,350	080083735266
WBSD-010DEC-C2	0-10V Decorator Dimmer	White, Ivory, Light Almond	120V/277V	1,350	080083735273

0-10V WBSD Preset Slide Dimmer

Greengate

- Full-travel slide control; LED ready
- Class 1 or Class 2 wiring capabilities
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Works with the SP20-RD4 or directly controls the load
- White face assembled on device, Ivory and Light Almond color change kits included



Catalog Number	Product Description	Finish	Voltage	Pallet Quantity	UPC
WBSD-010M-C1	0-10V Preset Slide Dimmer	White	120/277 VAC	960	080083834983

0-10V OSW Wallbox Dimmer Sensor

Greengate

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- 0-10V dimming with passive infrared (PIR) occupancy sensing; Surge protection built-in
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



Catalog Number	Product Description	Finish	Voltage	Watts	Detection Type	Coverage	Pallet Quantity	UPC
OSW-P-010-W	0-10V Wallbox Dimmer, Sensor	White	120/277V	1200W/2200W	PIR	1000 sq ft.	1,920	080083758661



0-10V Dual Tech Occupancy Sensor Dimmer

Greengate

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- Ultrasonic occupancy (US) and passive infrared (PIR) sensing; Daylight harvesting
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



OSW-D-010-W



Catalog Number	Product Description	Finish	Voltage	Watts	Detection Type	Coverage	Pallet Quantity	UPC
OSW-D-010-W	0-10V Dimmer, OCC Sensor	White	120/277V	960W/2200W	PIR and Ultrasonic	1000 sq. ft.	1,200	080083816071

NeoSwitch ONW Occupancy Wall Sensor

Greengate

- Passive Infrared (PIR) single level occupancy sensing switch for motion sensing control
- Also a conventional wall switch; Designed for energy savings and convenience
- Detects motion from a heat-emitting source (such as a person entering a room) within its field-of-view and automatically switches lights ON
- Neutral and non-neutral wiring options for installation; Ideal for retrofit applications



ONW-D-1001-DMV-W



ONW-P-1001-DMV-W



Catalog Number	Product Description	Finish	Voltage	Watts	Detection Type	Coverage	Pallet Quantity	UPC
ONW-P-1001-MV-W	PIR Wall Sensor	White	120/277V	1200W/2200W	PIR	1000 sq. ft.	900	080083523863
ONW-D-1001-MV-W	Dual Tech Wall Sensor	White	120/277V	1200W/2200W	PIR and Ultrasonic	1000 sq. ft.	900	080083524709
ONW-D-1001-MV-N-W	Dual Tech Wall Sensor, Neutral required	White	120/277V	1200W/2200W	PIR and Ultrasonic	1000 sq. ft.	900	080083524594

OAC MicroSet Dual Tech Ceiling Sensors

Greengate

- Combines ultrasonic and Passive Infrared (PIR) technologies, eliminates false deactivations
- MicroSet self-adjusting technology provides an adaptive and airflow tolerant technology
- Ideal for spaces that have increased airflow due to higher occupant levels
- Drastically simplifies and reduces installation and adjustment time
- Available in line-voltage and low-voltage versions; Compatible with SP20 switchpacks



Catalog Number	Product Description	Finish	Voltage	Watts	Detection Type	Coverage	Pallet Quantity	UPC
OAC-DT-2000-MV	DT Ceiling Mount, Line Voltage	White	120-347V	1200W-2700W	PIR and Ultrasonic	2000 sq. ft.	450	080083579426
OAC-DT-2000	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	2000 sq. ft.	450	080083579266
OAC-DT-2000-R	DT Ceiling Mount, Isolated Relay	White	10-30VDC	N/A	PIR and Ultrasonic	2000 sq. ft.	450	080083702077
OAC-DT-1000	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	1000 sq. ft.	540	080083579242
OAC-DT-1000-R	DT Ceiling Mount, Isolated Relay	White	10-30VDC	N/A	PIR and Ultrasonic	1000 sq. ft.	540	080083702060
OAC-DT-0501	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	500 sq. ft.	450	080083579228
OAC-P-1500-R	Low Voltage Ceiling Sensor	White	10-30VDC	N/A	N/A	N/A	800	080083579150

LightKeeper 8 Lighting Control Panel

Greengate

- An all-inclusive premium grade system, stand-alone lighting control panel
- For applications that would traditionally use a time clock in conjunction with contactors
- Control up to 8 relays per panel; Manual and programmable control of each relay
- Time schedules with astronomic clock; Occupant warn-off and overrides
- Prioritization and masking of switch inputs, schedules and remotes



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
LK8	LiteKeeper 8 Lighting Control Panel	White	120/277 VAC	40	45	080083594573

LiteKeeper 4 Lighting Control Panel

Greengate

- An all-inclusive premium grade system, stand-alone lighting control panel
- For applications that would traditionally use a time clock in conjunction with contactors
- Controls up to 4, 20A circuits; Manual and programmable control of each relay
- Time schedules with astronomic clock; Occupant warn-off and overrides
- Prioritization and masking of switch inputs, schedules and remotes



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
LK4-120NO	LiteKeeper 4 Lighting Control Panel	White	120V	20	126	080083592043
LK4-277NO	LiteKeeper 4 Lighting Control Panel	White	277V	20	150	080083594603

ControlKeeper CK4A Series

Greengate

- Cost-effective, specification grade lighting control system
- Control 4 relays per panel
- Network up to 254 ControlKeeper panels for a state-of-the-art lighting control system
- Capable of mixed load voltages (120/277 VAC) as well as mixed sources
- Time schedules with astronomic clock; NEMA 1 enclosure; UL listed, UL 916 Standard



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
CK4A-SLRC	ControlKeeper 4A, SLRC Relay card	White	120 / 277V	40	90	080083162062
CK4A-SSRCNO	ControlKeeper 4A, SSRCNO Relay card	White	120 / 277V	40	80	080083162079
CK4A-STPRCNO	ControlKeeper 4A, STPRCNO Relay card	White	120 / 277V	40	80	080083162055

GDS - Digital Switch

Greengate

- For the ControlKeeper and LiteKeeper 32, LiteKeeper 16 and LiteKeeper 8 lighting control panels
- Offers ON/OFF control of any relay or group of relays in the lighting control network
- Permits multiple control stations to be connected to the lighting control panels
- Provides override and status feedback; Create custom configuration for each button
- Suitable for standard single and multi-gang NEMA wall box; Class 2 low-voltage wiring



Catalog Number	Product Description	Finish	Voltage	Pallet Quantity	UPC
GDS-1TLB-W	Digital Switch, 1 large button	White	24VDC	1200	080083162130
GDS-2TLB-W	Digital Switch, 2 large buttons	White	24VDC	1200	080083162123
GDS-3TLB-W	Digital Switch, 3 large buttons	White	24VDC	1200	080083162116
GDS-4TSB-W	Digital Switch, 4 small buttons	White	24VDC	600	080083162109
GDS-6TSB-W	Digital Switch, 6 small buttons	White	24VDC	1200	080083663453
GDS-I-KIT	Digital Switch Integrator	White	24VDC	450	080083663477

Room Controller

Greengate

- Code-compliant lighting, emergency and plug load control
- Low-voltage control panel for ON/OFF and dimming loads
- Click & Go ready with RJ45 QuickConnect ports eliminates wiring errors
- Wallstations are pre-engraved low-voltage switches; Fits in standard decorator opening
- Input/Output Device provides connection of any Greengate low-voltage occupancy sensor



OCC-RJ45



RC3DE-PL



RC-5TSB-OS2-W



RC-3TLB-Z1D-W



Catalog Number	Product Description	Finish	Voltage	Pallet Quantity	UPC
RC3DE-PL	3 Zone with emergency	White	120- 277V	162	080083835041
RC3D-PL	3 Zone without emergency	White	120- 277V	120	080083835027
RC-3TLB-Z1D-W	1 Zone wall station	White	24V	1,120	080083695126
RC-5TSB-OS2-W	Office Station	White	24V	1,120	080083657322
OCC-RJ45	OCC Sensor Input/output device	White	24V	3,000	080083814572

Open Loop Daylight Sensor/IR Receiver

Greengate

- Measures natural light in order to automatically adjust the lighting zones
- Light sensor ranges: Low (3-300 lux), High (30-3000 lux), Direct Sun (300-30000 lux)
- High light range is selected by default, but can be adjusted using IR handheld remote
- Easy installation in suspended fixture or drop ceiling; RJ45 connection
- Mounting bracket for installation in light well or hard ceiling



Catalog Number	Product Description	Finish	Voltage	Detection Type	Pallet Quantity	UPC
DSRC-FMOIR	Open Loop Daylight Sensor	White	24VDC	Open Loop Photocell	2100	080083786497

Heavy Duty Switch Pack

Greengate

- Provides 15 VDC operating voltage to all low-voltage, 15 VDC, occupancy sensors and daylighting controllers
- A single switchpack can provide power for up to 5 sensors
- Up to 10 switchpacks can be connected to 1 sensor for control of multiple circuits
- Replaces separate transformer and relays; Capable of switching up to 20 amps
- Isolated contacts may also be used to control HVAC, contractors and motors, etc.



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
SP20-MV	Standard Heavy Duty	Raw Finish	120/277V	2400W-5400W	1,800	080083503223

SP20 Switch Pack

Greengate

- Robust switchpack with a wide array of switching solutions in a single unit
- Exclusive fail-safe circuitry: In an event of failure, return to close (ON)
- Reliable mechanical latching relays; Daylight harvesting; Bi-level switching
- Configurable for energy code requirements
- Designed to handle high inrush electronic ballast loads



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
SP20-RD4	Advanced Heavy Duty	White	120-230-277VAC	2400W-5400W	1,800	080083815869

Emergency Power Control

Greengate

- Allows control of emergency lighting by any Greengate lighting control panel or occupancy sensor
- Eliminates energy waste by allowing emergency lighting to be switched
- Senses a local single normal power circuit
- Wired as either a control device along with a relay panel and occupancy sensor or as a shunt to bypass line voltage devices when normal power fails



Catalog Number	Product Description	Finish	Voltage	Pallet Quantity	UPC
CEPC-2-D	Emergency Power Control 0-10V	White	120V or 277V	920	080083832088

High Bay Fixture Mount Sensors

Greengate

- Fixture-mount high bay/low bay occupancy sensor with integrated photocell
- Provides 0-10V control and 1-100% continuous dimming
- 2 interchangeable 360° high bay and low bay lenses; specifically designed for LED fixture control
- Easy to program; Quicksnap feature for easy installation
- Suitable for use in standard and cold storage applications



Catalog Number	Product Description	Finish	Voltage	Watts	Detection Type	Coverage	Pallet Quantity	UPC
OEF-P-010V-MV	Fixture Mount Sensor	White	120/277V	1200	PIR	1,500 sq. ft.	1200	080083758104

SURE-LITES | ALL-PRO | ATLITE

EXIT & EMERGENCY




Sure-Lites
p. 49-51



All-Pro
p. 51-52



AtLite
p. 52

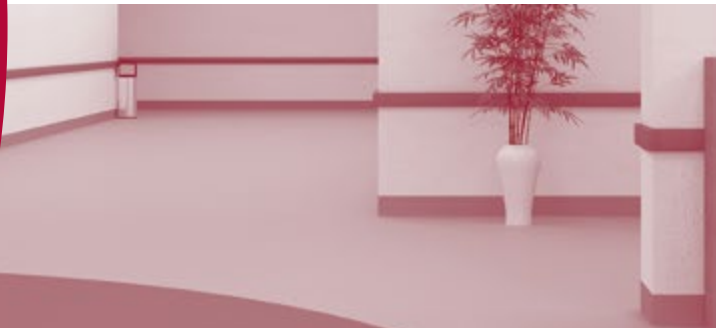

SEL LED Emergency Lighting

Sure-Lites

- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™
- Injection-molded, high-impact thermoplastic
- Long life LED's, No maintenance nickel cadmium battery
- EZ hang feature reduces installation time and cost



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
SEL17	2 Head, NiCad	White	2-5.4W Inc. Heads	17 ft.	120-277V	0.78W	270	080083722143
SEL25	2 Head, NiCad	White	2-9W Inc. Heads	25 ft.	120-277V	0.6W/0.64W	270	080083736669
SEL25SD	2 Head, NiCad, Self Diagnostic	White	2-9W Inc. Heads	25 ft.	120-277V	0.67	324	080083723027
SEL50	2 Head, NiCad	White	2-12W Inc. Heads	50 ft.	120-277V	1W/1.02W	324	080083733347
SEL50SD	2 Head, NiCad, Self Diagnostic	White	2-12W Inc. Heads	50 ft.	120-277V	1.19	270	080083733361

AP2SQ Emergency Lighting

Sure-Lites

- LED emergency light with a minimum of 90 minutes of run time
- Compact form factor optimizes aesthetics
- Adjustable square heads maximize design flexibility; Each head outputs 80 lumens
- No maintenance nickel cadmium battery
- Universal j-box mounting pattern and snap-fit polycarbonate housing construction reduces installation time



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
AP2SQLED	2 Head, NiCad	White	2-5W Inc.Heads	12 ft.	120/277V	2 at 277V	288	080083824922

SELW LED Outdoor Emergency Lighting

Sure-Lites

- Code compliant, wet location for outdoor use; Standard 0°C to 40°C temperature rating
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™; 25 feet of emergency egress coverage
- Injection-molded, high-impact thermoplastic
- Long life LED's, No maintenance nickel cadmium battery



SELW25BZ



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
SELW25BZ	2 Rotatable Heads, NiCad	Bronze	2-9 W INC Heads	25 ft.	120-277V	1.4	224	080083764037



Exit &
Emergency

XR LED Emergency Lighting

Sure-Lites

- Emergency light with minimum of 90 minutes runtime; Chicago and New York City compliant
- 20-gauge sheet metal housing; Heads are fully adjustable and 300 lumens each
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™, No maintenance nickel cadmium battery
- External battery disconnect and EZ Hang feature reduces installation time and cost



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
XR6C-LED	Steel, NiCad	White	2-12W INC Heads	60 ft.	120-277V	1.7	144	080083753215

SELMTG LED Emergency Lighting

Sure-Lites

- Architectural emergency light; Up to 60-feet of coverage; Rugged sheet metal housing
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™; Recessed heads to eliminate ceiling disruption
- Self-diagnostic automatically performs NFPA required testing; City of Chicago and New York City compliant
- External battery disconnect and EZ Hang features reduce installation time and cost



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
SELMTG60R5SD	2 Rotatable Heads, NiCad, Self Diag.	White	2-12 W INC Heads	60 ft.	120-277V	5	168	080083823406

CHX Exit Signage

Sure-Lites

- Chicago code compliant exits are ideal for general purpose applications
- Extensive range of field-installed accessories and choice of faces
- Ceiling and end mounting; Lens installs from side of fixture for convenient maintenance
- Durable steel construction and attractive styling
- High-efficiency illumination; Compatible in commercial, institutional and multi-housing applications



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
CHX60	AC Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	60	080083573615
CHX61	AC Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	60	080083574629
CHX70	Self Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	96	080083576753
CHX71	Self Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	120	080083567614
CHXC71	Self Powered Combo Unit, Steel	White	2-12 W INC Heads	60 ft.	120/277V	3.6	90	080083771271

EBP LED Emergency Battery Packs

Sure-Lites

- Battery Pack automatically switches to emergency mode when AC power fails
- Maintains illumination of an LED fixture for a minimum of 90 minutes
- UL 924 classified for field retrofit installation
- Guaranteed compatibility with Cooper Lighting Solutions' LED fixtures with accessible LED drivers



Catalog Number	Product Description	Voltage	Watts	Pallet Quantity	UPC
EBPLED7W	Emergency Battery Pack	120/277V	7	240	080083732265
EBPLED14W	Emergency Battery Pack	120/277V	14	288	080083732272
EBPLED-7.5WSD	Emergency Battery Pack	120/277V	7.5	210	080083158621
EBPLEDLP-10WSD	Emergency Battery Pack	120/277V	10	400	080083158645

EBP Fluorescent Emergency Battery Packs

Sure-Lites

- Battery Pack automatically switches to emergency mode when AC power fails
- Powers a fluorescent lamp for 90 minutes during a power outage
- UL 924 classified for field retrofit installation
- Compatible with most linear florescent lamps



Catalog Number	Product Description	Voltage	Watts	Pallet Quantity	UPC
EBP500	Emergency Battery Pack	120/277V	2.7	576	080083906741
EBP1400	Emergency Battery Pack	120/277V	3.8	432	080083912162

APEL LED Emergency Lighting

All-Pro

- Emergency light with a minimum of 90 minutes of run time
- No maintenance nickel cadmium battery
- Fully adjustable LED heads maximizes design flexibility
- Compact form factor optimizes aesthetics; Components are injection-molded, high impact thermoplastic
- Universal j-box mounting pattern and snap-fit housing construction reduce installation time



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
APEL	2 Head, NiCad	White	2-5.4W Inc. Heads	17 ft.	120/277V	0.47W at 277V	384	080083566501
APELH2	2 Head, Nicad, Remote Capacity	White	4-5.4 W INC Heads	34 ft.	120/277V	0.8 W at 277 V	512	080083804986

APX LED Exit Signage

All-Pro

- Economical LED exit sign for general purpose applications
- Durable, injection-molded, thermoplastic material resists discoloration due to UV radiation
- Energy-efficient, low-maintenance LED's provide bright illumination
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
APX7G	Self Powered, Unv. Green	White	120/277V	1.05W at 277V	270	080083566549
APX7R	Self Powered, Unv. Red	White	120/277V	1.14W at 277V	270	080083566532

APC LED EM Combo Light

All-Pro

- Economical LED combo unit; Exit and LED emergency lighting heads
- Durable, injection-molded, thermoplastic material resists discoloration due to UV radiation
- Energy-efficient, low-maintenance LED's provide bright illumination
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)
- Low-voltage disconnect, Line-Latched; Brownout circuit



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
APC7G	2 Heads, Unv. Green	White	2-5.4W Inc. Heads	17 ft.	120/277V	1.68W at 277V	192	080083567164
APC7R	2 Heads, Unv. Red	White	2-5.4W Inc. Heads	17 ft.	120/277V	1.68W at 277V	192	080083566556
APCH7G	2 Heads, Unv. Green, Remote Cap.	White	4-5.4W Inc. Heads	34 ft.	120/277V	1.68W at 277V	192	080083567188
APCH7R	2 Heads, Unv. Red, Remote Cap.	White	4-5.4W Inc. Heads	34 ft.	120/277V	1.68W at 277V	192	080083567171

APWR LED Remote Heads

All-Pro

- Emergency lighting remote heads unit; Allows for 17 feet of emergency egress coverage
- Adjustable heads adjust 80° from vertical with 358° rotation
- Wet location listed and can be used indoors or outdoors
- Injection-molded thermoplastic material
- Universal mounting plate; Flame-resistant and impact-resistant



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
APWR2	Remote Emergency Lamps, 2 Heads	White	2-5.4W Inc. Heads	17 ft.	3.6V	1W	810	080083608584

RCS LED Combo Exit Light

AtLite

- New York City compliant LED combo exit sign
- Heavy-duty, 20-gauge steel housing and face plate provides durability
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Single or double face with maximum of three heads for ultimate flexibility



Catalog Number	Product Description	Finish	Replaces Up To	Voltage	Watts	Pallet Quantity	UPC
RCS183LED	NY LED Combo, 1 face, 3 heads	White	3 12W Inc. Heads	120/277V	N/A	192	080083574308
RCS283LED	NY LED Combo, double face, 3 heads	White	3 12W Inc. Heads	120/277V	N/A	192	080083574292
RCS182LED	NY LED Combo, 1 face, 2 heads	White	2 12W Inc. Heads	120/277V	N/A	192	080083574322
RCS282LED	NY LED Combo, double face, 2 heads	White	2 12W Inc. Heads	120/277V	N/A	192	080083574315

Rival RXS Exit Signage

AtLite

- New York City compliant steel LED exit sign
- Heavy-duty, 20-gauge steel housing with canopy
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
RXSN8RU	NY LED Steel Exit, Self Powered, Univ. Face	White	120/277V	5	24	080083634576

REL Emergency Lighting

AtLite

- New York City compliant steel LED emergency light
- Heavy-duty, 20-gauge steel housing and face plate for maximum durability
- Long-lasting, high-efficiency LED heads; maintenance-free nickel cadmium battery
- Brownout protection; low-voltage disconnect



Catalog Number	Product Description	Finish	Replaces Up To	Voltage	Watts	Pallet Quantity	UPC
10REL36-LED42	NY LED Emergency Light, 2 heads, 2 remotes	White	2 9W Inc. Heads	120/277V	5	144	080083574353
10REL72-LED83	NY LED Emergency Light, 3 heads, 5 remotes	White	2 9W Inc. Heads	120/277V	5	192	080083574339

AUX LED Edge-Lit Exit Signage

AtLite

- Edge-lit Exit allows seamless presence in architecturally significant surroundings
- Eagle Eye self-diagnostics; New York City compliant
- Universal mounting; Universal Lens (clear, mirror, white and single- and double-sided)
- Ordering and installation simplified as all housing and lens options are included



Catalog Number	Product Description	Finish	Voltage	Watts	Pallet Quantity	UPC
AUXSSD	Unv. Self powered, Self Diag.	Silver	120/277V	1.1 at 277 V	50	080083703296
AUXSSD6	Unv. Edge Lit, Self powered	Silver	120/277V	0.9/1.1W	50	080083718115
AUXSSD-SP PACK	Unv. Self powered, Self Diag., Single Pack	Silver	120/277V	1.1 at 277 V	50	080083848669

ATLEMINI Series Emergency Lights

AtLite

- New York City compliant LED emergency light with 90 minutes of run time
- J-box and conduit knockouts for easy installation; wall or ceiling mount applications
- Long-lasting, energy-efficient LED heads; maintenance-free nickel cadmium battery
- Available with two or three 80 lumen rotatable heads



Catalog Number	Product Description	Finish	Replaces Up To	Coverage	Voltage	Watts	Pallet Quantity	UPC
ATLEMINI-2H	2 Rotable Heads, NiCad	White	5.4 W INC	18 ft.	120-277V	0.78 W	400	080083836079
ATLEMINI-3H	2 Rotable Heads, NiCad	White	5.4 W INC	27 ft.	120-277V	0.78 W	200	080083836093

Exit &
Emergency

OUTDOOR

LUMARK & HALO OUTDOOR



Floodlight
p. 55-56



Wall Mount
p. 57-58



Ceiling Mount
p. 58



Area/Site
p. 59



Night Falcon LED Floodlight

Lumark

- Cost-effective solution available in 3 sizes
- Precision engineered and high-efficiency optics delivers superior uniformity
- Compact, robust die-cast aluminum housing, driver compartment and door
- 6H x 6V NEMA distribution
- Perfect for area lighting for security, building facade lighting, accent and signage lighting



NFFLD-S



NFFLD



NFFLD-L



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
NFFLD-S-C15-KNC-UNV	Small, Knuckle	Carbon Bronze	150W HID	4000K	120-277V	5,797	51	27	080083760268	P07DFEUO
NFFLD-S-C15-T-UNV	Small, Trunnion	Carbon Bronze	150W HID	4000K	120-277V	5,797	51	36	080083760275	P07DFEUO
NFFLD-C25-S	Medium, Slipfitter	Carbon Bronze	250W HID	4000K	120-277V	10,530	85	20	080083801244	PFT7DB3V, PY7YCS7P, P688KBF9
NFFLD-C25-T	Medium, Trunnion	Carbon Bronze	250W HID	4000K	120-277V	10,530	85	24	080083801220	P1KJC5UE, PX8F6VUW, P5VPYGW5
NFFLD-C40-S	Medium, Slipfitter	Carbon Bronze	400W HID	4000K	120-277V	16,932	128	20	080083801206	P6WY96JR, PSCSJCSY, P9J2MXXC
NFFLD-C40-T	Medium, Trunnion	Carbon Bronze	400W HID	4000K	120-277V	16,932	128	20	080083801183	P1FRZ85N, P5KZZS6U, P2UR5RKV
NFFLD-L-C100-S	Large, Slipfitter	Carbon Bronze	1,000W HID	4000K	120-277V	33,941	252	6	080083800889	PXL241RW, PWCEZG57, P15GC6CP
NFFLD-L-C100-T	Large, Trunnion	Carbon Bronze	1,000W HID	4000K	120-277V	33,941	252	6	080083800902	PWOBVSIR, PVK3AY96, PYOWZCFO

Note: DLC Premium items are noted in bold.

Tracer LED Floodlight

Lumark

- Combines value and performance in a unique durable design; Die-cast aluminum housing
- Delivers superior uniformity and excellent illumination to the targeted application
- Rugged, die-cast housing; IP66 rated for exceptional durability and long-term reliability
- Energy and maintenance savings up to 94% compared to halogen; Up to 138 lm/W
- Design flexibility for applications such as landscape, accent, facade or sign lighting



TCRL



TCRS



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
TCRS5M	Small, Medium Distribution	Carbon Bronze	50W Halogen	4000K	120-277V	552	5	360	080083884834	P8738XR6
TCRS8W	Small, Wide Distribution	Carbon Bronze	70W Halogen	4000K	120-277V	860	8	360	080083884957	P7RUSYQ7
TCRL15M	Large, Medium Distribution	Carbon Bronze	100W Halogen	4000K	120-277V	1,630	12	144	080083884872	PRMSPIFM
TCRL20M	Large, Medium Distribution	Carbon Bronze	120W Halogen	4000K	120-277V	2,215	18	144	080083884896	PD93F1ZM
TCRL20W	Large, Wide Distribution	Carbon Bronze	120W Halogen	4000K	120-277V	2,251	18	144	080083884995	PRCTOM6W
TCRL26M	Large, Medium Distribution	Carbon Bronze	150W Halogen	4000K	120-277V	2,953	25	144	080083884919	PRXQGDD7

MST LED Motion Floodlight

HALO Outdoor

- 180° or 270° motion-activated floodlight series
- Durable die-cast aluminum housing; Superior area coverage
- Integrated photocontrol ensures lights come on only after dark
- Adjustable detection area motion sensor turns lights ON when motion is detected (up to 50 feet) and OFF after a preselected time delay
- Field-selectable CCT: 3000K, 4000K, 5000K; 90 CRI



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC
MST203T18B	Twin, 180° PIR	Bronze	180W INC	3000K/4000K/5000K	120V	2,034	23	150	080083810161
MST203T18W	Twin, 180° PIR	White	180W INC	3000K/4000K/5000K	120V	2,034	23	150	080083810185
MST203T27B	Twin, 270° PIR	Bronze	180 W INC	3000K/4000K/5000K	120V	2034	23	150	080083810246
MST203T27W	Twin, 270° PIR	White	180 W INC	3000K/4000K/5000K	120V	2034	23	150	080083810260

Twin Head Round LED Floodlight

HALO Outdoor

- Floodlight utilize the latest in LED technology for maximum light output
- Low-profile, compact housing
- Ideal as a direct replacement for traditional
- Available in white or bronze
- Wall or eave mounted for a wide range of applications



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC
FTR1740L	Twin LED Floodlight	Bronze	2-75W, PAR 38	5000K	120V, 60Hz	1,600	20	240	080083705061
FTR1740LW	Twin LED Floodlight	White	2-75W, PAR 38	5000K	120V, 60Hz	1,600	20	150	080083705078
MST18R17L	Twin LED with 180° Motion Sensor	Bronze	2-75W, PAR 38	5000K	120V, 60 Hz	1,600	20	150	080083703173
MST18R17LW	Twin LED with 180° Motion Sensor	White	2-75W, PAR 38	5000K	120V, 60 Hz	1,600	20	150	080083703166



Axcent LED Wall Mount Luminaire

Lumark

- Architectural design with high-performing, energy-efficient illumination
- Flush-mounted; Hook-N-Lock mechanism for quick, easy installation
- Full cutoff and refractive lens model available; Die-cast aluminum construction
- Gasketed housing and sealed optical compartment making impervious to contaminants
- For building entrances, vehicle ramps, schools, tunnels, stairways, loading docks and floodlighting applications



Full Cutoff



Refractive Lens



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
AXCS1A	Small Full Cutoff	Carbon Bronze	70W HID	4000K	120-277V	1,806	14	96	080083887965	PM2QBCKN, P6C9PUNY
AXCS2A	Small Full Cutoff	Carbon Bronze	100W HID	4000K	120-277V	2,561	21	96	080083887989	P7QPNUH6, PSBR7D60
AXCS3A	Small Full Cutoff	Carbon Bronze	150W HID	4000K	120-277V	3,537	27	96	080083888009	PVRJ2Q9Q, PTFQ0X79
AXCS4A	Small Full Cutoff	Carbon Bronze	250W HID	4000K	120-277V	5,520	44	96	080083888023	PI16J9UO, POMJ1T2K
AXCS4ARL	Small Refractive Lens	Carbon Bronze	250W HID	4000K	120-277V	5,858	44	96	080083888030	PPXSGJ9K, PCFKRFBV
AXCS5A	Small Full Cutoff	Carbon Bronze	320W HID	4000K	120-277V	6,300	52	96	080083888047	PHKFITX6, PCPDYSZM
AXCL6A	Large Full Cutoff	Carbon Bronze	320W HID	4000K	120-277V	7,594	56	45	080083811564	PFN4XXRX
AXCL6ARL	Large Refractive Lens	Carbon Bronze	320W HID	4000K	120-277V	7,809	56	45	080083811649	PZXNXUOI
AXCL8A	Large Full Cutoff	Carbon Bronze	400W HID	4000K	120-277V	9,696	72	45	080083811588	PG4TJNY3
AXCL8ARL	Large Refractive Lens	Carbon Bronze	400W HID	4000K	120-277V	9,970	72	45	080083811663	PBA84MB6
AXCL10A	Large Full Cutoff	Carbon Bronze	400W HID	4000K	120-277V	13,283	102	45	080083811601	PEEEJWAF
AXCL12A	Large Full Cutoff	Carbon Bronze	450W HID	4000K	120-277V	16,823	123	45	080083811625	PD1N4D39

Note: DLC Premium items are noted in bold.

Axcent LED Back Box Accessory

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC
BB/AXC	Back Box	Carbon Bronze	N/A	N/A	N/A	N/A	N/A	432	080083160709
BB/AXC-PC	Back Box with Photocontrol	Carbon Bronze	N/A	N/A	N/A	N/A	N/A	432	080083160723

Features

Lumen Select pack allows installer to reduce the light output to 75 or 50%

Integrated photocontrol provides maximum energy savings while leveraging

Four 1/2" NPT conduit entry points for surface mounted conduit

Single die-cast aluminum back box to simultaneously accommodate Axcent Small and Large housings



Crosstour LED Wall Pack

Lumark

- Architectural style with super bright, energy-efficient LEDs
- Low-profile, rugged die-cast aluminum construction and stainless steel hardware
- Universal back box with sealed and gasketed optical compartment
- Surface- or inverted-mount for post/bollard mounting, facade/canopy and low-level pathway illumination
- For building entrances, multi-use facilities, apartment buildings, institutions, schools, stairways and loading docks



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
XTOR1B	Small Full Cutoff	Carbon Bronze	70W HID	5000K	120-277V	1,418	12	324	080083777969	PRVAZAZR
XTOR2B	Small Full Cutoff	Carbon Bronze	100W HID	5000K	120-277V	2,135	18	270	080083778225	PGP4FYV3
XTOR3B	Small Full Cutoff	Carbon Bronze	150W HID	5000K	120-277V	2,751	26	270	080083778041	PWFZHYJH
XTOR4B	Medium Full Cutoff	Carbon Bronze	250W HID	5000K	120-277V	4,269	38	216	080083778003	PUJ1NXGY
XTOR6B	Large Full Cutoff	Carbon Bronze	320W HID	5000K	120-277V	6,129	58	72	080083774807	PWEKQNMV
XTOR6BRL	Large Refractive Lens	Carbon Bronze	320W HID	5000K	120-277V	6,225	58	54	080083774821	PH59ANRG
XTOR8B	Large Full Cutoff	Carbon Bronze	400W HID	5000K	120-277V	8,502	81	54	080083774814	P5557CRH
XTOR8BRL	Large Refractive Lens	Carbon Bronze	400W HID	5000K	120-277V	8,635	81	54	080083774852	P2F72ZQT
XTOR6B-PC1	Large Full Cutoff	Carbon Bronze	N/A	5000K	120-277V	6,129	58	54	080083774845	PWEKQNMV
XTOR8B-PC1	Large Full Cutoff	Carbon Bronze	N/A	5000K	120-277V	8,502	81	54	080083774869	P5557CRH

Note: DLC Premium items are noted in bold.

WP LED Glass Wall Pack

Lumark

- High performance, energy-efficient illumination across 3 housing sizes
- Rugged, die-cast aluminum construction; Heat and impact resistant borosilicate glass lens
- Gasketed housing and sealed optical compartment makes impervious to contaminants
- Energy and maintenance savings up to 89% versus HID solutions
- Ideal for pathway illumination, building entrances, vehicle ramps, schools, tunnels, stairways and loading docks



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
WPSLED10	Small Refractive Lens	Bronze	100W HID	4000K	120-277V	4,733	39	48	080083885664	PTV55HZL
WPMLED10	Medium Refractive Lens	Bronze	100W HID	4000K	120-277V	4,700	39	32	080083885688	PIV2ITCS
WPMLED15	Medium Refractive Lens	Bronze	150W HID	4000K	120-277V	6,203	49	32	080083885701	PBJ759X5
WPMLED25	Medium Refractive Lens	Bronze	250W HID	4000K	120-277V	10,227	81	32	080083885725	PGE0EJ1Q
WPLLED15	Large Refractive Lens	Bronze	150W HID	4000K	120-277V	6,075	49	32	080083885749	PSEL08UB
WPLLED25	Large Refractive Lens	Bronze	250W HID	4000K	120-277V	10,198	81	32	080083885763	PT0PZBCG
WPLLED45	Large Refractive Lens	Bronze	450W HID	4000K	120-277V	15,523	121	32	080083885787	PY0SAW93

Note: DLC Premium items are noted in bold.

CLCSLED Canopy Luminaire

Lumark

- Slim, low-profile, traditional design
- Die-cast aluminum housing
- High-performance, energy-efficient illumination
- Quick mount installation bracket
- Seamlessly integrates into new or existing spaces including bank/retail drive-thru, covered sidewalks and hospitality entryways



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
CLCSLED-40-SM-UNV	Square Surface Mount	Bronze	150W HID	4000K	120-277V	4,839	36	48	080083776061	PCQT436Y
CLCSLED-55-SM-UNV	Square Surface Mount	Bronze	175W HID	4000K	120-277V	7,230	56	72	080083776085	PJ1SCY7M
CLCSLED-86-SM-UNV	Square Surface Mount	Bronze	250W HID	4000K	120-277V	11,494	92	54	080083776108	P124NMP8

Caretaker LED Area Luminaire

Lumark

- Rugged die-cast housing for durability in security applications
- Uniform distribution with excellent vertical illumination for maximum light coverage
- Wall/pole-mount bracket and integral slipfitter for versatility in mounting
- Versatile universal mounting plate allows quick and easy installation
- Low-cost, low-maintenance solution for residential street lighting, perimeter area lighting, parking areas, loading platforms, boat docks, access drives or pathways



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
CTKRV1B	Area site with PC, UNV Mount Arm	Raw	150W HID	4000K	120-277V	4,515	29	48	080083865390	P9G7NN3C
CTKRV2B	Area site with PC, UNV Mount Arm	Raw	175W HID	4000K	120-277V	7,110	50	40	080083865406	PRSAJP8E, PKGOJV49
CTKRV3B	Area site with PC, UNV Mount Arm	Raw	250W HID	4000K	120-277V	9,741	71	48	080083865413	P9E35CQB, P3P0FHML
SR-CARETAKER	Small Acrylic Refractor	Clear	N/A	N/A	N/A	N/A	N/A	200	080083699087	N/A

Note: DLC Premium items are noted in bold.

Prevail LED Area/Site Luminaire

Lumark

- Provides a new level of performance, versatility and value
- Low-profile, architectural design with a die-cast aluminum housing
- Versatile mount arm includes multiple drill patterns, round and square poles
- Simple retrofit installation; Reduces installation time and provides labor savings
- Ideal for general area lighting such as parking lots, walkways, roadways and building areas



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
PRVS-C25-UNV-T3	T3 Distr., STD Arm Mount	Bronze	250W HID	4000K	120-277V	13,183	96	16	080083897308	PVJAMD08
PRVS-C25-UNV-T4	T4 Distr., STD Arm Mount	Bronze	250W HID	4000K	120-277V	13,140	96	16	080083897322	PC50ML3L
PRVS-C40-UNV-T3	T3 Distr., STD Arm Mount	Bronze	400W HID	4000K	120-277V	17,144	131	14	080083897346	PFLCEN3P
PRVS-C40-UNV-T4	T4 Distr., STD Arm Mount	Bronze	400W HID	4000K	120-277V	17,087	131	16	080083897360	P0B3IQ7D
PRVS-C60-UNV-T3	T3 Distr., STD Arm Mount	Bronze	450W HID	4000K	120-277V	20,050	153	14	080083897384	PG5CZXKH
PRVS-C60-UNV-T4	T4 Distr., STD Arm Mount	Bronze	450W HID	4000K	120-277V	19,984	153	14	080083897421	PM3XNS4Q
PRVS-XL-C75-UNV-T3	T3 Distr., STD Arm Mount	Bronze	750W HID	4000K	120-277V	26,120	176	8	080083906499	PX7MW2FB
PRVS-XL-C75-UNV-T4	T4 Distr., STD Arm Mount	Bronze	750W HID	4000K	120-277V	26,098	176	8	080083906512	PCWO68VF

Note: DLC Premium items are noted in bold.

LAS Area/Site Luminaire

Lumark

- Automatic dusk-to-dawn area lighting with included twistlock photocontrol
- 10-position, field-selectable lumens across 2 die-cast aluminum housing sizes
- Energy and maintenance savings up to 79% versus HID solutions up to 79%
- Versatile, adjustable slipfitter arm mounts horizontally or vertically for simple installation
- Ideal parking lots, walkways, building areas and other outdoor areas



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	Pallet Quantity	UPC	DLC Product ID
LAS45S-T3	T3 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900 - 20,000	30-153	28	080083155804	P1T4HG08
LAS45S-T4	T4 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900 - 20,000	30-153	28	080083155828	PJZTZ423
LAS45S-T5	T5 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900 - 20,000	30-153	28	080083155842	PW39PQB3
LAS100S-T3	T3 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200 - 34,000	48-251	21	080083155866	PP8AW4F5
LAS100S-T4	T4 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200 - 34,000	48-251	21	080083155880	P0CHU9AS
LAS100S-T5	T5 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200 - 34,000	48-251	21	080083155903	PMUFIF4F

Note: DLC Premium items are noted in bold.

Rapid Response and Quick Ship Programs

Expanded selection now available with customizable lighting products

cooperlighting.com/marketpro

Rapid Response

Fill your small projects on time and on budget

The Rapid Response program is designed to offer the most popular Metalux commercial and industrial lighting products with options delivered to you when you need them.

- ✓ Customizable Metalux commercial and industrial products
- ✓ Troffers, high bays and strips
- ✓ **Options include:** sensors, battery packs, flex, modular wiring, Chicago rated products



Stay ahead of demanding project schedules

The Quick Ship program focuses on the most popular and recently introduced LED luminaires that cover a wide array of architectural lighting applications.

- ✓ Customizable Corelite, Neo-Ray & Shaper architectural products
- ✓ Suspended and recessed slot fixtures available up to 1,000 feet
- ✓ Options include: sensors and battery packs




Resource Center

One-stop shop for all your resource needs.

cooperlighting.com > Resources

LITERATURE, PRODUCT PHOTOGRAPHY, VIDEOS, CASE STUDIES, LOGOS & MORE!

Visit Cooperlighting.com and click on the Resources tab. The Resource Center is a central location of supportive product selection tools, inspirational images and downloadable digital resources.

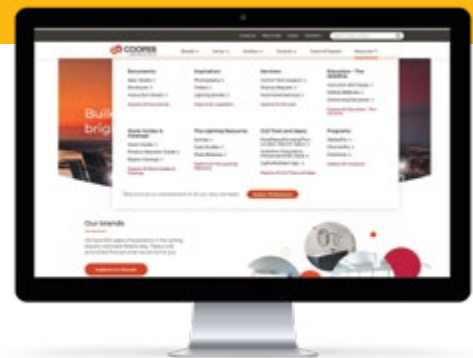

Product Resources

- Brochures & Guides
- Spec sheets
- Installation sheets and guides



Inspiration

- Application Photography
- Product Photography & Videos
- Case studies
- Logos



Tools

- Energy Incentive Finder
- Photometric IES
- Revit Models
- Calculators & Audit Tools



Programs

- MarketPro
- Rapid Response
- Quick Ship



Education

- Instructor-led Classes
- Free online courses
- Continuing education

SOURCE Education Center

Expanded selection now available with customizable lighting products.


cooperlighting.com/source



Expand Your knowledge!

The SOURCE is an excellent resource for training and professional development. As the industry's leading lighting educational facility, the SOURCE offers numerous online and instructor-led courses and workshops for those wanting to expand their lighting and controls knowledge.

- Instructor-led Classes
- Free Online Courses
- Continuing Education
- reSource Articles

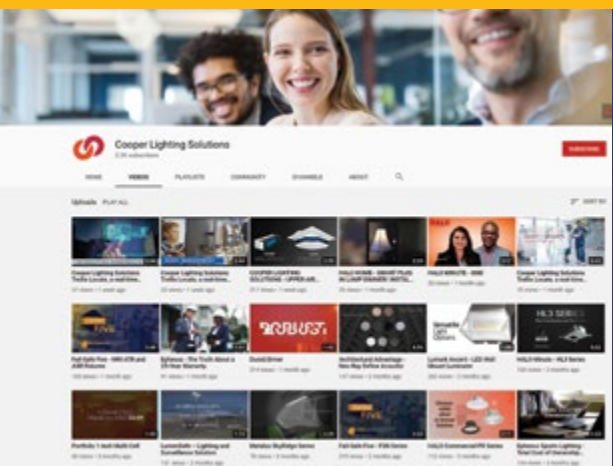

Product Videos


Explore our one-stop-shop for Cooper Lighting Solutions product videos and training.

Youtube.com > Cooper Lighting Solutions > Videos

Code Compliance

The largest verified list of high performing LED lighting products.

cooperlighting.com/marketpro

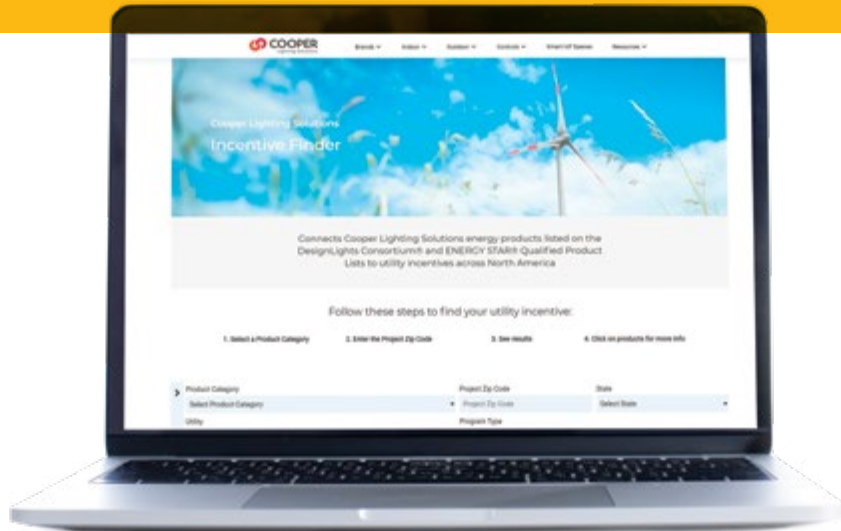

By using our online Incentive Finder, you can search by state and zip code to find local rebates to save money and add value for your customers. We've also identified within the MarketPro catalog the **ENERGY STAR®** and **DLC®** product ID numbers for your convenience.

Cooper Lighting Solutions has the largest portfolio of **ENERGY STAR®**-certified recessed downlights and **DesignLights® Consortium (DLC)** - qualified commercial luminaires, meeting high-quality, energy-efficient standards.

<http://www.designlights.org/search/>
DLC Premium items are denoted in bold



UPC	DLC Product ID
080083811588	PG4TJNY3

<http://www.energystar.gov/productfinder/>



UPC	ENERGY STAR Unique ID
080083848164	2322242

www.energy.ca.gov



Look for the DLC, ENERGY STAR and T20 icons that identifies qualified products.

Metalux DLC codes qualified as of December 16, 2020. Verify DLC codes after January 31, 2021.

2021 LIGHTING & CONTROLS STOCK PRODUCT GUIDE

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
Halo
Halo Commercial
Invue
io
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems

Distributed Low-Voltage Power
HALO Home
iLumin Plus
LumaWatt Pro
WaveLinx
Trellix



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com
Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. CA525415EN
February 2021

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.