


Preface

Thank you for purchasing UGREEN products. For optimum operation, please read this manual carefully before using.

Package Contents



1 × DP Bi-directional Switch



1 × USB-C Cable (1 m/3.2 ft)




1 × User Manual




1 × Warranty Card

Product Overview

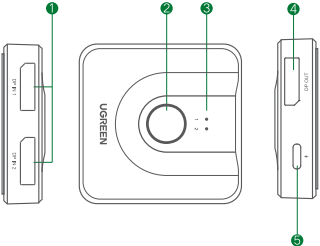


- ① DP IN 1/2
- ② Switch Button
- ③ Signal Indicator
- ④ DP OUT
- ⑤ USB-C DC5V

2-In 1-Out Mode

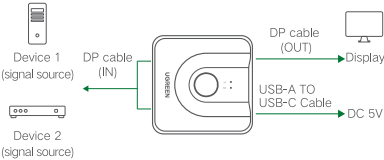

1. In 2-in 1-out mode, "DP IN 1/2" is connected to the signal source; "DP OUT" is connected to the display device.
2. Short pressing the switch button to choose signal 1 or 2 to show on the display device, and then indicator 1 or 2 glows blue.

1-In 2-Out Mode

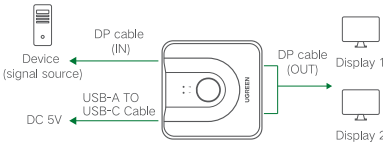

Note: Images of Device 1 and Device 2 can't be shown simultaneously in 1-in 2-out mode.

1. In 1-in 2-out mode, "DP IN 1/2" is connected to the display device ; "DP OUT" is connected to the signal source.
2. Short pressing the switch button to choose monitor 1 or 2 to display content of the signal source, and then indicator 1 or 2 glows blue.

Resolutions and DP Cable

Resolutions	Cable Length (input)	Cable Length (output)	Wire Gauge	Total Cable Length
4K@60Hz	≤2 m/ 6.56 ft	≤3 m/ 9.84 ft	28AWG	≤5 m/ 16.40 ft
4K@30Hz	≤5 m/ 16.40 ft	≤3 m/ 9.84 ft	28AWG	≤8 m/ 26.24 ft
1080P@60Hz	≤5 m/ 16.40 ft	≤5 m/ 16.40 ft	28AWG	≤10 m/ 32.80 ft

When the total cable length exceeds 5 m (16.4 ft), you'll need a DP fiber-optic cable to achieve 4K@60Hz.

Notes

- Please power off the product if it is not used for a long time.
- Voltage of the power adapter must be within the standard voltage (DC 5V ± 5%).
- Please contact UGREEN after-sales service if you need to disassemble the product.
- Do not leave the product in high-temperature or moist environments.
- Do not drop, hit, crush or throw the product in case of circuit damage.
- Please deal with the product based on your local laws instead of classifying it as household waste.
- Keep out of reach of children.

Specification

Power Supply	USB-C 5V/1A
DP Port	Supports resolutions of up to 4K@60Hz and backward compatibility
Other	Hot-swappable, plug and play
Compatible Systems	Windows/Linux/macOS
Dimension	L51 × W51 × H13.5(mm)/ L2.0 × W2.0 × H0.5 (in.)



扫码更多贴心服务