




◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers

## GENERAL


Remove all parts and hardware from the box and make sure that none are missing by referencing the illustrations



①



②




③



④



⑤



⑥



⑦



⑧



⑨




⑩



⑪




⑫

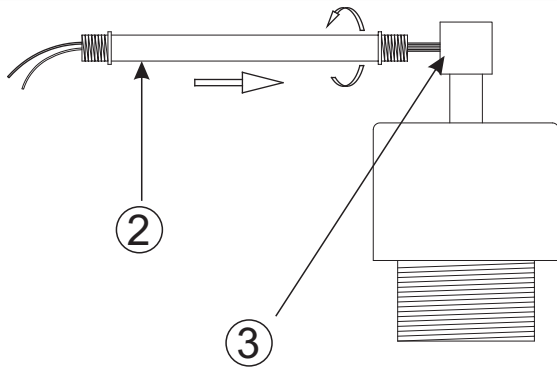

## STEP1

Connect the two bracket tubes ② to the lamp body ③


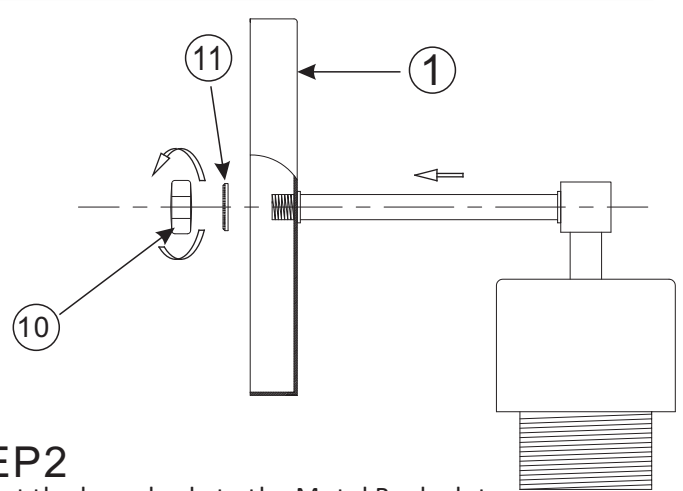


## STEP2

Connect the lamp body to the Metal Back plate


## STEP3

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

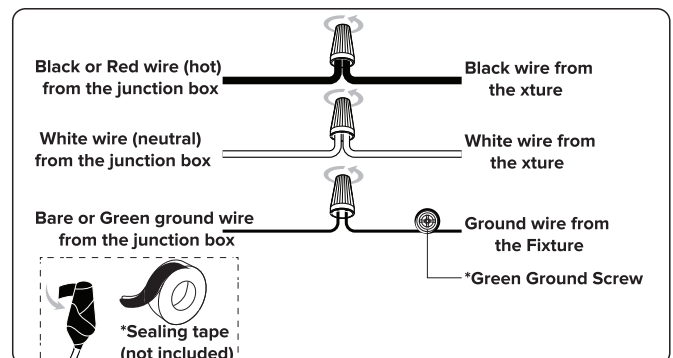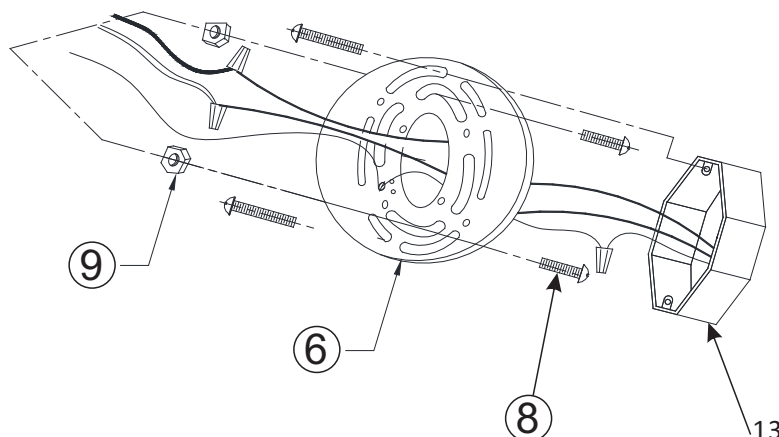


OUTLET BOX (NOT INCLUDED)

# ASSEMBLY INSTRUCTIONS (INSTALLATION)

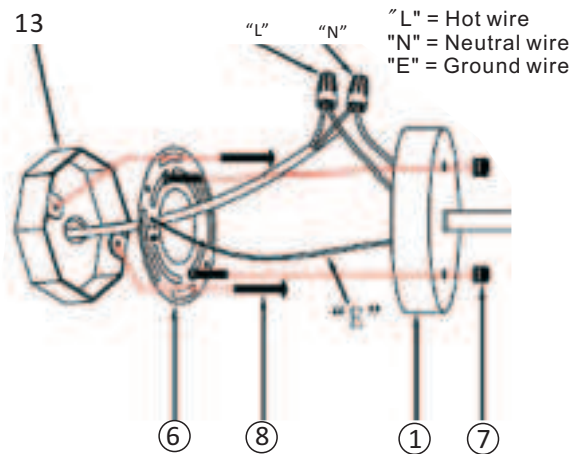

## STEP4

Attach the fixture to the mounting unit through screw holes as shown, and secure it with ball nuts.

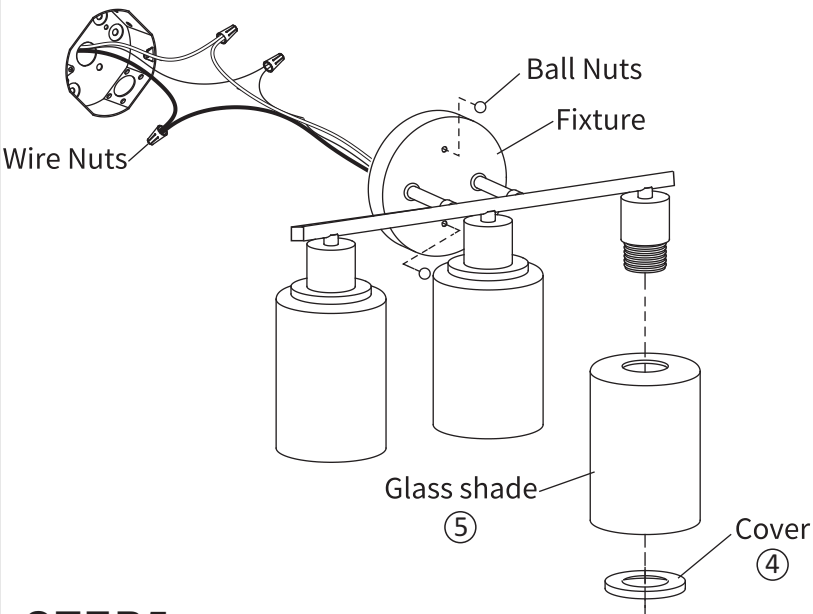

## STEP5

Attache the cover and glass shade onto fixture

## STEP6

Install bulbs (not included).

