




Installation Instructions

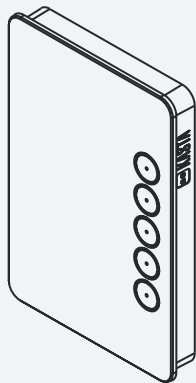

HESPERUS Multivue Smart 5-Button Multivue Screen

Product Code:
H5MSMB-WH/H5MSMB-BK

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app.
iOS: requires iOS 9.0 or later.
Android: requires Android 4.4 or later.
Devices must support Bluetooth 4.0



Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user serviceable parts inside.

FEATURES

- Mains powered remote switch with LCD screen.
- Simple 2 wire connection – A, N (LOOP available).
- Pairs to existing hard wired KASTA devices including: Switch Relays, Dimmers, Curtain controllers and many other devices.
- Configure smart functions via the KASTA app such as timers, scenes and groups.
- Fits most Australian Standard wall mounting accessories.
- Integral tri-colour backlight.
- Radar sensing backlight.
- To prevent a reduction in Bluetooth® signal strength, install away from metal objects.

FUNCTION SETUP

ON/OFF	1 PRESS
--------	---------

Turns paired device on or off. When paired with a dimmable light, light will adjust to previous brightness level.

DIM UP/DOWN	ONE LONG PRESS
-------------	----------------

When paired with a light, long press button to dim up or down.
Release button to stop.

FULL BRIGHTNESS	2 PRESSES
-----------------	-----------

When paired with a light, sets light to full brightness.

DELAY TO OFF	3 PRESSES*
--------------	------------

Paired device turns off automatically after a set time (configured in the app).
Single click to cancel.

VARIABLE	4 PRESSES*
----------	------------

Refer to the paired device for functionality.

VARIABLE	5 PRESSES*
----------	------------

Refer to the paired device for functionality.

APP ENABLED FUNCTION

RETRIGGER TIMER	1 PRESS
-----------------	---------

Refer to the paired device for functionality.

TECHNICAL SPECIFICATIONS

Operating Temp: -20°C to 40°C

Supply: 220-240V AC 50Hz

CONNECTION DIAGRAM

