




ASSEMBLY INSTRUCTIONS

30.5 IN. ROLLING TOOL CART WITH WOOD TOP

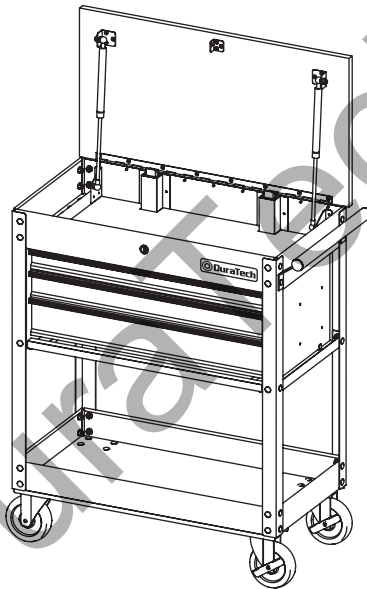

USE PRECAUTION
For your safety



INSTRUCTION
MANUAL
Read and understand



EYE PROTECTION
Must be worn



PROTECTIVE GLOVES
Must be worn when
handling tool



CAUTION: Read and follow all Safety Rules and Operating instructions before first use of this product.

NOTE: Ensure all components are present. If any components are missing, do not proceed with assembly. Contact Brands customer services at service@greatstartools.com

SAVE THIS MANUAL FOR FUTURE REFERENCE






Distributed by
Hangzhou GreatStar Industrial Co., Ltd.
No.35 Jiuhuan Road, Jiubao Town,
Hangzhou 310019, China
www.greatstartools.com

PRODUCT SPECIFICATIONS







COMPONENTS	SPECIFICATIONS
Maximum load for small drawer	50 lbs.
Maximum load for middle drawer	50 lbs.
Maximum load for big drawer	100 lbs.
Maximum load for bottom tray	100 lbs.
Maximum load for top tray	100 lbs.
Maximum load for wood top	200 lbs.
Maximum total load	400 lbs.

COMPONENTS


Ensure all components are present. If any components are missing, do not proceed with assembly. Contact Brands customer services at service@greatstartools.com

#	PIC	DESCRIPTION	QTY
A		Cabinet	1
B		Side handle	1
C		Post	4
D		Beam	2
E		Bottom tray	1

COMPONENTS

#	PIC	DESCRIPTION	QTY
F		Swivel caster with brake	2
G		Swivel caster	2
AA		M8 x 11 mm Bolt	38
BB		M8 x 15 mm Bolt	18
CC		M8 Nut	56
DD		Key	2

**TOOLS REQUIRED
(INCLUDED):**



13mm
Wrench

SAFETY INFORMATION

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble or operate this product. Failure to follow may result in serious injury. Save all warnings and instructions for future reference.

WARNING!

- Do not stand on, step on, or alter this unit for anything outside the designed function of storage.
- When locking the product, close all drawers and the top cover completely in order for the lock bars to work properly.
- Secure all items and lock the lid and all drawers before rolling this product. Only roll the product short distances by using the handle provided.
- Lock wheels when the product is not being moved.
- Do not open more than one drawer at a time. The product may become unstable and tip, which may cause personal injury or product damage.
- The metal may have sharp edges or corners. The use of protective gloves is recommended.
- Always remember to use proper lifting techniques when moving the boxed or assembled unit.
- Do not attach or mount this product to a vehicle or any other moving object. This may cause personal injury or product damage.


CAUTION!

- Do not exceed maximum load capacities listed in Product Specifications on Page 2, including contents.
- When storing articles, equally distribute loads. Always balance the loads to avoid tipping. Place heavier weight on the bottom cart when possible.
- Keep the product on level surfaces. The product may become unstable and tip if stored or moved on an unlevel surface, which may cause personal injury or product damage.
- Do not store flammable liquids in the unit unless they are secured in an approved container.
- Do not store gasoline in the unit under any circumstances.
- Do not leave children unattended near this product. Cabinet may tip over if improperly opened.
- Always use common sense and be cautious when using this product.

ASSEMBLY

STEP 1:

Mount the two swivel casters with brake (F) to the bottom of the bottom tray (E) using four M8 x 15 mm bolts (BB) and M8 nuts (CC) per caster. The swivel casters with brake (F) should be installed on the same end as the side handle (B). Repeat this process for the other swivel casters (G) on the opposite end of the bottom tray (E). Tighten all bolts with a 13 mm wrench. Return the unit to its upright position.

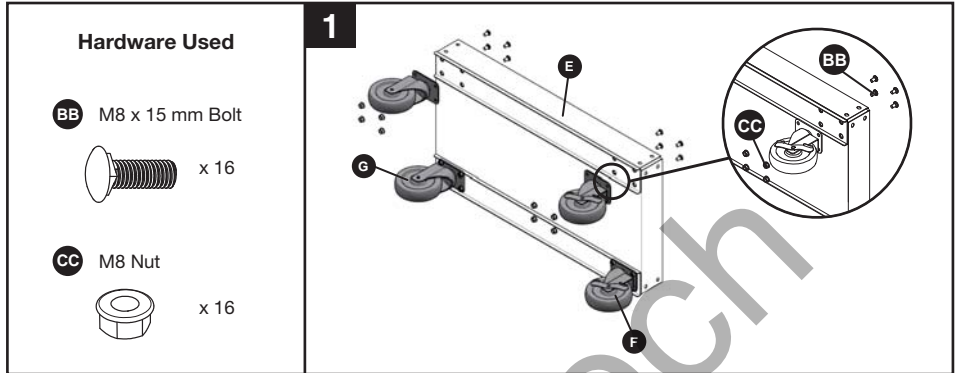


NOTE:

Do not over tighten the bolts.
Be sure to keep the tray on a soft surface, such as carpeting or a piece of cardboard, to protect them from scratches.

STEP 2:

Mount the four posts (C) to the bottom tray (E) using four M8 x 11 mm bolts (AA) and M8 nuts (CC) per post (C). Finger tighten only.

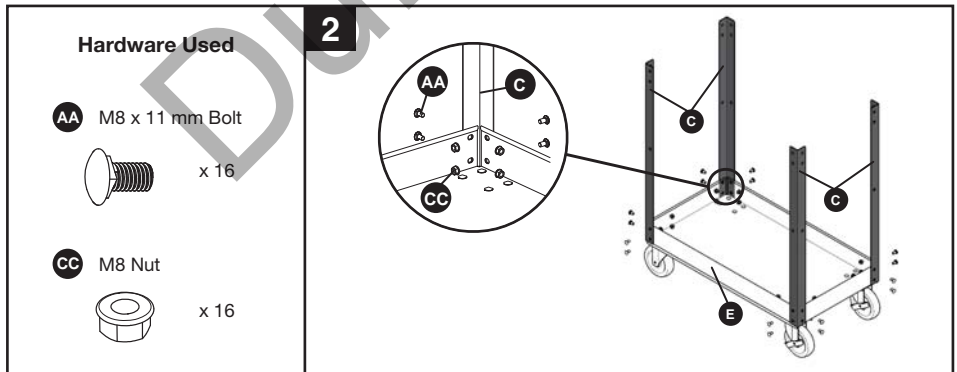


NOTE:

Lock 2 swivel casters to prevent it from rolling and swiveling.
Be sure to install the posts in the direction indicated by the arrow on the label, or the next step will not be able to install.
Do not fully tighten bolts yet to allow for some movement during cabinet installation.

ASSEMBLY

STEP 3:

Mount the two beams (D) to four posts (C) using eight M8 x 11 mm bolts (AA) and M8 nuts (CC). Tighten the 8 bolts securely.

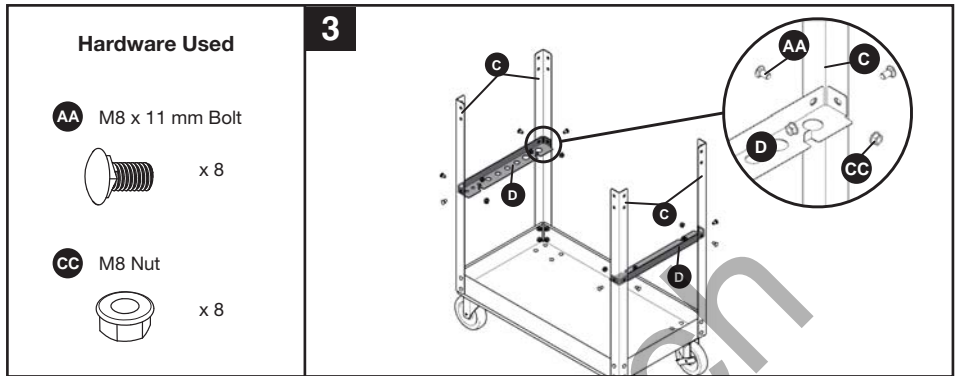


STEP 4:

Carefully and slowly lower the cabinet (A) between the four posts (C) until the cabinet (A) is properly secured onto the 2 beams (D) and the holes are in alignment.



NOTE:


Lock the lid and all drawers before operation.
This step requires at least two adults.

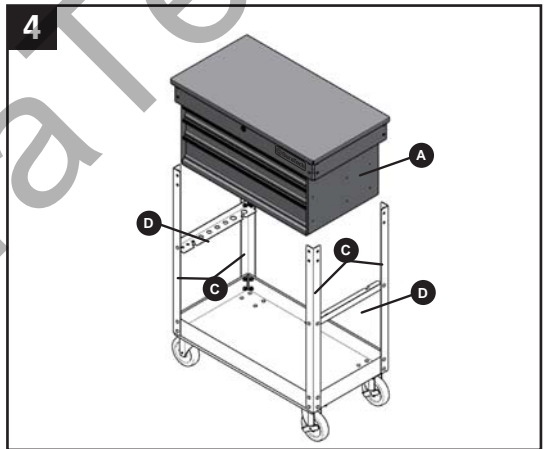

ASSEMBLY

STEP 5:

Unlock and open the lid, secure the cabinet (A) to the four posts (C) using fourteen M8 x 11 mm bolts (AA) and M8 nuts (CC). Do not over tighten the bolts.

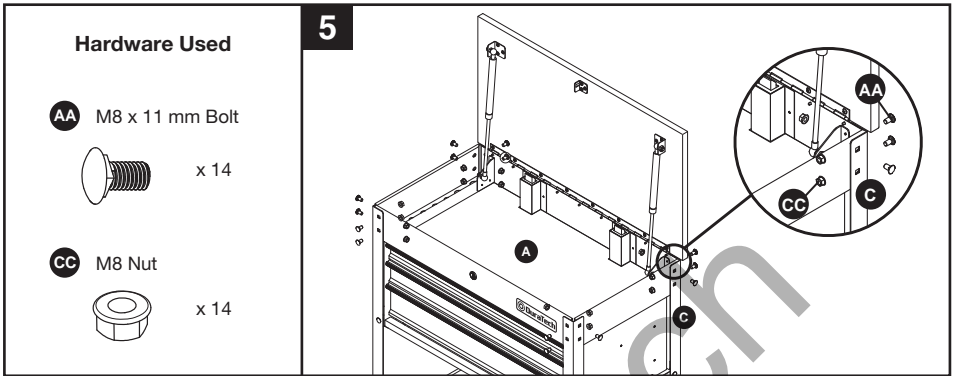


NOTE:

Do not install the top second 2 bolts and nuts on the side with the 2 swivel casters with brake (F), they are for the side handle (B) in next step. For easier assembling, screw the 2 bolts on the bottom side first.

STEP 6:

Attach the side handle (B) to the tool cart using two M8 x 15 mm bolts (BB) and M8 nuts (CC). Tighten all bolts securely.

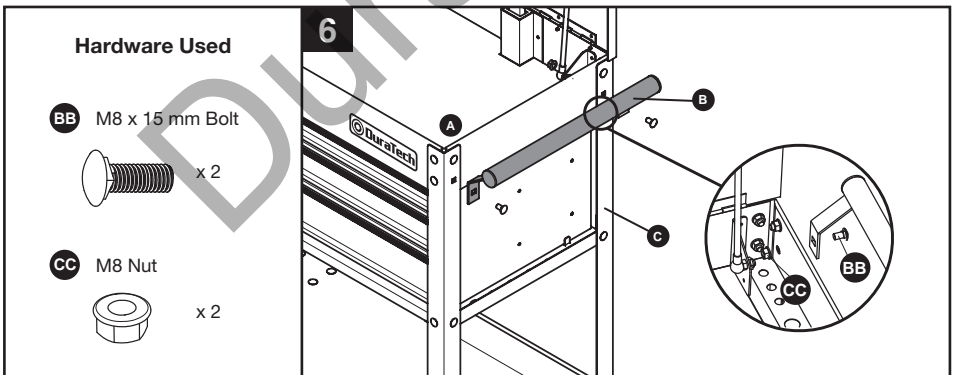

NOTE:

The side handle (B) must be installed on the end of the tool cart with swivel casters with brake (F).

OPERATING INSTRUCTIONS

1. USING THE CASTER BRAKES


To lock the swivel casters, step down the levers marked with ON. To unlock casters, push down the levers marked with OFF.



NOTE:

Be sure to lock both swivel casters with brake to prevent tool cart from rolling or swiveling.


1

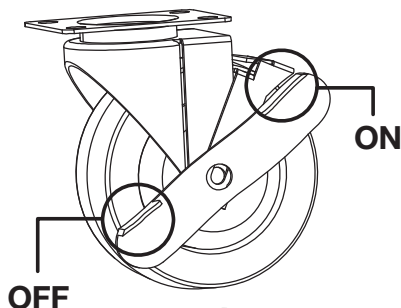

2. REMOVING THE DRAWERS

Fully empty and extend the drawer. Depending on the side, either lift or lower the release lever on both sides so the slides can ride over the stops. Pull the drawer outward until it is released from the slides.

2

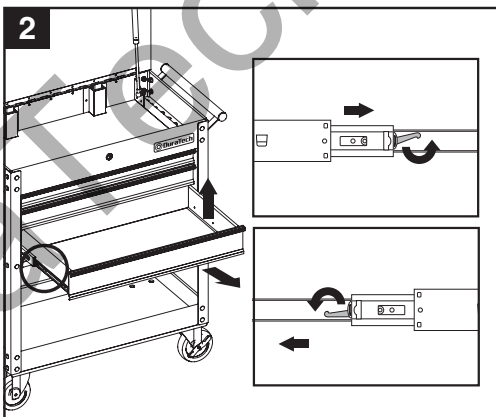

3. RE-INSERTING THE DRAWERS


Pull the slides and slide carrier out until fully extended. Hold the slide on the tool cart while aligning it with the slide on the drawer. Slightly insert one side and repeat for the other side. Slowly push the drawer until it is fully closed to engage the slide. Open and close the drawer to verify proper operation.



NOTE:

Do not slide in the drawer violently until both drawer slides are aligned properly or it will cause damage on drawer slide.

3

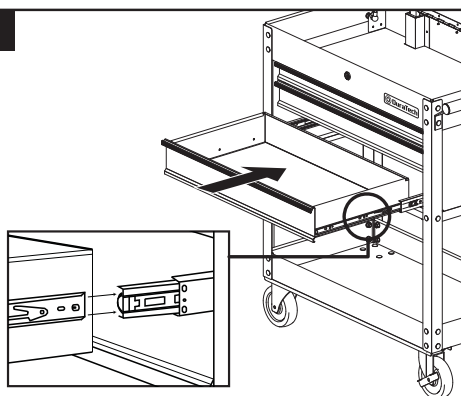

CARE AND MAINTENANCE

- Keep your tool cart in good repair by adopting a regular maintenance program.
- The use of drawer liners (included) is recommended to protect the finish inside the drawers and make the drawers easier to clean.
- Grease the casters annually using high quality bearing grease.
- Lubricate the slides semi-annually with general purpose grease or equivalent.
- Periodically clean the drawer fronts, drawer trim, and other surfaces with a mild detergent and water.
- Remove grease and oil with a standard nonflammable cleaning fluid.

DISPOSAL INFORMATION

- Please recycle where facilities exist. Check with your local authority for recycling advice.

CUSTOMER SERVICE

- If you are having difficulty using this product and require support, please contact **service@greatstartools.com**