


USER MANUAL FOR MONITOR

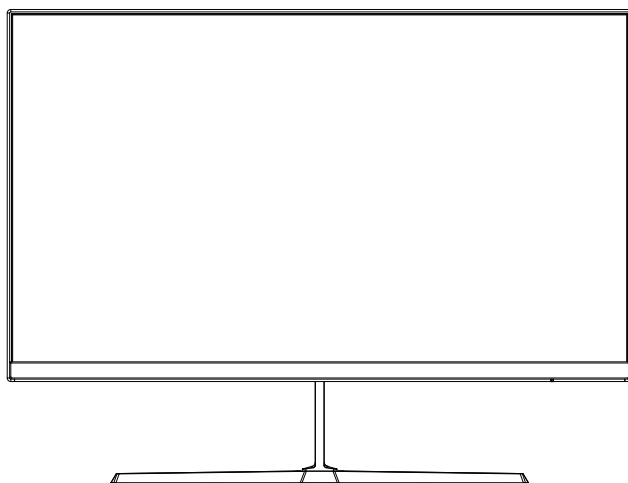

P24H2P

Precautions


Before using this product, please read this User Manual carefully and keep it well

- Keep the monitor away from water sources or damp places, such as bath rooms, kitchens, basements and swimming pools.
- Make sure the monitor is placed on a flat surface. If the monitor falls down, it may cause human injury or device damage.
- Store and use the monitor in a cool, dry and well ventilated place, and keep it away from emission and heat sources.
- Do not cover or block the vent hole in the rear casing, and do not use the product on a bed, sofa, blanket or similar objects.
- The range of the supply voltage of the monitor is printed on the label on the rear casing. If it is impossible to determine the supply voltage, please consult the distributor or local power company.
- If the monitor will not be used for a long period, please cut off the power supply to avoid electric shock in rainy days and damage due to abnormal supply voltage.
- Please use a reliable grounded socket, Do not overload the socket, or it may cause fire or electric shock.
- Do not put foreign matters into the monitor, or it may cause short circuits resulting fire or electric shock.
- Do not disassemble or repair this product by self to avoid electric shock. If faults occur, please contact the after-sales service directly.
- Do not pull or twist the power cable forcedly.
- There is a polarizer layer (not a protective film) on the surface of the screen. Do not peel it off, or the product may be damaged and the warranty will be invalid.


Package Content

Packing list

- Please check that the package of the monitor contains all parts. If any part is lost, please contact the distributor.
- The color and shape of parts may vary with models. Figures in this User Manual are for reference only.
- Cables supplied may vary with purchased products. Figures in this User Manual are for reference only.



Monitor



Base



Stand stem




● Screws x5
(KM4x10)




● Screws x3
(KM4x14)



Mount adapter



Power adapter



HDMI signal cable




User Manual

- Redundant screws can be used as spare screws.


Installation

Installation of base


1. Open the carton package, take out the foam and put it flat on the table top. Keep the foam underneath the monitor before attaching the stand.

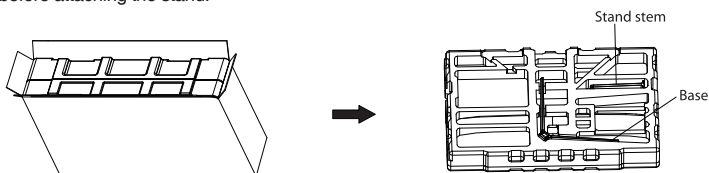


2. Take out the bracket and place it on the machine shaft and fix it with two screws.

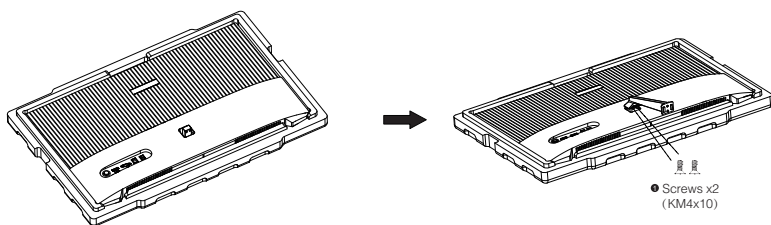

3. Take out the base, align it with the bottom of the stand, and fix it with two screws.

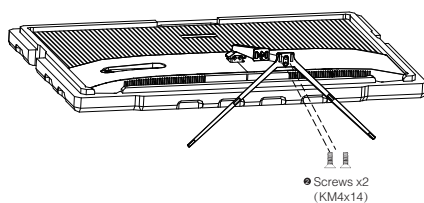


4. After assembly, simply hold the stand with hand to stand the monitor upright.

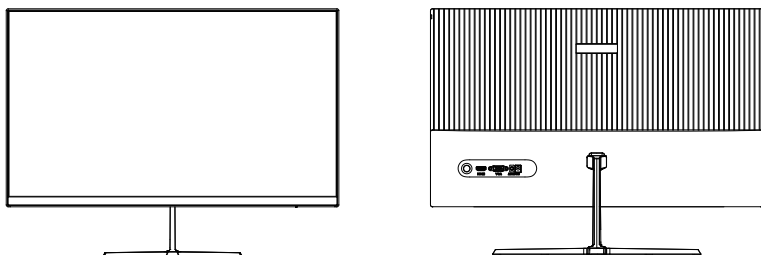


Note: During standing of the whole monitor, do not press the liquid crystal screen with hand to avoid damage to the screen.

Installation of mount


1. Open the carton, take out the product with foam still attached, and gently place it on a desktop or table. Remove the extra parts and the foam covering the back of the monitor.

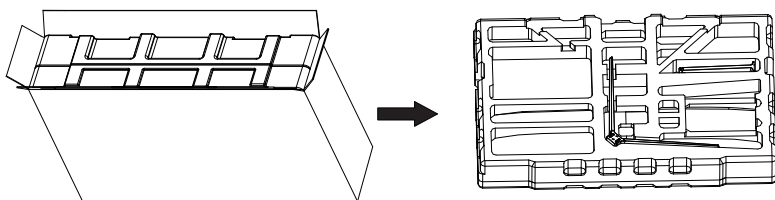

2. Put the monitor in the lower foam cover. Take out the mount adapter and 2 KM4x10 screws and tighten the mount adapter with the screws.

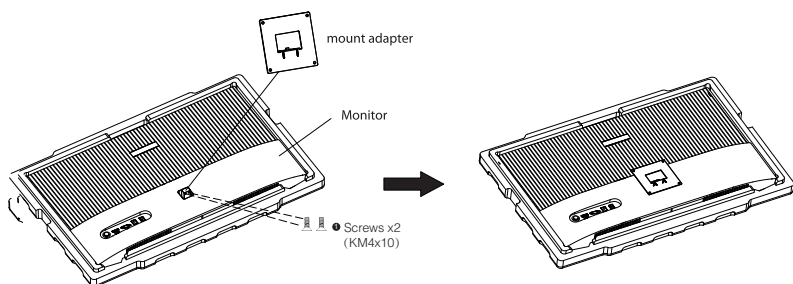


3. Note: Hang the assembled product on a hard wall. Do not pinch the screen with your hands during the hanging process to avoid damaging the screen.

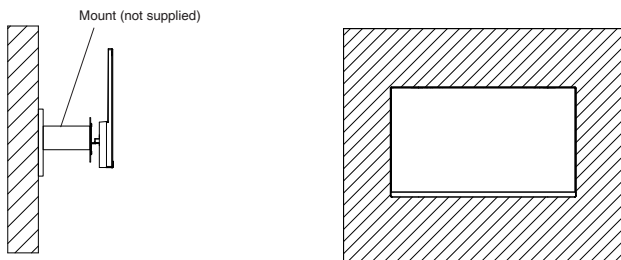

Note: In order to prevent the monitor from falling when it is used on the wall, please install it properly and do safety protection. Do not place or hang any objects on the wall bracket, and the wall height should be within 2 meters.

Adjustment of monitor

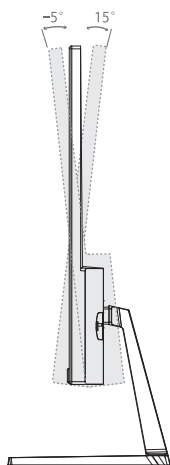


Tilting angle

$-5.0^{\circ}(\pm 2.0^{\circ})$ ~ $+15^{\circ}(\pm 2.0^{\circ})$


Instructions

Description of buttons

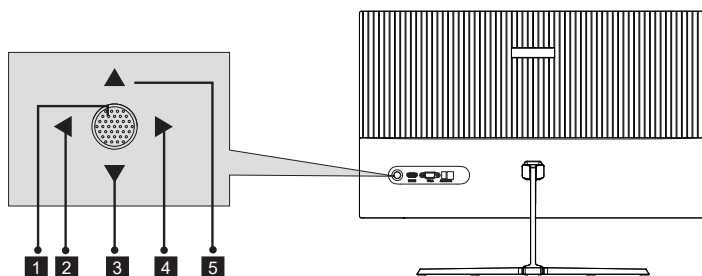


Button	Function
1	Power button: Turn on/of the monitor
2	Exit/Left button: Enter the Input select. Return to the previous menu to the left, exit the current menu.
3	Down button: Enter the game aiming. Move down the menu option or decrease the function value.
4	Right button: Enter the OSD menu. Dial right to select a submenu and enter the next menu.
5	Up button: Enter the view mode options. Move up the menu option or increase function value.

Explanation of indicators

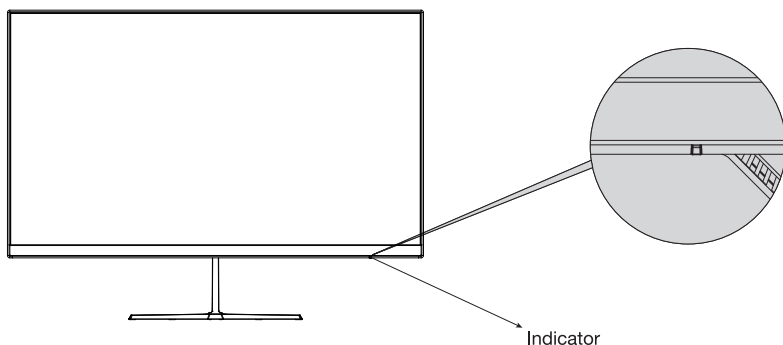

Indicator: Steady blue light indicates that the power is on and the monitor is operating normally. Red light indicates there is no video source and no horizontal or vertical signal or low voltage is detected, and that the monitor is in standby status. Make sure your computer is turned on and all video cables are fully plugged in and/or connected.



* The bottom interface configuration at the back of the monitor varie with products.
 * Note: If the power cable or signal cable is damaged, you must replace it with special soft cables or special components purchased from the manufacture or maintenance department.

HDMI interface



Use the HDMI cable to connect the HDMI IN interface of the product to the HDMI OUT interface of a PC.



Use the HDMI-DVI cable to connect the HDMI IN interface of the product to the DVI OUT interface of a PC. (In general, PCs do not transfer video signals to the monitor through the DVI OUT interface, and it is necessary to connect a loudspeaker box additionally to play sounds of PCs.)



VGA interface



Use a VGA cable to connect the VGA interface of the product to the VGA interface of the PC.



AUDIO OUT



Connect audio outputting devices such as earphones to the AUDIO OUT interface.



DC IN



Please connect the power adapter plug to the corresponding power port of the monitor, and connect the other end to a properly grounded power outlet.




OSD menu

Menu description

- The color and shape of the OSD menu of the actual computer may be slightly different from them shown in the figure.
- Specifications of the OSD menu may change with improvements of functions without prior notice.

Press the menu button on the control panel to access the monitor menu. The detailed information of each menu can be found in the following sections.

1. Press ► to enter the OSD menu.

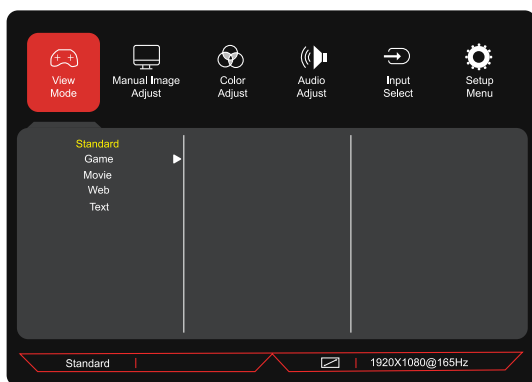

2. Press ▲ or ▼ to scroll through the functions.

- Highlight the features you want to set, and press ► to open the sub-menu.
- Press ▲ or ▼ to browse the sub-menu and press ► to highlight the features you want to see.
- Press ▲ or ▼ to highlight the options and press ► to confirm the settings and exit the current screen.

3. Press ◀ to return to the previous menu or exit the current menu.

* Functions of the monitor vary with models, and the functions in this manual are for reference only.

View Mode	Standard		
	Game	FPS1	
		FPS2	
		RTS	
		Night Vision	
		GAMER1	Black Stabilization Advanced DCR Blue Light Filter Response Time Recall
		GAMER2	
		GAMER3	
	Movie		
	Web		
	Text		
Manual Image Adjust	Auto Image Adjust		
	Horizontal Size		
	H./V. Position	H. Position	
		V. Position	
	Fine Tune		
	Sharpness		
	Blue Light Filter		
	Aspect Ratio	4:3	
		5:4	
		16:9	
		16:10	
	Adaptive-Sync	On	
		Off	
Color Adjust	Contrast/Brightness	Contrast	
		Brightness	
	Color Temperature	Bluish	
		Warm	
		Native	
		User Color	Red
			Green
			Blue
	Color Range	Auto	
		Full Range	
		Limited Range	

* Functions of the monitor vary with models, and the functions in this manual are for reference only.

Audio Adjust	Volume		
	Mute	On	
		Off	
Input Select	D-Sub		
	HDMI		
Setup Menu	Language Select	简体中文/繁体中文/한국어/日本語/Türkçe/Русский/Suomi/Italiano/Español/Deutsch/Français/English	
	Resolution Notice		
	Information	Resolution	
		H Frequency	
		V Frequency	
		Pixel Clock	
		Model Number	
	OSD Timeout		
	OSD Background	On	
		Off	
	Auto Power Off	On	
		Off	
	Sleep	30 Minutes	
		45 Minutes	
		60 Minutes	
		120 Minutes	
		Off	
	Memory Recall		

Basic parameters

Product Name		Liquid Crystal Display
Product model		P24H2P
Screen Size		23.8 inches
Aspect Ratio		16:9
Viewing Angle		178°(H) / 178°(V)
Pixel pitch		0.2745(H) × 0.2745(V) mm
Contrast ratio		1000:1 (TYP)
Colors		16.7M
Resolution		1920x1080
Maximum refresh rate		100Hz
Power specifications		12V == 2.0A The standard voltage and current may vary with countries, please refer to the label at the back of the product.
Product Dimentions Normal base	Without base	542.4 × 323.1 × 38.5 mm
	With base	542.4 × 412.3 × 174.9 mm
Tilting angle		Forward tilting: 5°(±2°) ; Backward tilting: 15°(±2°)
Height range		NA
Rotation angle		NA
Vertical angle		NA
Environmental conditions	Action	Temperature: 0°C~ 40°C (32°F ~ 104°F) Humidity: 10%~90% RH (non-condensing)
	Storage	Temperature: -20°~ 60° (-4°F ~ 140°F) Humidity: 5%~95% RH (non-condensing)



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.



"This device complies with Part 15 of the FCC rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation."



TITAN ARMY

物料号码	108.007.xxxxx		
厂内型号	24H2F-I	厂外型号	P24H2P
物料名称	说明书	品 牌	泰坦美国
协力厂商		日 期	2023.8.24
规 格	140*210mm		
要 求	封面封底120G铜版纸，内页80G铜版纸，单色印刷，骑马钉		
版 本		设 计	程海军
确 认		核 准	

备注:如不够页数，可以在封面封底的内面插入空白页