
CyberPower[®]

YOUR ULTIMATE ALLY IN POWER

6-OUTLET SURGE PROTECTOR

B625

USER MANUAL

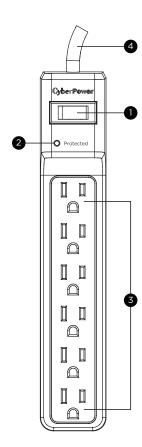

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com

FEATURES

1. ON/OFF Reset Control Switch and Circuit Breaker

Controls power to all outlets. The switch is also a 15 A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.

- 2. Protected LED Indicator
- 3. Standard Grounded Outlets (6)
- 4. 25 ft Power Cord
- 5. Keyhole Mounting Slots

SPECIFICATIONS

Model Number: B625

Outlets: Standard Grounded Outlets (6)

Power Cord Length: 25ft

Surge Protection: 1500 Joules

Electrical Rating: 125 V/15 A/60 H/1875 W
UL Clamping Voltage: 600V (L-N, L-G, N-G)

Maximum Peak Current: 45000 A

AC Lines Protected: L-N: 15000 A, L-G: 15000 A,

N-G: 15000 A

Response Time: Less than 1 nanosecond

Circuit Breaker: Resettable 15 Amp

 \triangle **WARNING:** This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

TROUBLESHOOTING

If the ON/OFF is switched OFF, the 15 Amp circuit breaker may have tripped. Examine your connected equipment and remove the device that is overloading the circuit. Then, turn the ON/OFF switch back to RESET.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

Hours of Operation: Monday - Friday: 7:00am - 6:00pm CST © 2023 Cyber Power Systems (USA), Inc. All rights reserved. All other trademarks are the property of their respective owners.