



Algoritmo System for projectors - Pre-Wired gear for 37 Cube - Direct + indirect emission LED 3000K DALI

Carlotta de Bevilacqua
Paola di Arianello

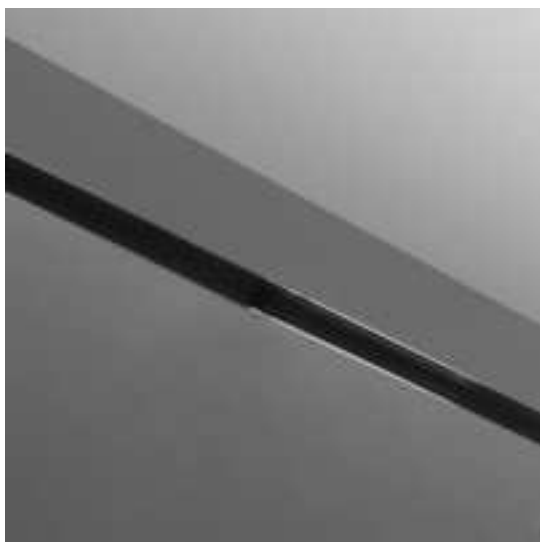

Dimmable:

LUMINAIRE

- Power Supply: **Electronique Intégré**
- Watt: **27W**
- Flux Lumineux (lm): **2475lm**
- CCT: **3000K**
- Efficiency: **77%**
- Efficacy: **91.68lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Remarques

Allows installation and supplying of 37 Cube, 1 or 2 groups of 3 projectors each. (max 6 projectors in total). MV through-wiring included. Double emission version, with upper screen in PMMA. 37 Cube projectors to be ordered separately.

DESCRIPTION

A modular system for ceiling or wall-recessed installation, to be installed as a continuous line or with angles, composed of structural modules in extruded aluminium, of pre-wired gear plates with through-wiring and quick-connection system of optics systems and components for connecting, fixing, joining or finishing the system. The prewired LED plates were designed for diffused emission, wall washer light, prismoptic or controlled emission, for projectors integration (PAD or Cube 37), for 3 phase track alimentation. Complies with standard EN60598-1 and any other specific standard.

CARACTÉRISTIQUES

- Code Produit : **M2198W01**
- Installation: **Projecteur, Encastré, Plafonnier**
- Séries: **Architectural Indoor**
- dessiné par: **Carlotta de Bevilacqua, Paola di Arianello**

DIMENSIONS

- Longueur : **1180 mm**
- Poids: **kg 1,2**
- Test au fil incandescent: **650°**

ACCESSOIRES



Algoritmo System - Embout intermédiaire (jeu 2 pièces). Pour la liaison esthétique de modules à projecteur PAD ou 37 CUBE avec des modules fluorescents ou LED. Gris métallisé. M217660



Algoritmo System panneau de fermeture lg. 591mm. Pour obturer les positions sans module à lumière d'accentuation. M217560