



A0125 AHD Rear View Camera



1. Specification

Horizontal Angle: 100°

Wide Angle: 140°

Resolution: 1280*720

Vertical Angle: 75°

Waterproof : IP68

Video Output: AHD

Operation Voltage: DC 12V

Operation Current: 70mA


Operation Temperature: -20°C to +60°C

Minimum illumination: 0.2Lux

2. Installtion

Wiring

a. Wiring Diagram

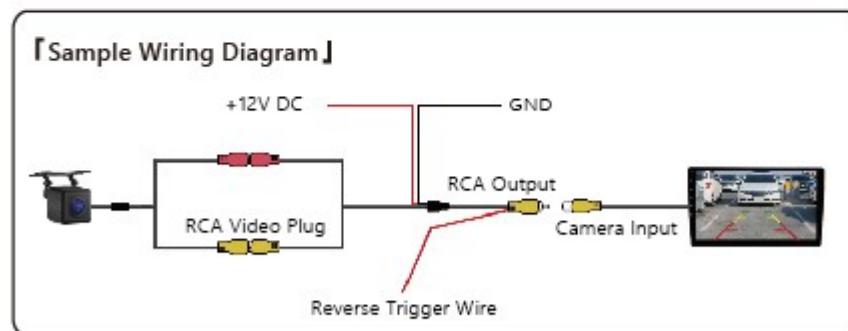



Note: This wiring diagram is just for reference. Please seek assistance from professionals for different situations.

Note: If the voltage/current of the reverse lamp of some cars (especially made by VW Group) is unstable, it is recommended to use BATT or ACC with relay.

2. Installtion

b. Wiring Method

- A** Connect the video out of camera with the cam input of head unit
- B** Connect the trigger wire of camera with the reverse signal wire of head unit
- C** Connect the +12V (Red) and Ground (Black) with the reverse lamp (or other power source)

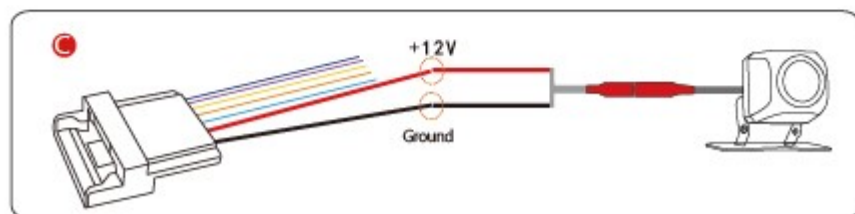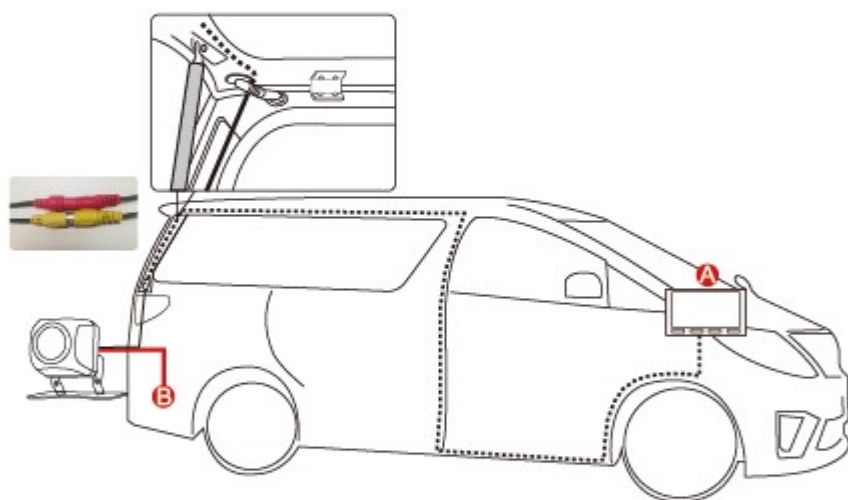

4. Attention

- This product is designed for rear view parking only. Please do not use in long operation such as CCTV or drive recorder.
- Please do not operate the camera for 10 mins or above continuously.
- Please do not start the engine or batt during wiring. It may lead to short circuit.
- Please make sure there is no wire or part inside before drilling a hole on the car for the camera.
- Please prevent the positive terminal of the power cable from touching the metal side of the car. It may lead to short circuit that may destroy the product.
- Please use tape or cable tie to hold the wire tight and fix the camera.
- Please confirm all the wire is protected well and make sure all wire is covered by insulator material.
- This product is just for assistance. Driver should pay attention to the real driving environment when driving.
- Please avoid using a high-pressure washer to spray to the camera directly.
- Please check the camera from time to time to see whether it is loose or other physical damage.
- This product is with RCA input. Does not support signal from other sources such as fiber optic or coaxial cable.

5. Troubleshooting

Problem	Solution
Show "No image"	<ol style="list-style-type: none">1. Check the cam input connection.2. Check whether the camera is powered on or not.
Loose or noisy image	<ol style="list-style-type: none">1. Set the cam input format on the head unit as AHD input.2. Try other stable power sources such as ACC or BATT to power the cam. If it's working properly, the problem should be the power source of the reverse lamp.
Mirror image	Turn off the reverse mirror function on the head unit.
Parking guideline is duplicated	Turn off the reverse guideline function on the head unit.