

Quick Installation Guide

Ceiling AP Series
W63AP/W64AP/W66AP

Package contents

- Wireless ceiling AP x 1
- Bracket x 1
- Accessories (Screws, plastic nuts, and plastic anchors)
- Quick installation guide x 1

If any items missing or damaged, please keep the original package and contact the local retailer or distributor immediately.

This Quick Installation Guide is for installation reference only. For more product or function details, please go to www.ip-com.com.

1. Getting to know your AP

Ports and buttons

Port/Button	Description
PoE LAN	It is a 10/100/1000 Mbps auto-negotiation port used to transmit data or supply PoE power for the AP through the power supply device compliant with IEEE 802.3at.
Reset	When the SYS LED indicator of the AP blinks, you can hold the Reset button down for about 5 seconds to reset the AP.
DC	DC power jack. You can use a power adapter to supply power for the AP.

▲ Caution: The power specification may vary. When installation, check if the power specification requirement you comply with your AP.

LED indicators

W63AP/W64AP

LED indicator	Status	Description
SYS LED indicator	Solid on	The system is starting. After startup, it indicates that the system is faulty.
	Blinking	The system is working properly.
W66AP	Off	The AP is not powered on, or all the LED indicators have been turned off using the web UI of AP.
	Solid on	The 2.4 GHz WiFi network is enabled.
2.4G (For W66AP only)	Off	The 2.4 GHz WiFi network is disabled, or all the LED indicators have been turned off using the web UI of AP.
	Solid on	The 5 GHz WiFi network is enabled.
5G (For W66AP only)	Off	The 5 GHz WiFi network is disabled, or all the LED indicators have been turned off using the web UI of AP.
	Solid on	The 5 GHz WiFi network is enabled.

2. Installing your AP

Tip: You may need a rubber hammer, a marker, a hammer drill, a drill bit, a screwdriver, and a ladder for the installation. Please prepare them yourself.

Ceiling installation

1 Position the bracket on the ceiling and mark screw holes on the ceiling with the marker.

2 Drill holes in the marked positions using a hammer drill.

Tip: Option A applies to most general cases for ceilings with weak strength (such as plasterboard), please choose Option B.

3 Option A: Knock the plastic anchors into the holes using the rubber hammer. Align the screw holes in the bracket with the holes in the ceiling, and then use the included screws to fix the bracket.

4 Option B: Align the plastic nuts with the holes in the ceiling, and use the included screws to fix the bracket.

5 Connect a CAT5 or better cable to the PoE LAN port of the AP. Connect a PoE switch to the PoE LAN port, or a power adapter to the DC power jack to supply power for the AP.

6 Align the slots of the AP with the hooks of the bracket, and push the AP to one side until you hear a click.

Wall mounting

1 Position the bracket on the wall, and mark screw holes on the wall with the marker.

2 Drill holes in the marked positions using a hammer drill.

3 Knock the plastic anchors into the holes using the rubber hammer. Then use the screwdriver to tighten the screws into the plastic anchors.

4 Connect a CAT5 or better cable to the PoE LAN port of the AP. Connect a PoE switch to the PoE LAN port, or a power adapter to the DC power jack to supply power for the AP.

5 Align the slots of the AP with the hooks of the bracket, and push the AP to one side until you hear a click.

6 Align the wall mounting holes on the bracket with the screws to mount it.

3. Connecting and Configuring your APs

Scenario 1: Deploying your network without a management device for IP-COM AP

Tip: Connect and configure your APs one by one. That is to say, connect one AP to your PoE switch and configure it. After finished, connect the second AP and repeat 1 and 2 on them.

1 Connect devices

Connect your AP to a PoE port of the PoE switch using an Ethernet cable. Refer to the following figure for detailed connection.

2 Configure the IP address of your computer (Example: Win10)

On the computer desktop, click **Start** > **Settings** > **Network & Internet** > **Ethernet**, and click **Properties**, and double-click **Internet Protocol Version 4 (TCP/IPv4)**. Choose **Use the following IP address**, set **IP address** to **192.168.0.x** (x ranges from 1 to 253 and is not occupied by other devices) and **Subnet mask** to **255.255.255.0**, and save the configurations.



3 Log in to the web UI of the AP

Start a web browser on your computer and access **192.168.0.254**. Follow the on-screen instructions for login. Choose **Quick Setup**, the **2.4GHz** configuration page appears. Configure **SSID** (WiFi name), **Security Mode** (**WPA2-PSK** is recommended), **Key**, and click **Save**. Then select **5GHz** from the **Radio Band** drop-down list and repeat this step.


4 Modifying the IP address of the AP

Choose **Internet Settings** > **LAN Setup**. Modify the IP address of the AP to **192.168.0.x** (x is 1 to 253), and ensure that the new IP address has not been used in this network, then click **Save**.

Example: You can set the new IP address of the first AP to 192.168.0.201, and the new IP address of the second AP to 192.168.0.202.



Tip: If you cannot log in to the web UI of the AP, refer to Q1 in FAQ.



Done. WiFi name: The SSID you set in step 3. WiFi password: The Key you set in step 3.


Scenario 2: Deploying your network with an IP-COM access controller (AC)

1 Connect devices

Use Ethernet cables to connect APs to PoE ports of the switch. Refer to the following figure for detailed connection.

2 Configure APs

Start a web browser on your computer and log in to the web UI of the AC. Refer to your AC's user guide for detailed instructions.

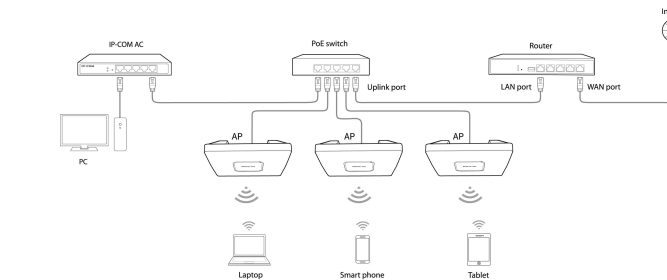


Scenario 3: Deploying your network with an IP-COM router that includes the AC functionality

1 Connect devices

Use Ethernet cables to connect APs to the PoE ports of the switch. Refer to the following figure for detailed connection.

2 Configure APs

Start a web browser on your computer and log in to the web UI of your IP-COM router. Refer to the router's user guide for detailed instructions.

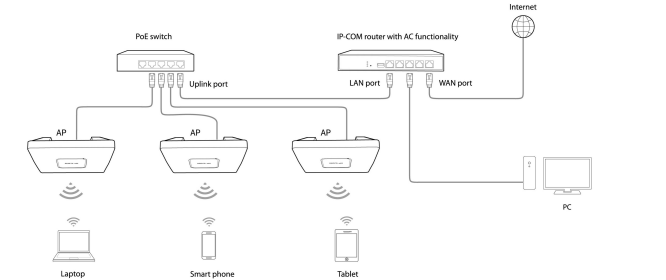

FAQ

Q1. Cannot access the web UI of the AP after entering 192.168.0.254.

A1. What should I do?

- Check if your Ethernet cables are connected properly. If yes, the corresponding LED indicator lights up.
- Clear the cache of your web browser, or replace the web browser.
- Disable the firewall of your computer, or replace the computer.
- If two or more APs are connected in the network without an AP controller, you should have only one AP in the network first and configure the AP's IP address. Then repeat this procedure to change the IP addresses of the other APs. Meanwhile, ensure that the AP's new IP addresses are in the same network segment with the IP address of your computer. Then try logging in to the AP's web UI using their new IP addresses.
- The AP may be being managed by an AC and therefore its IP address is no longer 192.168.0.254. In this case, go to the web UI of the AC to view the new IP address of the AP, and then log in to the AP's web UI using the new IP address.
- If the problem persists, reset the AP.

Q2. My wireless AC cannot find the AP. What should I do?

- Try the following solutions:
 - Check if you use the IP-COM AC. The AP can only be managed by IP-COM AC.
 - Ensure that all the devices in the network are connected properly and the AP has completed startup.
 - If VLANs have been defined in your network, verify that the corresponding VLAN has been added to your AC.
 - Reset the AP.
 - Ensure that the firmware versions of your AP and AC are the same with the latest firmware versions available on www.ip-com.com.
 - Reset your AP.

Q3. How to upgrade my AP?

A3. Perform as follows:

- Choose your firmware version and download it from our official website www.ip-com.com.
- Upload the file you downloaded.
- Log in to the web UI of the AP, choose **Tools** > **Maintenance**, and navigate to the **Firmware Upgrade** section. Click **Upgrade**, select and upload the file ending with **.bin** from this file folder you uploaded, and click **Upgrade**.
- After successful upgrade, reset your AP to apply your settings.

Q4. How to reset my AP?

A4.

- Option 1: Reset using the Reset button. When the SYS LED indicator of the AP blinks, hold down the Reset button for about 8 seconds. The AP is reset successfully when the SYS LED indicator lights solid on.
- Option 2: Reset using the web UI. Log in to the web UI of the AP, choose **Tools** > **Maintenance**, and navigate to the **Reset** section, then follow the on-screen instruction to reset it.

Note: Resetting clears all configurations of your AP.



CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures. Operations in the 5.15-5.25 GHz band are restricted to indoor use only. This equipment should be installed and operated with minimum distance 20cm between the device and your body. The main plug is used as a disconnect device, the disconnect device shall remain readily accessible. NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.



RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. Use has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

Declaration of Conformity

Hereby, SHENZHEN IP-COM Networks Co., Ltd. declares that the radio equipment type W66AP is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://ip-com.com/en/en/ica.html>

Declaration of Conformity

Hereby, SHENZHEN IP-COM Networks Co., Ltd. declares that the radio equipment type W64AP is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://ip-com.com/en/en/ica.html>

Declaration of Conformity

Hereby, SHENZHEN IP-COM Networks Co., Ltd. declares that the radio equipment type W63AP is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://ip-com.com/en/en/ica.html>



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device is for indoor usage only.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment should be installed and operated with minimum distance 20cm between the device and your body.

Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operating frequency: 2412-2462MHz, 5150-5250MHz, 5725-5800MHz

NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

Operating temperature: -10°C ~ 40°C
Operating humidity: 10% ~ 90% RH, non-condensing
Storage temperature: -30°C ~ 70°C
Storage humidity: 10% ~ 90% RH, non-condensing

Operating Frequency:
2.4GHz: EU/2402-2483.5MHz (CH1-CH13)
5GHz: EUS/5150-5250MHz (CH36-CH48)

ERP Power:
2.4GHz: <200mW
5GHz: <300mW
Software Version: V1.0.0.3

For E.U./EFTA, this product can be used in the following countries:

BE	BG	CZ	DK	DE	EE	EL	ES	FR
HR	IT	CY	LV	LT	LU	HU	MT	NL
PL	PT	RO	SI	SK	FI	SE	UK	AT

Technical Support

Tel: (86)755 2765 3089
Email: info@ip-com.com
Website: www.ip-com.com

Address Info

Room 101, Unit A, First Floor, Tower E3, NO.1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China, 518052

Copyright ©2019 IP-COM Networks Co., Ltd. All rights reserved.

This documentation (including pictures, images, and product specifications, etc.) is for reference only. To improve internal design, operational function, and/or reliability, IP-COM reserves the right to make changes to the products described in this document without obligation to notify any person or organization of such revisions or changes.