



VENTILATION EQUIPMENT

CATALOGUE | 2020



komfovent[®]

VENTILATION EQUIPMENT



Editorial

Why KOMFOVENT?	4
References	5
Wide rage	6
Energy-saving technologies	8
Selection software	12
Control systems C6 and C5	14
KOMFOVENT control system offers wide control options	15
Smart control system C6 for DOMEKT units	16
Control system C5 for VERSO, RHP and KLASIK units	18

DOMEKT

Residential ventilation units

DOMEKT	22
Domekt R	23
Domekt R 190 V <i>New unit</i>	24
Domekt R 200 V	25
Domekt R 250 F	26
Domekt R 400 V <i>New unit</i>	27
Domekt R 400 H <i>New unit</i>	28
Domekt R 400 F	29
Domekt R 450 V <i>New unit</i>	30
Domekt R 500 V	31
Domekt R 600 H	32
Domekt R 700 V	33
Domekt R 700 H	34
Domekt R 700 F	35
Domekt CF	36
Domekt CF 150 F	37
Domekt CF 200 V <i>New unit</i>	38
Domekt CF 250 F	39
Domekt CF 300 V <i>New unit</i>	40
Domekt CF 400 V	41
Domekt CF 500 F	42
Domekt CF 700 V	43
Domekt CF 700 H	44
Domekt CF 700 F	45
Domekt S	46
Domekt S 650 F	47
Domekt S 800 F	48
Domekt S 1000 F	49

VERSO

Commercial ventilation units

VERSO Standard	54
Verso R Standard	56
Verso R 1000 U/H/V	57
Verso R 1300 U/H/V	58
Verso R 1300 F	59
Verso R 1500 U/H/V	60
Verso R 1700 U/H/V	61
Verso R 2000 U/H/V	62
Verso R 2000 F	63
Verso R 2500 H	64
Verso R 3000 U/H/V	65
Verso R 3000 F	66
Verso R 4000 U/H/V	67
Verso R 5000 V	68
Verso R 5000 H	69
Verso R 7000 H	70
Verso CF Standard	71
Verso CF 1000 U/H/V	72
Verso CF 1000 F	73
Verso CF 1300 U/H/V	74
Verso CF 1300 F	75
Verso CF 1500 F	76
Verso CF 1700 U/H/V	77
Verso CF 2300 U/H/V	78
Verso CF 2500 F	79
Verso CF 3500 U/H/V	80
Verso S Standard	81
Verso S 1300 F	82
Verso S 2100 F	83
Verso S 3000 F	84
VERSO Pro2	85
VERSO Pro	88



RHP

Ventilation units
with a rotary heat exchanger
and an integrated heat pump

RHP Standard	99
RHP 400 V	100
RHP 600 U	102
RHP 800 U	104
RHP 1300 U	106
RHP 1500 U	108
RHP Pro	110



KLASIK

Industrial/commercial
ventilation units

KLASIK	114
Klasik R	116
Klasik CF	116
Klasik P	116
Klasik S	116
Klasik Ra	117
KLASIK units for hygienic application	117
KLASIK design	119



Accessories

for DOMEKT, RHP,
VERSO Standard units

Filters classification and standards	123
Pipework package	124
Motorized closing dampers	124
Silencers	125
Water and direct evaporation air coolers	126
Ducted heaters and coolers	127
Accessories for unit outdoor installation	128
Remote unit intensity control	129
Air quality control	129
Unit PC control (PING2) for C4 controller	129
Wireless router	129
Variable air volume control (C5 / C6)	129
Electric wiring of air handling units	130
Unit marking and ordering samples	131

Why KOMFOVENT?



High energy efficiency standards

All components and parts are accurately selected and assembled to achieve the best efficiency. An advanced control system optimizes the unit's performance.



Silent operation and easy mounting

The units have tight, insulated and painted casing and high quality components, which ensures extremely silent operation and easy mounting.



High efficiency PM fans

High efficiency PM (permanent magnet synchronous motors) fan motors use significantly less energy than AC (alternating current) motors. Automation communicates with PM motors through MODBUS protocol.



Relevant rotary heat exchangers

Various types of rotary heat exchangers are available for the most efficient energy and humidity recovery. EC motors ensure minimum operating expenses and high performance.



Connection possibilities

One of the main advantages of "U" series units is the multipurpose application of one unit – the unit can be connected to the ducts horizontally or vertically. An installer can always reverse the unit into the required version and choose the duct connection's position on site. One air handling unit – lots of connecting positions.



"Plug and Play" solution

All units are completely prewired and have an integrated automatic control.



Intelligent control

Smart controller algorithms provide a wide range of functional capabilities. The units can be controlled by control panel, via web browser and mobile devices or both. Due to the protocols implemented the units are easily integrated into any desired BMS.



RHP solution

The integrated heat pump in RHP units extends the air handling unit's possibilities – the unit not only ventilates, but also heats or cools the premises. No need for condensing unit, easier installation, start-up and adjustment work.



Eco-friendly and protected

R410A and R134A refrigerants are used in units with heat pumps.



Laboratory tested units

Our units are tested not only in our laboratory but also in the independent testing centers in Germany and Switzerland.



International quality approvals

Komfovent VERSO and KLASIK units are Eurovent certified, TÜV and RLT approved and conform to all required EU norms and regulations. Passive House Institute Certificate is also available for Domekt R 450 V unit.

References

KOMFOVENT energy efficient air handling units are being exported to more than 30 countries.

The wide range of the units and their functionality allows you to apply the equipment in different types of projects: residential, public, hospitals, shopping malls, industrial buildings. Efficient performance and innovative automatic control corresponds to and may satisfy the most demanding requirements.



1. **RŪTŲ NAMAI, residential building, Lithuania**
1 pc x Verso R
Total air flow 1700 m³/h.
2. **GIESENTURM residential building, Switzerland**
27 pcs x Domekt CF; 7 pcs x VERSO, 1 pc x Klasik RA
Total air flow 45 000 m³/h.
3. **S7 BUSSINESS CENTER, Lithuania**
8 pcs x Verso CF Pro, 1 pc x KLASIK
Total air flow 116 000 m³/h.
4. **CAIRNS PERFORMING ARTS CENTER, Australia**
14 pcs x Verso Pro, 14 pcs x Klasik S
Total air flow 172 000 m³/h.
5. **Clarence Correctional Centre, Australia**
100 pcs x RHP Pro
Total air flow 210 000 m³/h.



Wide range

DOMEKT

DOMEKT – residential ventilation units with heat recovery. Depending on the individual requirement, a rotary or counterflow plate heat exchanger, vertical, horizontal or flat duct connections can be selected from a wide range of modifications.

Capacity	50 – 800 m ³ /h
Control system	C6 SMART HOME
Selection software	 DOMEKT

VERSO

VERSO range consists of three groups:

- ✓ **VERSO Standard** – standardized air handling units with a rotary or counterflow plate heat exchanger, vertical, horizontal, universal or flat duct connections and integrated control system C5.
- ✓ **VERSO Pro** – energy-saving modular units for commercial premises. This series offers a large number of configurations to meet the most demanding requirements. Integrated control system C5 ensures the optimal unit operation.
- ✓ **VERSO Pro2** – a new generation of professional ventilation units with integrated control system for maintaining a comfortable climate in modern and energy efficient buildings.

Capacity	800 – 40 000 m ³ /h
Control system	 C5
Selection software	 VERSO

RHP

RHP range consists of two groups:

- ✓ **RHP Standard** – innovative units with heat pump and integrated control system C5 recovers the energy in two steps, and also maintains a comfortable indoor climate for residential and small commercial premises.
- ✓ **RHP Pro** – innovative units with rotary heat exchanger and integrated heat pump for commercial facilities. The highest level of comfort is provided in the premises – fresh air, efficient heating and conditioning, humidity control. Automation system C5 effectively controls all air parameters with maximum energy saving.

Capacity	250 – 25 000 m ³ /h
Control system	 C5
Selection software	 VERSO

KLASIK

KLASIK – a series of the unique ventilation units for the most complex projects. The largest selection of heat exchangers, fans, heaters, coolers and humidifiers. Non-standard dimensions, hygiene versions, anti-corrosion coatings and other options.

Capacity	1000 – 100 000 m ³ /h
Control system	 C5
Selection software	 KLASIK

Equipment by applications



Modifications to standard products

Heat exchanger

• Rotary heat exchanger

L/A – aluminum, condensing rotor – a standard for Domekt R and Verso R Standard units. The optimal efficiency and pressure loss ensures the shortest time to pay off the investment.

SL/A – aluminum, condensing rotor with increased surface and efficiency.

L/AZ – sorption rotary heat exchanger coated with special hygroscopic zeolite coating. The most effective control of humidity and the most comfortable indoor microclimate.

• Counterflow plate heat exchanger

Condensing – plate heat exchanger made of special polystyrene; there are no moving parts, which results in efficient heat exchange and long-term operation.

Enthalpy – plate heat exchanger made of special membrane ensures the best heat and humidity recovery, also known to be hygienic and durable.

Inspection side

Left or right inspection side is available for all units (see 131 p.).

Duct connection

H – horizontal

V – vertical

U – universal, 14 installation options

F – false ceiling (please refer to the installation options in the specific unit page)

Heater

HE – electric heater.

HW – a water duct heater is installed on the duct and must be ordered separately. Heaters are mounted on the outside of the unit in any user-convenient place. 0...10 V heater control included in automatic control system.

HCW – heater-cooler one for both – heating and cooling. Ideal for buildings using geothermal energy.

Cooler

CW – designed for air cooling using cold water (water-glycol mixture), provides a higher comfort level in rooms.

DX – direct expansion changeover heater and cooler in one piece. Used with outdoor heat pump unit.

Energy-saving technologies



1 Efficient heat exchangers

Rotary – condensing and sorption

Rotary heat exchangers are ideal for cold climate zones – they work efficiently both in winter and summer, do not ice even at extremely low temperatures, which saves you the most energy and is likely to pay off quickly. The sorption rotor provides better performance than a condensing rotor – better humidity control, higher comfort and greater energy savings for air conditioning.

Plate – condensing and enthalpy

The plate heat exchangers are more appropriate for the warmer climates, because, when the outside air temperature is negative, the icing begins and that results in a loss of energy. Enthalpy heat exchangers are more efficient than condensing ones. Enthalpy, like rotary heat exchangers, humidify the air in the winter and dry it in summertime efficiently saving the energy.

RHP double heat recovery – rotary heat exchanger and heat pump

The most efficient are RHP air handling units having double heat recovery and additional features: integrated heat pump efficiently heats the air in winter, while in summertime it cools the air like air conditioner.

2 Innovative control system

Preprogrammed operating modes and schedules allow the user to significantly reduce the energy consumption of the ventilation.

By controlling the ventilation intensity according to the CO₂ sensor signal, an optimal comfort level with minimal energy consumption is always maintained.

VAV – variable air function with additional sensors makes it possible to fully realize the function of "ventilation according to the need" – the ventilation intensity in each room is regulated according to a specific need, maximally saving energy.

3 Ultra and Super Premium fans

Highest energy efficiency *Ultra* and *Super Premium* class fan motors provide minimum power consumption.

Statically and dynamically balanced fans and their special design guarantee a quiet and harmonious operation of the unit.

Permanent magnets (PM) used in the fan motors create a powerful magnetic field, which greatly improves motor efficiency and reduces power consumption.


Rotary heat exchangers

Operating principle

The rotary heat exchanger transfer effect is based on the accumulation principle – the rotating aluminum wheel with small ducts is warmed up by extract indoor air and then the heat is transferred to the outdoor intake. At low temperatures, humidity from extract air condensates on the rotor surface and humidifies the outdoor intake air, where absolute humidity in winter is always too low to provide comfortable conditions. Therefore, such rotary heat exchangers are called condensing.

Advantages

- Efficiently recovers the heat when the outside temperature drops to -30°C .
- No icing.
- Efficiently saves cold during the summer by reducing the cost of conditioning.
- Controls the humidity in the room while maintaining the optimal comfort level.
- Advanced design ensures minimal mixing of air flows.
- No drainage is necessary – easy unit installation.
- No primary heater as the heat exchanger does not ice.

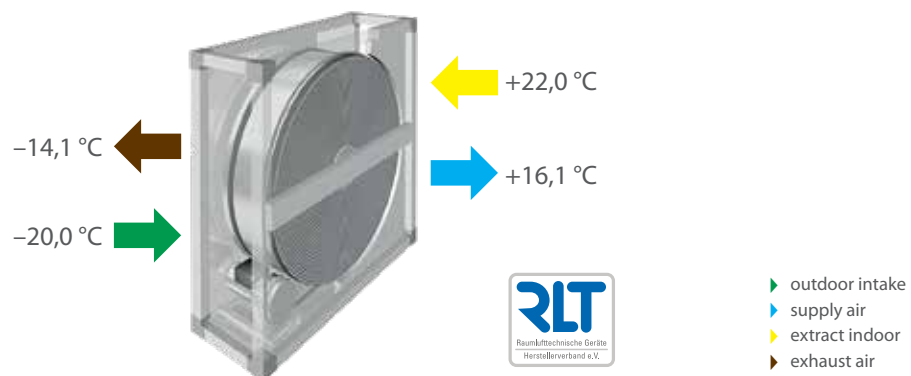

Sorption rotary heat exchanger – the highest comfort


Advanced energy saving technology

The latest improvements have been adapted in sorption rotary heat exchangers. The surface of the rotor has a zeolite coating, which improves the humidity exchange up to 90%, so this rotor effectively controls humidity – humidifies the supply air in the winter and dries it in the summer. The optimal comfort is maintained all year long, without the need for additional humidifiers and dehumidifiers.

Advantages

- The shortest payback time.
- Lower investment in air conditioning equipment.
- Lower investment and operating costs for air humidification and dehumidification.
- More efficient use of passive cooling.

Microclimate comfort zones of premises

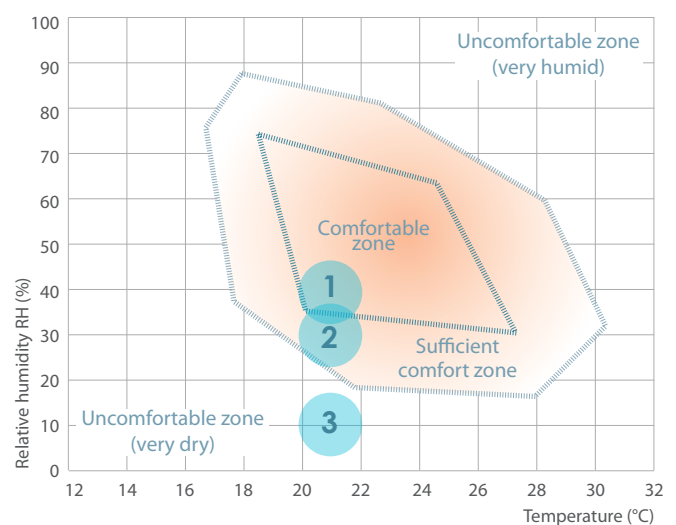

Parameters of equipment with different heat exchangers in winter:

- 1** Sorption rotary heat exchanger
- 2** Enthalpy counterflow plate heat exchanger
- 3** Counterflow plate heat exchanger


Counterflow plate heat exchangers

Operating principle

The plate heat exchangers are made of aluminum or plastic plates, which have gaps for air to flow. Fresh outdoor air and extract outdoor air flows in opposite directions through every second gap of the entire surface of the plates. Extract air transmits thermal energy to fresh outdoor air. Air flows do not mix. During winter, when the air is extracted from the room, the air cools in the heat and the humidity in it turns into ice, which makes plate heat exchangers more suitable for a medium and warm climate zone where there is no significant frost and no danger of icing. In cold weather, the automatic control system solves the problem of icing, but a loss of heat is lost, resulting in decreased seasonal efficiency and increased payback time.

Advantages


- Thermal efficiency is up to 92%.
- Air flows do not mix.
- Effective performance and long service life is ensured by high-quality design.
- Perfect solution for premises with high humidity, as it effectively eliminates humidity in the cold seasons.
- Two types available: condensing or enthalpy.
- Quality approved by Eurovent, TÜV, VDI and RLT.

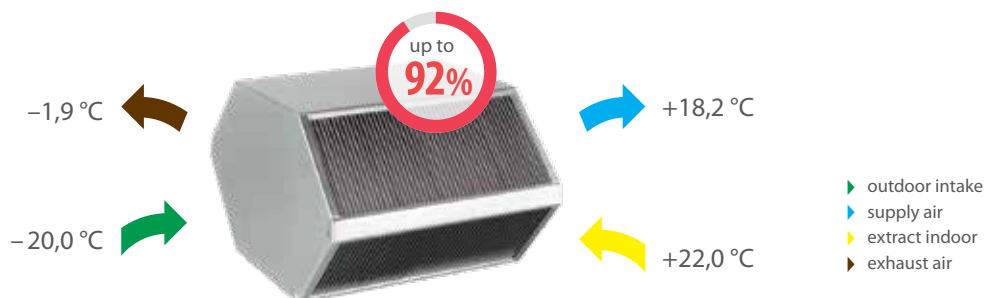

Enthalpy heat exchanger – higher comfort

Due to the simple design and relatively low price cross flow plate heat exchangers dominated in the market for a long period of time. After tightening the requirements for efficiency, they were replaced by more efficient (and more expensive) counterflow plate heat exchangers, but with increased efficiency; the probability of the icing increased as well. Also, the problem is that in the winter the air is too dry.

In order to solve these problems, an enthalpy counterflow plate heat exchanger was developed. Its properties were close to the rotary heat exchanger – enthalpy can operate without freezing up to -15°C , humidifies supplied air during the winter, and more efficiently saves the cold in the summer, as a result reducing the cost of conditioning.

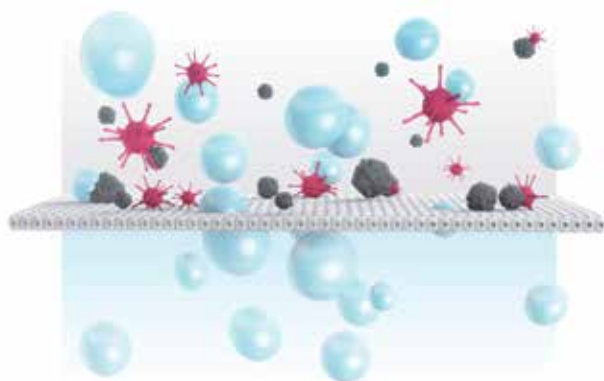

Patented membrane

Compared to cellulosic enthalpy heat exchangers, which have a limited life span, patented enthalpy heat exchanger manufactured from a special membrane achieves the best results in heat and humidity regeneration, moreover, the exchanger is very hygienic and durable.

Operating principle

Outlet air humidity is recovered to inlet air through a special patented membrane, which does not allow outside dirt and bacteria to get into the premises.

RHP double heat recovery – triple the benefits

Advanced Technologies


RHP ventilation unit is a complex solution that integrates all indoor microclimate support systems into one unit: ventilation, heating, air conditioning, air humidification and dehumidification, air quality and air filtering control. The latest and most advanced engineering and technological solutions developed and refined in the fields of heating, ventilation and air conditioning are included in these units.

- The sorption rotary heat exchanger not only effectively saves heat during the winter and cold in the summer, but also effectively controls the humidity in the rooms – during the winter, when it is too dry, the air is humidified, and in the summer – when it is too wet, the air is dried.
- The "heart" of the heat pump, an inverter constant current compressor with permanent magnets, complements and extends the capabilities of the air handling unit – during the transitional period, even when the outside air temperature drops to -15°C , it effectively heats up the supplied air and operates in the summer as the central air conditioner – the air is cooled down in all rooms.

- *Super Premium* and *Ultra Premium* performance class fans used in RHP units operate quietly and with minimal power consumption.
- Increased surface area filters clean fresh air supplied to the premises, resulting in no accumulation of dust in the premises.

Advantages of the RHP solution

- Double recovery – rotary heat exchanger + heat pump, returns 100% heat to the premises during winter.
- The heat pump works in the summer as an air conditioner.
- Unified automatic system controls all indoor microclimate processes – heating, cooling, humidifying, drying and air quality.
- Faster and easier installation and maintenance compared to individual heating, ventilation and air conditioning systems.
- No external blocks on the outside of the building.

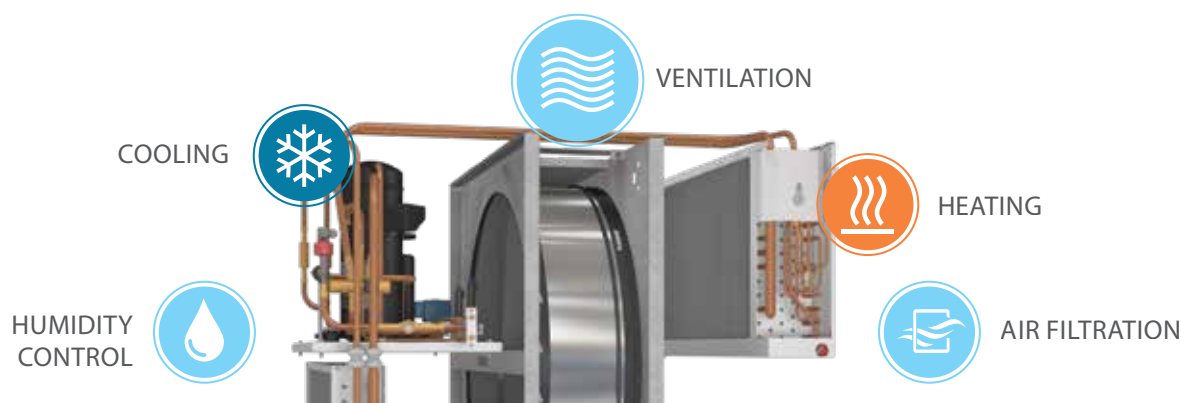


Operating principle

The ventilation unit with an integrated heat pump not only supplies fresh, cleaned air to the premises and eliminates impure air, but also heats, cools and humidifies the air. All processes are controlled by intelligent automation algorithms, and the premises maintain optimal microclimate with minimal energy use. The main energy-saving component – the rotary heat ex-


changer works efficiently for almost the whole year, with the exception of the times when the outside and indoor temperatures are almost equal. With a higher temperature difference between outdoor and indoor air, a second recovery step starts (heat pump) and, depending on the demand, the air supplied is warmed up or cooled down to the set temperature.



Cooling mode

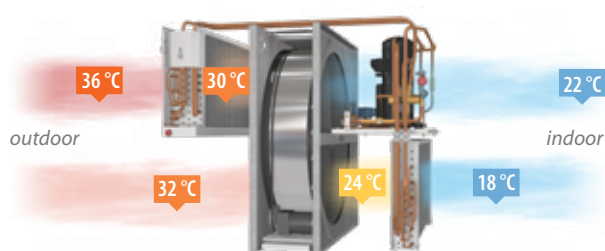

Heating mode

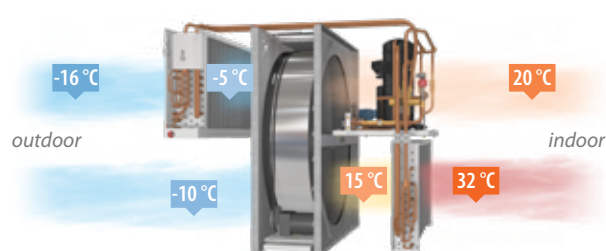

KOMFOVENT selection software



✓ Simple and intuitive navigation


✓ Accurate and detailed unit information

✓ Wide range of modifications

DOMEKT and RHP selection software



- For DOMEKT units with capacity from 50 to 800 m³/h.
- For RHP units with capacity from 250 to 1000 m³/h.
- Parameters are calculated for specific climate and operating conditions.
- Selection of units accessories.
- Comparison of the units.
- Integrated DOMEKT 3D models library – KOMFOVENT HUB.



AUTODESK
REVIT

Komfovent DOMEKT + REVIT

Easy units integration into building information modeling (BIM) – 3D REVIT models of DOMEKT units are available in the selection software.

VERSO and RHP selection software




- For VERSO units with capacity from 800 to 40 000 m³/h.
- For RHP units with capacity from 1000 to 25 000 m³/h.
- Eurovent, TUV and RLT certificates guarantee the accuracy of the parameters.
- Detailed technical data report.
- Generating VERSO Pro 3D models for the REVIT program.
- Integrated VERSO Standard 3D models library – KOMFOVENT HUB.




Komfovent VERSO + REVIT

Advanced, precise and fast integration of ventilation equipment into digital building projects (BIM).



AUTODESK
REVIT

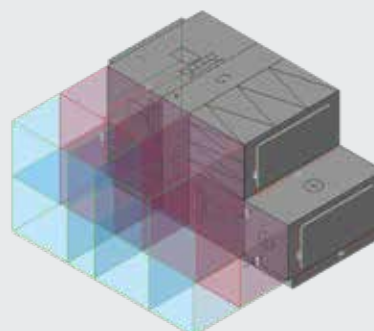


Komfovent HUB – VERSO Standard digital drawings library for REVIT users.

REVIT models of Komfovent VERSO Pro equipment are generated individually for each project.

KLASIK selection software



- For units from 1000 to 100 000 m³/h.
- Solutions to the most complex projects.
- Wide range of modifications.
- Eurovent, TÜV, RLT certified.

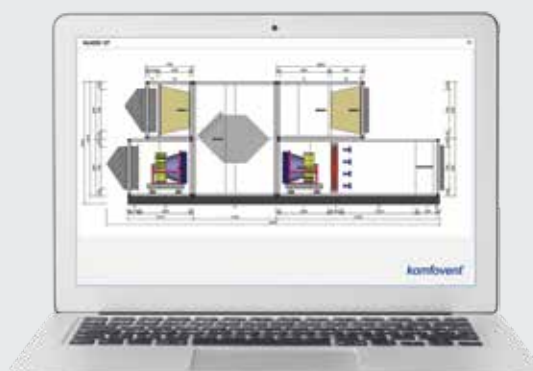

KOMFOVENT control systems

C6 and C5



Smart control system C6 – designed for end users, has wide control possibilities and simple navigation.

Core philosophy behind the design of C6 was that the ventilation unit would operate properly without constant adjustments from the user. Different ventilation modes are optimized for the user's daily needs.

The user-friendly interface allows you to intuitively control the air handling unit.



Control system C5 – designed for professionals, controls thermodynamic processes and saves energy.

The user is given detailed information about the operation of the device. A variety of modes and functions allows you to choose the most optimal operating mode that maximizes energy saving. For user convenience, the operation of the air handling units can be controlled not only by the control panel, but also via the Internet or BMS.



Extensive control options

Smart controller algorithms provide a wide range of control capabilities that ensure maximum energy savings while maintaining a high level of comfort in ventilated areas: air quality control, performance on demand, summer night cooling, VAV, CAV and many more.



User-friendly control

Controllers are easily and conveniently controlled. The user can monitor the operation parameters and change the settings in one or several ways convenient for him: using a control panel that has a touch-sensitive LED display, a mobile application, or a web server.



Integrated, specially designed automation


Fully integrated automatic control KOMFOVENT ensures the safe and reliable operation of air handling units, controls the system settings and optimizes the operating costs of the unit.



Quality and guarantee

Everything is installed and tested at the factory. Each unit produced passes a two-stage quality control. Firstly, it is checked in production, secondly, even more thorough, the parameters are checked and a performance check carried out before it is sent to the customer. Therefore, the customer can be sure that the device and its control system are properly synchronized and ready for operation.

KOMFOVENT control system offers wide control options

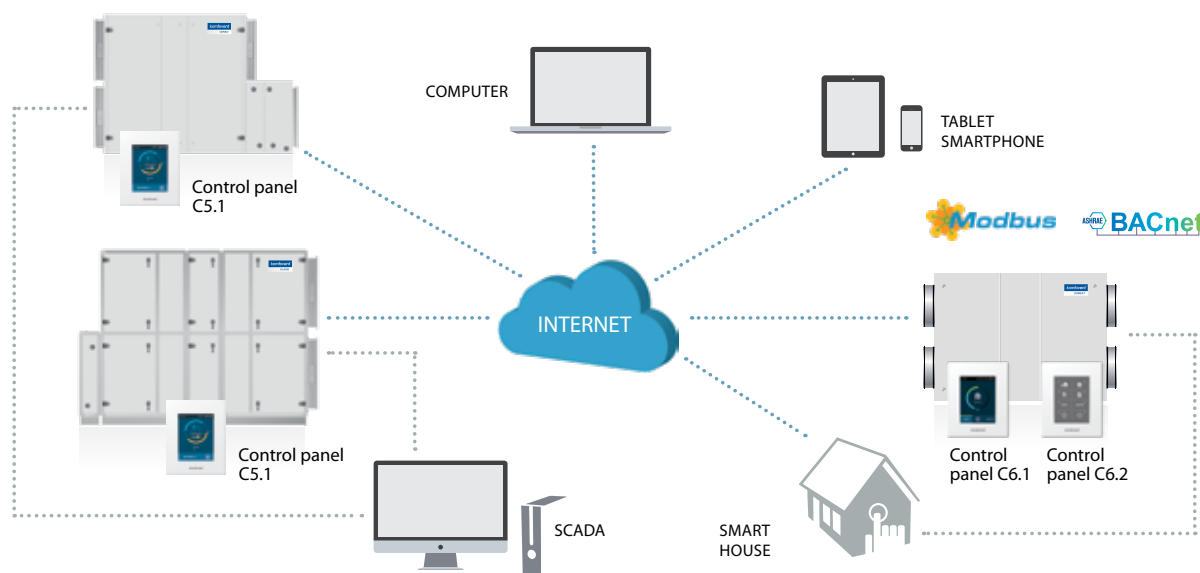

Web server

KOMFOVENT units have integrated web server for controlling and monitoring the units' operation via the Internet.

Apps

Smartphone applications "Komfovent C5" and "Komfovent Control" are specially developed for more convenient control. Applications fully replicate the control panel functions. A user-friendly interface enables clear and easy air handling unit control.

LogPlotter

Units' operation analysis tool for service and maintenance staff LogPlotter. The program has been designed to analyze the unit's operation history over the last 7 days. Unit's operation with C5 can be monitored not only in real-time from now on.


Integration to BMS

Implemented Modbus and BACnet protocols allow easy integration of KOMFOVENT air handling units to any desired Building Management Systems. A large number of units can be connected into a single building monitoring and control system.



C6 SMART HOME

Smart control system C6 for DOMEKT units

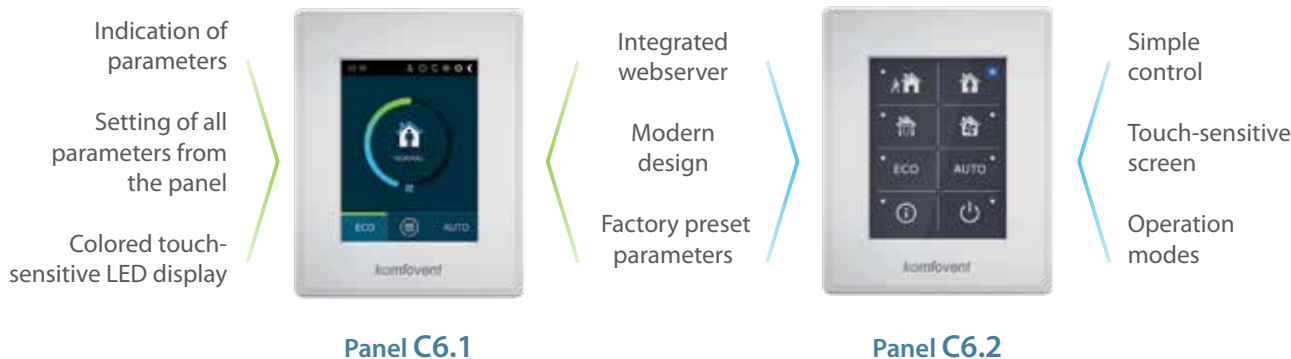

For both: beginners and advanced users

A user-friendly interface enables intuitive navigation and control of the unit. Core philosophy behind the design of C6 was that the ventilation unit would operate properly without constant adjustments from the user. Different ventilation modes are optimized for the user's daily needs. Automatic air quality control selects the most appropriate mode and ensures the comfort conditions in the room.

Advanced users can control unit's operation according to his needs, as many settings and control possibilities are provided as well:

- Airflow control: CAV / VAV / DCV.
- Intensity control by air quality, CO₂, humidity level.

Operating modes


- 8 preset modes.
- Intelligent energy saving algorithms.
- Automatic air quality control with optional AQ sensor.
- Extensive weekly schedule.

Control options

- Possibility to choose from two control panels.
- Control via web browser / smartphone.
- Ability to control via BMS (Modbus, BACnet).

Energy counters

- Real-time energy consumption indicator.
- Possibility of observing the running costs of ventilation unit.
- Heat recovery counter.

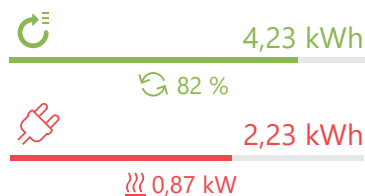

"Komfovent Control" app

New cloud-based application is designed to control residential ventilation units with C6 control system. User-friendly interface ensures intuitive control.

As the application fully replicates a control panel functions, you will have an access to all monitoring and control possibilities available in the control panel.

The application is available on Google Play and App Store.



SMART CONTROL FUNCTIONS

Air temperature control

The unit can control air temperature according user-defined supply or extract temperature setting. If the user desire, room ambient temperature can also be maintained according to the temperature sensor located in the control panel

Temperature balance control

The temperature support value of the supply air is automatically set on the basis of the current extract air temperature, i.e. the extract air temperature and the supply air temperature will be the same

Constant air volume control (CAV)

The unit supplies and extracts a constant air volume as set by the user, regardless of changes in the ventilation system

Variable air volume control (VAV)

The unit supplies and extracts air volume correspondingly to the ventilation requirements in different premises

Directly controlled volume (DCV)

The air volumes are controlled by direct external control signals

External water coil control

There is estimated an additional water duct heater or cooler control that can be activated by the user on the control panel

External DX unit control

There is estimated an additional external direct expansion (DX) unit control that can be activated by the user on the control panel

Combi-coil control*

Heating or cooling with water by using just one circulation pump and one 3-way valve. Heating and cooling modes can be switched automatically according water temperature, or by external switch

Weekly operation schedule

It is possible to choose one of the four pre-set weekly operation schedules. If necessary, the schedule can be modified. As well holiday schedule can be set, when unit will not operate for most of the time, but ventilate premises occasionally

Air quality control

Upon connecting the additionally ordered an external air quality or humidity sensors, the ventilation intensity is chosen automatically. The ventilation unit can even be stopped, when air quality level is bellow set value and restart automatically only when air quality is getting worse. In this way, the optimum room comfort is ensured with the minimum energy cost

Operation on demand

The ventilation unit will operate when the air quality in the premises exceeds the set levels. An additional air quality sensor is required

Cool recovery

During the summer season, in the conditioned premises cool from extract air is returned back into the premises

Temperature saving function

The automatic function attempts to maintain comfortable temperature conditions in the premises by reducing the ventilation intensity, i.e. it prevents excessive cooling down or overheating of the premises

Free cooling

When the room temperature air exceeds the set value, and the outdoor temperature is lower than the room temperature, the heat recovery and the other heating/cooling processes is blocked automatically and freecooling are performed only by fans

Variable speed rotary heat exchanger*

By modulating rotation speed of heat exchanger it is possible to maintain supply air temperature more precisely, to reduce rotation noise and to prolong exchanger motor life time

Ventilation control by external contacts

Air flow can be controlled by three external contacts, each of which can be assigned to different ventilation intensity

Control via internet browser

When the device is connected to the computer network or the Internet, the user-friendly web interface allows the operator to control the equipment with a computer or with another mobile device

Air dehumidification

If the relative humidity of the room exceeds the set limit, the air handling unit's operating intensity is increased until the humidity is reduced to the desired level. To make the function more efficient, the unit is recommended to be equipped with a refrigeration unit and an additional duct humidity sensor

SAFETY FUNCTIONS

Filter clogging indication

Clogging of the air filters is measured depending on the duration and intensity of the unit's operation. The user is informed by a message, when it is time to change air filters

Heat exchanger frost protection

Units with a counter-flow plate heat exchanger have a primary electric heater that is controlled as needed, and is operated only at the capacity to ensure frost protection. In this way, the ventilation unit can operate in low outside temperatures

Heat exchanger failure indication

In units with plate or rotary heat exchanger, a control system monitors the thermal efficiency, and if it does not reach the stated level, a fault is indicated

Water heater frost protection

This ensures the maximum reduction of the possibility of water freezing during the unit's operation. When the unit is switched off, warm water circulation is supported

Electric heater overheat protection

If there is danger of overheating, heater shuts down automatically. When unit is shut down during the heating operation, fans will continue to operate for set time period

Low air flow indication

If the ventilation unit does not reach the set air volume during the specified time, the unit's operation is stopped

Emergency shut down in case of fire

The external fire alarm is provided when the unit is connected to the building fire alarm system. There is also an internal fire alarm to detect an increased temperature inside the air handling unit or the ventilation system

Fire damper control

Possibility to monitor and perform periodical fire damper system tests directly from the control panel. External fire damper controller constantly checks fire dampers functionality and gives the feedback to the ventilation system

Emergency shut down when temperature reaches critical limits

When the supply air temperature drops below or exceeds the permitted value, the unit is stopped

Intelligent self-diagnostic

Self-check function of controller and elements of the air handling unit. If a fault is detected, controller terminates the operation of the unit and warns about such a fault using the respective informative messages

* Only with C6M automatics controller.

Control system C5 for VERSO, RHP and KLASIK units

Detailed information for the user

- Air flow indication (m^3/h , m^3/s , l/s).
- Thermal efficiency of the heat exchanger (%).
- Heat exchanger energy recovery (kW).
- Thermal energy savings indicator (%).
- Air heater energy consumption (kWh).
- Heat exchanger recovered energy counter (kWh).
- Fan's energy consumption (kWh).
- SFP factor of PM fans.
- Clogging level of filters (%).



Various operating modes

- 5 different operation modes: *Comfort1*, *Comfort2*, *Economy1*, *Economy2*, and *Special*. User may set supply and extract air volumes as well as air temperature for each of mode separately.
- Temperature control modes: Supply air / Extract air / Room / Balance. Possibility to select which temperature to maintain.
- Flow control modes: Constant Air Volume (CAV), Variable Air Volume (VAV), Directly Controlled Volume (DCV).
- Universal operating schedule with up to 20 events, for which of them the user can assign weekday(s) and one of five operating modes.
- Holliday scheduling allows the user to change operating mode or switch off the air handling unit on some dates of the year. Up to 10 events are possible.

Extended control possibilities

- Controlling up to 30 units connected into a network from one panel.
- Ability to connect the controller to the Internet network and manage it via a standard internet browser without any accessories.
- Possibility to control air handling unit by Smartphone via Android OS or iOS application software.
- Ability to control the unit not only by a control panel or a computer, but also by different external devices (switch, timer, etc.) and systems (e.g. the smart house system).

Connectivity & Protocols

- Modbus RTU over RS-485
- Modbus TCP over Ethernet
- BACnet/IP over Ethernet



"Komfovent C5" app

Application is designed to control air handling units with integrated C5 control system. User-friendly interface is intuitive for both experienced and less experienced users. As the application fully replicates a control panel functions, you will have an access to all monitoring and control possibilities available in the control panel. The application is available on Google Play and App Store.

CONTROL FUNCTIONS

Air quality control

Two different air quality values may be set for two different unit operating modes (e.g. *Comfort* and *Economy*). These values will be maintained by automatically increasing or reducing the intensity of ventilation

Outdoor compensated ventilation

This function adjusts the air volume depending on the outdoor temperature. It is possible to enter four temperature points where two of them define winter conditions and the other two define summer conditions. Upon entering the compensation curve according to the outdoor temperature, the current intensity of ventilation is decreased or increased accordingly

Summer night cooling

This function is intended for energy saving in summer: utilising the outside chill of night hours to cool down the heated rooms. The user may enable or disable function at any time as well as set the room temperature at which the function is automatically activated

Override function

Override control of the unit can be performed by an external device (timer, switch, thermostat, etc.). The signal received from the outside activates the function which switches the unit to the pre-programmed mode ignoring the current operating mode

Minimum temperature control

This function forces the reduction of the supply and extract air volumes set by the user when the heater capacity available in the unit is insufficient and/or heat recovery does not ensure the supply of the minimum temperature to the room

Operation on demand

The air handling unit start-up function is designed to start the unit operating in off mode when one of the selected parameters (CO₂, air quality, humidity, or temperature) has exceeded the critical limit

Humidity control

An air handling unit can be ordered with an air humidity control function. If this function is available the user is able to choose the humidity control location: supply air, extract air or room. The user is also able to choose the method of control: humidification, dehumidification or both at a time

Circulation pumps control on demand

Both heating and cooling pumps are controlled according to the current need for heating or cooling instead of a season control

Air flow density compensation

Air density depends on the temperature. The controller has a function which adjusts the air flows automatically to avoid any misbalance in rooms while being ventilated

Change-over function

Control of combined water heater cooler and DX cooler reversing to the heating mode

Additional zone control

Option for independently control of additional heaters and coolers in separately ventilated area. You can control up to two additional zones or a preheater (electric or water). Also applicable to STANDARD series

Recirculation control

The controller has a modulated extract air recirculation function. There are four control options: 1) recirculation according to the air quality which may be defined by one of the selected parameters: CO₂, air pollution by organic components and chemical substances, humidity or temperature; 2) recirculation according to the external temperature curve; 3) recirculation according to a weekly schedule; 4) recirculation controlled by an external device

Recirculation limitation by temperature

Recirculation may be limited according to the need for heating or cooling. In cases where recirculation is controlled automatically according to one of the air quality sensors or the recirculation level set by the user, the required value of extract air recirculation may be ignored if recirculation heats or cools down the supplied air too much. In such a case recirculation is forcibly reduced until the temperature of supply air set by the user has been reached

SAFETY FUNCTIONS

Rotary or plate heat exchanger failure protection

This function observes the thermal efficiency of the heat exchanger. If it does not reach the required level a fault is recorded and indicated

Rotary or plate heat exchanger anti-frost

Under the low outdoor temperature conditions, this function is constantly observing decreasing tendency of the heat exchanger thermal efficiency, determines the moment when the heat exchanger starts freezing, and activates the defrosting function automatically

Service time

A warning message appears when the continuous operation of the AHU has reached 12 months

Rotor warm-up function

This function forcibly activates the rotary heat exchanger if the air handling unit is turned off for some time and the temperature inside the unit or ventilation system is low enough for the rotor to freeze

Circulation pumps start-up in off mode

This function starts water circulation pumps for a short period of time when they are off longer than the set period

Warning for too low air flow

If the air handling unit does not reach the air volume set within the time set, the user is warned by an informative message

External stop

Shut-down function from external device. May be used with or without an automatic unit restart

Emergency shut-down in case of fire

The external fire alarm is provided when the unit is connected to the building fire alarm system. There is also an internal fire alarm to detect an increased temperature inside the air handling unit or the ventilation system

Intelligent self-diagnostic

Self-check function of controller and elements of the air handling unit. If a fault is detected, controller terminates the operation of the unit and warns about such a fault using the respective informative messages



komfovent[®]

DOMEKT

Smart Home Comfort



DOMEKT

Range review

Energy recovery

DOMEKT series are equipped with only the most efficient EC (electronically commutated) fans, high efficiency rotary and counterflow plate heat exchangers, filters with a huge filtering area and intelligent automation C6.

Wide range

Depending on your installation plans, you can choose the most appropriate model: horizontal, vertical or flat. Non-freezing rotary or high efficiency counterflow plate heat exchangers are available. All units are equipped with electrical heaters. Water heater is available as an option. Detailed information on all units can be found in the DOMEKT selection software.

Integrated smart control system C6

Core philosophy behind the design of C6 was that the ventilation unit would operate properly without constant adjustments from the user. The units can be controlled not only with the control panel, but also remotely via a web browser on your computer or mobile devices. The "Komfovent Control" application was specially developed for more convenient control.

Low noise level

Only perfectly balanced fans with unique geometry are used in DOMEKT units. All of the unit's components are aerodynamically matched. Housings padded with mineral wool and the use of special composite materials ensure silent operation of these units.

New casing technology EPP

The latest manufacturing technologies are applied to the following DOMEKT units: CF 150 F, CF 200 V, CF 300 V. The casing is produced from a special thermo-insulating sound absorbing material.


The advantages of units produced using EPP (expanded polypropylene) technology:

- No thermal bridges, no condensation;
- Improved thermal insulation;
- Better aerodynamics;
- Reduced weight;
- Hydrophobic.


Reliability and durability

Double protection from corrosion – the housing of the units is made of galvanized steel with a powder coated finish. Fan motors are protected from humidity and dust, and equipped with long-life bearings.


Domekt R | with rotary heat exchanger

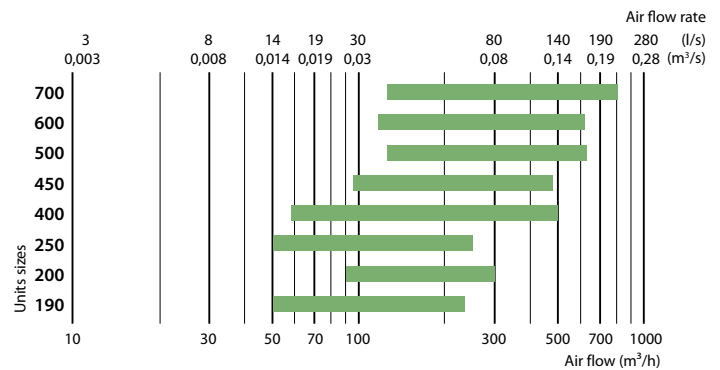

Domekt CF | with counter flow heat exchanger

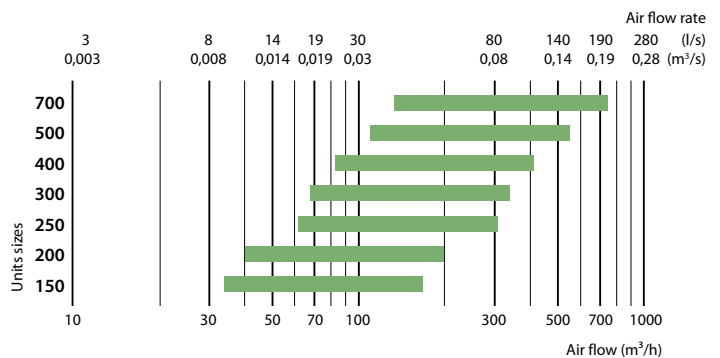


Domekt S | supply air handling unit

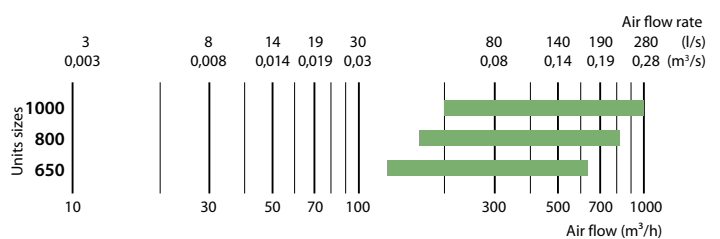

Domekt R

Air handling units with rotary heat exchanger

Sizes and capacities of Domekt R units

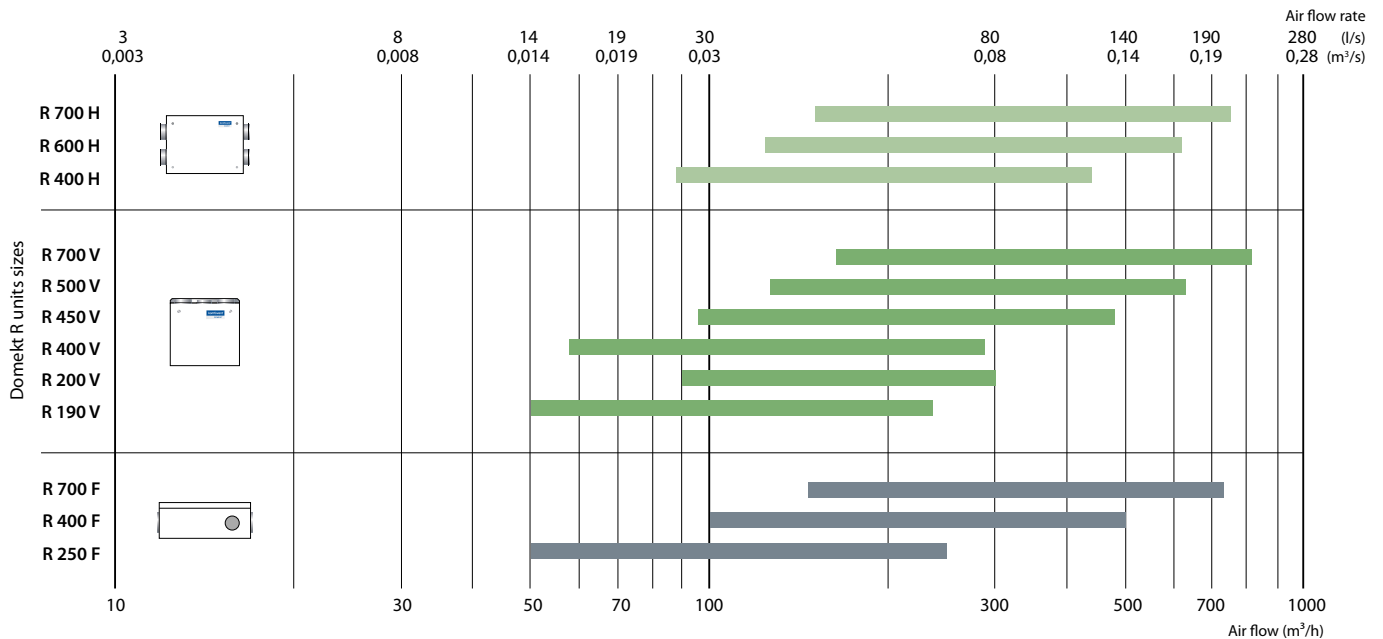

Modifications of Domekt R units

Unit	Heat exchanger		Supply/exhaust air filter class		Heater			Cooler		Inspection side				Control system / panel		
	L/A	L/AZ	F7	M5	HE	HW	HCW	CW	DX	R1	R2	L1	L2	C4.1	C6.1	C6.2
Domekt R 190 V	●		○	●	●	△	△			○		○		●		
Domekt R 200 V	●		○	●	●	△	△			○		○		●		
Domekt R 250 F	●	○	○	●	●	△	△	△	△	○	○	○	○		○	○
Domekt R 400 V	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 400 H	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 400 F	●	○	○	●	●	△	△	△	△	○	○	○	○		○	○
Domekt R 450 V	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 500 V	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 600 H	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 700 V	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 700 H	●	○	○	●	●	△	△	△	△	○		○			○	○
Domekt R 700 F	●	○	○	●	●	△	△	△	△	○	○	○	○		○	○

● standard equipment ○ possible choice △ ordered separately duct heater/cooler

The markings are explained on p. 7.




Domekt R 190 V

Maximal air flow, m ³ /h	183
Maximal air flow, l/s	50,83
Unit weight, kg	42
Supply voltage, V	1~230
Maximal operating current, A	HE3,3
Thermal efficiency of heat recovery, %	83
Reference flow rate, m ³ /s	0,036
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,27
Filters dimensions BxHxL, mm	285x130x46
Electric power input of the fan drive at reference flow rate, W	15
Electric power input of the fan drive at maximum flow rate, W	41
Electric air heater capacity, kW / Δt, °C	0,5 / 10,8
Maintenance space, mm	300



C4.1



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	50
Supply outlet	62
Exhaust inlet	50
Exhaust outlet	62
Casing	40

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	30
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,4	15,7	16,6	17,4	18,3	22,5	23,4	24,2

indoor +22°C, 20 % RH

Shown as left (L1)




Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)
- F kitchen hood connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

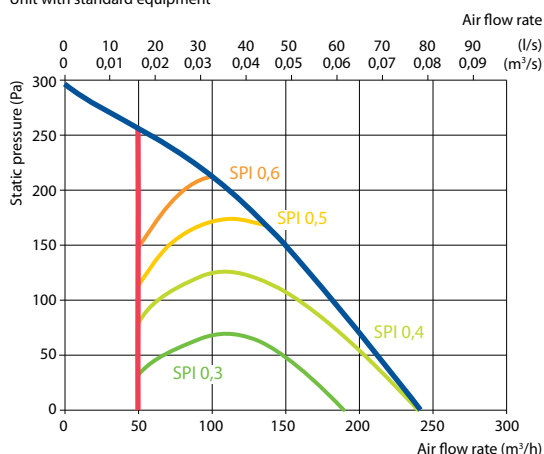

Accessories (p. 123)

Closing damper	AGUJ-M-125+LF230/LM230
Silencer	A/D AGS-125-50-600-M
	B/C AGS-125-50-900-M
Water heater	DH-125
PPU	PPU-HW-3R-15-0,4-W1
2-way valve (water heater)	VVP47.10-0,4


Water cooler	DHCW-125
2-way valve (water cooler)	VVP47.10-1,6
Kitchen hood	KH
Decorative panel	DP
Air distribution box	OSD-200 VE-125
Outdoor grill	LD-125

Domekt R 200 V

Maximal air flow, m ³ /h	258
Maximal air flow, l/s	71,67
Unit weight, kg	42
Supply voltage, V	1~230
Maximal operating current, A	HE4,7
Thermal efficiency of heat recovery, %	82
Reference flow rate, m ³ /s	0,05
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,35
Filters dimensions BxHxL, mm	285x130x46
Electric power input of the fan drive at reference flow rate, W	27
Electric power input of the fan drive at maximum flow rate, W	66
Electric air heater capacity, kW / Δt, °C	0,8 / 12,3
Maintenance space, mm	300



C4.1



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	53
Supply outlet	66
Exhaust inlet	53
Exhaust outlet	66
Casing	43

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.




Surroundings	33
--------------	----

Temperature efficiency


	Winter				
Outside temperature, °C	-23	-15	-10	-5	0
After heat exchanger, °C	11,6	13,5	14,6	15,8	16,9

indoor +22°C, 20 % RH

Shown as left (L1)




Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)
- F kitchen hood connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

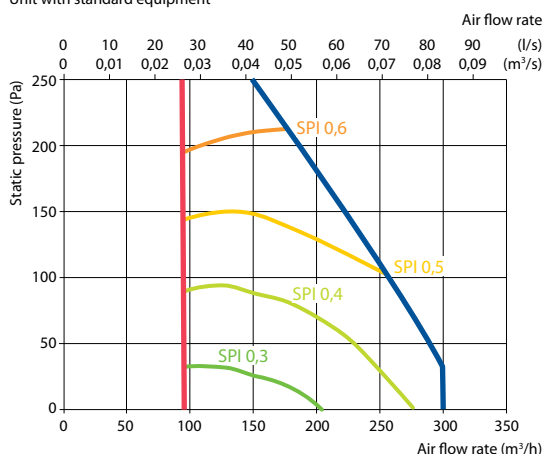

Accessories (p. 123)

Closing damper	AGUJ-M-125+LF230/LM230
Silencer	A/D AGS-125-50-600-M
	B/C AGS-125-50-900-M
Water heater	DH-125
PPU	PPU-HW-3R-15-0,4-W1
2-way valve (water heater)	VVP47.10-0,4

Water cooler	DHCW-125
2-way valve (water cooler)	VVP47.10-1,6
Kitchen hood	KH
Decorative panel	DP
Air distribution box	OSD-200 VE-125
Outdoor grill	LD-125



Domekt R 250 F


Maximal air flow, m ³ /h	250
Maximal air flow, l/s	69,44
Unit weight, kg	40
Supply voltage, V	1~230
Maximal operating current, A	HE 6,1
Thermal efficiency of heat recovery, %	80
Reference flow rate, m ³ /s	0,049
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,47
Filters dimensions B×H×L, mm	278×258×46
Electric power input of the fan drive at reference flow rate, W	40
Electric power input of the fan drive at maximum flow rate, W	90
Electric air heater capacity, kW / Δt, °C	1/15,9
Maintenance space, mm	300



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	61
Supply outlet	70
Exhaust inlet	61
Exhaust outlet	70
Casing	49

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	38
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,7	12,7	14,0	15,2	16,5	22,8	24,0	25,3

indoor +22°C, 20 % RH

Shown as right (R2)

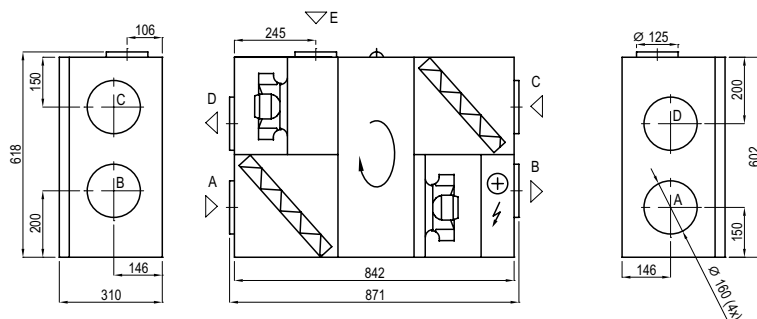


Shown as left (L2)

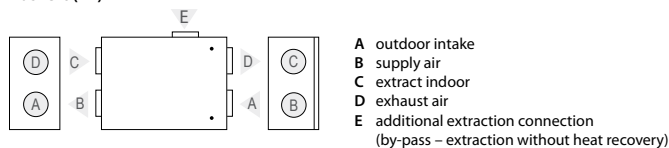


Performance

Unit with standard equipment

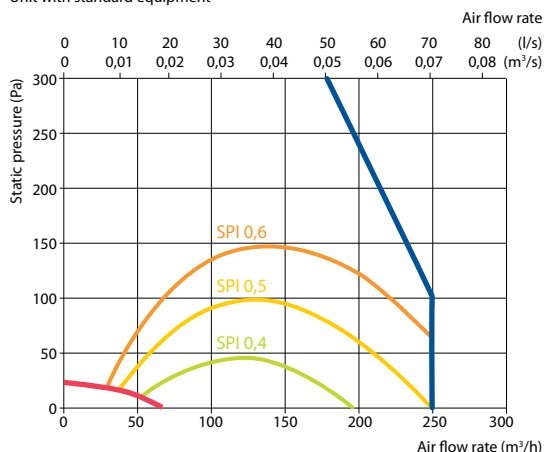

Mounting positions

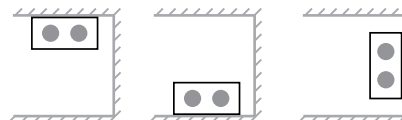


Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
	A/D AGS-160-50-600-M
Silencer	B/C AGS-160-50-900-M
Water heater	DH-160

PPU	PPU-HW-3R-15-0,4-W1
2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,2-1 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6

Domekt R 400 V


Maximal air flow, m ³ /h	381
Maximal air flow, l/s	106
Unit weight, kg	49
Supply voltage, V	1~230
Maximal operating current, A	HE6,5
Thermal efficiency of heat recovery, %	85
Reference flow rate, m ³ /s	0,074
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,3
Filters dimensions BxHxL, mm	428x231x46
Electric power input of the fan drive at reference flow rate, W	55
Electric power input of the fan drive at maximum flow rate, W	126
Electric air heater capacity, kW / Δt, °C	1 / 10,4
Maintenance space, mm	600



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	55
Supply outlet	68
Exhaust inlet	55
Exhaust outlet	69
Casing	43

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	33
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,2	16,4	17,2	17,9	18,7	22,5	23,2	24

indoor +22°C, 20 % RH

Shown as left (L1)





Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

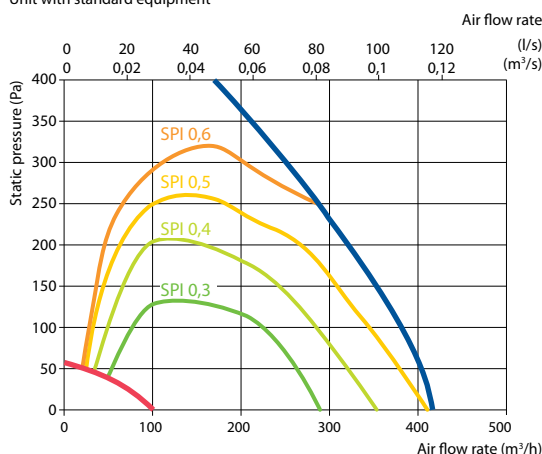

Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W1
2-way valve (water heater)	VVP47.10-0,4

Water cooler	DCW-0,4-3
2-way valve (water cooler)	VVP47.10-1,6
Outdoor grill	LD-160
DX cooler	DCF-0,4-3
Cooling unit	MOU-12HFN8+KA8140

Domekt R 400 H


Maximal air flow, m ³ /h	460
Maximal air flow, l/s	128
Unit weight, kg	49
Supply voltage, V	1~230
Maximal operating current, A	HE 7,3
Thermal efficiency of heat recovery, %	84
Reference flow rate, m ³ /s	0,089
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,27
Filters dimensions BxHxL, mm	417x210x46
Electric power input of the fan drive at reference flow rate, W	45
Electric power input of the fan drive at maximum flow rate, W	113
Electric air heater capacity, kW / Δt, °C	1/8,6
Maintenance space, mm	650



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	56
Supply outlet	65
Exhaust inlet	56
Exhaust outlet	65
Casing	46

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	34
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,8	16,1	16,9	17,7	18,5	22,5	23,3	24,1

indoor +22°C, 20 % RH

Shown as right (R1)

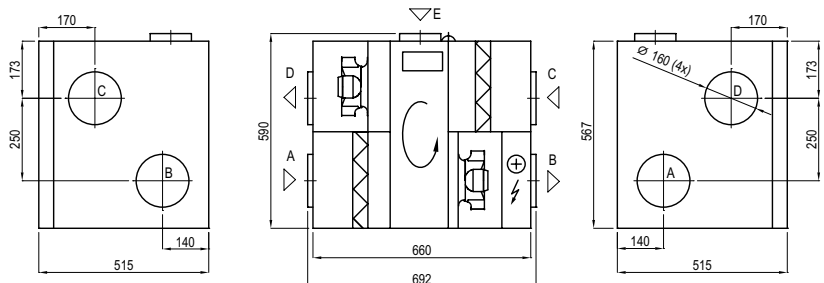


Shown as left (L1)



Performance

Unit with standard equipment

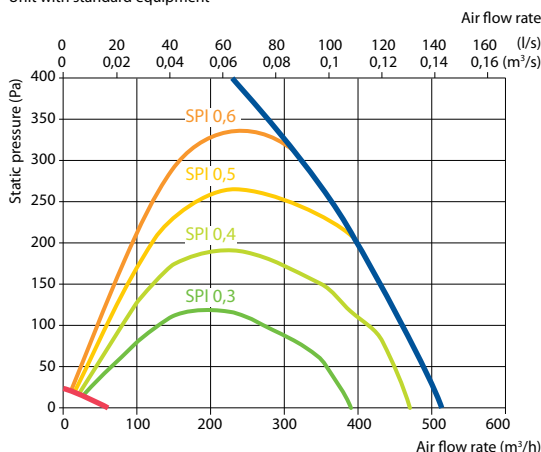

Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W2
2-way valve (water heater)	VVP47.10-0,4

Water cooler	DCW-0,5-3
2-way valve (water cooler)	VVP47.10-1,6
Outdoor grill	LD-160
DX cooler	DCF-0,5-3
Cooling unit	MOU-12HFN8+KA8243

Domekt R 400 F


Maximal air flow, m³/h	472
Maximal air flow, l/s	131,11
Unit weight, kg	67
Supply voltage, V	1~230
Maximal operating current, A	HE 7,3
Thermal efficiency of heat recovery, %	81
Reference flow rate, m³/s	0,092
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,41
Filters dimensions BxHxL, mm	278x258x46
Electric power input of the fan drive at reference flow rate, W	72
Electric power input of the fan drive at maximum flow rate, W	165
Electric air heater capacity, kW / Δt, °C	1 / 8,4
Maintenance space, mm	300



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	63
Supply outlet	72
Exhaust inlet	63
Exhaust outlet	72
Casing	52

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	41
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,4	13,3	14,5	15,7	16,8	22,7	23,9	25,1

indoor +22°C, 20 % RH

Shown as right (R1)

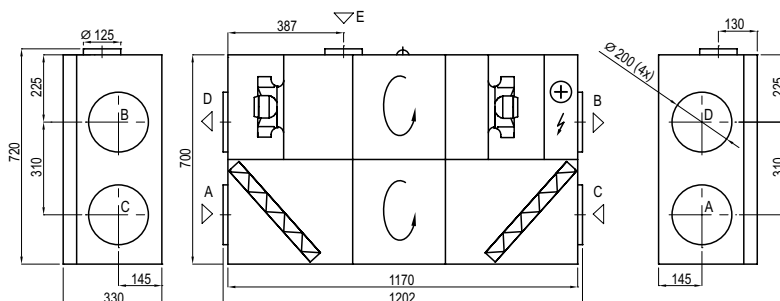


Shown as left (L1)

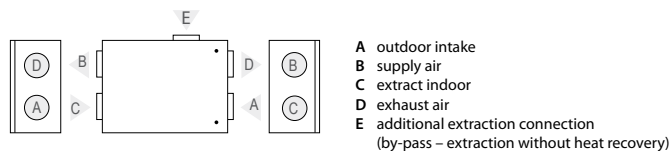

Performance

Unit with standard equipment

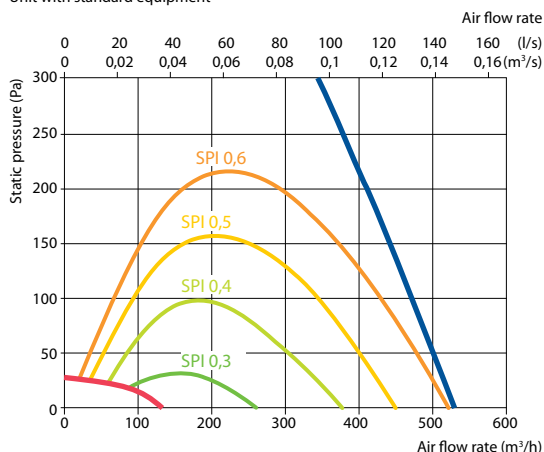


Accessories (p. 123)

Closing damper	AGUJ-M-200+LF230/LM230
Silencer	A/D AGS-200-50-600-M B/C AGS-200-50-900-M
Water heater	DH-200
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,4-3 / DHCW-200
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,4-3
Cooling unit	MOU-12HFN8+KA8140

Mounting positions

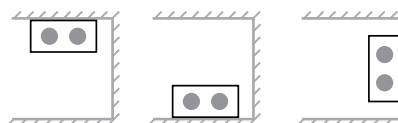

Domekt R 450 V


Maximal air flow, m ³ /h	490
Maximal air flow, l/s	136,11
Unit weight, kg	60
Supply voltage, V	1~230
Maximal operating current, A	HE6,5
Thermal efficiency of heat recovery, %	86
Reference flow rate, m ³ /s	0,095
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,27
Filters dimensions BxHxL, mm	517x278x46
Electric power input of the fan drive at reference flow rate, W	47
Electric power input of the fan drive at maximum flow rate, W	128
Electric air heater capacity, kW / Δt, °C	1 / 8,6
Maintenance space, mm	700



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	59
Supply outlet	73
Exhaust inlet	59
Exhaust outlet	73
Casing	44

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	33
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,7	16,8	17,5	18,2	18,9	22,4	23,1	23,8

indoor +22°C, 20 % RH

Shown as left (L1)





Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

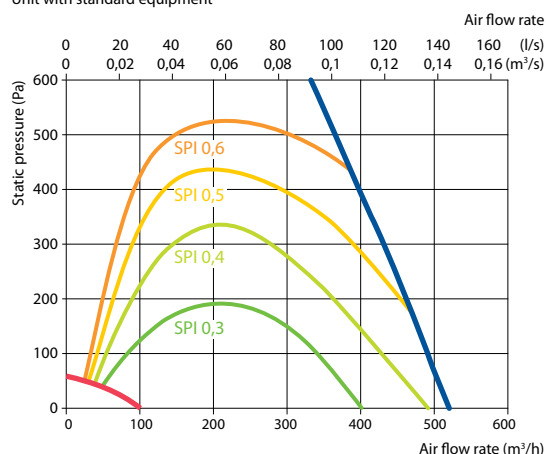


Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W1

2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,5-3 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6
DX cooler	DCF-0,5-3
Cooling unit	MOU-12HFN8+KA8243

Domekt R 500 V


Maximal air flow, m³/h	629
Maximal air flow, l/s	174,72
Unit weight, kg	113
Supply voltage, V	1~230
Maximal operating current, A	HE 7,3
Thermal efficiency of heat recovery, %	85
Reference flow rate, m³/s	0,122
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,21
Filters dimensions BxHxL, mm	540x260x46
Electric power input of the fan drive at reference flow rate, W	47
Electric power input of the fan drive at maximum flow rate, W	107
Electric air heater capacity, kW / Δt, °C	1 / 6,3
Maintenance space, mm	1050



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	52
Supply outlet	60
Exhaust inlet	52
Exhaust outlet	60
Casing	42

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	31
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,3	16,5	17,2	18,0	18,7	22,5	23,2	24,0

indoor +22°C, 20 % RH

Shown as left (L1)





Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

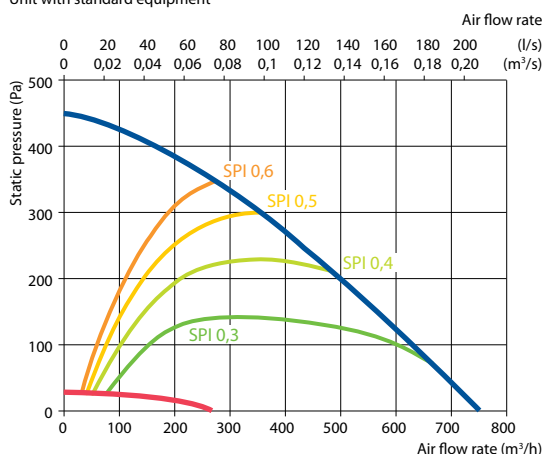


Accessories (p. 123)

Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,5-3 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,5-3
Cooling unit	MOU-12HFN8+KA8140

Domekt R 600 H


Maximal air flow, m ³ /h	584
Maximal air flow, l/s	162,22
Unit weight, kg	80
Supply voltage, V	1~230
Maximal operating current, A	HE 7,3
Thermal efficiency of heat recovery, %	83
Reference flow rate, m ³ /s	0,114
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,35
Filters dimensions BxHxL, mm	475x235x46
Electric power input of the fan drive at reference flow rate, W	77
Electric power input of the fan drive at maximum flow rate, W	179
Electric air heater capacity, kW / Δt, °C	1 / 6,8
Maintenance space, mm	500



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	58
Supply outlet	67
Exhaust inlet	58
Exhaust outlet	67
Casing	47

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	36
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,1	14,7	15,7	16,7	17,6	22,6	23,6	24,6

indoor +22°C, 20 % RH

Shown as right (R1)

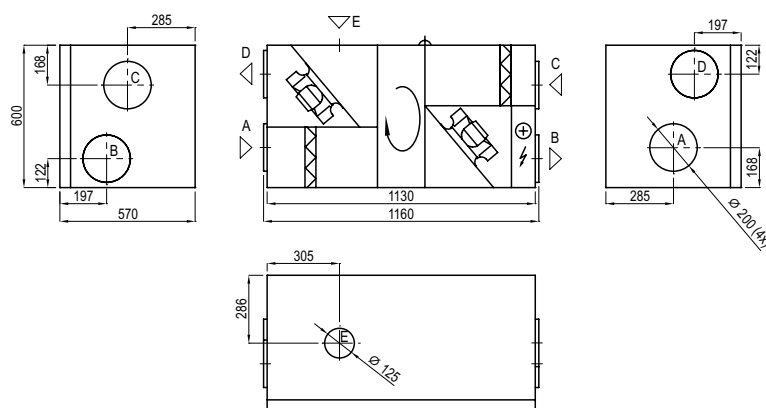


Shown as left (L1)

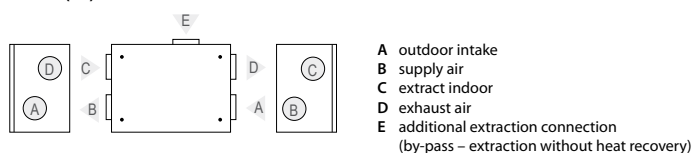

A outdoor intake
B supply air
C extract indoor
D exhaust air
E additional extraction connection
(by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

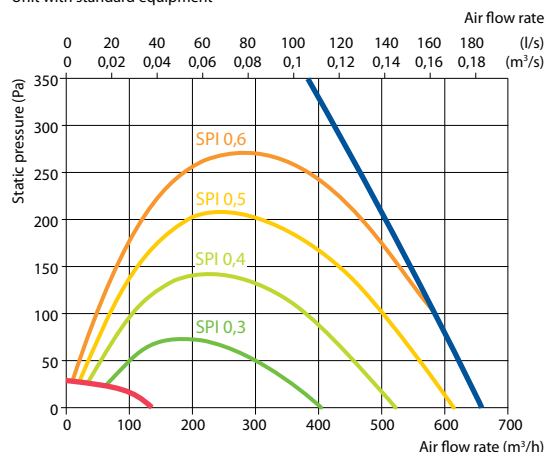


Accessories (p. 123)

Closing damper	AGUJ-M-200+LF230/LM230
Silencer	A/D AGS-200-50-600-M
	B/C AGS-200-50-900-M
Water heater	DH-200
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-200
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt R 700 V


Maximal air flow, m ³ /h	764
Maximal air flow, l/s	212,22
Unit weight, kg	114
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	83
Reference flow rate, m ³ /s	0,149
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,26
Filters dimensions BxHxL, mm	540x260x46
Electric power input of the fan drive at reference flow rate, W	73
Electric power input of the fan drive at maximum flow rate, W	179
Electric air heater capacity, kW / Δt, °C	2 / 10,4
Maintenance space, mm	1050



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	55
Supply outlet	63
Exhaust inlet	55
Exhaust outlet	63
Casing	44

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	34
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,1	14,7	15,7	16,7	17,7	22,6	23,6	24,6

indoor +22°C, 20 % RH

Shown as left (L1)




Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

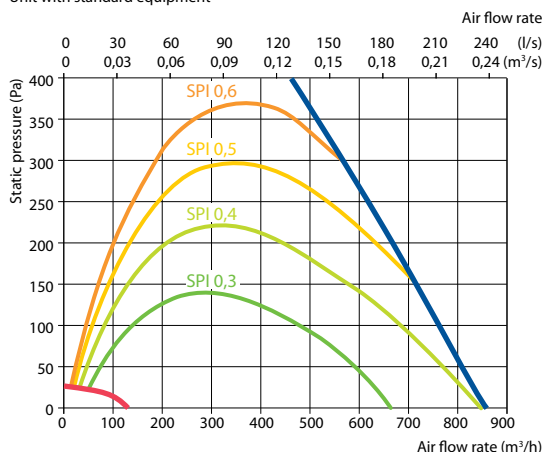

Accessories (p. 123)

Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt R 700 H


Maximal air flow, m ³ /h	696
Maximal air flow, l/s	193,33
Unit weight, kg	87
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	84
Reference flow rate, m ³ /s	0,135
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,34
Filters dimensions BxHxL, mm	540x260x46
Electric power input of the fan drive at reference flow rate, W	89
Electric power input of the fan drive at maximum flow rate, W	176
Electric air heater capacity, kW / Δt, °C	2 / 11,4
Maintenance space, mm	950



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	60
Supply outlet	69
Exhaust inlet	60
Exhaust outlet	69
Casing	48

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.




Surroundings	37
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,6	15,1	16,0	16,9	17,9	22,6	23,5	24,4


indoor +22°C, 20 % RH

Shown as right (R1)




Performance

Unit with standard equipment

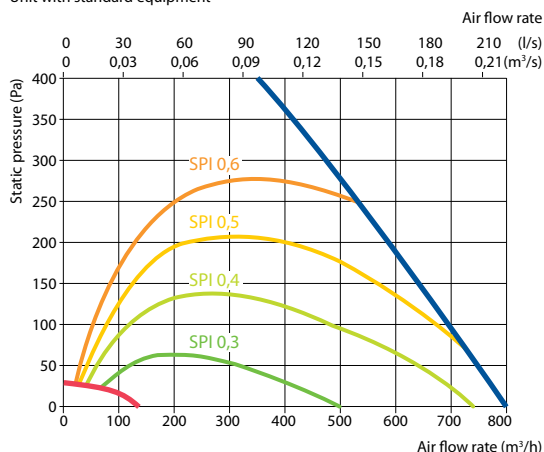

Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air
- E additional extraction connection (by-pass – extraction without heat recovery)

Accessories (p. 123)

Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt R 700 F


Maximal air flow, m ³ /h	686
Maximal air flow, l/s	190,56
Unit weight, kg	93
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	83
Reference flow rate, m ³ /s	0,133
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,30
Filters dimensions BxHxL, mm	370x360x46
Electric power input of the fan drive at reference flow rate, W	76
Electric power input of the fan drive at maximum flow rate, W	176
Electric air heater capacity, kW / Δt, °C	2 / 11,6
Maintenance space, mm	430



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	54
Supply outlet	67
Exhaust inlet	54
Exhaust outlet	67
Casing	47

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.


Surroundings	36
--------------	----

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,6	14,3	15,3	16,4	17,4	22,6	23,7	24,7

indoor +22°C, 20 % RH

Shown as left (L1)

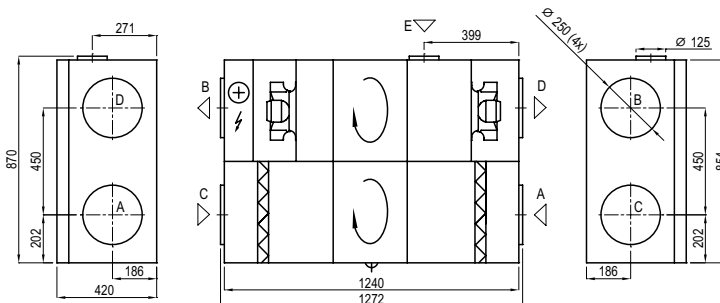


Shown as right (R1)



A outdoor intake
B supply air
C extract indoor
D exhaust air
E additional extraction connection
(by-pass – extraction without heat recovery)

Performance

Unit with standard equipment

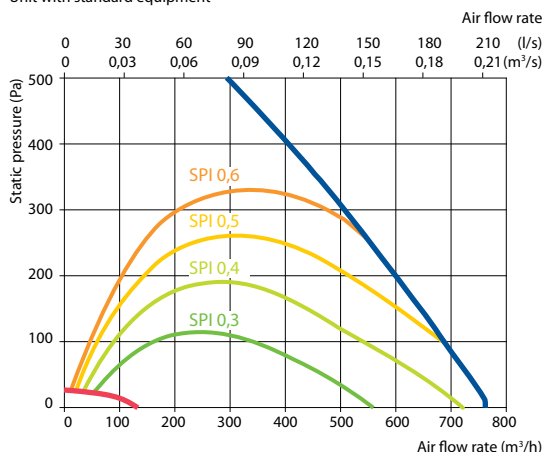


Accessories (p. 123)

Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140


Mounting positions

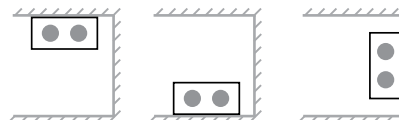

Domekt CF

Air handling units with counterflow plate heat exchangers

Sizes and capacities of Domekt CF units

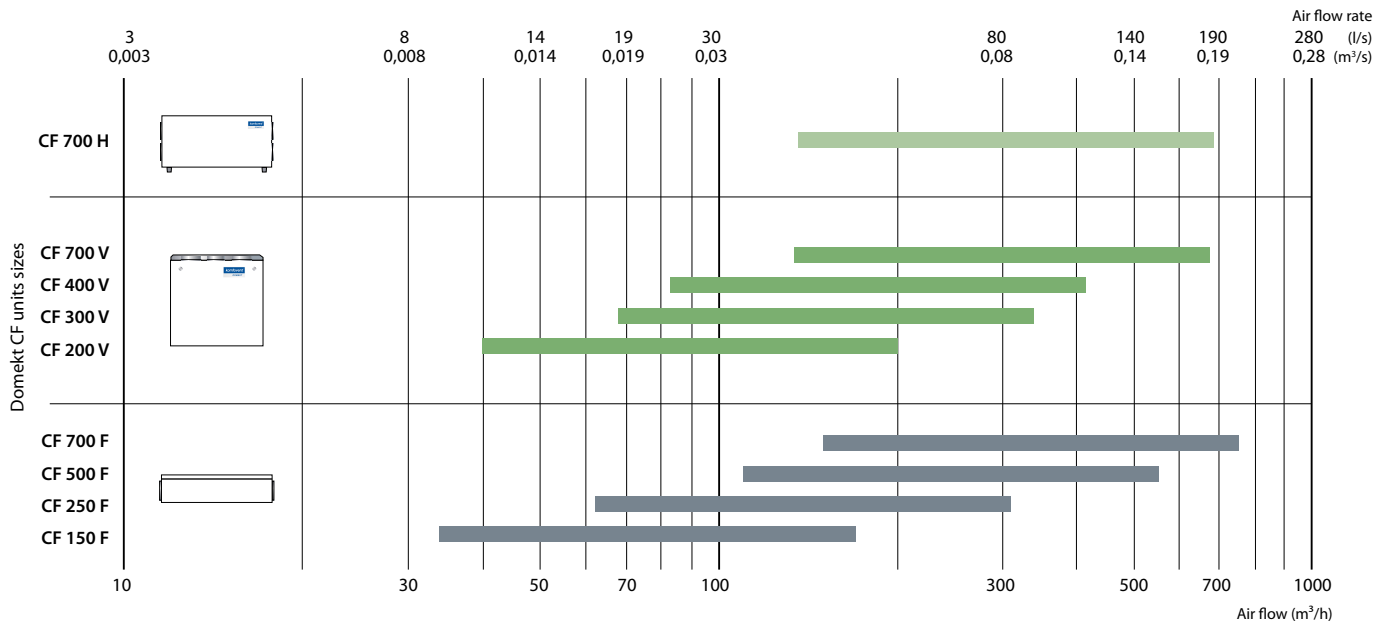

Modifications of Domekt CF units

Unit	Heat exchanger		Supply/ exhaust air filter class		Preheater	Heater			Cooler		Inspection side				Bypass	Control system/ panel C6	
	Condensing	Enthalpy	F7	M5	HE	HE	HW	HCW	CW	DX	R1	R2	L1	L2	Inner	C6.1	C6.2
Domekt CF 150 F	●	○	○	●	●	●	△	△	△			○	○		●	○	○
Domekt CF 200 V	●	○	○	●	●	●	△	△	△		○		○		●	○	○
Domekt CF 250 F	●	○	○	●	●	●	△	△	△		○	○	○	○	●	○	○
Domekt CF 300 V	●	○	○	●	●	●	△	△	△	△	○		○		●	○	○
Domekt CF 400 V	●	○	○	●	●	●	△	△	△	△	○		○		●	○	○
Domekt CF 500 F	●	○	○	●	●	●	△	△	△	△	○	○	○	○	●	○	○
Domekt CF 700 V	●	○	○	●	●	●	△	△	△	△	○		○		●	○	○
Domekt CF 700 H	●	○	○	●	●	●	△	△	△	△	○		○		●	○	○
Domekt CF 700 F	●	○	○	●	●	●	△	△	△	△	○	○	○	○	●	○	○


● standard equipment ○ possible choice △ ordered separately duct heater/cooler

The markings are explained on p. 7.



Domekt CF 150 F


Maximal air flow, m³/h	158
Maximal air flow, l/s	43,89
Unit weight, kg	29
Supply voltage, V	1~230
Maximal operating current, A	6,1
Thermal efficiency of heat recovery, %	92
Reference flow rate, m³/s	0,031
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,2
Filters dimensions BxHxL, mm	260x232x46
Electric power input of the fan drive at reference flow rate, W	11
Electric power input of the fan drive at maximum flow rate, W	31
Electric air heater capacity, kW / Δt, °C	0,5 / 13,4
Electric preheater capacity, kW / Δt, °C	0,75 / 20
Maintenance space, mm	300



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	47
Supply outlet	57
Exhaust inlet	47
Exhaust outlet	58
Casing	40

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	29
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	18,8*	19,1*	19,1*	19,1	19,5	22,3	22,9	23,5


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as left (L1)

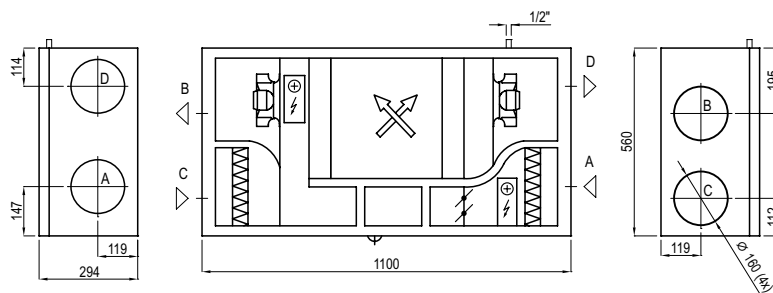


Shown as right (R2)



Performance

Unit with standard equipment

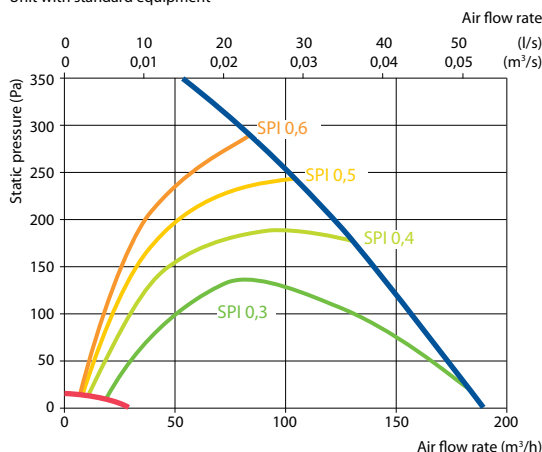


Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160

PPU	PPU-HW-3R-15-0,4-W2
2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,2-1 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6

Domekt CF 200 V

Maximal air flow, m ³ /h	202
Maximal air flow, l/s	56,11
Unit weight, kg	42
Supply voltage, V	1~230
Maximal operating current, A	HE8,3
Thermal efficiency of heat recovery, %	92
Reference flow rate, m ³ /s	0,039
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,22
Filters dimensions BxHxL, mm	365x132x46
Electric power input of the fan drive at reference flow rate, W	15
Electric power input of the fan drive at maximum flow rate, W	37
Electric air heater capacity, kW / Δt, °C	0,5 / 9,8
Electric preheater capacity, kW / Δt, °C	1 / 19,6
Maintenance space, mm	600



C6.1



C6.2

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	45
Supply outlet	59
Exhaust inlet	45
Exhaust outlet	59
Casing	41

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	30
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	18,9*	19,0*	19,0*	19,0	19,6	22,3	22,9	23,4



indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)




Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Performance

Unit with standard equipment

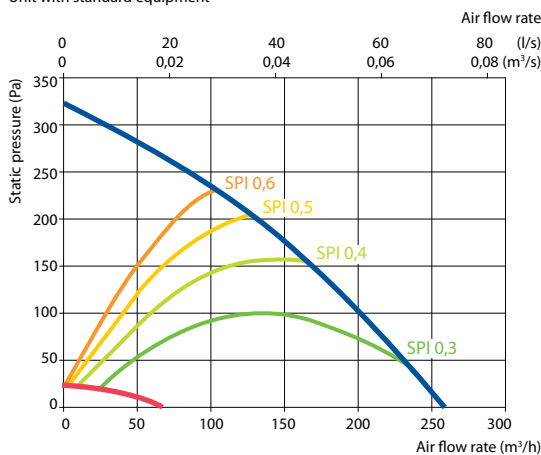

Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160

PPU	PPU-HW-3R-15-0,4-W2
2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,2-1 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6

Domekt CF 250 F


Maximal air flow, m³/h	295
Maximal air flow, l/s	81,94
Unit weight, kg	52
Supply voltage, V	1~230
Maximal operating current, A	8,3
Thermal efficiency of heat recovery, %	86
Reference flow rate, m³/s	0,0574
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,29
Filters dimensions BxHxL, mm	265x250x46
Electric power input of the fan drive at reference flow rate, W	32
Electric power input of the fan drive at maximum flow rate, W	89
Electric air heater capacity, kW / Δt, °C	0,5 / 6,7
Electric preheater capacity, kW / Δt, °C	1 / 13,4
Maintenance space, mm	300



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	53
Supply outlet	65
Exhaust inlet	54
Exhaust outlet	65
Casing	46

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	35
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	16,1*	17,0*	17,0*	17,0	17,9	22,6	23,5	24,4


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)

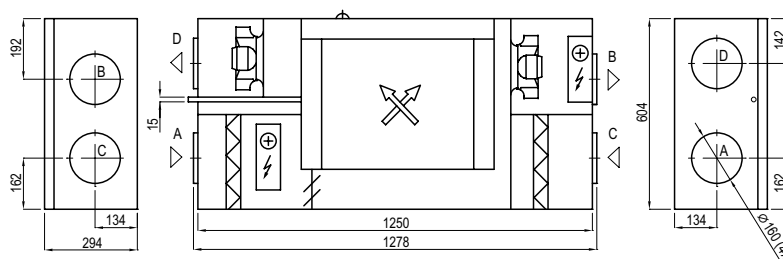


Shown as left (L1)



Performance

Unit with standard equipment

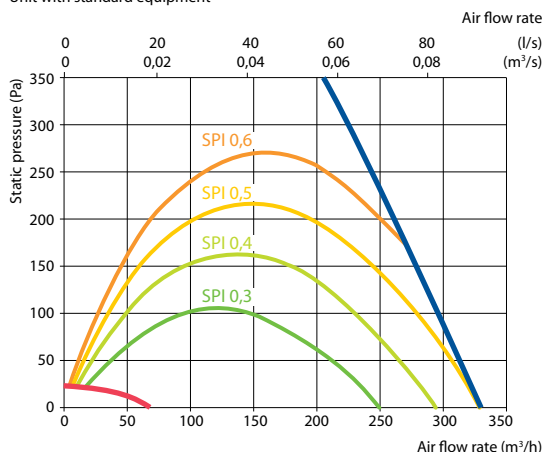


Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160

PPU	PPU-HW-3R-15-0,4-W1
2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,2-1 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6

Domekt CF 300 V

Maximal air flow, m ³ /h	319
Maximal air flow, l/s	88,61
Unit weight, kg	42
Supply voltage, V	1~230
Maximal operating current, A	HE8,3
Thermal efficiency of heat recovery, %	88
Reference flow rate, m ³ /s	0,062
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,29
Filters dimensions BxHxL, mm	365x132x46
Electric power input of the fan drive at reference flow rate, W	34
Electric power input of the fan drive at maximum flow rate, W	91
Electric air heater capacity, kW / Δt, °C	0,5 / 6,2
Electric preheater capacity, kW / Δt, °C	1 / 12,4
Maintenance space, mm	600



C6.1



C6.2

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	49
Supply outlet	65
Exhaust inlet	49
Exhaust outlet	65
Casing	45

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	34
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	16,9*	17,6*	17,7*	17,7	18,4	22,5	23,3	24,1



indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)




Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Performance

Unit with standard equipment

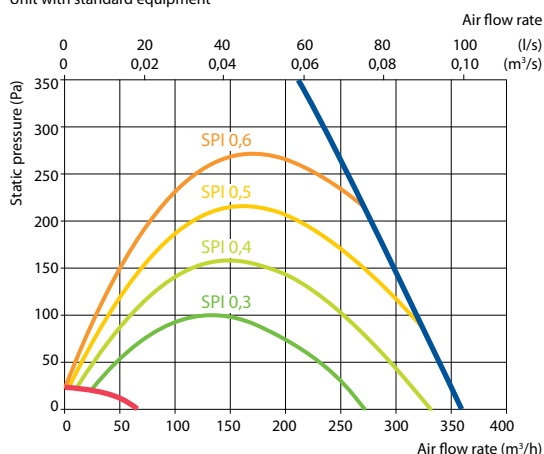

Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W2

2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,4-3 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6
DX cooler	DCF-0,4-3
Cooling unit	MOU-12HFN8+KA8140

Domekt CF 400 V

Maximal air flow, m ³ /h	366
Maximal air flow, l/s	101,67
Unit weight, kg	54
Supply voltage, V	1~230
Maximal operating current, A	HE 10.5
Thermal efficiency of heat recovery, %	93
Reference flow rate, m ³ /s	0,0712
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,25
Filters dimensions BxHxL, mm	350x235x46
Electric power input of the fan drive at reference flow rate, W	33
Electric power input of the fan drive at maximum flow rate, W	91
Electric air heater capacity, kW / Δt, °C	0,5 / 5,4
Electric preheater capacity, kW / Δt, °C	1,5 / 16,3
Maintenance space, mm	600

Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	58
Supply outlet	53
Exhaust inlet	58
Exhaust outlet	53
Casing	41


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	31
--------------	----

Performance


Unit with standard equipment

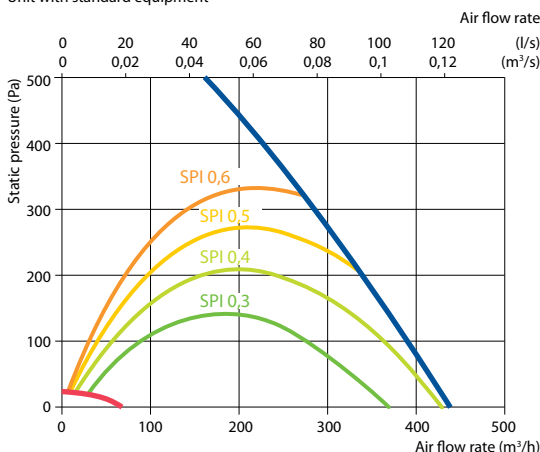

C6.1



C6.2





Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	17,4*	17,9*	17,9*	17,9	18,6	22,5	23,2	24,0


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)

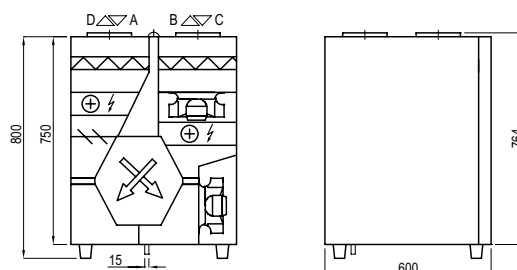

Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Accessories (p. 123)

Closing damper	AGUJ-M-160+LF230/LM230
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W1

2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,4-3 / DHCW-160
2-way valve (water cooler)	VVP47.10-1,6
DX cooler	DCF-0,4-3
Cooling unit	MOU-12HFN8+KA8140

Domekt CF 500 F


Maximal air flow, m ³ /h	521
Maximal air flow, l/s	144,72
Unit weight, kg	93
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	87
Reference flow rate, m ³ /s	0,1013
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,34
Filters dimensions B×H×L, mm	484×250×46
Electric power input of the fan drive at reference flow rate, W	67
Electric power input of the fan drive at maximum flow rate, W	171
Electric air heater capacity, kW / Δt, °C	0,5 / 3,8
Electric preheater capacity, kW / Δt, °C	1,5 / 11,4
Maintenance space, mm	520



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	56
Supply outlet	70
Exhaust inlet	56
Exhaust outlet	70
Casing	50

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	38
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	17,4*	18,0*	18,2*	18,2	18,8	22,4	23,2	24,0


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R2)

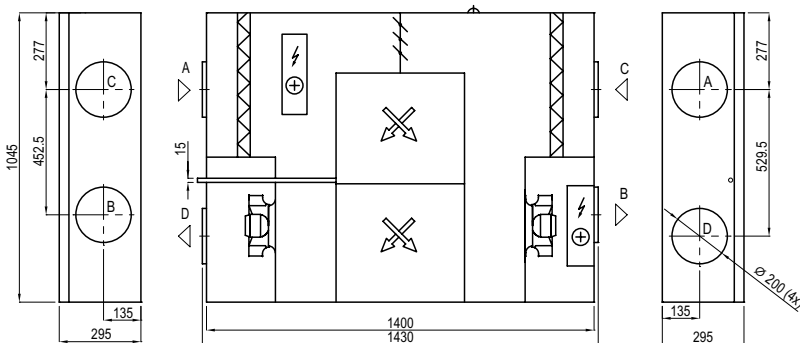


Shown as left (L2)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Performance

Unit with standard equipment

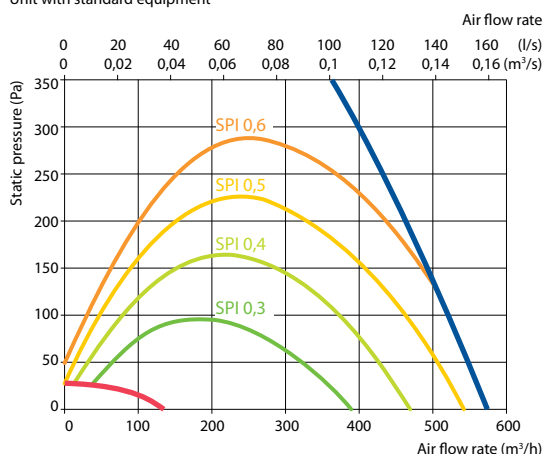

Accessories (p. 123)

Closing damper	AGUJ-M-200+LF230/LM230
Silencer	A/D AGS-200-50-600-M
	B/C AGS-200-50-900-M
Water heater	DH-200
PPU	PPU-HW-3R-15-0,4-W1

2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,5-3 / DHCW-200
2-way valve (water cooler)	VVP47.10-1,6
DX cooler	DCF-0,5-3
Cooling unit	MOU-12HFN8+KA8140

Domekt CF 700 V

Maximal air flow, m ³ /h	637
Maximal air flow, l/s	176,94
Unit weight, kg	100
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	88
Reference flow rate, m ³ /s	0,1239
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,30
Filters dimensions BxHxL, mm	390x300x46
Electric power input of the fan drive at reference flow rate, W	73
Electric power input of the fan drive at maximum flow rate, W	179
Electric air heater capacity, kW / Δt, °C	0,5 / 3,1
Electric preheater capacity, kW / Δt, °C	1,5 / 9,3
Maintenance space, mm	1000

Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	47
Supply outlet	67
Exhaust inlet	47
Exhaust outlet	67
Casing	47


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	36
--------------	----

Performance


Unit with standard equipment

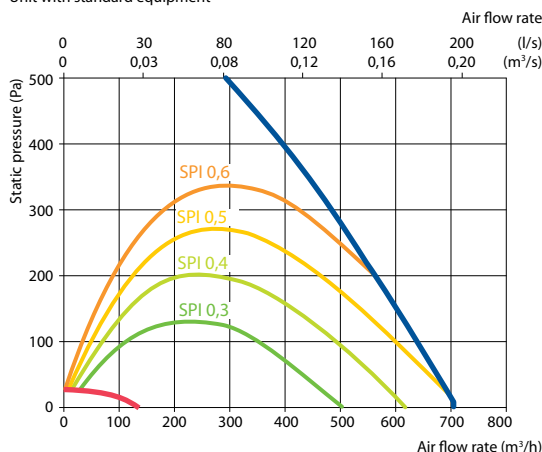

C6.1



C6.2




Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	17,3*	17,9*	18,1*	18,1	18,8	22,4	23,2	23,9


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as left (L1)

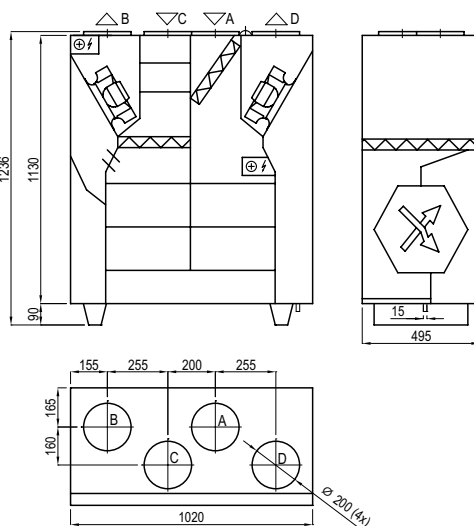

Shown as right (R1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Accessories (p. 123)

Closing damper	AGUJ-M-200+LF230/LM230
Silencer	A/D AGS-200-50-600-M
	B/C AGS-200-50-900-M
Water heater	DH-200
PPU	PPU-HW-3R-15-0,4-W1

2-way valve (water heater)	VVP47.10-0,4
Water cooler	DCW-0,7-5 / DHCW-200
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt CF 700 H


Maximal air flow, m ³ /h	651
Maximal air flow, l/s	180,83
Unit weight, kg	115
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	88
Reference flow rate, m ³ /s	0,1266
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,29
Filters dimensions B×H×L, mm	390×300×46
Electric power input of the fan drive at reference flow rate, W	72
Electric power input of the fan drive at maximum flow rate, W	178
Electric air heater capacity, kW / Δt, °C	0,5 / 3,0
Electric preheater capacity, kW / Δt, °C	1,5 / 9,1
Maintenance space, mm	500



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	47
Supply outlet	67
Exhaust inlet	47
Exhaust outlet	67
Casing	47

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	36
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	17,2*	17,7*	18,0*	18,0	18,8	22,4	23,2	23,9


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)

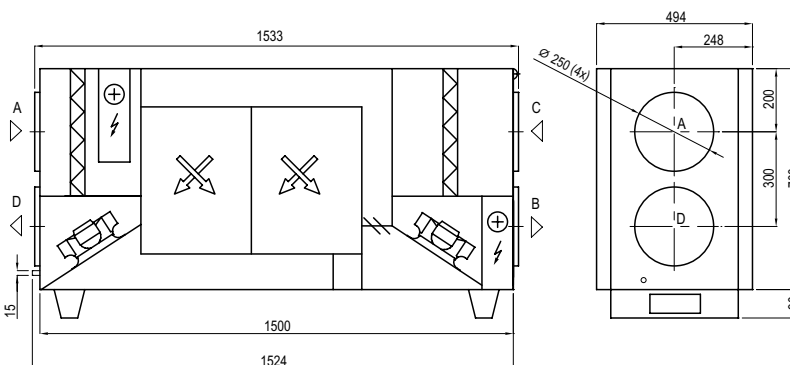


Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Performance

Unit with standard equipment

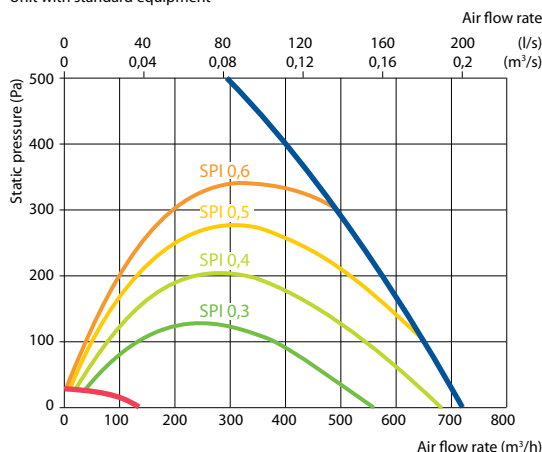

Accessories (p. 123)

Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt CF 700 F


Maximal air flow, m ³ /h	720
Maximal air flow, l/s	200
Unit weight, kg	81
Supply voltage, V	1~230
Maximal operating current, A	HE 11,7
Thermal efficiency of heat recovery, %	82
Reference flow rate, m ³ /s	0,14
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,25
Filters dimensions BxHxL, mm	400x300x46
Electric power input of the fan drive at reference flow rate, W	70
Electric power input of the fan drive at maximum flow rate, W	177
Electric air heater capacity, kW / Δt, °C	0,5 / 2,8
Electric preheater capacity, kW / Δt, °C	1,5 / 8,3
Maintenance space, mm	450



C6.1



C6.2



Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	53
Supply outlet	66
Exhaust inlet	53
Exhaust outlet	66
Casing	46

A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	35
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	15,5*	16,1*	16,8*	16,8	17,7	22,5	23,5	24,4


indoor +22°C, 20 % RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)

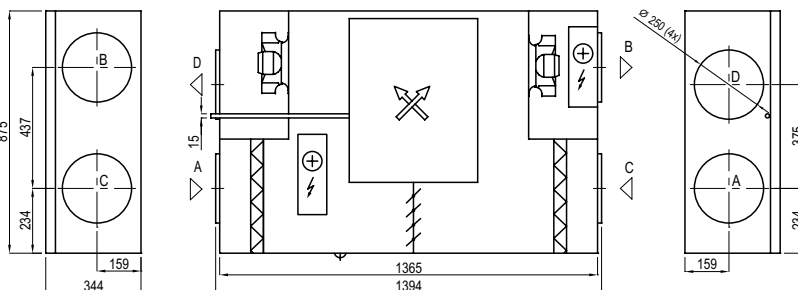


Shown as left (L1)



Performance

Unit with standard equipment

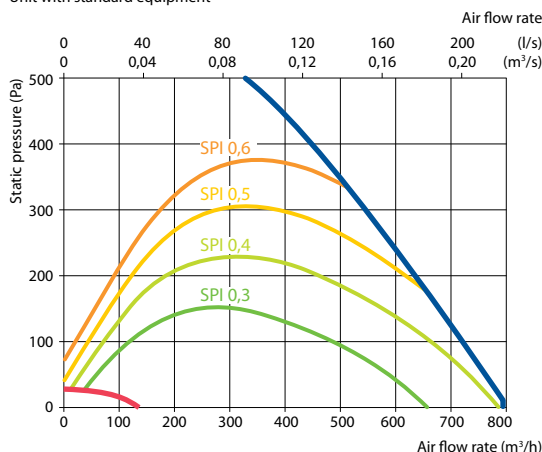

Accessories (p. 123)


Closing damper	AGUJ-M-250+LF230/LM230
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M
Water heater	DH-250
PPU	PPU-HW-3R-15-0,63-W1

2-way valve (water heater)	VVP47.10-0,63
Water cooler	DCW-0,7-5 / DHCW-250
2-way valve (water cooler)	VVP47.15-2,5
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt S

False ceiling supply air handling units

Sizes and capacities of Domekt S units

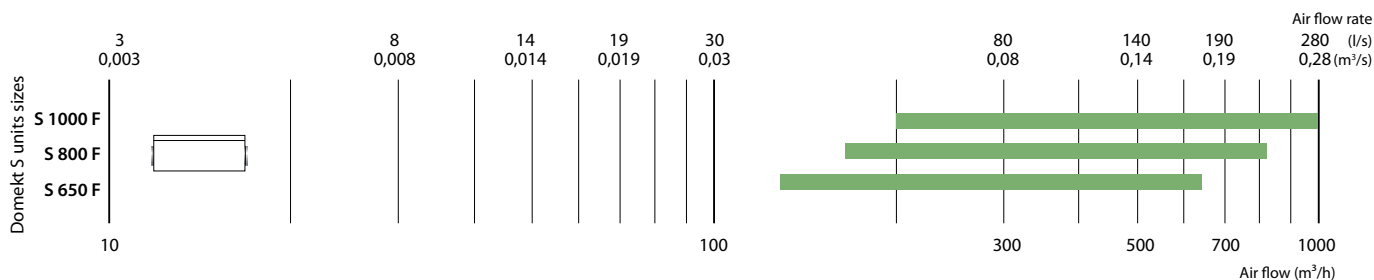

Modifications of Domekt S units

Unit	Supply / exhaust air filter class		Heater		Cooler		Inspection side		C5 panel
	F7	M5	HE	HW	CW	DX	R1	L1	C5.1
Domekt S 650 F	○	●	●		△	△	○	○	●
Domekt S 800 F	○	●	●	○	△	△	○	○	●
Domekt S 1000 F	○	●	●	○	△	△	○	○	●

● standard equipment ○ possible choice △ ordered separately duct heater/cooler

The markings are explained on p. 7.




Domekt S 650 F

Maximal air flow, m³/h	642
Maximal air flow, l/s	178,33
Unit weight, kg	35
Reference flow rate, m³/s	0,125
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,15
Filters dimensions BxHxL, mm	371x235x46
Electric power input of the fan drive at reference flow rate, W	63
Electric power input of the fan drive at maximum flow rate, W	172
Maintenance space, mm	300



C5.1



Acoustic data


A-weighted sound power level L_{WAr} dB(A)
at reference flow rate

Supply inlet	63
Supply outlet	69
Casing	41

A-weighted sound pressure level L_{pAr} dB(A)


10 m² normally isolated room, distance from casing – 3 m.

Surroundings	30
--------------	----

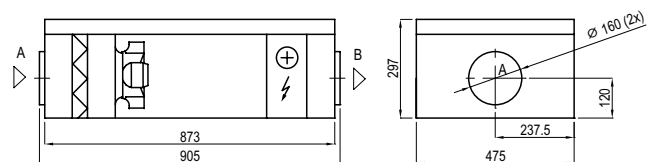

Performance

Unit with standard equipment

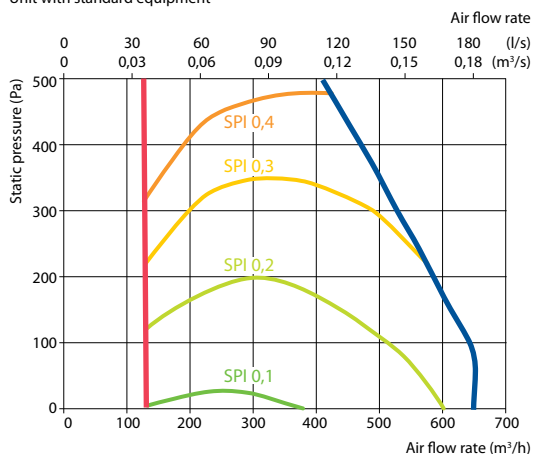

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Domekt S 650 F-HE/3	1~230	3,0	14,7	13
Domekt S 650 F-HE/6	3~400	6,0	10,4	26

Accessories (p. 123)


Closing damper	AGUJ-M-160+LF24/LM24
Silencer	A AGS-160-50-600-M
	B AGS-160-50-900-M
PPU	–
Air heater-cooler	DCW-0,7-5
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,7-5
Cooling unit	MOU-18HFN8+KA8140

Domekt S 800 F

Maximal air flow, m ³ /h	826
Maximal air flow, l/s	229,44
Unit weight, kg	37
Reference flow rate, m ³ /s	0,161
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,14
Filters dimensions B×H×L, mm	371×287×46
Electric power input of the fan drive at reference flow rate, W	75
Electric power input of the fan drive at maximum flow rate, W	181
Maintenance space, mm	400



C5.1



Acoustic data


A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	60
Supply outlet	65
Casing	44

A-weighted sound pressure level L_{PA} , dB(A)


10 m² normally isolated room, distance from casing – 3 m.

Surroundings	33
--------------	----

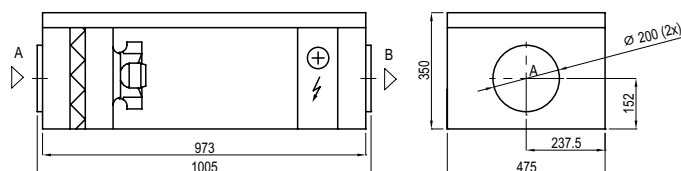

Performance

Unit with standard equipment

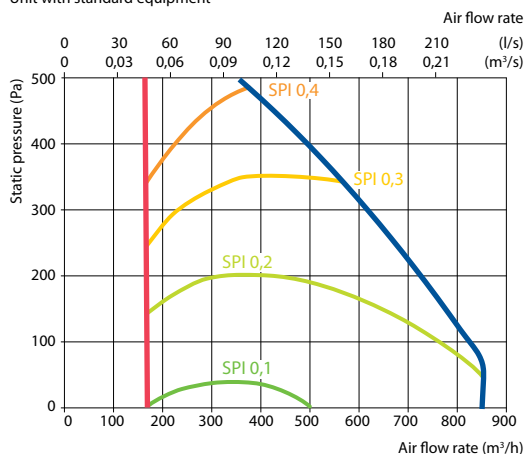

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT, °C
Domekt S 800 F-HE/6	3~400	6,0	10,3	20,2
Domekt S 800 F-HE/9	3~400	9,0	14,6	30,3
Domekt S 800 F-HW	1~230	–	1,9	–

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	6,3	5,2	4,1
Flow rate, dm ³ /h	277	230	181
Pressure drop, kPa	4,8	3,8	3
Temperature in/out, °C	-5/20,0	-5/15,9	-5/11,6
Maximal capacity, kW	6,3	5,2	4,1
Connection, "	½		

Accessories (p. 123)


Closing damper	AGUJ-M-200+LF24/LM24
Silencer	A AGS-200-50-600-M
	B AGS-200-50-900-M
PPU	PPU-HW-3R-15-1,6-W2
Air heater-cooler	DCW-0,9-6
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,9-6
Cooling unit	MOU-18HFN8+KA8140

Domekt S 1000 F

Maximal air flow, m³/h	1000
Maximal air flow, l/s	277,78
Unit weight, kg	46
Reference flow rate, m³/s	0,194
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,12
Filters dimensions BxHxL, mm	558x287x46
Electric power input of the fan drive at reference flow rate, W	82
Electric power input of the fan drive at maximum flow rate, W	182
Maintenance space, mm	400



C5.1



Acoustic data


A-weighted sound power level L_{WA} dB(A)
at reference flow rate

Supply inlet	60
Supply outlet	66
Casing	43

A-weighted sound pressure level L_{PA} dB(A)


10 m² normally isolated room, distance from casing – 3 m.

Surroundings	32
--------------	----

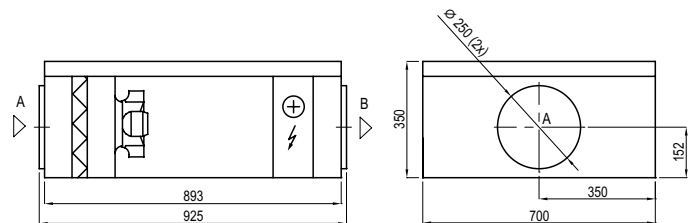

Performance

Unit with standard equipment

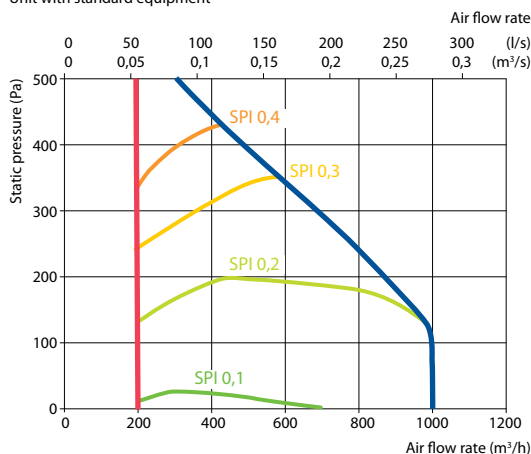

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Domekt S 1000 F-HE/9	3~400	9,0	14,6	25
Domekt S 1000 F-HE/15	3~400	15,0	23,3	41,7
Domekt S 1000 F-HW	1~230	–	1,9	–

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	8,1	8,0	6,5
Flow rate, dm³/h	358	351	286
Pressure drop, kPa	8,1	7,9	6,0
Temperature in/out, °C	-5/20	-5/19,7	-5/15,2
Maximal capacity, kW	9,4	8,0	6,5
Connection, "	½		

Accessories (p. 123)

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A AGS-250-50-900-M
	B AGS-250-50-1200-M
PPU	PPU-HW-3R-15-1.6-W2
Air heater-cooler	DCW-0,9-6
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,9-6
Cooling unit	MOU-18HFN8+KA8140





komfovent®

VERSO

*Efficient and Advanced
Commercial Ventilation*



Energy recovery

Non-freezing rotary heat exchangers efficiently recover heat and cold, control humidity and provide comfort throughout the year.

Energy saving technologies

Units are equipped with the most efficient and advanced technical solutions: high efficiency PM/EC fans of Ultra and Premium classes, non-freezing condensing and sorption rotary heat exchangers, high efficiency counter flow heat exchangers, high surface area air filters. All of these solutions greatly reduce operational costs and shorten payback time.

PM motors

Ultra Premium efficiency IE5 class PM fan motors minimize power consumption and ensure durability of the unit.

Integrated control system C5

Automatic system designed for professionals, controls thermodynamic processes and saves energy.

The user is given detailed information about the operation of the unit. A variety of modes and functions allows the user to choose the optimal operating mode that maximizes energy saving. For user convenience, the operation of the air handling units can be controlled not only with the control panel, but also via the Internet or BMS.

Eurovent certified

VERSO units are tested on a regular basis at the Eurovent climatic laboratory in Germany. Parameters such as performance, efficiency, noise level, tolerances and other are tested.



Wide range



Verso R
units with a rotary
heat exchanger



Verso CF
units with a counterflow
plate heat exchanger



Verso P
units with a plate
heat exchanger



Verso S
supply air
units


VERSO units are designed for efficient ventilation and are suitable for various types of projects. You can choose a unified unit from the VERSO Standard series, or VERSO Pro and VERSO Pro2 which can be specifically tailored to meet your requirements. Large number of configurations (vertical, horizontal, flat and universal type, with rotary or plate heat exchangers) allow you to always select optimal and most efficient solution.

VERSO Standard

800 – 7000 m³/h



- Vertical, horizontal, flat or universal application
- Compact design
- REVIT models of VERSO Standard

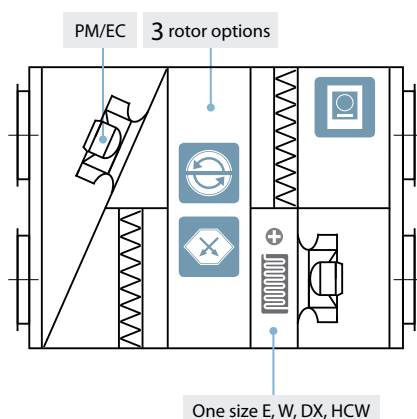


VERSO Pro / Pro2

1000 – 40000 m³/h



- 10 basic sizes for various combinations
- Professionally convenient software
- Selection of desired heat exchanger, fan, heater/cooler
- REVIT models of VERSO Pro

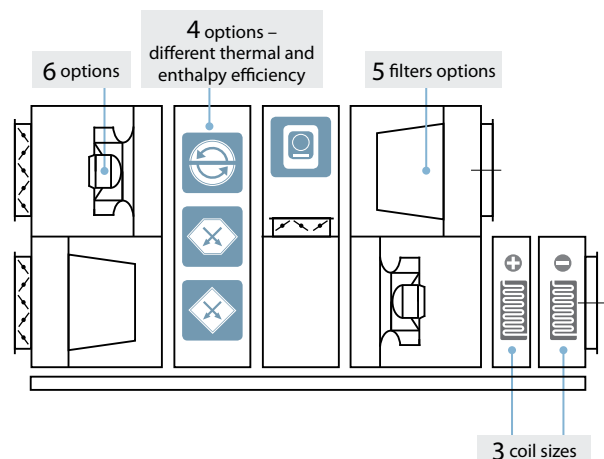

VERSO Standard




Verso R Standard

A wide selection of compact units with non-freezing rotary heat exchanger, horizontal, vertical, universal and false ceiling ducts connection.

Verso R Standard units efficiently save energy all year round by significantly reducing both heating and air conditioning costs. Ideal for cold weather countries.

Sorption rotary heat exchangers maintain comfortable climate in the premises.

Sizes and capacities of Verso R Standard

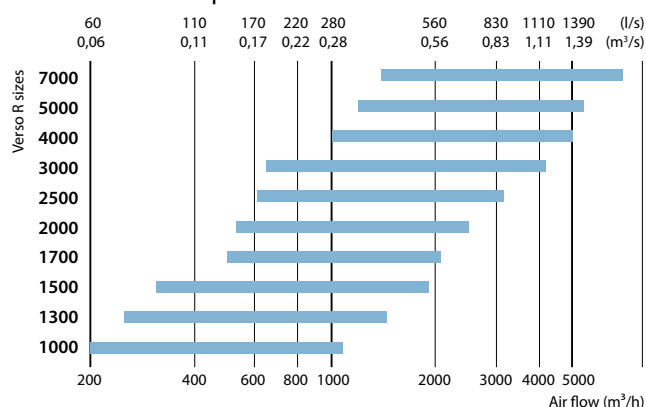


Verso CF Standard

A wide selection of compact units with counterflow plate heat exchanger, horizontal, vertical, universal and false ceiling ducts connection.

Verso CF Standard units efficiently save energy all year round by significantly reducing both heating and air conditioning costs. Ideal for mild and warm climate countries.

Sizes and capacities of Verso CF Standard

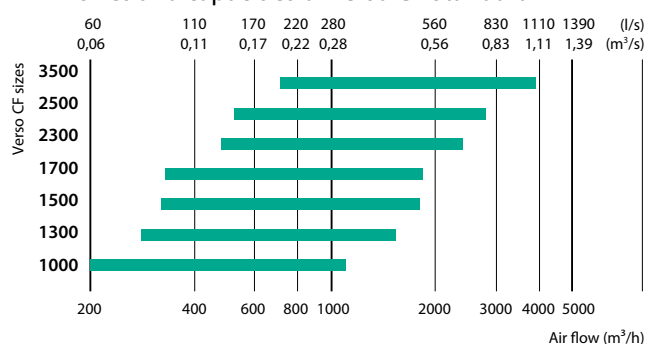


Verso S Standard

Low-height false ceiling supply air handling units are easily installed even in the smallest premises.

All Verso S Standard units have integrated control system, which simplifies units' installation.


Sizes and capacities of Verso S Standard

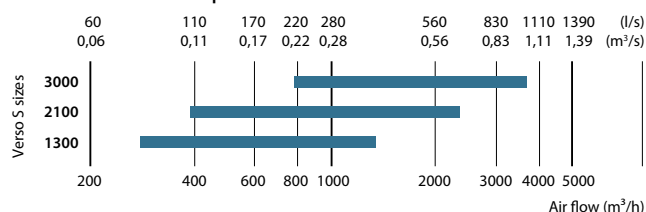

VERSO Standard U features

Universal design – 14 duct connections options

The ducts can be connected in the optimal way and installation space saved due to universal design of VERSO Standard U.


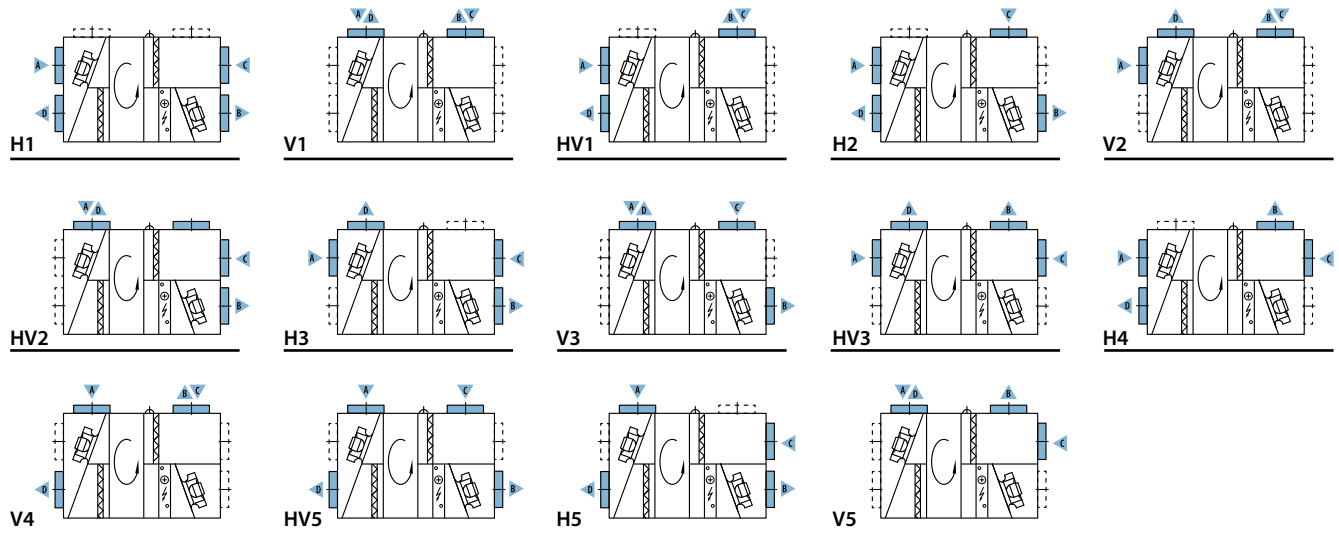


Integrated DX coil

- All VERSO Standard units of the universal type can be ordered with integrated DX coil.
- Extremely economical air heating even at very low outdoor temperatures.
- Cooling/heating power control.
- Wide range of inverter outdoor units.

Sorption rotary heat exchanger


- Sorption rotary heat exchanger controls the humidity in the premises more efficiently than a condensing rotor. Now sorption is an available option for all Verso R Standard units.
- The humidity from exhaust air is used to humidify the supply air in winter.
- Wet supplied air in summertime is dried.
- High comfort is ensured all year long.

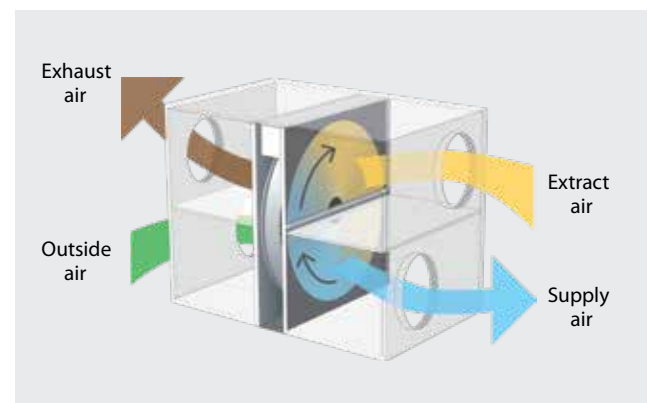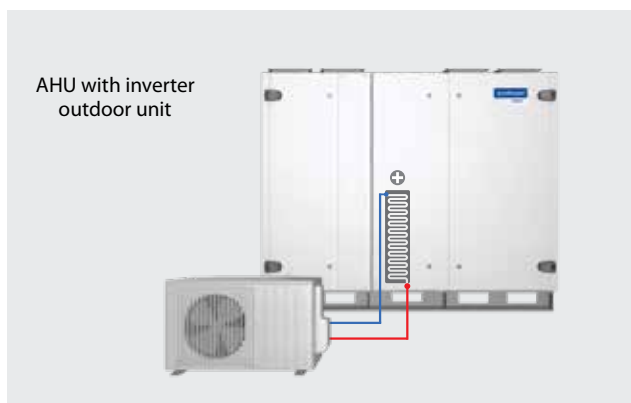

Verso R Standard

Air handling units with rotary heat exchanger

Sizes and capacities of Verso R Standard units

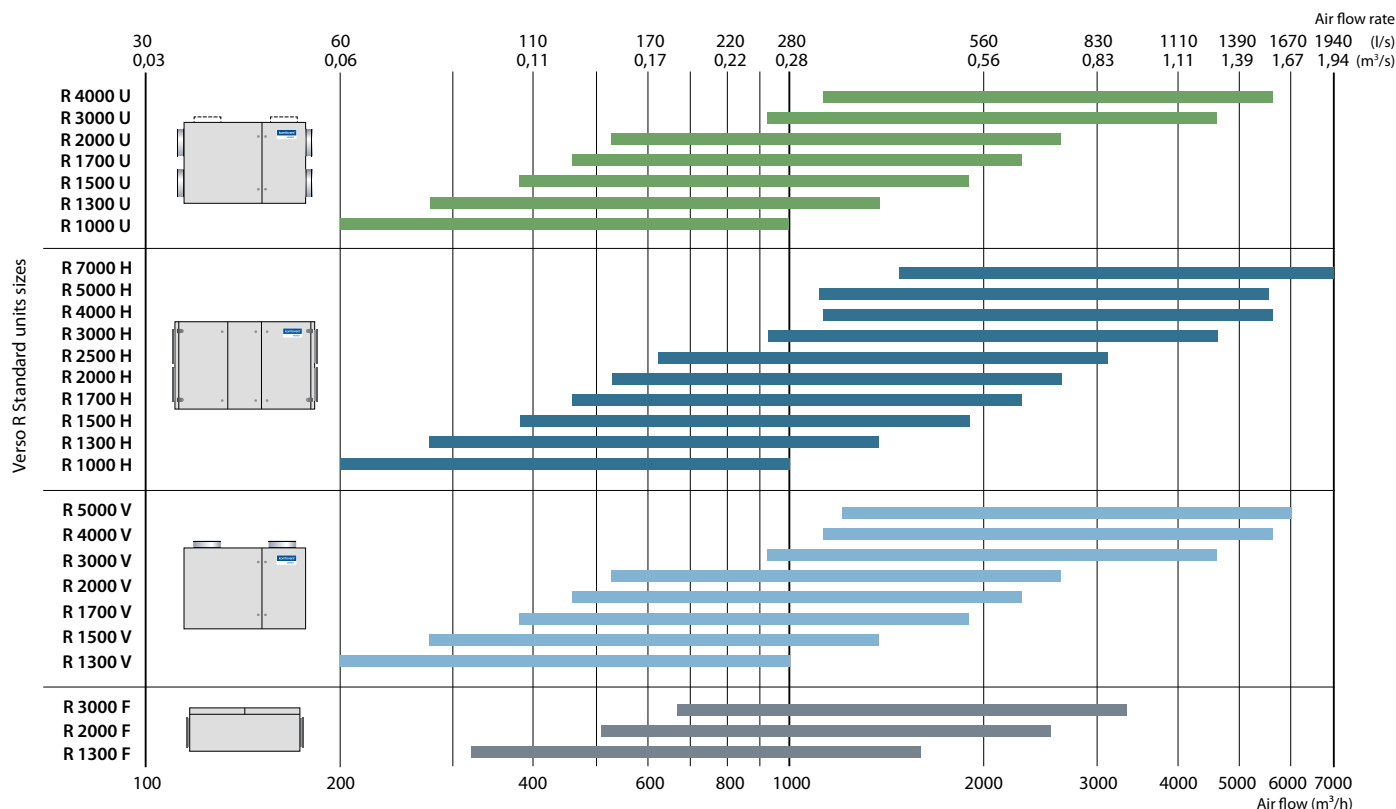

Modifications of Verso R Standard units

Unit	Heat exchanger			Supply/exhaust air filter class		Heater			Cooler		Inspection side				Control system C5 panel C5.1
	L/A	SL/A	L/AZ	F7	M5	HE	HW	HCW	CW	DX	R1	L1	R2	L2	
Verso R 1000 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 1000 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 1300 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 1300 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 1300 F	●	○	○	●	●	●	△	△	△	△	○	○			●
Verso R 1500 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 1500 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 1700 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 1700 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 2000 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 2000 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 2000 F	○	●		●	●	●	△	△	△	△	○	○			●
Verso R 2500 H	●	○	○	●	●	○	○	○	△	△	○	○	○	○	●
Verso R 3000 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 3000 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 3000 F	○	●		●	●	●	△	△	△	△	○	○			●
Verso R 4000 U	●	○	○	●	●	○	○	○	△	○	○	○			●
Verso R 4000 H/V	●	○	○	●	●	○	○	○	△	△	○	○			●
Verso R 5000 V	○	●	○	●	●	○	○	○		○	○	○			●
Verso R 5000 H	●	○	○	●	●		●		△	△	○	○	○	○	●
Verso R 7000 H	●	○	○	●	●		●		△	△	○	○			●

● standard equipment ○ possible choice △ ordered separately duct heater/cooler

The markings are explained on p. 7.

Verso R 1000 U/H/V

Nominal air flow according to ErP 2018, m³/h	990
Nominal air flow according to ErP 2018, l/s	275
Panel thickness, mm	50
Unit weight, kg	196
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	7,3
Maximal operating current HW, A	3,3
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	180
Electric air heater capacity, kW / Δt, °C	3 / 8,4
Maintenance space, mm	800

Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at nominal flow rate

Supply inlet	59
Supply outlet	73
Exhaust inlet	59
Exhaust outlet	70
Casing	52


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	42
--------------	----

Performance (Verso R 1000 UH data)

Supply air filter F7, exhaust air filter M5

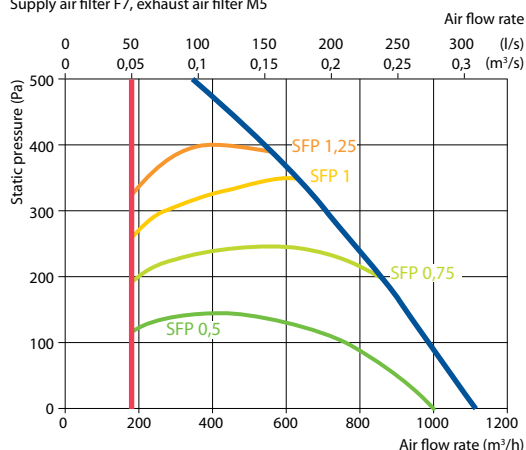

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-0,63-W1
Water cooler	DCW-0,9-6
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,9-6
Cooling unit	MOU 18HFN8+KA8140



Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,7	15,2	16,1	17,0	17,9	22,6	23,5	24,4


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	2,6	5,1	2,6	6,7
Maximal capacity, kW	5,7	6,4	6,1	9,3
Pressure drop, kPa	1,6	4,9	–	–
Air temperature in/out, °C	13,8/22	30/18	13,8/22	30/18
Connection, " / mm	¾		½ / 22	

Summer: 30°C / 50%; HCW – 899 m³/h.

Shown as right (R1)

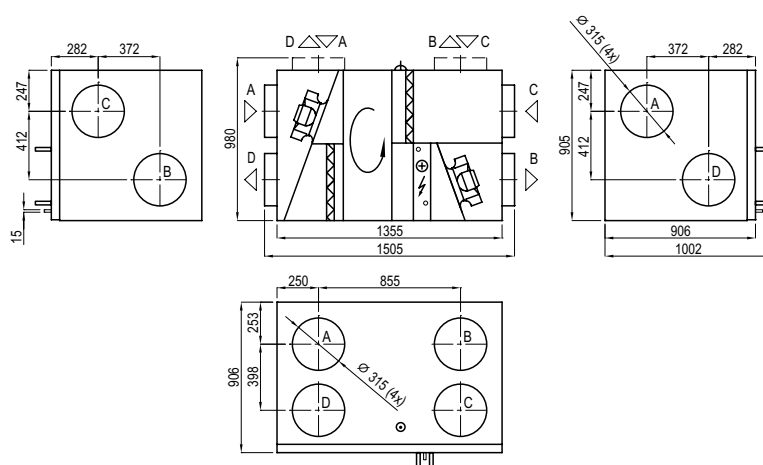

Shown as left (L1)

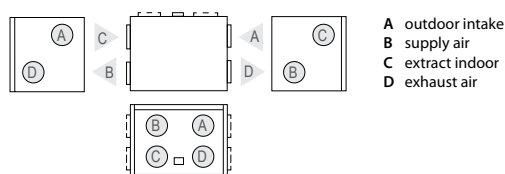

Verso R 1300 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	1380
Nominal air flow according to ErP 2018, l/s	383,33
Panel thickness, mm	50
Unit weight, kg	203
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,7
Maximal operating current HW, A	5,5
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	270
Electric air heater capacity, kW / Δt, °C	4,5 / 9,1
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate


Supply inlet	66
Supply outlet	82
Exhaust inlet	67
Exhaust outlet	79
Casing	58

A-weighted sound pressure level L_{PA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Performance (Verso R 1300 UH data)

Supply air filter F7, exhaust air filter M5

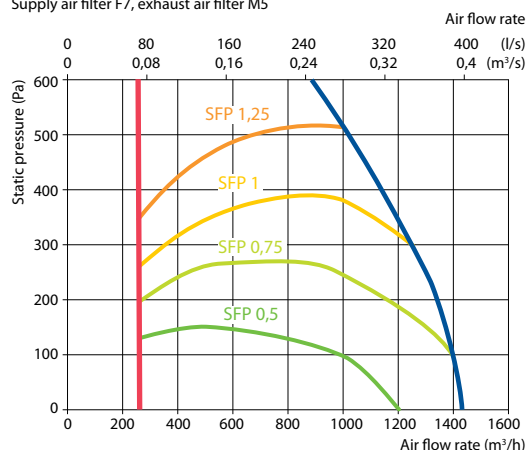

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1-W2
Water cooler	DCW-1,2-8
2-way valve	VVP45.20-4.0+SSB61
DX cooler	DCF-1,2-8
Cooling unit	MOU 36HFN8+KA8243

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,7	14,3	15,4	16,4	17,4	22,6	23,7	24,7


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	4,2	7,9	9,6	4,3
Maximal capacity, kW	9,8	8,9	12,0	7,5
Pressure drop, kPa	1,7	9,5	–	–
Air temperature in/out, °C	12,7 / 22	30 / 18	12,7 / 22	30 / 18
Connection, " / mm	¾		½ / 22	

Summer: +30°C/ 50%; HCW – 1350 m³/h

Shown as right (R1)

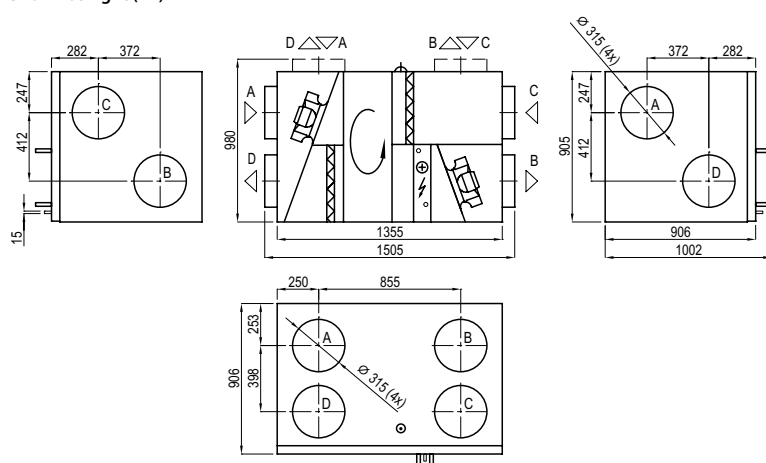

Shown as left (L1)

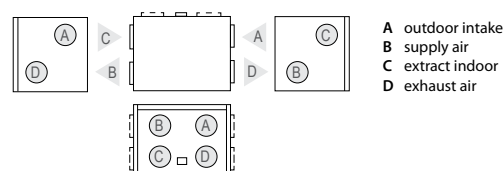

- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Verso R 1300 F

Nominal air flow according to ErP 2018, m³/h	1200
Nominal air flow according to ErP 2018, l/s	333,33
Panel thickness, mm	50
Unit weight, kg	144
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	10,7
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	410x420x46
Electric power input of the fan drive at maximum flow rate, W	370
Electric air heater capacity, kW / Δt, °C	3 / 5,4
Maintenance space, mm	400

Acoustic data

A-weighted sound power level L_{wAr} dB(A)
at nominal flow rate

Supply inlet	64
Supply outlet	73
Exhaust inlet	63
Exhaust outlet	72
Casing	54


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	44
--------------	----

Performance

Supply air filter F7, exhaust air filter M5

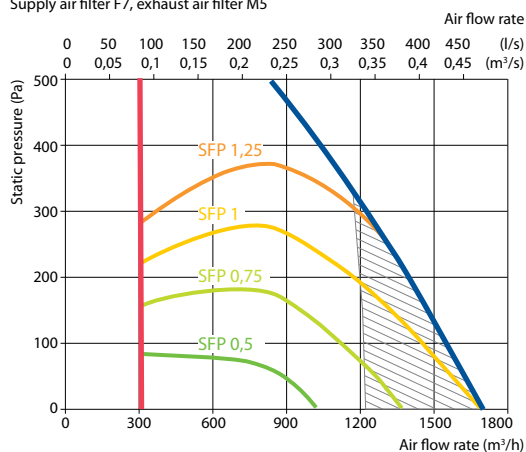

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-1,2-8 / DHCW-315
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-1,2-8
Cooling unit	MOU 24HFN8+KA8243



C5.1

Temperature efficiency

	Winter						Summer		
Outside temperature, °C	-23	-15	-10	-5	0		25	30	35
After heat exchanger, °C	10,0	12,1	13,5	14,8	16,1		22,8	24,1	25,5


indoor +22°C, 20% RH

Hot water duct air heater (DH)*


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	4,8	4,8	4,8
Flow rate, dm³/h	214	213	212
Pressure drop, kPa	10,9	11,0	11
Temperature in/out, °C	10,0 / 22,0		
Maximal capacity, kW	12,4	10,2	8,0
Connection, "	½		

* option


Shown as right (R1)

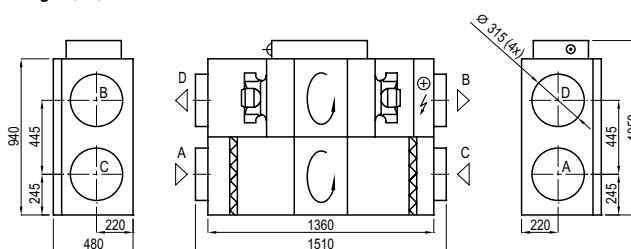

Shown as left (L1)



Mounting positions

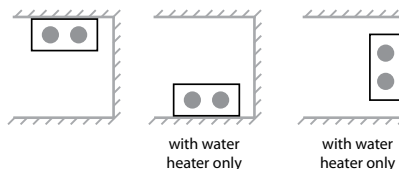

Verso R 1500 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	1530
Nominal air flow according to ErP 2018, l/s	425
Panel thickness, mm	50
Unit weight, kg	206
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	450
Electric air heater capacity, kW / Δt, °C	4,5 / 6,9
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate


Supply inlet	60
Supply outlet	75
Exhaust inlet	60
Exhaust outlet	71
Casing	54

A-weighted sound pressure level L_{PA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	44
--------------	----

Performance (Verso R 1500 UH data)

Supply air filter F7, exhaust air filter M5

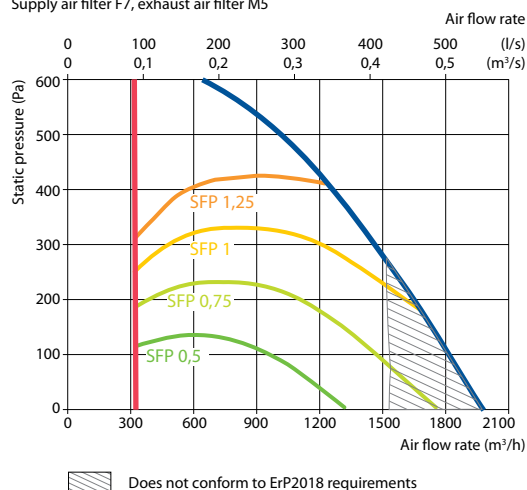

Does not conform to ErP2018 requirements

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1,6-W2
Water cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU 36HFN8+KA8243

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,3	14,0	15,1	16,2	17,2	22,6	23,7	24,8


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	5,0	9,1	5,3	10,4
Maximal capacity, kW	10,9	9,7	8,2	12,6
Pressure drop, kPa	1,7	11,8	–	–
Air temperature in/out, °C	12,3 / 22	30 / 18,1	12,3 / 22	30 / 18
Connection, " / mm	¾		½ / 22	

Summer: +30°C/ 50%; DX – 1500 m³/h

Shown as right (R1)

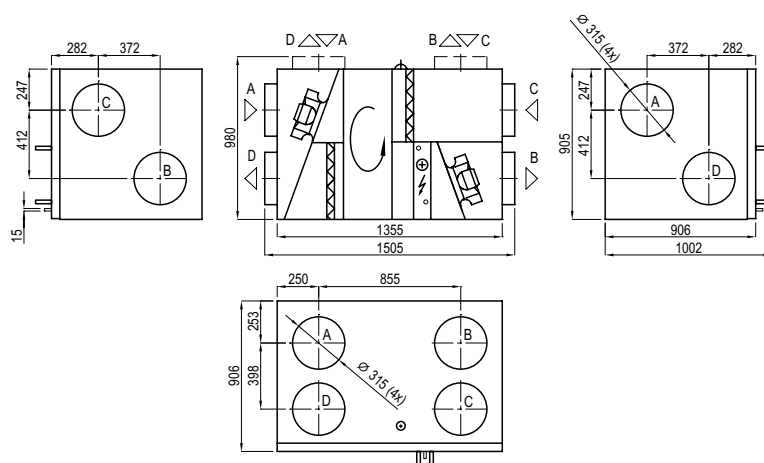

Shown as left (L1)

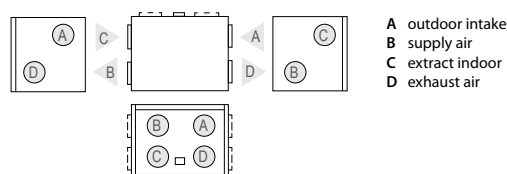

A outdoor intake
B supply air
C extract indoor
D exhaust air

Verso R 1700 U/H/V

Nominal air flow according to ErP 2018, m³/h	1780
Nominal air flow according to ErP 2018, l/s	484,44
Panel thickness, mm	50
Unit weight, kg	220
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	800x450x46
Electric power input of the fan drive at maximum flow rate, W	470
Electric air heater capacity, kW / Δt, °C	4,5 / 6,2
Maintenance space, mm	800

Acoustic data

A-weighted sound power level L_{wA} dB(A)
at nominal flow rate

Supply inlet	61
Supply outlet	76
Exhaust inlet	61
Exhaust outlet	73
Casing	55


A-weighted sound pressure level L_{pA} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	45
--------------	----

Performance (Verso R 1700 UH data)

Supply air filter F7, exhaust air filter M5

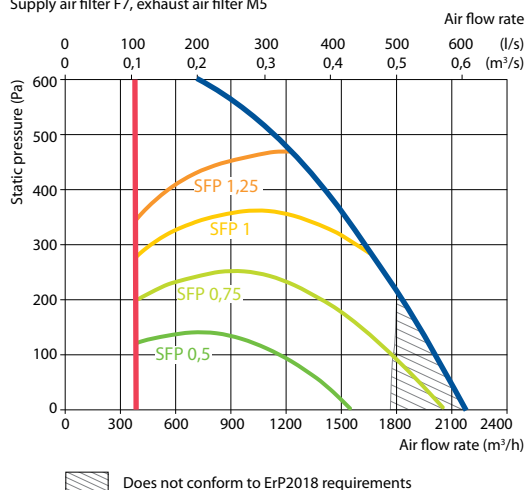

Accessories (p. 123)

Closing damper	H	SRU-M-300x400+LF24/LM24
	V	SRU-M-400x300+LF24/LM24
Silencer	A/D	STS-IVR3BA-600-300-700-S
	B/C	STS-IVR3BA-600-300-1250-S
PPU		PPU-HW-3R-15-1,6-W2
Air heater-cooler		DCW-1,6-11
2-way valve		VVP47.20-4,0+SSP61
DX cooler		DCF-1,6-11
Cooling unit		MOU 36HFN8+KA8243



C5.1



Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,5	13,4	14,6	15,7	16,9	22,7	23,9	25,0


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	6,3	10,4	6,3	12,3
Maximal capacity, kW	13,1	11,4	8,9	14,7
Pressure drop, kPa	1,6	6,9	–	–
Air temperature in/out, °C	11,5 / 22	30 / 18	11,5 / 22	30 / 18
Connection, " / mm	1		5/8 / 22	

Summer: +30°C/ 50%

Shown as right (R1)

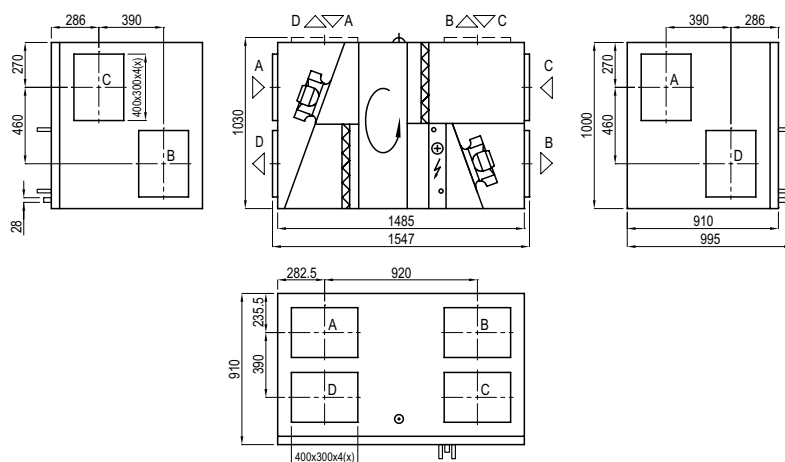

Shown as left (L1)

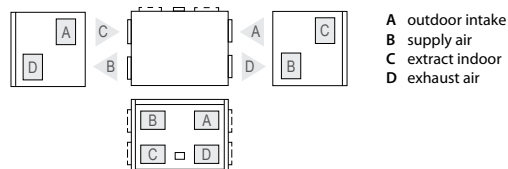

A outdoor intake
B supply air
C extract indoor
D exhaust air

Verso R 2000 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	2170
Nominal air flow according to ErP 2018, l/s	602,78
Panel thickness, mm	50
Unit weight, kg	210
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,9
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	800x450x46
Electric power input of the fan drive at maximum flow rate, W	650
Electric air heater capacity, kW / Δt, °C	7,5 / 8,0
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	64
Supply outlet	79
Exhaust inlet	64
Exhaust outlet	76
Casing	56


A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

Performance (Verso R 2000 UH data)

Supply air filter F7, exhaust air filter M5

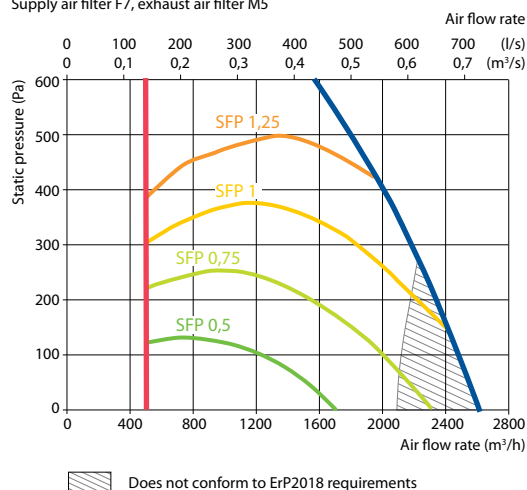

Accessories (p. 123)

Closing damper	H	SRU-M-300x400+LF24/LM24
	V	SRU-M-400x300+LF24/LM24
Silencer	A/D	STS-IVR3BA-600-400-700-S
	B/C	STS-IVR3BA-600-400-1250-S
PPU		PPU-HW-3R-15-2,5-W2
Air heater-cooler		DCW-2,5-17
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-2,5-17
Cooling unit		MOU-55HFN8+KA8243

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,3	12,4	13,7	15,0	16,3	22,8	24,1	25,4


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12		
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	8,5	12,9	7,7	12,5
Maximal capacity, kW	15,9	12,9	9,6	14,8
Pressure drop, kPa	1,8	9,5	–	–
Air temperature in/out, °C	10,3 / 22	30 / 18,5	9,2 / 22	30 / 18
Connection, " / mm	1		5/8 / 22	

Summer +30°C/ 50%; DX – 1800 m³/h

Shown as right (R1)

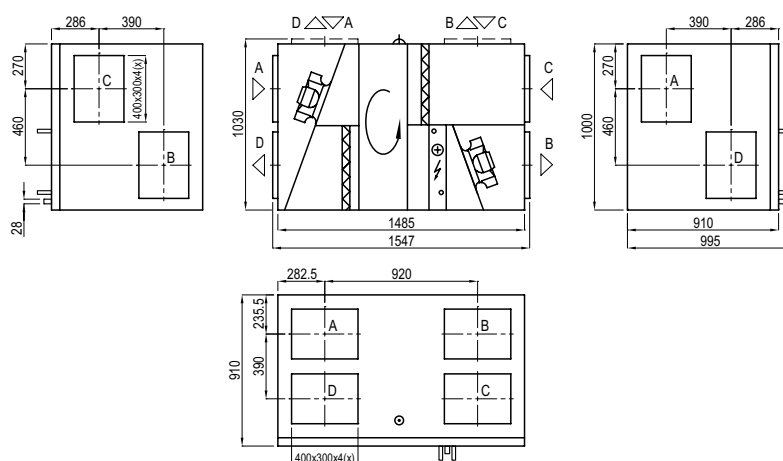

Shown as left (L1)

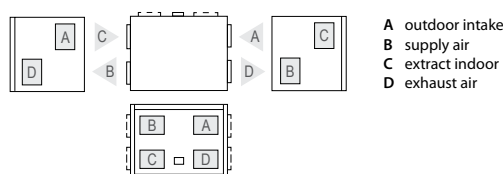

Verso R 2000 F

Nominal air flow according to ErP 2018, m³/h	2080
Nominal air flow according to ErP 2018, l/s	577,78
Panel thickness, mm	50
Unit weight, kg	280
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,8
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	560x420x96
Electric power input of the fan drive at maximum flow rate, W	670
Electric air heater capacity, kW / Δt, °C	7,5 / 8,8
Maintenance space, mm	400

Acoustic data

A-weighted sound power level L_{wA} dB(A)
at nominal flow rate

Supply inlet	69
Supply outlet	79
Exhaust inlet	69
Exhaust outlet	79
Casing	59


A-weighted sound pressure level L_{pA} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Performance

Supply air filter F7, exhaust air filter M5

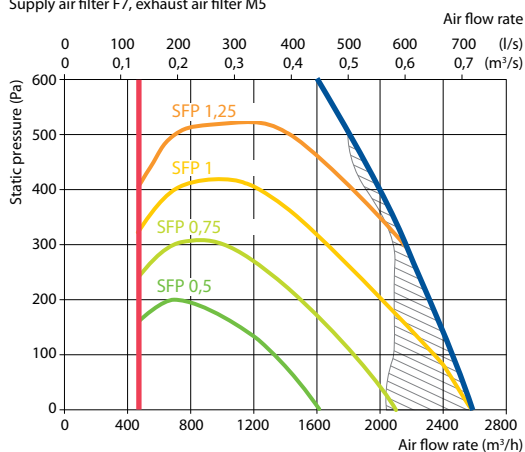

Accessories (p. 123)

Closing damper	AGUJ-M-355+LF24/LM24
Silencer	A/D AGS-355-100-900-M
	B/C AGS-355-100-1200-M
Water heater	DH-355
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-2,0-13/ DHCW-355
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-2,0-14
Cooling unit	MOU-48HFN8+KA8243



C5.1

Temperature efficiency

	Winter						Summer		
Outside temperature, °C	-23	-15	-10	-5	0		25	30	35
After heat exchanger, °C	14,9	16,2	17,0	17,8	18,5		22,5	23,3	24,0


indoor +22°C, 20% RH

Hot water duct air heater (DH)*


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	5,0	5,0	5,0
Flow rate, dm³/h	221	220,0	219,0
Pressure drop, kPa	12,2	12,3	12,4
Temperature in/out, °C	14,9/22		
Maximal capacity, kW	17,20	13,9	10,5
Connection, "	½		

* option


Shown as right (R1)

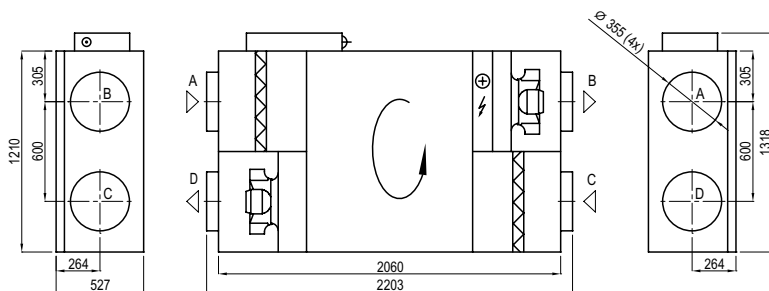

Shown as left (L1)



Mounting positions

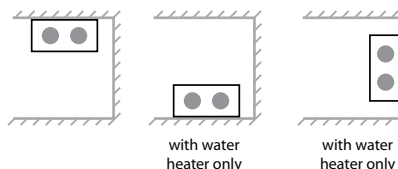

Verso R 2500 H

Nominal air flow according to ErP 2018, m ³ /h	2800
Nominal air flow according to ErP 2018, l/s	777,78
Panel thickness, mm	50
Unit weight, kg	289
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	22
Maximal operating current HW, A	11,7
Filters dimensions BxHxL, mm	792x392-10x500
Electric power input of the fan drive at maximum flow rate, W	520
Electric air heater capacity, kW / Δt, °C	7,5/7,4
Maintenance space, mm	900



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	58
Supply outlet	76
Exhaust inlet	61
Exhaust outlet	72
Casing	59

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	45
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,4	12,5	13,7	15,0	16,3	22,8	24,1	25,4


indoor +22°C, 20% RH

Hot water air heater


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,9	10,9	10,9
Flow rate, dm ³ /h	481	479	477
Pressure drop, kPa	3,3	3,3	3,3
Temperature in/out, °C	10,4/22		
Maximal capacity, kW	22,1	17,7	13,2
Connection, "	½		

Performance


Supply air filter F7, exhaust air filter M5

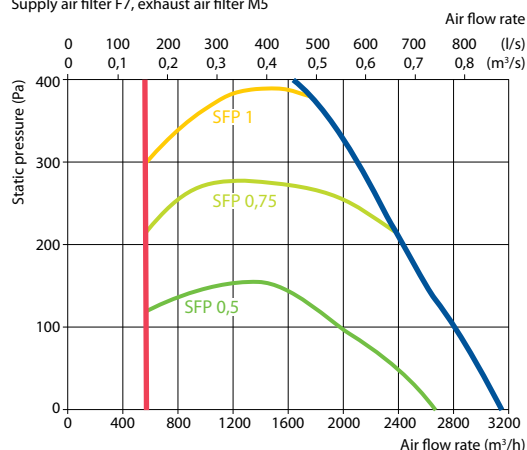

Shown as right (R1)

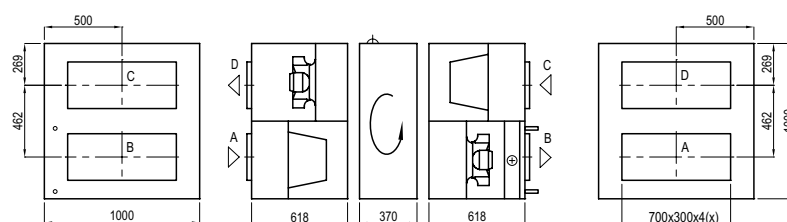

Shown as left (L1)



Accessories (p. 123)

Closing damper	SRU-M-700x300+LF24/LM24
Silencer	A/D STS-IVR3BA-800-300-700-S
	B/C STS-IVR3BA-800-300-1250-S
PPU	PPU-HW-3R-15-2,5-W2
Air heater-cooler	DCW-2,5-17
2-way valve	VVP45.25-6.3
DX cooler	DCF-2,5-17
Cooling unit	MOU-55HFN8+KA8243

Verso R 3000 U/H/V

Nominal air flow according to ErP 2018, m³/h	3450
Nominal air flow according to ErP 2018, l/s	958,33
Panel thickness, mm	50
Unit weight, kg	456
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	19,8
Maximal operating current HW, A	7,1
Filters dimensions BxHxL, mm	525x510x46
Electric power input of the fan drive at maximum flow rate, W	850
Electric air heater capacity, kW / Δt, °C	9/6,6
Maintenance space, mm	1000

Acoustic data

A-weighted sound power level L_{wA} dB(A)
at nominal flow rate

Supply inlet	59
Supply outlet	76
Exhaust inlet	59
Exhaust outlet	73
Casing	51


A-weighted sound pressure level L_{pA} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	40
--------------	----

Performance (Verso R 3000 UH data)

Supply air filter F7, exhaust air filter M5

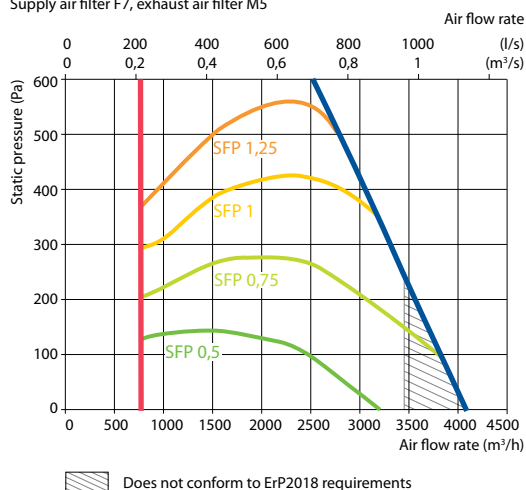

Accessories (p. 123)

Closing damper	H	SRU-M-400x500+LF24/LM24
	V	SRU-M-500x400+LF24/LM24
Silencer	A/D	STS-IVR3BA-600-500-700-S
	B/C	STS-IVR3BA-600-500-1250-S
PPU		PPU-HW-3R-15-2,5-W2
Air heater-cooler		DCW-3,0-20
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-3,0-20-2
Cooling unit		2xMOU36HFN8+KA8243



C5.1

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,0	13,0	14,2	15,4	16,6	22,7	24,0	25,2


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	12,8	21,5	11,5	19,6
Maximal capacity, kW	26,0	21,7	20,4	22,9
Pressure drop, kPa	2,0	20,5	–	–
Air temperature in/out, °C	11,0 / 22	30 / 18,0	11,0 / 22	30 / 18
Connection, " / mm	1		½ / 22	

Summer +30°C/ 50%; DX – 2900 m³/h

Shown as right (R1)

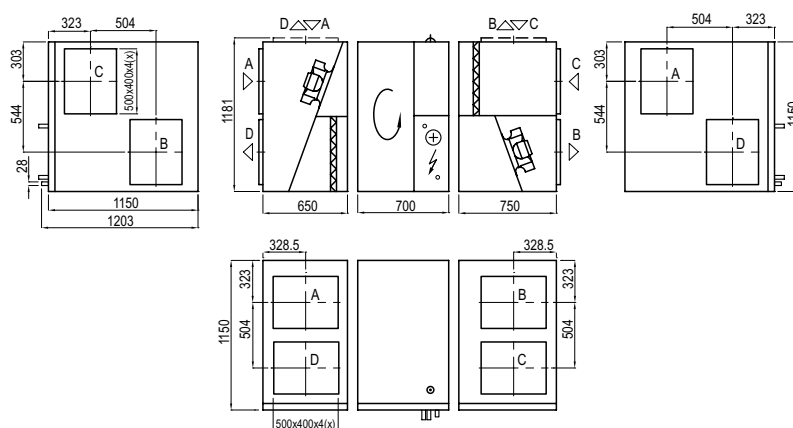

Shown as left (L1)

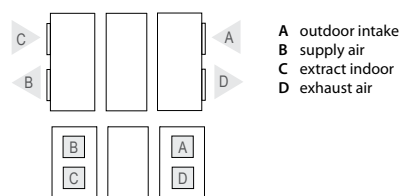

Verso R 3000 F

Nominal air flow according to ErP 2018, m ³ /h	3300
Nominal air flow according to ErP 2018, l/s	916.67
Panel thickness, mm	50
Unit weight, kg	289
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	19.9
Maximal operating current HW, A	7.1
Filters dimensions BxHxL, mm	560x540x96
Electric power input of the fan drive at maximum flow rate, W	720
Electric air heater capacity, kW / Δt, °C	9/7,6
Maintenance space, mm	600



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	72
Supply outlet	84
Exhaust inlet	71
Exhaust outlet	85
Casing	60

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	49
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,8	14,5	15,5	16,5	17,5	22,6	23,6	24,6

indoor +22°C, 20% RH


Hot water air heater (SVK)*

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,2	10,2	10,2
Flow rate, dm ³ /h	450	448	446
Pressure drop, kPa	8,1	8,2	8,3
Temperature in/out, °C	12,8 / 22,0		
Maximal capacity, kW	26,0	21,1	16,1
Connection, "	½		

* option


Performance

Supply air filter F7, exhaust air filter M5

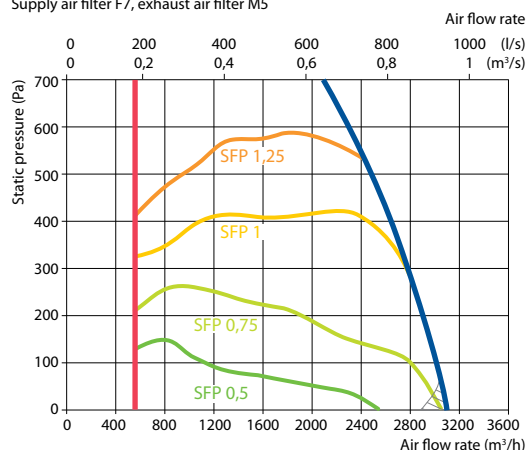


Does not conform to ErP2018 requirements

Shown as right (R1)

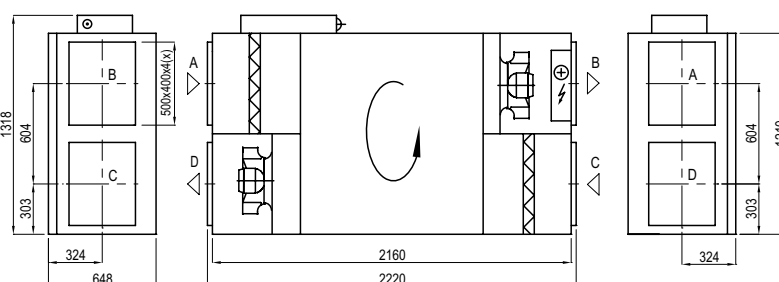


Shown as left (L1)



A outdoor intake
B supply air
C extract indoor
D exhaust air

Mounting positions

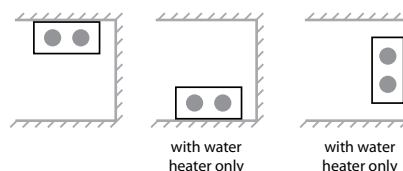

Accessories (p. 123)

Closing damper	SRU-M-500x400+LF24/LM24
Silencer	A/D STS-IVR3BA-600-400-700-S B/C STS-IVR3BA-600-400-1250-S
Water heater	SVK-700x400-2R
PPU	PPU-HW-3R-15-1.6-W2
Air heater-cooler	DCW-3,0-20
2-way valve	VVP45.25-6.3+SSB61
DX cooler	DCF-3,0-20-2
Cooling unit	2xMOU-36HFN8+KA8243

Verso R 4000 U/H/V

Nominal air flow according to ErP 2018, m³/h	3500
Nominal air flow according to ErP 2018, l/s	972,22
Panel thickness, mm	50
Unit weight, kg	470
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	31,1
Maximal operating current HW, A	9,7
Filters dimensions BxHxL, mm	525x510x46
Electric power input of the fan drive at maximum flow rate, W	1830
Electric air heater capacity, kW / Δt, °C	15 / 8,7
Maintenance space, mm	1000

Acoustic data

A-weighted sound power level L_{wA} dB(A)
at nominal flow rate

Supply inlet	59
Supply outlet	76
Exhaust inlet	59
Exhaust outlet	73
Casing	47


A-weighted sound pressure level L_{pA} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	36
--------------	----

Performance (Verso R 4000 UH data)

Supply air filter F7, exhaust air filter M5

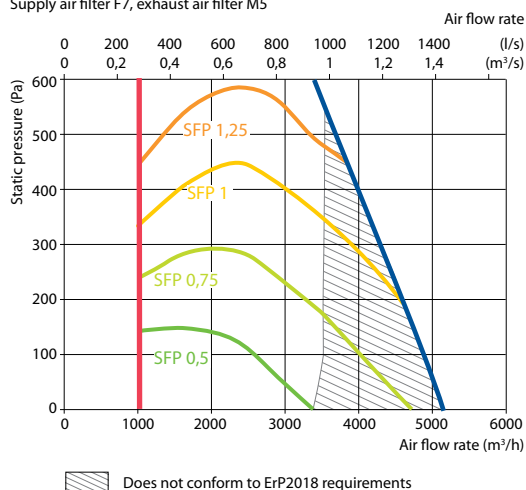

Accessories (p. 123)

Closing damper	H	SRU-M-400x500+LF24/LM24
	V	SRU-M-500x400+LF24/LM24
Silencer	A/D	STS-IVR3BA-800-500-700-S
	B/C	STS-IVR3BA-800-500-1250-S
PPU		PPU-HW-3R-25-6.3-W2
Air heater-cooler		DCW-4,5-30
2-way valve		VVP45.25-10+SSC61
DX cooler		DCF-4,5-31-2
Cooling unit		2xMOU-55HFN8+KA8243



C5.1

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,9	12,9	14,1	15,4	16,6	22,7	24,0	25,2


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	13,1	21,7	13,1	24,1
Maximal capacity, kW	26,3	21,8	17,6	26,8
Pressure drop, kPa	2	20,9	–	–
Air temperature in/out, °C	10,9 / 22	30 / 18,0	10,9 / 22	30 / 18,0
Connection, " / mm	1		2x½" / 2x22	

Summer +30°C / 50%

Shown as right (R1)

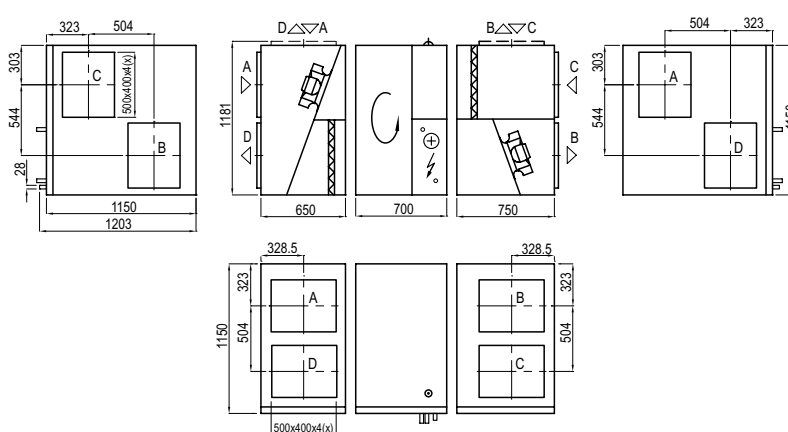

Shown as left (L1)

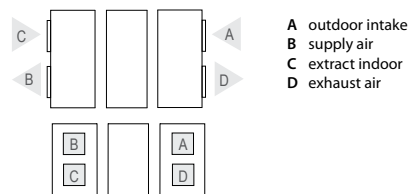

A outdoor intake
B supply air
C extract indoor
D exhaust air

Verso R 5000 V

Nominal air flow according to ErP 2018, m ³ /h	5000
Nominal air flow according to ErP 2018, l/s	1388,89
Panel thickness, mm	50
Unit weight, kg	600
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	29,5
Maximal operating current HW, A	8,1
Filters dimensions BxHxL, mm	650x630x92
Electric power input of the fan drive at maximum flow rate, W	1215
Electric air heater capacity, kW / Δt, °C	15 / 8,9
Maintenance space, mm	1300



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	70
Supply outlet	80
Exhaust inlet	68
Exhaust outlet	83
Casing	61


A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	58
--------------	----

Performance

Supply air filter F7, exhaust air filter M5

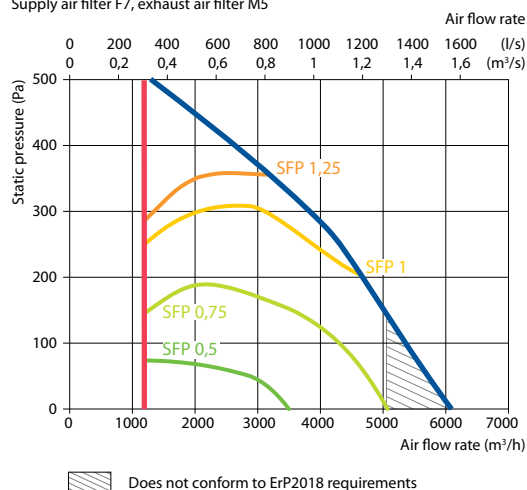

Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,9	16,2	17	17,8	18,5	22,5	23,3	24,0

indoor +22°C, 20% RH


Changeover water/ DX heating – cooling exchanger (HCW/HCDX)

	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12		
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	11,7	31,1	11,7	34,6
Maximal capacity, kW	40	38,8	25	42,8
Pressure drop, kPa	1,8	25,1	–	–
Air temperature in/out, °C	15/22	30/18	15/22	30/18
Connection, " / mm	½		2x½ / 2x22	

Shown as right (R1)

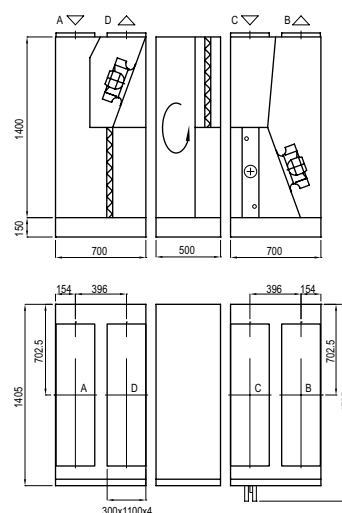

Shown as left (L1)

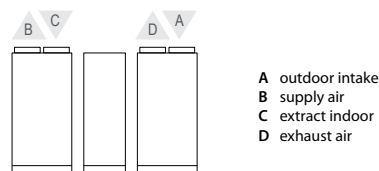

A outdoor intake
B supply air
C extract indoor
D exhaust air

Accessories (p. 123)

Closing damper	SRU-M-1100x300+LF24/LM24
Silencer	A/D STS-IXY5BU-1250-300-700-S
	B/C STS-11XAMR-1250-300-1250-S
PPU	PPU-HW-3R-20-4-W2
Water cooler	DCW-4,5-30
2-way valve	VVP45.25-10.0+SSC61
DX cooler	DCF-4,5-31-2
Cooling unit	2xMOU-55HFN8+KA8243

Verso R 5000 H

Nominal air flow according to ErP 2018, m ³ /h	5250
Nominal air flow according to ErP 2018, l/s	1458,33
Panel thickness, mm	50
Unit weight, kg	442
Supply voltage HE, V	3~400
Maximal operating current HE, A	HW 13,1
Filters dimensions BxHxL, mm	592x592-8x500
Electric power input of the fan drive at maximum flow rate, W	1000
Maintenance space, mm	1200



C5.1



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	61
Supply outlet	78
Exhaust inlet	64
Exhaust outlet	75
Casing	63

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	50
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,5	12,6	13,8	15,1	16,4	22,8	24,0	25,3


indoor +22°C, 20% RH

Hot water air heater

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	20,2	20,2	20,2
Flow rate, dm ³ /h	894	890	881
Pressure drop, kPa	5,3	5,3	5,3
Temperature in/out, °C	10,5 / 22,0	10,5 / 22,0	10,5 / 21,9
Maximal capacity, kW	37,1	29,0	20,1
Connection, "	½		


Performance

Supply air filter F7, exhaust air filter M5

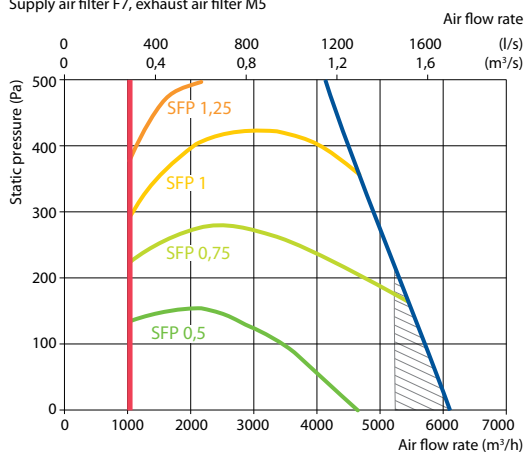


Does not conform to ErP2018 requirements

Shown as right (R1)

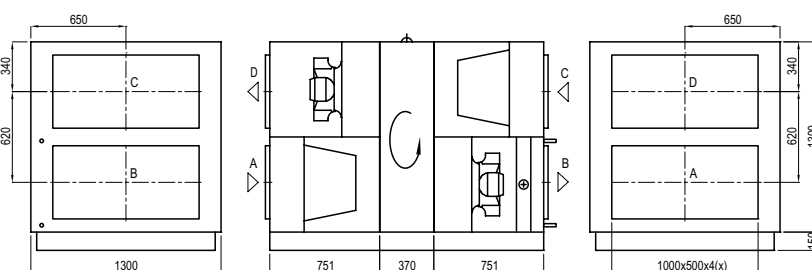

Shown as left (L1)



A outdoor intake
B supply air
C extract indoor
D exhaust air

Accessories (p. 123)

Closing damper	SRU-M-1000x500+LF24/LM24
Silencer	A/D STS-IVR3BA-1000-500-700-S B/C STS-IVR3BA-1000-500-1250-S
PPU	PPU-HW-3R-20-4,0-W2
Air heater-cooler	DCW-4,5-30
2-way valve	VVP45.25-10.0+SSC61
DX cooler	DCF-4,5-31-2
Cooling unit	2xMOU-55HFN8+KA8243

Verso R 7000 H

Nominal air flow according to ErP 2018, m ³ /h	6680
Nominal air flow according to ErP 2018, l/s	1855,56
Panel thickness, mm	45
Unit weight, kg	765
Supply voltage HE, V	3~400
Maximal operating current HE, A	HW 18,1
Filters dimensions B×H×L, mm	592×592-8×500
Electric power input of the fan drive at maximum flow rate, W	1340
Maintenance space, mm	1400



C5.1



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	60
Supply outlet	82
Exhaust inlet	64
Exhaust outlet	82
Casing	59

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,1	13,0	14,2	15,4	16,7	22,7	24,0	25,2


indoor +22°C, 20% RH

Hot water air heater

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	24,5	24,5	24,5
Flow rate, dm ³ /h	1083	1077	1072
Pressure drop, kPa	8,6	8,8	8,9
Temperature in/out, °C	11,1/22,0		
Maximal capacity, kW	55,2	45,1	34,9
Connection, "	1		


Performance

Supply air filter F7, exhaust air filter M5

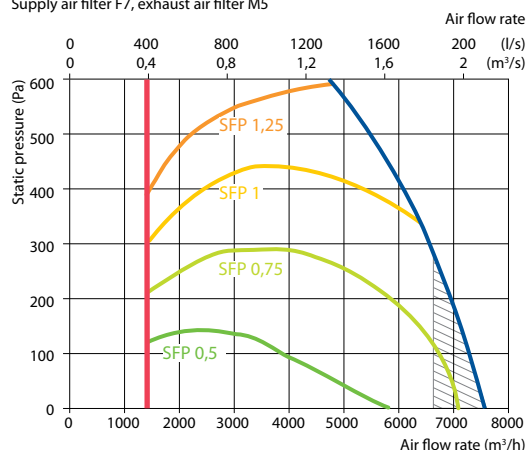


Does not conform to ErP2018 requirements

Shown as right (R1)

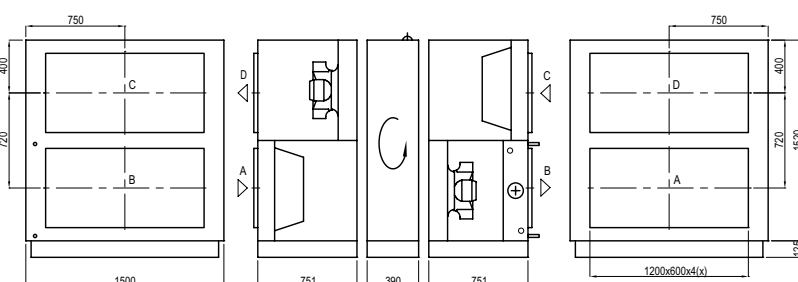

Shown as left (L1)



A outdoor intake
B supply air
C extract indoor
D exhaust air


Accessories (p. 123)

Closing damper	SRU-M-1200x600+LF24/LM24
Silencer	A/D STS-IVR3BA-1200-600-700-S B/C STS-IVR3BA-1200-600-1250-S
PPU	PPU-HW-3R-20-4,0-W2
Air heater-cooler	DCW-7,0-47
2-way valve	HRB3 32 16+AMB162
DX cooler	DCF-7,0-48-3
Cooling unit	3xMOU-55HFN8+KA8243

Verso CF Standard

Air handling units with counterflow plate heat exchangers

Sizes and capacities of Verso CF Standard units

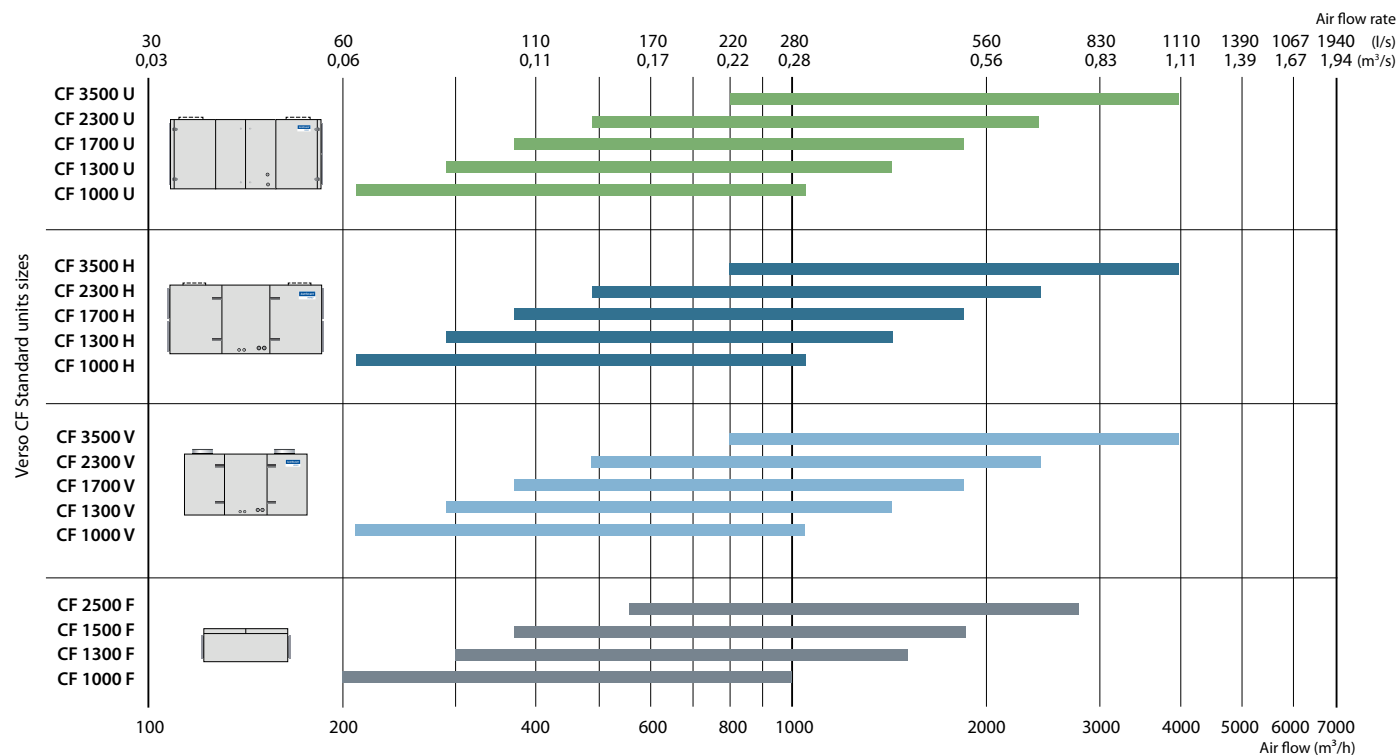

Modifications of Verso CF Standard units

Unit	Supply / exhaust air filter class		Heater			Cooler		Inspection side		Control system C5 panel C5.1
	F7	M5	HE	HW	HCW	CW	DX	R1	L1	
Verso CF 1000 U	●	●	○		○	△	○	○	○	●
Verso CF 1000 H / V	●	●	○	○		△	△	○	○	●
Verso CF 1000 F	●	●	●	△	△	△	△	○	○	●
Verso CF 1300 U	●	●	○		○	△	○	○	○	●
Verso CF 1300 H / V	●	●	○	○		△	△	○	○	●
Verso CF 1300 F	●	●	●	△	△	△	△	○	○	●
Verso CF 1500 F	●	●	●	△	△	△	△	○	○	●
Verso CF 1700 U	●	●	○		○	△	○	○	○	●
Verso CF 1700 H / V	●	●	○	○		△	△	○	○	●
Verso CF 2300 U	●	●	○		○	△	○	○	○	●
Verso CF 2300 H / V	●	●	○	○		△	△	○	○	●
Verso CF 2500 F	●	●	●	△		△	△	○	○	●
Verso CF 3500 U	●	●	○		○	△	○	○	○	●
Verso CF 3500 H / V	●	●	○	○		△	△	○	○	●

● standard equipment ○ possible choice △ ordered separately duct heater/cooler

The markings are explained on p. 7.

Verso CF 1000 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	1050
Nominal air flow according to ErP 2018, l/s	291,67
Panel thickness, mm	50
Unit weight, kg	269
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	9,5
Maximal operating current HW, A	3,3
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	178
Electric air heater capacity, kW / Δt, °C	4,5/11,9
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate


Supply inlet	56
Supply outlet	74
Exhaust inlet	57
Exhaust outlet	74
Casing	54

A-weighted sound pressure level L_{PA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	43
--------------	----

Performance (Verso CF 1000 UH data)

Supply air filter F7, exhaust air filter M5

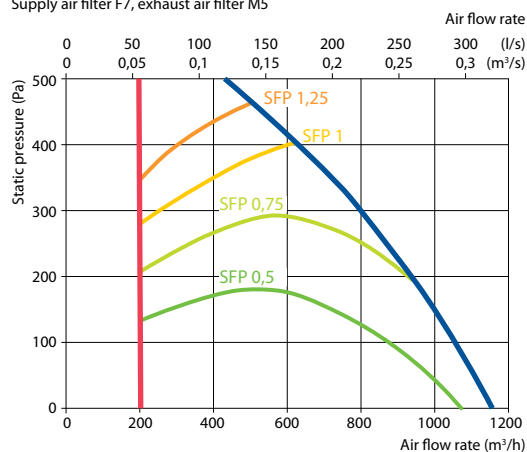

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-0,63-W1
Water cooler	DCW-0,9-6
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,9-6
Cooling unit	MOU-18HFN8+KA8140

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,2	16,0	16,8	17,1	18,0	22,6	23,5	24,7


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	2,4	6,8	2,4	7,3
Maximal capacity, kW	8,7	8,9	5,2	9,9
Pressure drop, kPa	1,8	34,5	–	–
Air temperature in/out, °C	15,2 / 22	30 / 18	15,2 / 22	30 / 18
Connection, " / mm	½		½ / 22	

Summer +30°C/ 50%

Shown as right (R1)

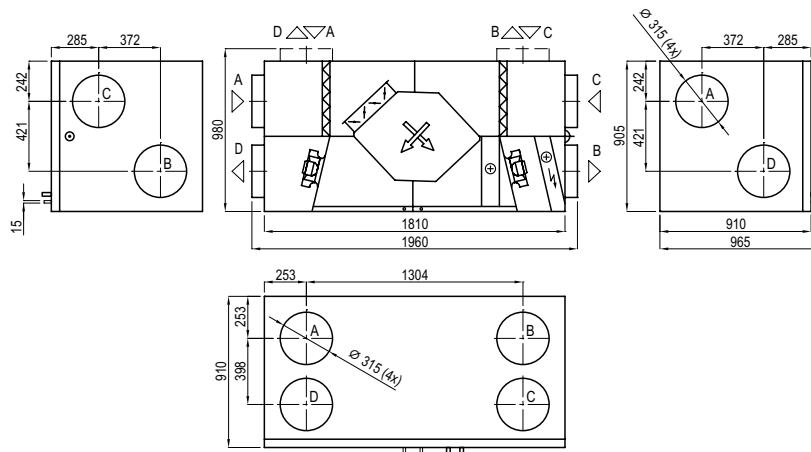

Shown as left (L1)

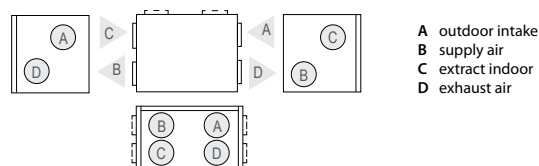

A outdoor intake
B supply air
C extract indoor
D exhaust air

Verso CF 1000 F

Nominal air flow according to ErP 2018, m³/h	850
Nominal air flow according to ErP 2018, l/s	236,11
Panel thickness, mm	50
Unit weight, kg	173
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	7,3
Maximal operating current HW, A	3,3
Filters dimensions BxHxL, mm	550x420x46
Electric power input of the fan drive at maximum flow rate, W	168
Electric air heater capacity, kW / Δt, °C	3/9,8
Maintenance space, mm	400

Acoustic data

A-weighted sound power level L_{WAr} dB(A)
at nominal flow rate

Supply inlet	59
Supply outlet	73
Exhaust inlet	59
Exhaust outlet	73
Casing	54


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	42
--------------	----

Performance

Supply air filter F7, exhaust air filter M5

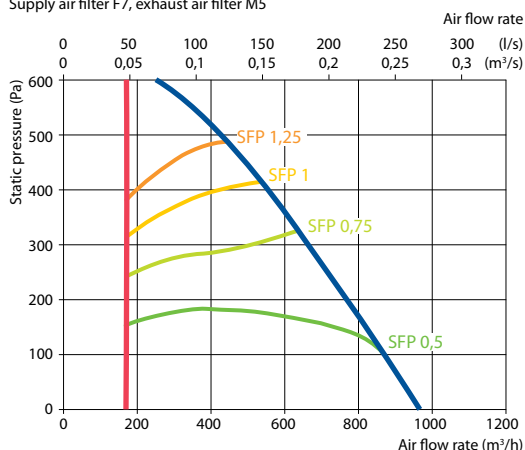

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-0,9-6 / DHCW-315
2-way valve	VVP47.15-2,5+SSP61
DX cooler	DCF-0,9-6
Cooling unit	MOU-18HFN6+KA8140



C5.1

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	17,2	17,4	17,8	18,1	18,7	22,6	23,6	24,7


indoor +22°C, 20% RH

Hot water duct air heater (DH)*


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	1,4	1,4	1,4
Flow rate, dm³/h	60	60	60
Pressure drop, kPa	2,3	2,3	2,4
Temperature in/out, °C	17,2/22		
Maximal capacity, kW	8,8	7,0	5,2
Connection, "	½		

* option

Shown as right (R1)

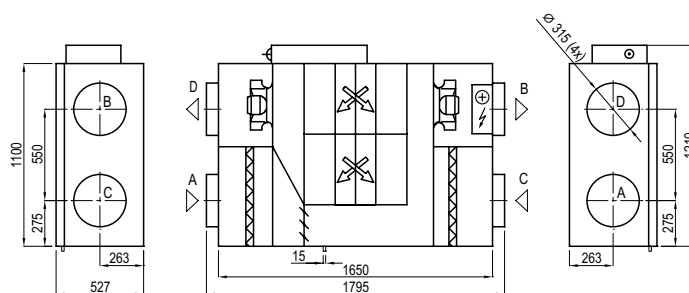

Shown as left (L1)



A outdoor intake
B supply air
C extract indoor
D exhaust air

Verso CF 1300 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	1340
Nominal air flow according to ErP 2018, l/s	372,22
Panel thickness, mm	50
Unit weight, kg	225
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,7
Maximal operating current HW, A	5,5
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	370
Electric air heater capacity, kW / Δt, °C	4,5 / 8,9
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	62
Supply outlet	81
Exhaust inlet	63
Exhaust outlet	81
Casing	59

A-weighted sound pressure level L_{PA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,6	15,5	16,4	16,8	17,8	22,6	23,6	24,6

indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	3,3	8,6	3,3	9,3
Maximal capacity, kW	10,7	10,5	6,2	11,5
Pressure drop, kPa	2,1	53,7	–	–
Air temperature in/out, °C	14,6 / 22	30 / 18	14,6 / 22	30 / 18
Connection, " / mm	½		½ / 22	

Summer: +30°C / 50%


Performance

(Verso CF 1300 UH data)


Supply air filter F7, exhaust air filter M5

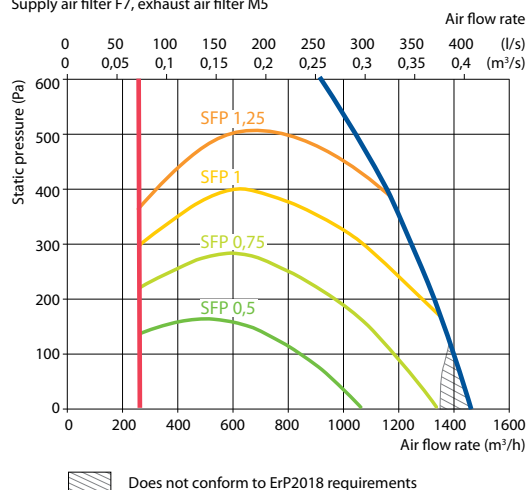

Shown as right (R1)

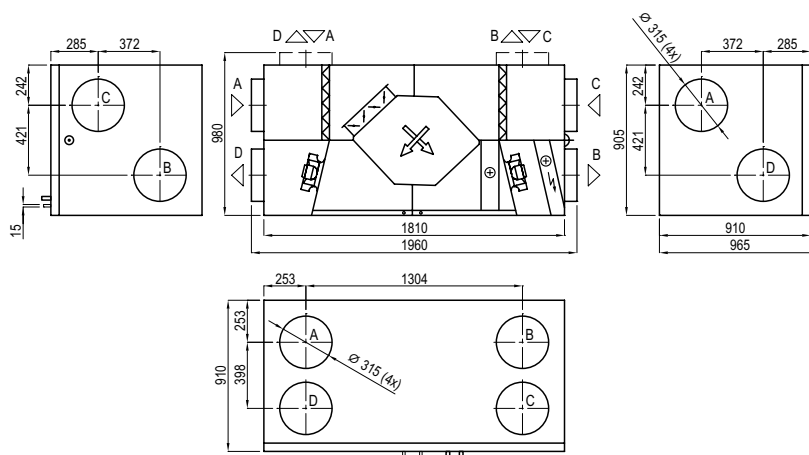

Shown as left (L1)

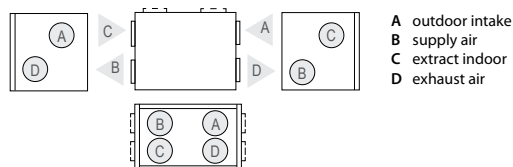

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1-W2
Water cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243

Verso CF 1300 F

Nominal air flow according to ErP 2018, m³/h	1340
Nominal air flow according to ErP 2018, l/s	372,22
Panel thickness, mm	50
Unit weight, kg	175
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,7
Maximal operating current HW, A	5,5
Filters dimensions BxHxL, mm	550x420x46
Electric power input of the fan drive at maximum flow rate, W	360
Electric air heater capacity, kW / Δt, °C	4,5 / 9,1
Maintenance space, mm	400

Acoustic data

A-weighted sound power level L_{wAr} dB(A)
at nominal flow rate

Supply inlet	65
Supply outlet	80
Exhaust inlet	65
Exhaust outlet	80
Casing	59


A-weighted sound pressure level L_{pAr} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Performance

Supply air filter F7, exhaust air filter M5

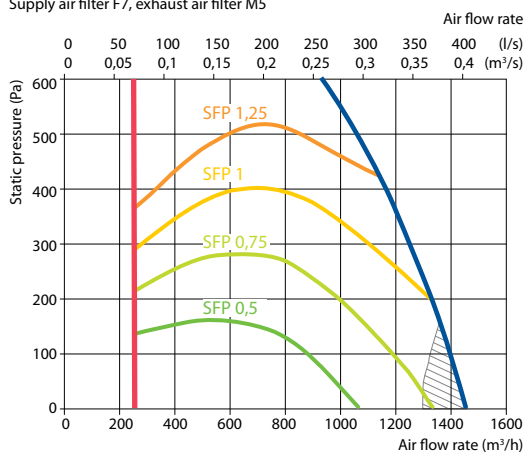

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-1,4-9 / DHCW-315
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243



C5.1

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	16,2	16,5	16,8	17,4	18,1	22,6	23,7	24,9


indoor +22°C, 20% RH

Hot water duct air heater (DH)*


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	2,6	2,6	2,6
Flow rate, dm³/h	115	115	114
Pressure drop, kPa	4,4	4,4	4,4
Temperature in/out, °C	16,2 / 22,0		
Maximal capacity, kW	11,9	9,5	7,1
Connection, "	½		

* option

Shown as right (R1)

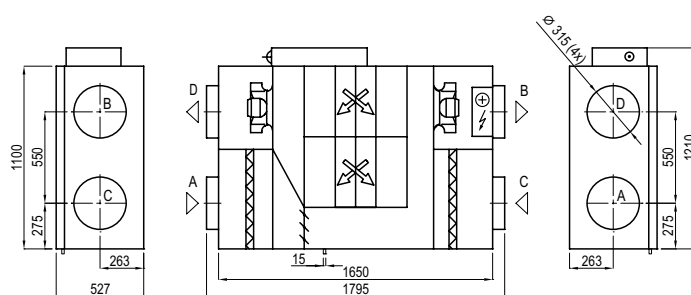

Shown as left (L1)



Verso CF 1500 F

Nominal air flow according to ErP 2018, m ³ /h	1475
Nominal air flow according to ErP 2018, l/s	409,72
Panel thickness, mm	50
Unit weight, kg	190
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	550x420x46
Electric power input of the fan drive at maximum flow rate, W	460
Electric air heater capacity, kW / Δt, °C	4,5 / 7,5
Maintenance space, mm	400



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	60
Supply outlet	75
Exhaust inlet	60
Exhaust outlet	74
Casing	57

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	16,0	16,3	16,6	17,3	18,0	22,6	23,8	25,0

indoor +22°C, 20% RH


Hot water duct air heater (DH)*

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	3,0	3,0	3,0
Flow rate, dm ³ /h	131	131	131
Pressure drop, kPa	5,2	5,2	5,3
Temperature in/out, °C	16,0 / 22,0		
Maximal capacity, kW	12,6	10,1	7,6
Connection, "	½		


* option

Performance


Supply air filter F7, exhaust air filter M5

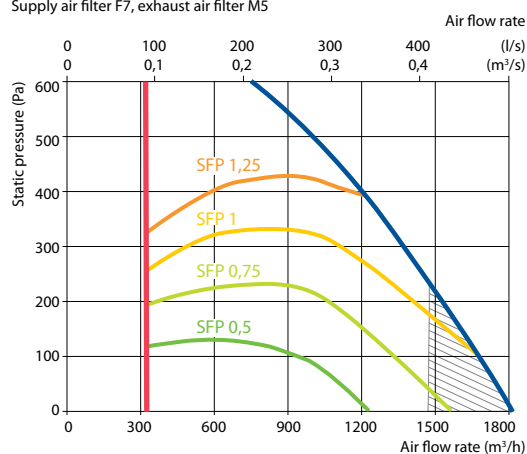

Shown as right (R1)

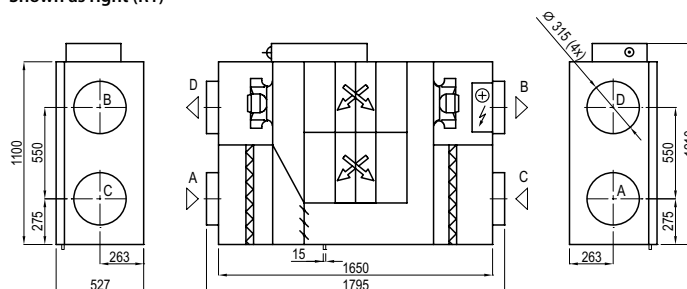

Shown as left (L1)



Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-1,6-11/DHCW-315
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,6-11
Cooling unit	MOU-36HFN8+KA8243

Verso CF 1700 U/H/V

Nominal air flow according to ErP 2018, m³/h	1515
Nominal air flow according to ErP 2018, l/s	420,83
Panel thickness, mm	50
Unit weight, kg	243
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	465
Electric air heater capacity, kW / Δt, °C	4,5/7,4
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} dB(A)
at nominal flow rate

Supply inlet	58
Supply outlet	75
Exhaust inlet	58
Exhaust outlet	75
Casing	57

A-weighted sound pressure level L_{pA} dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,4	15,3	16,2	16,6	17,6	22,6	23,6	24,7

indoor +22°C, 20% RH


Changeover water/ DX heating – cooling exchanger (HCW/HCDX)

	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T_c , °C	–	–	45	45/5
Capacity, kW	3,9	9,8	3,7	10,0
Maximal capacity, kW	11,7	11,3	6,5	12,1
Pressure drop, kPa	2,3	67,3	–	–
Air temperature in/out, °C	14,4 / 22	30 / 18	14,4 / 22	30 / 18
Connection, " / mm		½		¾ / 22

Summer: +30°C / 50%; DX – 1450 m³/h


Performance (Verso CF 1700 UH data)

Supply air filter F7, exhaust air filter M5

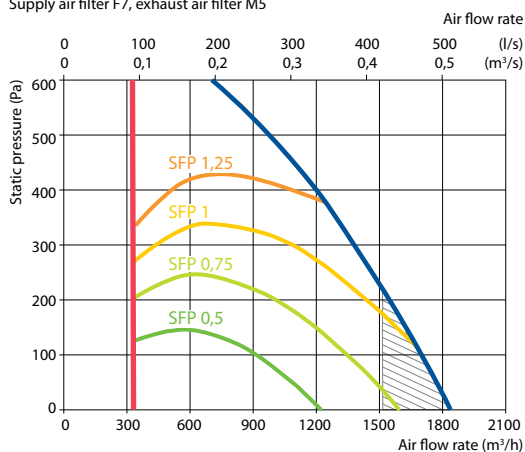


Does not conform to ErP2018 requirements

Shown as right (R1)

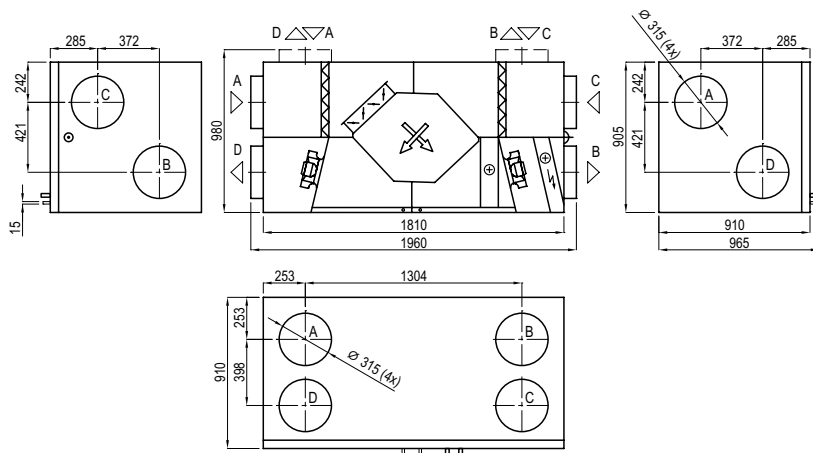

Shown as left (L1)

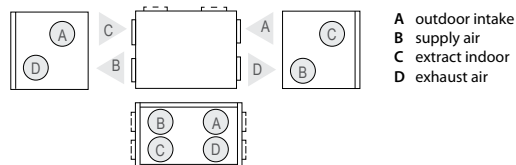

A outdoor intake
B supply air
C extract indoor
D exhaust air

Accessories (p. 123)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1,6-W2
Water cooler	DCW-1,6-11
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,6-11
Cooling unit	MOU-36HFN8+KA8243

Verso CF 2300 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	1990
Nominal air flow according to ErP 2018, l/s	552,78
Panel thickness, mm	50
Unit weight, kg	250
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,8
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	660
Electric air heater capacity, kW / Δt, °C	7,5/8,9
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	60
Supply outlet	78
Exhaust inlet	60
Exhaust outlet	78
Casing	57

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	47
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,7	16,2	16,5	17,2	18,0	22,5	23,4	24,4

indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	4,2	12,5	3,6	11,7
Maximal capacity, kW	13,0	12,6	6,7	13,2
Pressure drop, kPa	2	54,7	–	–
Air temperature in/out, °C	15,7 / 22	30 / 18,4	15,7 / 22	30 / 18
Connection, " / mm	¾		½ / 22	

Summer: +30°C/ 50%; HCW – 2200 m³/h; DX – 1450 m³/h


Performance

(Verso CF 2300 UH data)


Supply air filter F7, exhaust air filter M5

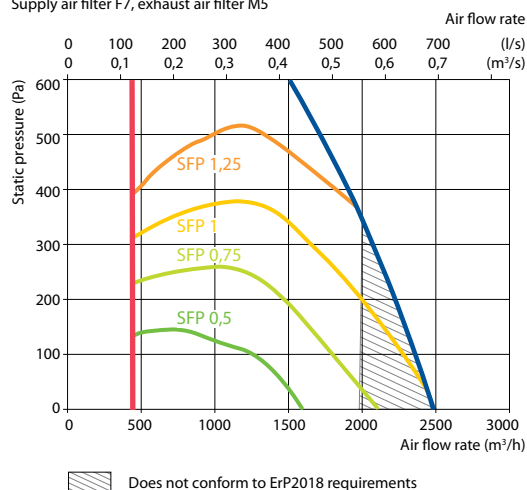

Shown as right (R1)

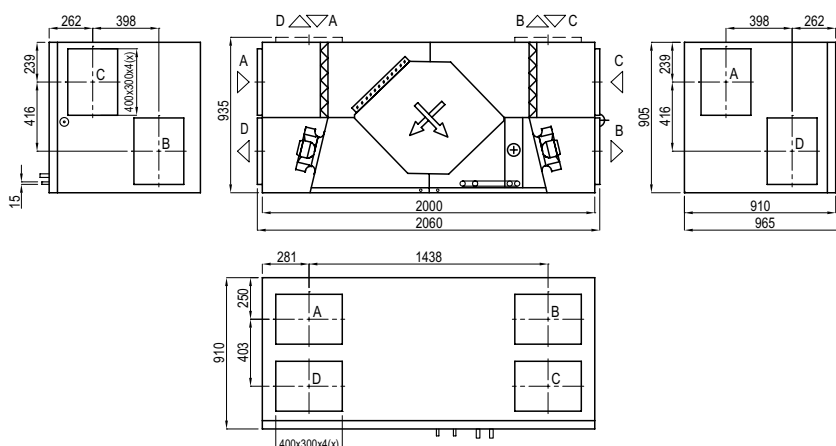

Shown as left (L1)

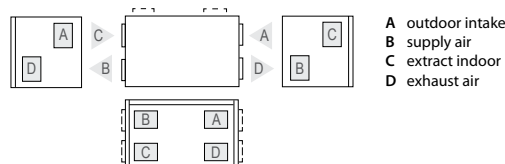

Accessories (p. 123)

Closing damper	H	SRU-M-300x400+LF24/LM24
	V	SRU-M-400x300+LF24/LM24
Silencer	A/D	STS-IVR3BA-600-400-700-S
	B/C	STS-IVR3BA-600-400-1250-S
PPU		PPU-HW-3R-15-1,6-W2
Air heater-cooler		DCW-2,5-17
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-2,5-17
Cooling unit		MOU-55HFN8+KA8243

Verso CF 2500 F

Nominal air flow according to ErP 2018, m³/h	2590
Nominal air flow according to ErP 2018, l/s	719,44
Panel thickness, mm	50
Unit weight, kg	340
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,9
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	888x420x96
Electric power input of the fan drive at maximum flow rate, W	640
Electric air heater capacity, kW / Δt, °C	7,5 / 7,8
Maintenance space, mm	620

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	64
Supply outlet	83
Exhaust inlet	64
Exhaust outlet	83
Casing	62


A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	51
--------------	----


Performance

Supply air filter F7, exhaust air filter M5

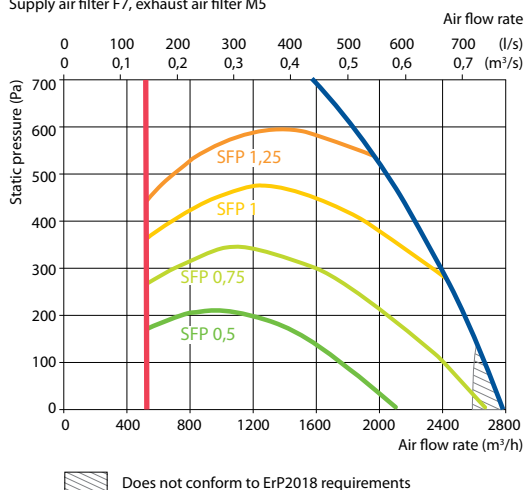

Accessories (p. 123)

Closing damper	SRU-M-700x300+LF24/LM24
Silencer	A/D STS-IVR3BA-800-300-700-S
	B/C STS-IVR3BA-800-300-1250-S
Water heater	SVK-700x400-2R
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-2,5-17
2-way valve	VVP45.25-6,3+SSB61
DX cooler	DCF-2,5-17
Cooling unit	MOU-55HFN8+KA8243

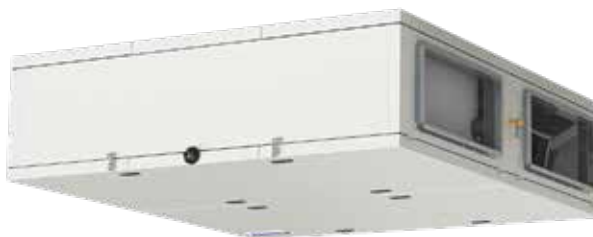

C5.1

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,9	14,9	15,9	16,6	17,6	22,6	23,6	24,7


indoor +22°C, 20% RH

Hot water air heater (SVK)*


	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	7,0	7,0	7,0
Flow rate, dm³/h	311	309	308
Pressure drop, kPa	4,8	4,8	4,9
Temperature in/out, °C	13,9 / 22		
Maximal capacity, kW	22,3	18,0	13,6
Connection, "	½		

* option

Shown as right (R1)

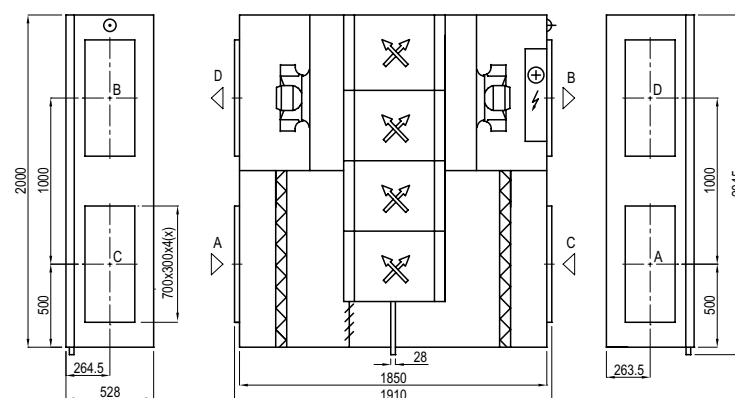

Shown as left (L1)



Verso CF 3500 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	3540
Nominal air flow according to ErP 2018, l/s	983,33
Panel thickness, mm	50
Unit weight, kg	500
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	23,4
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	525x510x46
Electric power input of the fan drive at maximum flow rate, W	960
Electric air heater capacity, kW / Δt, °C	12/9,8
Maintenance space, mm	1000



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	55
Supply outlet	78
Exhaust inlet	56
Exhaust outlet	77
Casing	54


A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	43
--------------	----

Performance (Verso CF 3500 UH data)

Supply air filter F7, exhaust air filter M5

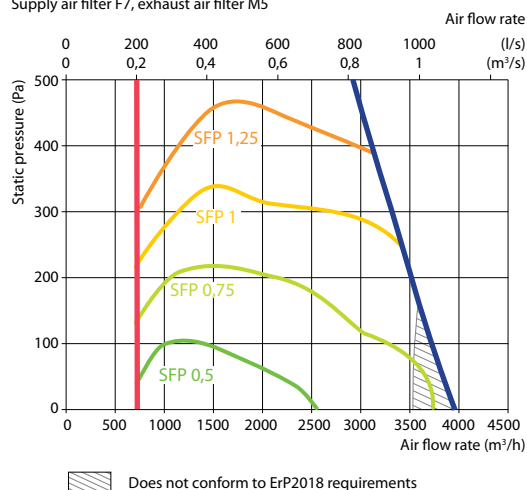

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,0	15,0	15,9	16,3	17,4	22,6	23,7	24,8


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	9,5	8,4	8,2	21,8
Maximal capacity, kW	18,7	10,0	18,3	30,9
Pressure drop, kPa	3,6	25,1	–	–
Air temperature in/out, °C	14,0 / 22	30 / 24	14,0 / 22	30 / 18
Connection, " / mm	¾		2x5/8/2x22	

Summer: 30°C / 50%; DX/HCW – 3150 m³/h

Shown as right (R1)

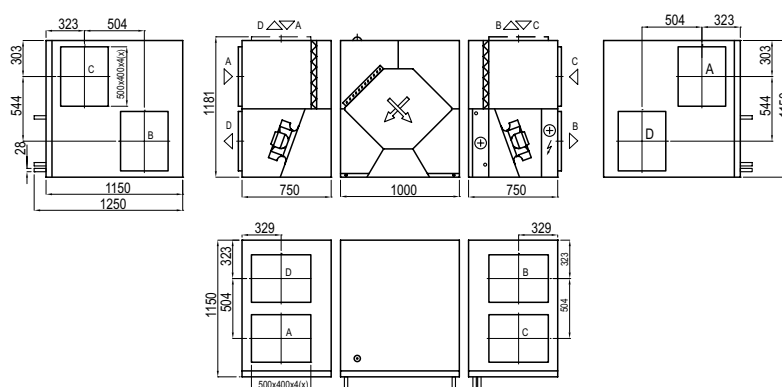

Shown as left (L1)

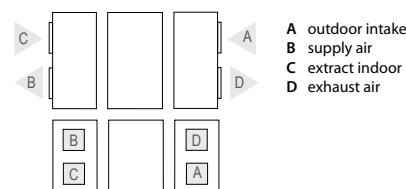


Accessories (p. 123)

Closing damper	H	SRU-M-400x500+LF24/LM24
	V	SRU-M-500x400+LF24/LM24
Silencer	A/D	STS-IVR3BA-800-500-700-S
	B/C	STS-IVR3BA-800-500-1250-S
PPU		PPU-HW-3R-15-2,5-W2
Air heater-cooler		DCW-4,0-27
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-4,0-27-2
Cooling unit		2xMOU-48HFN8+KA8243

Verso S Standard

False ceiling supply air handling units

Sizes and capacities of Verso S Standard units

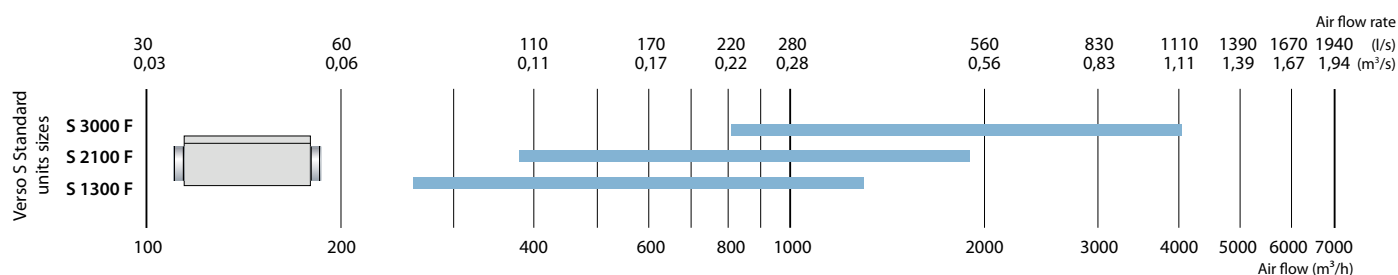

Modifications of Verso S Standard units


Unit	Supply air filter class	Heater		Cooler		Inspection side		Control system C5 panel C5.1
		HE	HW	CW	DX	R1	L1	
Verso S 1300 F	●	○	○	△	△	○	○	●
Verso S 2100 F	●	○	○	△	△	○	○	●
Verso S 3000 F	●		●	△	△	○		●

● standard equipment ○ possible choice △ ordered separately duct heater/cooler


The markings are explained on p. 7.

Verso S 1300 F

Nominal air flow, m ³ /h	1300
Nominal air flow, l/s	361,11
Panel thickness, mm	50
Unit weight, kg	46
Filters dimensions B×H×L, mm	558×287×46
Electric power input of the fan drive at reference flow rate, W	350
Maintenance space, mm	400

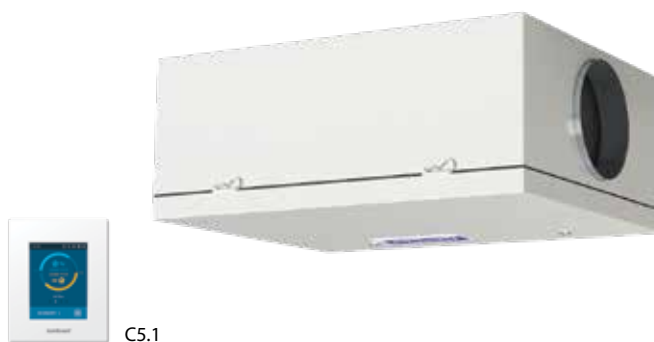

C5.1

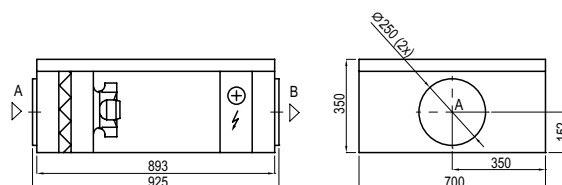

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate


Supply inlet	74
Supply outlet	80
Casing	56

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

Performance

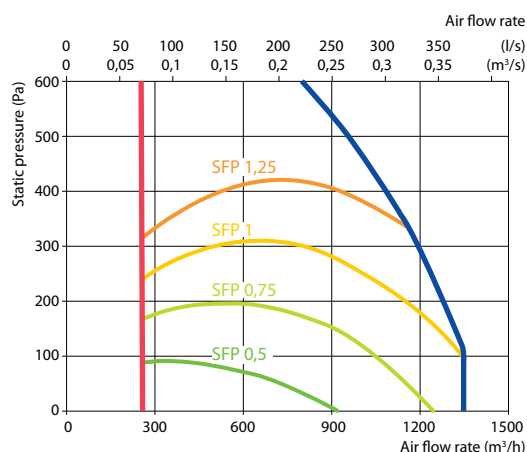

* Compliance to ErP2018 requirements check with the selection program.

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 1300 F-HE/9	3~400	9,0	15,7	19,2
Verso S 1300 F-HE/15	3~400	15,0	24,4	32,1
Verso S 1300 F-HW	1~230	–	3	–

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,1	8,4	6,5
Flow rate, dm ³ /h	448	369	286
Pressure drop, kPa	3,3	2,8	2,3
Temperature in/out, °C	-5 / 18,2	-5 / 14,2	-5,0 / 10,0
Maximal capacity, kW	10,1	8,4	6,5
Connection, "	½		

Accessories (p. 123)

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A AGS-250-50-900-M
	B AGS-250-50-1200-M
PPU	PPU-HW-3R-15-2.5-W2
Air heater-cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243

Verso S 2100 F

Nominal air flow, m ³ /h	1900
Nominal air flow, l/s	527,78
Panel thickness, mm	50
Unit weight, kg	73
Filters dimensions BxHxL, mm	858x287x46
Electric power input of the fan drive at reference flow rate, W	340
Maintenance space, mm	400



C5.1



Acoustic data


A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	70
Supply outlet	75
Casing	52


A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	41
--------------	----

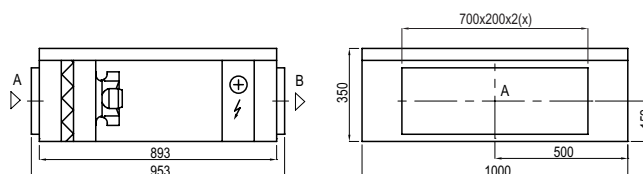

Performance

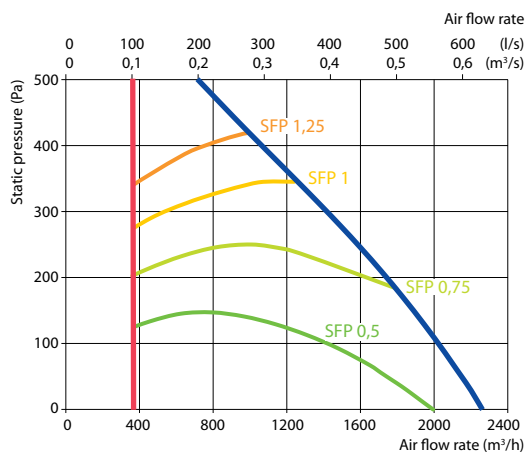

* Compliance to ErP2018 requirements check with the selection program.

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 2100 F-HE/15	3~400	15,0	24,7	21,9
Verso S 2100 F-HE/22,5	3~400	22,5	35,6	32,9
Verso S 2100 F-HW	1~230	–	3,3	–

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	17,0	14,4	11,7
Flow rate, dm ³ /h	752	632	511
Pressure drop, kPa	7,5	5,9	4,5
Temperature in/out, °C	-5,0/21,7	-5,0/17,5	-5,0/13,3
Maximal capacity, kW	17,0	14,4	11,7
Connection, "	½		

Accessories (p. 123)


Closing damper	SRU-M-700x250+LF24/LM24	
Silencer	A	STS-IVR3BA-800-250-700-S
	B	STS-IVR3BA-800-250-1250-S
PPU	PPU-HW-3R-15-2.5-W2	
Air heater-cooler	DCW-2,0-13	
2-way valve	VVP47.20-4,0+SSP61	
DX cooler	DCF-2,0-14	
Cooling unit	MOU-48HFN8+KA8243	

Verso S 3000 F

Nominal air flow, m ³ /h	3800
Nominal air flow, l/s	1055,56
Panel thickness, mm	50
Unit weight, kg	130
Filters dimensions B×H×L, mm	450×480×96
Electric power input of the fan drive at reference flow rate, W	629
Maintenance space, mm	600



C5.1

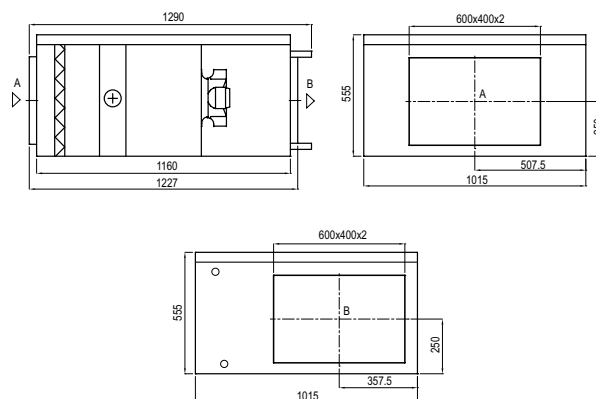

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate


Supply inlet	66
Supply outlet	77
Casing	52

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	42
--------------	----

Performance

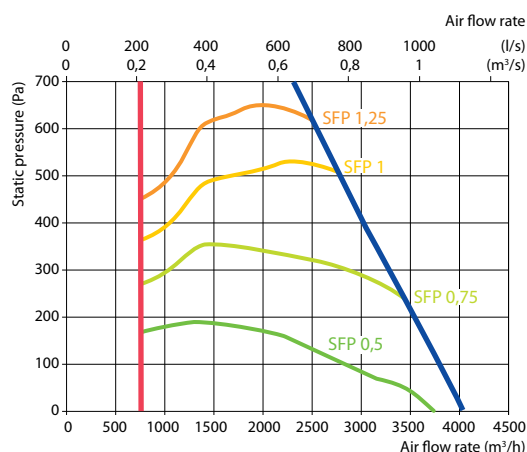

* Compliance to ErP2018 requirements check with the selection program.

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 3000 F-HW	3~400	–	3,8	–

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	34,5	34,5	34,5
Flow rate, dm ³ /h	1523	1516	1509
Pressure drop, kPa	4,8	4,8	4,9
Temperature in/out, °C	-5 / 22,0	-5 / 22,0	-5 / 22,0
Maximal capacity, kW	52,0	44,1	35,9
Connection, "	1		

Accessories (p. 123)

Closing damper	SRU-M-600x400+LF24/LM24
Silencer	A STS-IVR3BA-600-400-700-S
	B STS-IVR3BA-600-400-1250-S
PPU	PPU-HW-3R-25-6.3-W2
Air heater-cooler	DCW-3,0-20
2-way valve	VVP45.25-6,3+SSB61
DX cooler	DCF-3,0-20-2
Cooling unit	2xMOU-36HFN8+KA8243

VERSO Pro2

Advanced and highly efficient air handling units



Airflow capacity:
1000 – 40 000 m³/h



Wide range of rotary and
plate heat exchangers




Modular frameless
casing design



C5 integrated
control system

Sizes and capacities of VERSO Pro2 units

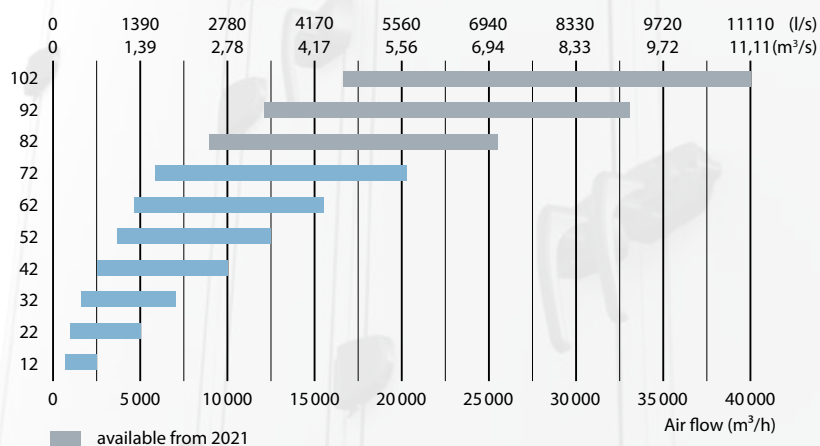

New casing – superior performance: T2/TB1/L1/D1




TB1 Thermal bridging




L1 Leakage


Advanced PVC profile technology ensures best casing characteristics: minimal energy losses, lowest sound levels, highest air tightness and mechanical durability.

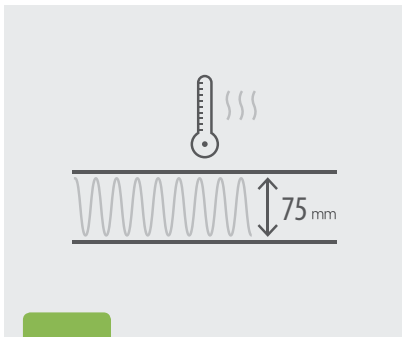

T2 Thermal transmittance

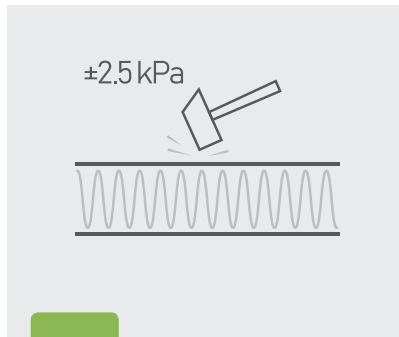

D1 Mechanical strength

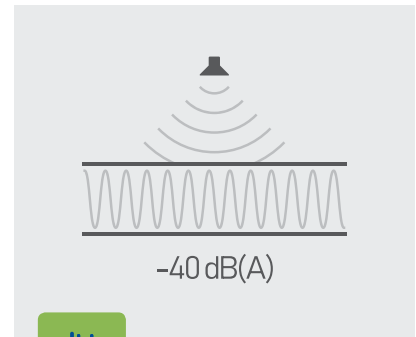

Casing sound insulation

Highest energy efficiency throughout efficient components




Highly efficient heat exchangers

Heat exchanger efficiency up to 90 % – efficient in energy saving and reducing ventilation system costs.

Air handling units with sorption rotor maintain optimal indoor climate while being efficient both during winter and summer. Humidity recovery efficiency up to 95 %.

Wide selection of counter-flow heat exchangers: increased thermal efficiency exchangers or exchangers with lower pressure losses.

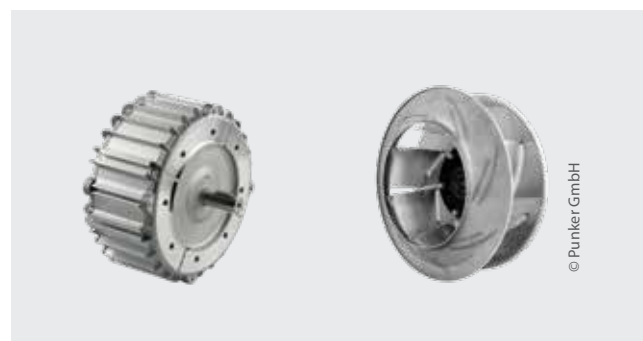

Fans with Ultra Premium IE5 class motors

Fans of highest energy efficiency class ensure colossal energy savings, are distinguished by low noise operation, reliability and durability.


VERSO Pro2 air handling units are equipped with the most efficient components. More than 90 % of efficiency is reached by ultra Premium IE5 class PM motors with highly efficient frequency converters and new generation impellers.

Dimensions

Modern air handling unit proportions allow reaching better technical parameters: a lower air flow velocity inside the unit, better acoustic data.




Verso R Pro2

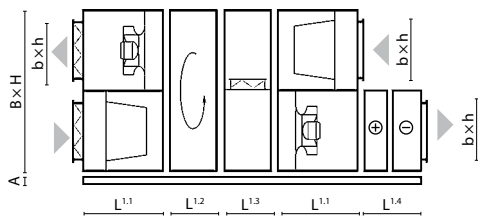

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.3}	L ^{1.4}	b	h	A
12	1054	1054	618	380	435	865	700	200	125
22	1204	1204	751	380	435	865	900	300	125
32	1354	1354	751	380	435	865	1000	400	125
42	1554	1574	751	380	435	865	1200	500	125
52	1754	1769	885	380	435	865	1400	600	125
62	1954	1974	885	380	570	865	1600	700	125
72	2154	2154	885	380	705	865	1800	800	125

Note: if data do not correspond to data in the selection software, please refer to data shown in software.


Verso CF Pro2

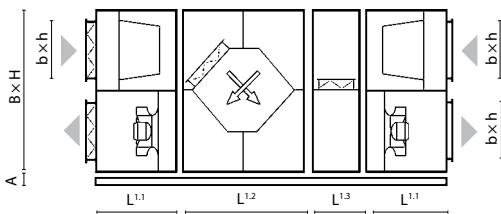

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.3}	b	h	A
12	1054	1204	618	1428	435	700	200	125
22	1204	1354	751	1548	435	900	300	125
32	1354	1574	751	1648	435	1000	400	125
42	1554	1769	751	1934	435	1200	500	125
52	1754	1974	885	2102	435	1400	600	125
62	1954	2154	885	2102	570	1600	700	125
72	2154	2154	885	2102	705	1800	800	125

Note: if data do not correspond to data in the selection software, please refer to data shown in software.

Verso S Pro2

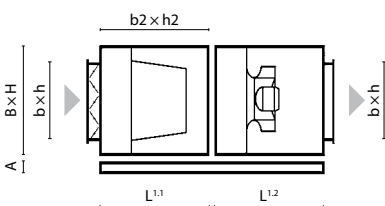

Size	B	H	L ^{1.1}	L ^{1.2}	b	h	A
12	1054	540	650	700	700	200	125
22	1204	635	650	750	900	300	125
32	1354	710	650	810	1000	400	125
42	1554	790	650	845	1200	500	125
52	1754	940	650	945	1400	600	125
62	1954	1040	650	1040	1600	700	125
72	2154	1125	650	1170	1800	800	125

Note: if data do not correspond to data in the selection software, please refer to data shown in software.

VERSO Pro



Convenient and safe

Unit design assures effective transportation and easy installation. Separate parts are compact, without projecting parts; therefore, it is easy to transport them to a designated area of the building, where they are later assembled. Finished air handling units are delivered to the customer in packages that are ready to be transported.

Durable

Unit doors are mounted with firm and aesthetic-looking hinges and are locked with convenient and elegant locks. Door seals are made of firm and elastic foam-type gaskets, which are automatically fastened to the door by the newest machinery and are long-lasting and hermetic.

User friendly


Filters, fans, heat exchangers, coolers and other components are easily accessible during use; if necessary, they can easily be replaced. A new filter clamping mechanism, not only assures tightness, but also essentially simplifies filter change procedure.


Effective and universal

Unit walls are made of galvanized steel sheets with 50 mm thickness insulation. This assures not only effective heat and noise insulation, but also a high level of fire resistance. Air handling unit accessories – external grilles for supply/exhaust vents, hood and roof – allow installing units outside.



Sizes and capacities of VERSIO Pro units

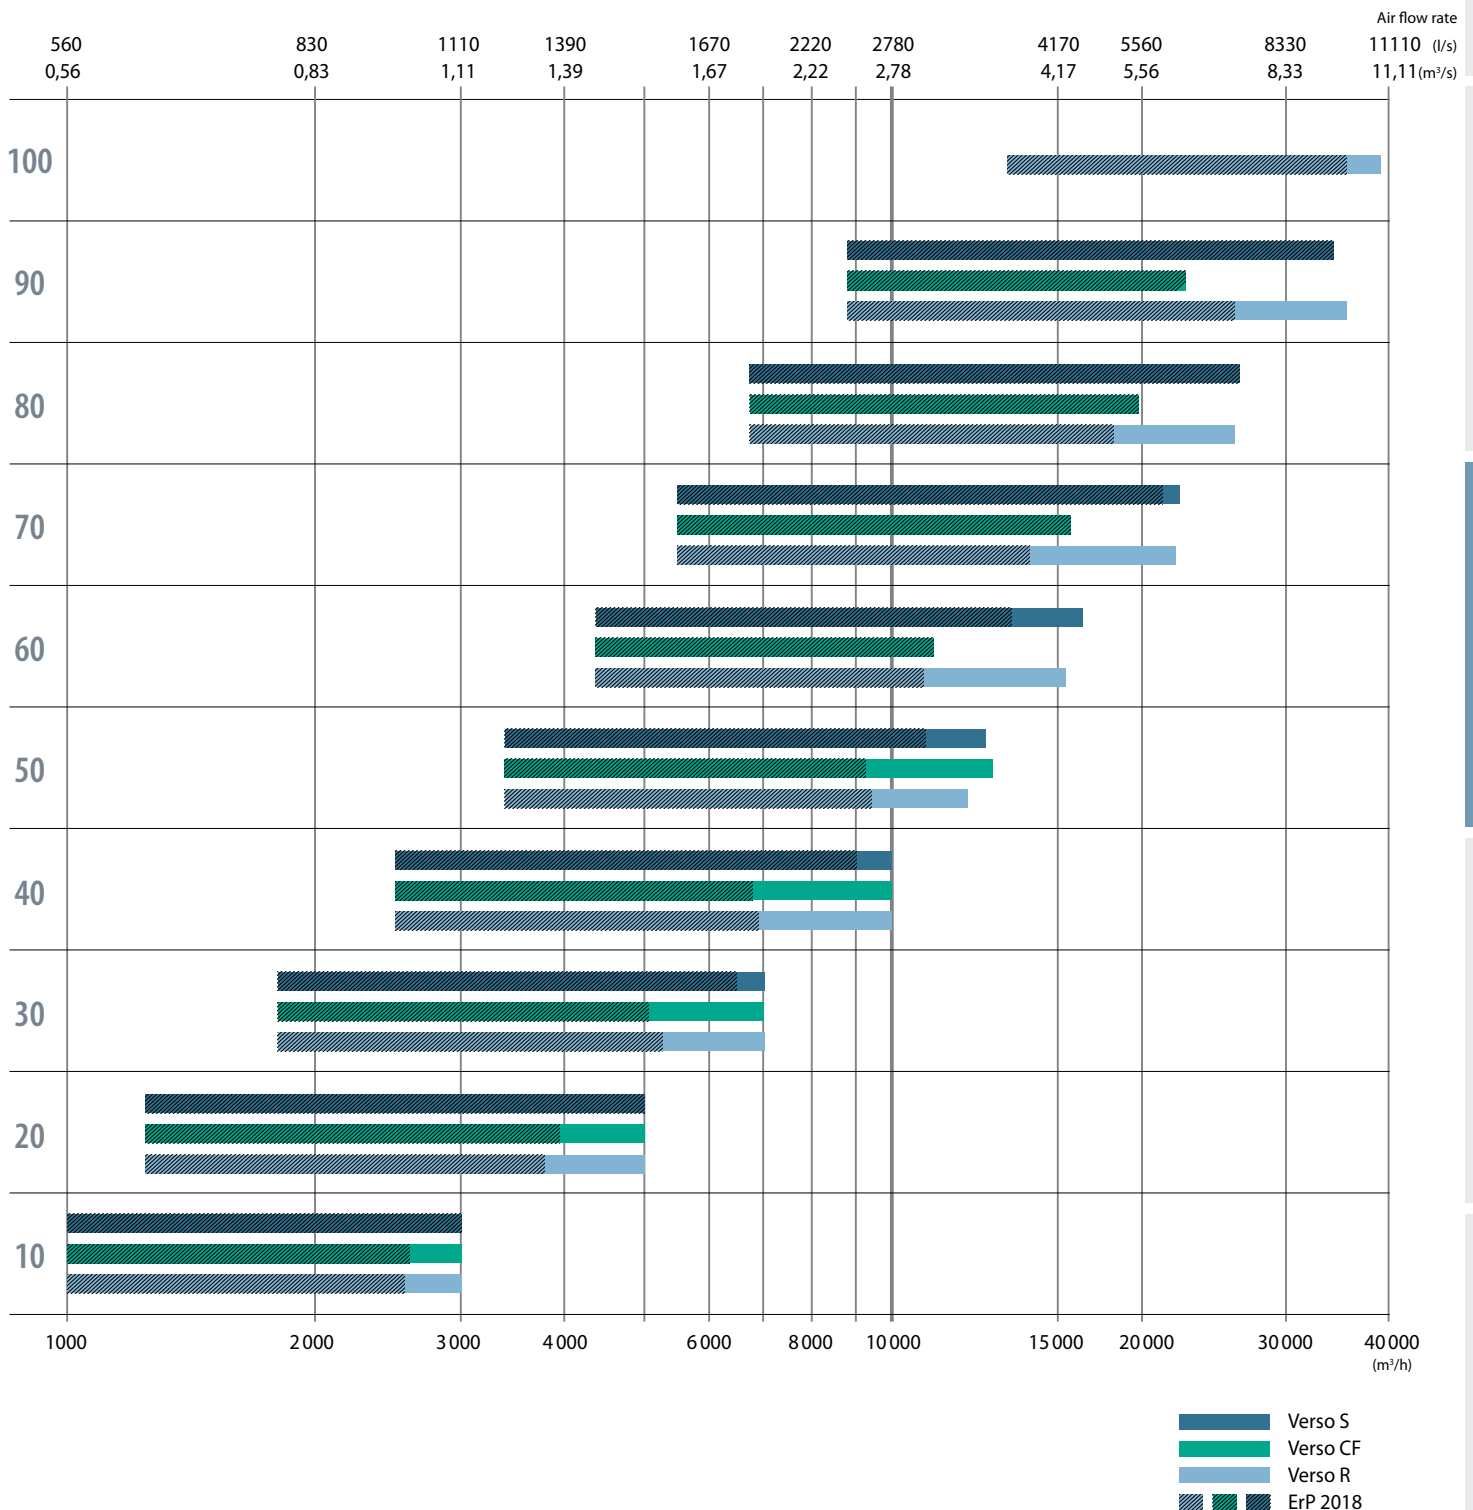

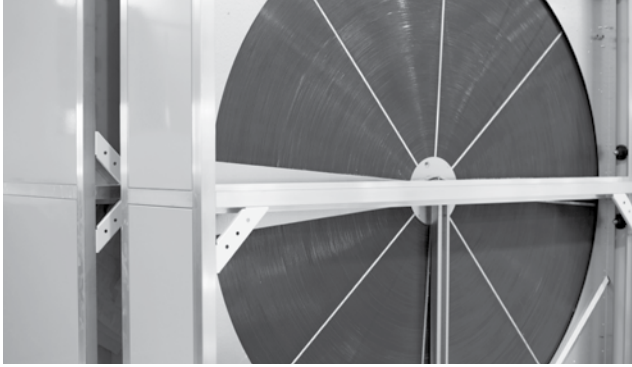

Heat exchangers

Rotary heat exchanger

Used in Verso R series units. Temperature efficiency factor – up to 86%. Possible wave height: 1.4 mm, 1.6 mm, 1.7 mm. Types of rotary heat exchangers:

- Condensation (aluminium);
- Sorption (aluminium with zeolith coating);
- Deep epoxy coating technology.

Aluminium foil is made of an aluminium alloy resistant to sea water. Rotary heat exchanger rotation speed is controlled by a frequency converter, according to the air temperature. The heat exchanger can be ordered with an installed purge section.

Counter flow plate heat exchanger

Used in Verso CF series units. Temperature efficiency factor – up to 95% in wet conditions and up to 88% in dry conditions. The plate heat exchanger is equipped with an automatic by-pass. Aluminium plates are made of an aluminium alloy resistant to sea water.

Anti-frost precautions

Under conditions when the outdoor air temperature is low and humidity is high, the risk of heat exchanger frosting may occur. To avoid frosting of the heat exchanger the by-pass damper is opened. For an extremely low outdoor air temperature the duct-mounted electric preheater is recommended. The counter cross-flow heat exchanger is even more sensitive for low outside air temperatures, as the risk of icing appears in the temperature range from -3°C to -5°C and below. A standard aluminium cross-flow plate heat exchanger has better features, as the risk of icing appears only at -10°C . The lowest risk and the highest resistance to cold outside air is a competitive feature of the rotary heat exchanger, as it does not freeze even at the temperatures of -30°C if the humidity level of the air is appropriate.

Multi-stage frost prevention (FP)

When air handling units with plate heat exchangers operate in a cold climate zone and when the outside air temperature drops below minus $3-4^{\circ}\text{C}$, the heat exchanger starts icing up and therefore periodically needs to be defrosted using the heat of the exhaust air. Heat is lost during these periods, and a more powerful air heater should be installed to compensate these losses. A multi-stage frost prevention system was developed that allows the device to function effectively with a negative outdoor temperature. Its essence is that in case of danger of icing, 2/3 of the surface area of heat exchanger is in normal mode and 1/3 in defrosting mode. After some time, when one segment is thawed, segments change places. Thus, a sufficiently high efficiency is maintained, more thermal energy is saved, without a significant increase in heater power.



Multi-stage frost prevention



Fans

In VERSO series units plug type fans are used, so, units are silent and use electricity effectively. The fans are balanced statically and dynamically, based on the ISO 1940 standard; therefore, unit vibration is minimal and meets all requirements.

When running, fans exhibit the following qualities:

- Very high efficiency coefficient.
- Frequency converters ensure an optimal capacity.
- Good acoustic performance.
- Longevity: a fan is directly connected to the electric motor, so, there is no a belt gear that simplifies maintenance.
- There is a possibility of installing an air flow measuring device.

Two types of fan motors are available – three-phase permanent magnet synchronous motors (PM) (400 V, 50 Hz), controlled by frequency converters, or electronically commutated (EC) with an integrated electronic controller with 20-100 % speed regulation. Safety category – IP54 according to IEC 34-5. Windings insulation category – F. Maximum operating temperature is 40°C.

PM motors


- Highest energy efficiency – more than 93 %.
- Ultra Premium IE5 efficiency class according to IEC.
- Compact dimensions and low weight.
- Wide range of regulation while maintaining high efficiency.
- Low heat dissipation.
- Reliability and durability.
- The shortest payback time.

Fan impellers


- The highest efficiency of the wheel with backward curved blades.
- Static efficiency up to 80 %.
- Statically and dynamically balanced in accordance with the standard ISO1940.
- Material – composite, aluminum or painted steel.

Frequency converters

- High energy efficiency – 97 %.
- Low heat dissipation.
- Specially designed algorithms for optimal PM motor control.

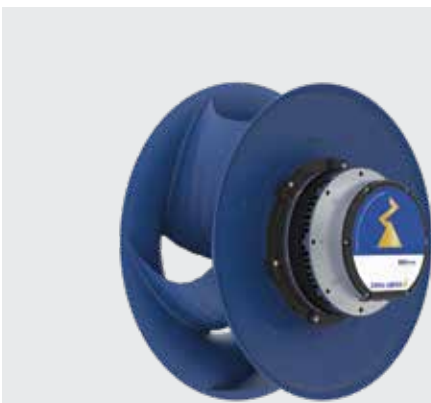

PM/EC fans

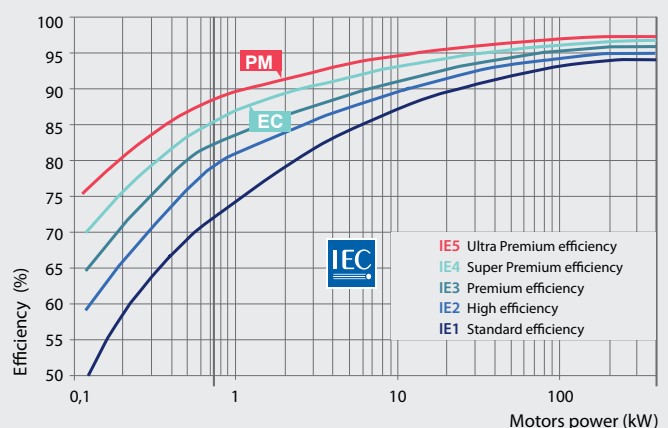



Air heaters

Water air heaters

Normally used with aluminium fins and copper pipes. Can be made with a thread joint to connect a freezing sensor. Insulated with a mineral wool heater section mounted on the outside of the unit – room space is saved this way; it is also more convenient to mount it.

- Maximum operating pressure – 21 bars
- Maximum water temperature +100°C (on special order – up to +130°C)
- Heated air temperature – up to +40°C

Electric air heaters

Stainless steel heating elements are used in production. A three level protection ensures protection from overheating.

- Protection class IP54 in accordance with IEC 34-5.
- Heated air temperature – up to +40°C.

Note: exact electric air heater measurements and other information can be found in VERSO air handling units selection software. The electric heater has its own supply voltage.



Air coolers

Water air coolers

Normally used with aluminium fins (spacing 2.5 or 3 mm) and copper pipes. Insulated with a mineral wool heater section mounted on the outside of the unit – room space is saved this way and it is more convenient to mount it.

Maximum operating pressure – 21 bars.

The air cooler section is assembled with a stainless steel sloping drain tray and a water trap.

Direct evaporation air coolers

Normally used with aluminium fins (spacing 2.5 or 3 mm) and copper pipes. Insulated with a mineral wool heater section mounted on the outside of the unit – room space is saved this way; it is also more convenient to mount it.

Maximum operating pressure – 42 bars.

The cooler section is assembled with a stainless steel sloping drain tray and a water trap. The power of the direct evaporation air cooler can be divided into 2 or 3 steps. It is necessary to indicate this when ordering. DX coil also can operate in heating mode.



Air dampers

Closing air dampers installed in the air handling units are produced from aluminium with rubber sealing. Connectors – L20.

For unit sizes 60, 70, 80 – L30, 90, 100 – L40.

Dampers are located outside the unit; they can be made with an insulated damper casing.

Standard tightness Class 2, it possible to order higher tightness Class 4 or higher thermal insulation Class 2 TBB.



Air filters

From G4 to F9 class synthetic or fiberglass pocket type filters are used.

Standard length of G4 class filters – 360 mm.

Standard length of M5–F9 class filters – 500, 635 mm.

The filter clamping mechanism ensures tightness and simplifies the filter replacement procedure.

Also G4 or M5 prefilter can be selected on supply air flow.

KOMFOVENT air filters

correspondence to ISO 1890 standard:

Bag filters ISO 16890	Filter class EN 779:2012
Coarse 65%	G3 / G4
ePM10 60%	M5
ePM10 65%	M6
ePM1 60%	F7
ePM1 85%	F9



Noise reduction sections

To avoid excessive pressure losses inside the air handling unit, duct-mounted sound attenuation sections are offered for VERSO units.

The sound attenuation section of 900 mm length will reduce the noise to air ducts by 15 to 20 dB, a longer section of 1200 mm in length – by 20 to 25 dB. The width and height of these sections correspond to air-handling unit dimensions.

The baffle-type sound absorber is installed inside this section. Baffles are filled with special acoustic mineral stone wool and are covered by non-woven glass fibre felt certified to be inside the air duct. Mineral wool can be replaced with polyester wool in the case of a special request.

Splitters of the absorber can be easily removed from the section for dry or semi-wet washing for ventilation hygiene purposes.

The efficiency of the channel noise reduction section, in dB

Nr.	Length, mm	Noise reduction dB when frequency Hz							
		63	125	250	500	1000	2000	4000	8000
10	900	10	19	27	31	33	32	27	17
	1200	13	26	35	42	44	43	36	22
20	900	6	13	17	21	22	21	18	11
	1200	8	17	23	27	29	28	24	15
30	900	7	13	18	22	23	22	19	12
	1200	9	18	24	29	30	30	25	15
40	900	6	13	18	21	22	21	18	11
	1200	8	17	23	27	29	28	24	15
50	900	6	12	17	20	21	21	18	11
	1200	8	16	22	27	28	27	23	14
60	900	8	15	21	25	26	25	21	13
	1200	10	20	28	33	34	34	28	18
70	900	7	14	20	23	25	24	20	13
	1200	10	19	26	31	33	32	27	17
80	900	7	14	19	23	24	23	20	12
	1200	9	18	25	30	32	31	26	16
90	900	7	14	20	23	25	24	20	13
	1200	10	19	26	31	33	32	27	17




Casing and outside grilles

Casing and outside grilles can be additionally mounted on the supply and exhaust vents of outdoor air handling units.



Roof

A roof with water drainage must be additionally installed on outdoor air-handling units.

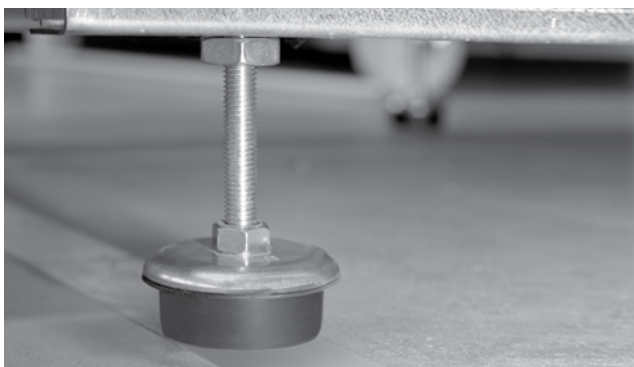

Height-adjustable feet

The construction frame of the air handling unit with height adjustable feet makes it much easier to level the unit on the site.



Door locks and handles

Easy to use door locks and handles ensure safe unit maintenance.



Inspection window and lighting


Internal lighting enables to observe unit's internal operation through an inspection window. Economy light is used with a switch outside the unit.

Inspection window enables you to observe the unit's internal operation. The diameter of the plastic window is 200 mm.

Dimensions

Modern air handling unit proportions allow reaching better technical parameters: a lower air flow velocity inside the unit, better acoustic data.


Verso R

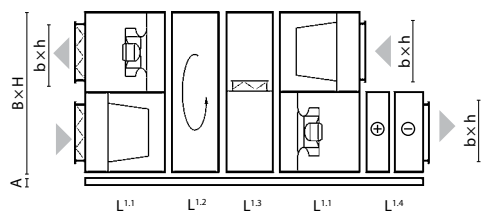

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.3}	L ^{1.4}	b	h	A
10	1000	1000	618	370	435	800	700	300	125
20	1150	1150	751	370	435	800	900	400	125
30	1300	1300	751	370	435	800	1000	500	125
40	1500	1520	751	390	435	800	1200	600	125
50	1700	1715	885	390	435	800	1400	700	125
60	1900	1920	885	390	570	800	1600	800	125
70	2100	2100	885	390	705	800	1800	900	125
80	2300	2420	1250	510	841	830	2000	1000	125
90	2610	2650	1400	550	1040	830	2200	1100	125
100	3770	2420	1250	1400	841	830	3400	1000	125

Note: the electric air heaters, water heaters and coolers section length and configuration are noted in the selection programme of VERSO air handling units.


Verso CF

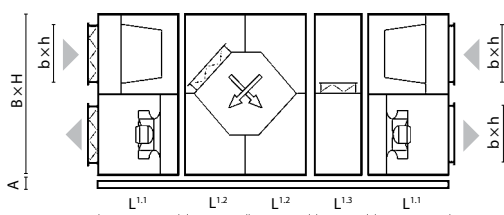

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.3}	b	h	A
10	1000	1000	618	570	435	700	300	125
20	1150	1150	751	645	435	900	400	125
30	1300	1300	751	720	435	1000	500	125
40	1500	1520	751	720	435	1200	600	125
50	1700	1715	885	720	435	1400	700	125
60	1900	1920	885	920	570	1600	800	125
70	2100	2100	885	1020	705	1800	900	125
80	2300	2420	1250	1250	841	2000	1000	125
90	2610	2650	1400	1250	1040	2200	1100	125

Notes: size 20÷70 plate heat exchanger section is made of two parts. Size 10, 80 and 90 – of one part. The electric air heater section length is noted in the selection programme of VERSO air handling units.


Verso P

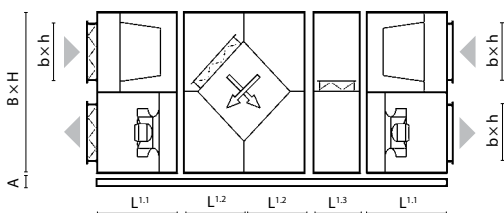

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.3}	b	h	A
10	1000	1000	618	422	435	700	300	125
20	1150	1150	751	570	435	900	400	125
30	1300	1300	751	570	435	1000	500	125
40	1500	1520	751	570	435	1200	600	125
50	1700	1715	885	707	435	1400	700	125
60	1900	1920	885	845	570	1600	800	125
70	2100	2100	885	845	705	1800	900	125
80	2300	2420	1250	1150	841	2000	1000	125
90	2610	2650	1400	1150	1040	2200	1100	125

Notes: size 20÷70 plate heat exchanger section is made of two parts. Size 10, 80 and 90 – of one part. The electric air heaters, water heaters and coolers section length and configuration are noted in the selection programme of VERSO air handling units.

Verso S

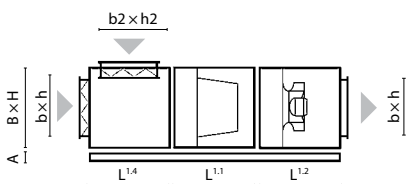

Size	B	H	L ^{1.1}	L ^{1.2}	L ^{1.4}	b	h	b1	h1	b2	h2	A
10	1000	490	750	705	430	900	400	700	300	700	300	125
20	1150	585	750	705	430	1100	500	900	400	1000	300	125
30	1300	660	750	705	470	1200	600	1000	500	1100	400	125
40	1500	740	750	842	470	1400	700	1200	600	1200	400	125
50	1700	890	750	842	470	1600	800	1400	700	1400	400	125
60	1900	960	750	979	570	1800	900	1600	800	1600	500	125
70	2100	1085	750	979	705	2000	1000	1800	900	1800	600	125
80	2300	1235	750	1250	705	2200	1100	2000	1000	2000	600	125
90	2610	1350	750	1400	705	2500	1200	2200	1100	2200	600	125

Note: the electric air heaters, water heaters and coolers section length and configuration are noted in the selection programme of VERSO air handling units.






komfovent[®]

RHP

*Complete Indoor
Climate Control*

All HVAC systems in one unit

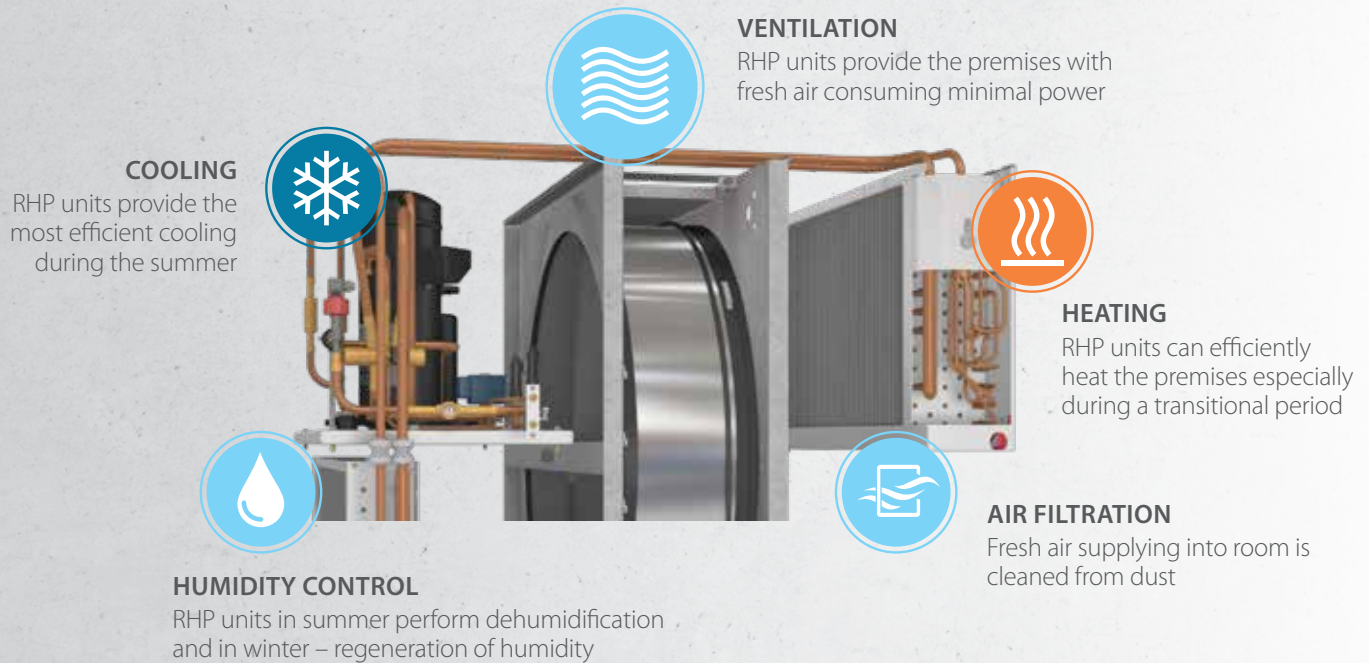

Wide possibilities with RHP:

- Unit monitoring and management through the Internet and BMS.
- Extremely high energy efficiency.
- Simple designing, installing, operation and maintenance.
- Shortest payback time.
- Unified smart control, simplified management.
- No outdoor unit, no refrigeration specialists required.

Integrated control system C5

Automatic system designed for professionals, controls thermodynamic processes and saves energy.


The user is given detailed information about the operation of the unit. Variety of modes and functions allows the user to choose the most optimal operating mode that maximizes energy saving.

Two-stage heat / cool recovery

To reach the maximum efficiency Komfovent RHP units are designed to recover the energy in two steps:

- 1st step** recovery up to 80 %
by enthalpy rotary heat exchanger
- 2nd step** recovery up to 60 %
by reversible heat pump

Operation range:

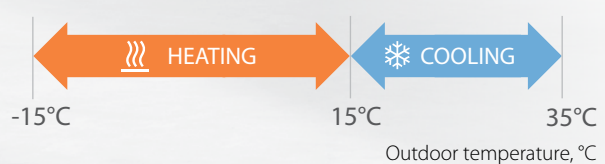

RHP Standard



Why choose RHP Standard units?

Total comfort all year long

Reversible heating and cooling operation of heat pump ensures comfort indoor climate.

Added value to indoor climate

Heating and humidity recovery in winter, cooling and dehumidifying in summer.

"All-inclusive" solution

No need for condensing unit, chiller, piping or additional work providing.

Convenience and safety

Factory-charged with refrigerant; no refrigeration knowledge is needed.

Eco-friendly and protected

Non ozone depleting refrigerant R134A is used in RHP units and one circuit charge limits are applied.

Extremely energy-efficient and resource saving

Two-step efficiency is provided by rotary heat exchanger recovery and post heating / cooling operated by a heat pump.

Factory tested

Reliable and convenient "Plug and Play" installation, commissioning and exploitation.

Intelligent control

Clever automatic control algorithms and reliable components ensure safe and efficient equipment operation.

Extremely compact design

It saves building spaces, easier transportation.


Exclusive connectivity – 14 ways

(except model RHP 400)

Allows optimal and rational connection of the ducts.



Sizes and capacities of RHP units

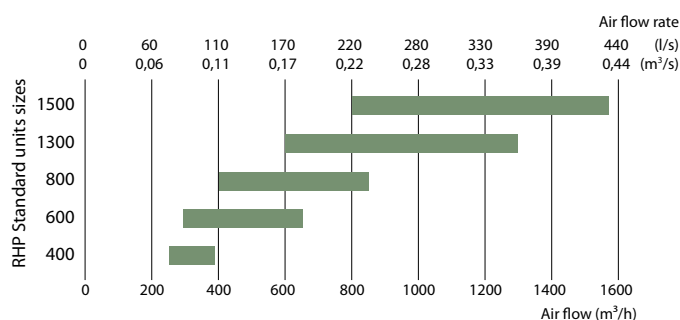

RHP 400 V

Nominal air flow, m ³ /h	398
Nominal air flow, l/s	110,56
Panel thickness, mm	30/50
Unit weight, kg	106
Supply voltage, V	1~230
Maximal operating current, A	7,7
Filters dimensions B×H×L, mm	462×200×46
Electric power input of the fan drive at maximum flow rate, W	103
Electric air heater capacity, kW / Δt, °C	1 / 7
Refrigerant R134 A, kg	1,1
Maintenance space, mm	720



C5.1



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	59
Supply outlet	74
Exhaust inlet	59
Exhaust outlet	74
Casing	54

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.



Surroundings	44
--------------	----

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,2	13,2	14,4	15,5	16,7	22,7	23,9	25,1

indoor +22°C, 20 % RH.

Shown as right (R1)

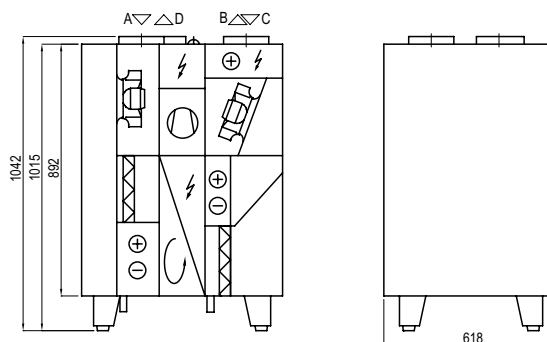


- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

The unit is available only right inspection side.

Performance


Filter M5, rotary heat exchanger L,
heat pump system and electric air heater.

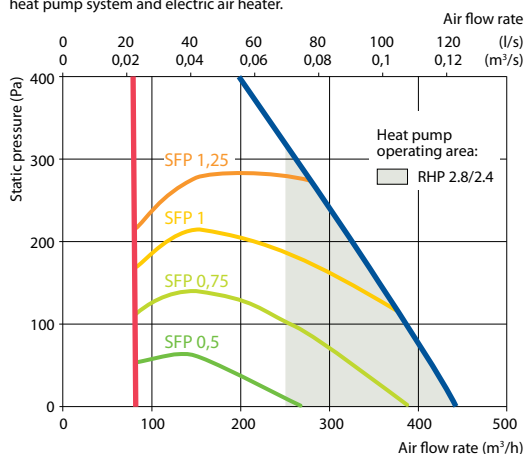

Accessories (p. 123)


Closing damper	AGUJ-M-160+LF24/LM24
Silencer	A/D AGS-160-50-600-M
	B/C AGS-160-50-900-M

Heating mode

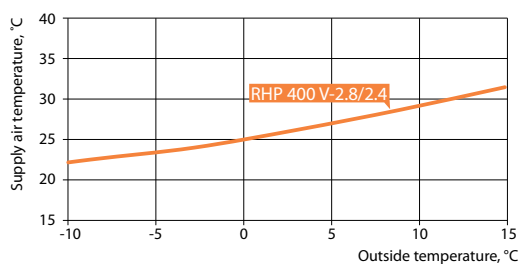

Application: 20°C, RH 45% indoor.

Cooling mode

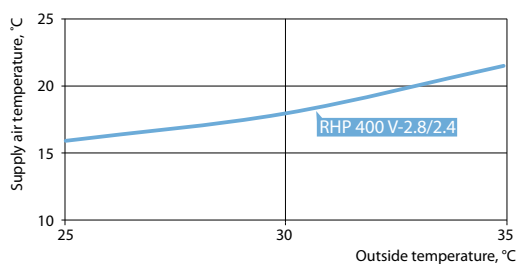

Application: 24°C, RH 55% indoor
Total (heating and cooling) – rotary heat recovery + heat pump.

Heat pump parameters

	RHP 400 V-2.8/2.4					
	Heating			Cooling		
Outdoor temperature, °C	7	2	-7	35	27	
Outdoor air related humidity, %	86	84	74	40	45	
Indoor air temperature, °C	20	20	20	27	21	
Indoor air related humidity, %	50	50	45	40	50	
Supply air temperature, °C	28,2	26,3	22,4	19,1	13,9	
Heat pump heating/cooling power, kW	1,5	1,4	1,18	1,97	1,85	
Heat pump heating/cooling power consumption, kW	0,45	0,42	0,37	0,49	0,42	
System SCOP ^{1,2,3} , Average climate / System SEER ^{1,2,3}		7,2		3,45		
COP/EER	3,35	3,28	3,20	3,07	3,38	

¹ Rotary heat exchanger wave size "L"

² Rotary heat exchanger + heat pump

³ According to EN 14825 standard

RHP 600 U

Nominal air flow, m ³ /h	650
Nominal air flow, l/s	180,56
Panel thickness, mm	50
Unit weight, kg	194
Supply voltage, V	1~230
Maximal operating current, A	9,6 (RHP 3.7/3)
Maximal operating current, A	10,5 (RHP 4.4/3.8)
Filters dimensions B×H×L, mm	500×280×46
Electric power input of the fan drive at maximum flow rate, W	128
Electric air heater capacity, kW / Δt, °C	1 / 4,3
Refrigerant R134 A, kg	2,2
Maintenance space, mm	600



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	57
Supply outlet	70
Exhaust inlet	59
Exhaust outlet	69
Casing	52

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	41
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,9	15,3	16,2	17,1	18,0	22,5	23,4	24,4


indoor +22°C, 20 % RH.

Performance


Filter M5, rotary heat exchanger L,
heat pump system and electric air heater.

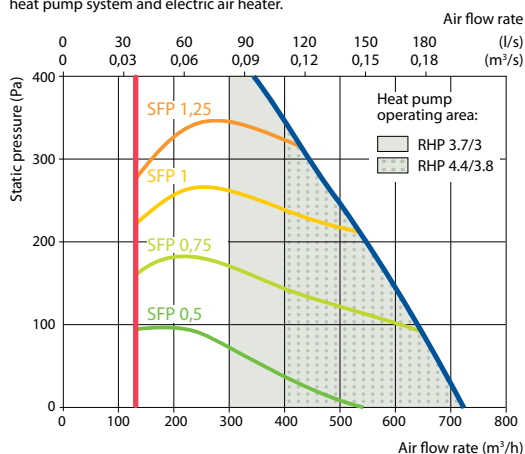

Shown as right (R1)

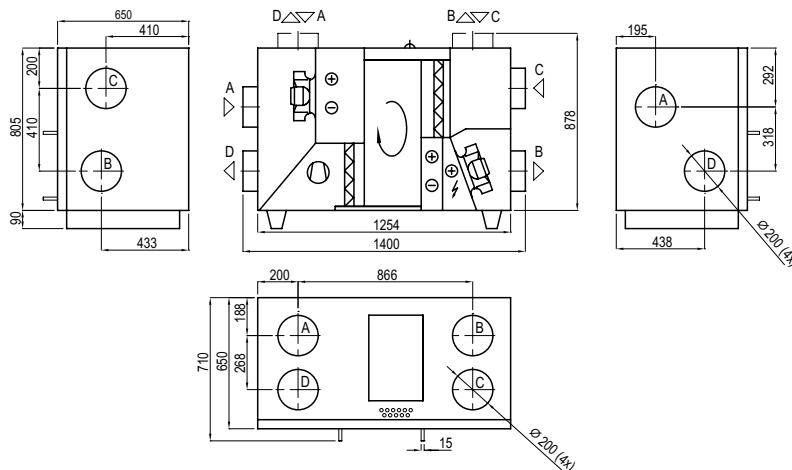


Shown as left (L1)

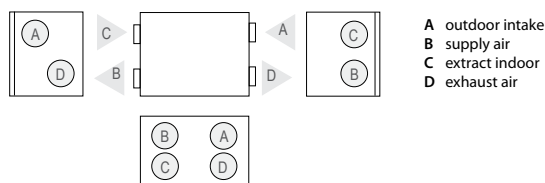

Accessories (p. 123)


Closing damper	AGUJ-M-200+LF24/LM24
Silencer	A/D AGS-200-50-600-M
	B/C AGS-200-50-900-M

Heating mode

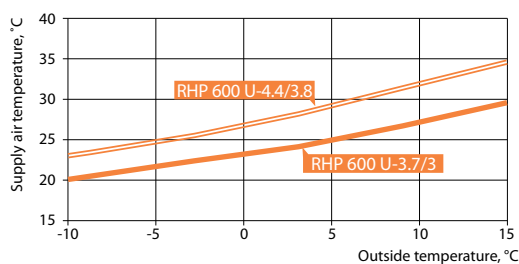

Application: 20 °C, RH 45% indoor.

Cooling mode

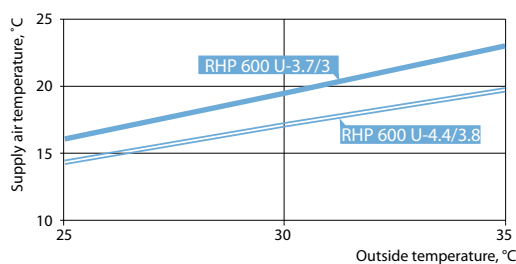

Application: 24 °C, RH 55% indoor.
Total (heating and cooling) – rotary heat recovery + heat pump.

Heat pump parameters

	RHP 600 U-3.7/3					RHP 600 U-4.4/3.8				
	Heating			Cooling		Heating			Cooling	
Outdoor temperature, °C	7	2	-7	35	27	7	2	-7	35	27
Outdoor air related humidity, %	86	84	74	40	45	86	84	74	40	45
Indoor air temperature, °C	20	20	20	27	21	20	20	20	27	21
Indoor air related humidity, %	50	50	45	40	50	50	50	45	40	50
Supply air temperature, °C	27,9	26,1	22,5	18	15,1	32,1	29,8	25,6	16,6	11,5
Heat pump heating/cooling power, kW	1,66	1,53	1,25	1,76	1,84	2,33	2,11	1,73	2,15	2,15
Heat pump heating/cooling power consumption, kW	0,4	0,38	0,34	0,49	0,38	0,62	0,58	0,52	0,73	0,62
System SCOP ^{1,2,3} , Average climate / System SEER ^{1,2,3}	13,3			4,52		9,7			4,7	
COP/EER	4,19	3,97	3,61	4,5	4,83	3,66	3,5	3,27	3,06	3,48

¹ Rotary heat exchanger wave size "L"

² Rotary heat exchanger + heat pump

³ According to EN 14825 standard

RHP 800 U

Nominal air flow, m ³ /h	800
Nominal air flow, l/s	222,22
Panel thickness, mm	50
Unit weight, kg	255
Supply voltage, V	3~400
Maximal operating current, A	14,8 (RHP 5.3/4.7)
Maximal operating current, A	16,1 (RHP 6.1/5.8)
Filters dimensions B×H×L, mm	750×400×46
Electric power input of the fan drive at maximum flow rate, W	127
Electric air heater capacity, kW / Δt, °C	2 / 6,9
Refrigerant R134 A, kg	3,1
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	59
Supply outlet	72
Exhaust inlet	59
Exhaust outlet	69
Casing	51


A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	40
--------------	----

Performance

Filter M5, rotary heat exchanger L,
heat pump system and electric air heater.

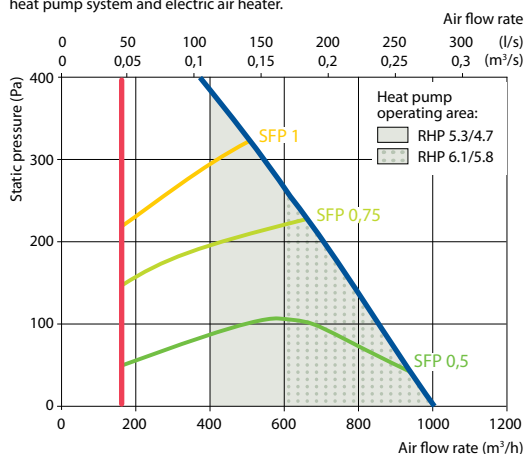


Temperature efficiency


	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,5	16,7	17,4	18,1	18,8	22,4	23,2	23,9

indoor +22°C, 20 % RH.

Shown as right (R1)

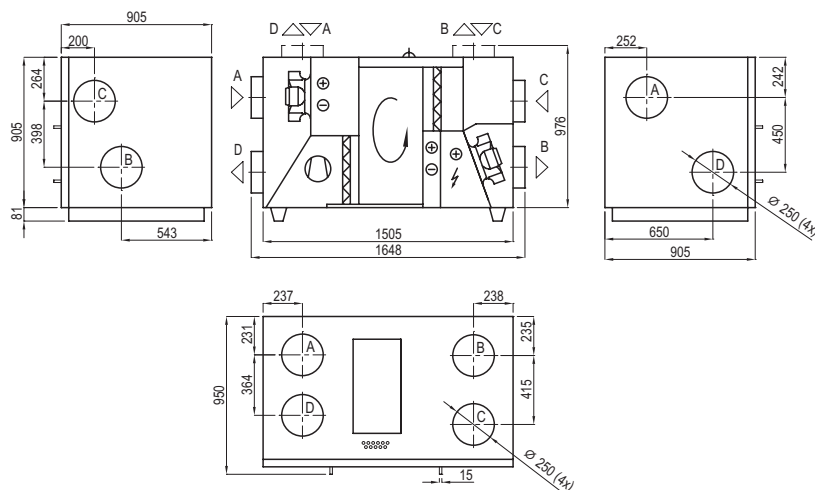

Shown as left (L1)

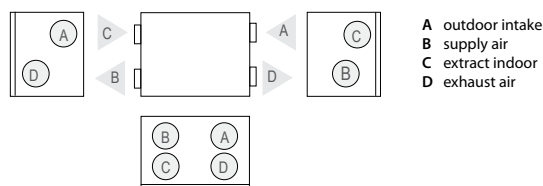


A outdoor intake
B supply air
C extract indoor
D exhaust air


Accessories (p. 123)

Closing damper	AGUJ-M-250+LF24/LM24
	A/D AGS-250-50-600-M
Silencer	B/C AGS-250-50-900-M

Heating mode

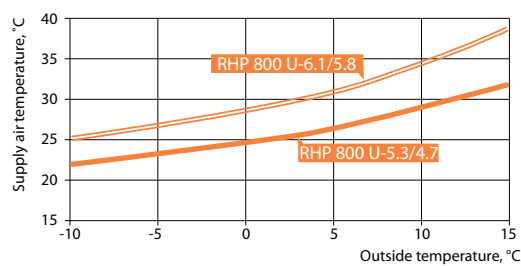

Cooling mode

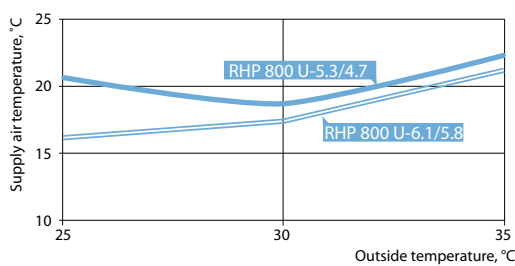

Heat pump parameters

	RHP 800 U-5.3/4.7					RHP 800 U-6.1/5.8				
	Heating			Cooling		Heating			Cooling	
Outdoor temperature, °C	7	2	-7	35	27	7	2	-7	35	27
Outdoor air related humidity, %	86	84	74	40	45	86	84	74	40	45
Indoor air temperature, °C	20	20	20	27	21	20	20	20	27	21
Indoor air related humidity, %	50	50	45	40	50	50	50	45	40	50
Supply air temperature, °C	29,3	27,4	23,5	17,4	11,6	32,9	30,4	26,5	15,6	10,6
Heat pump heating/cooling power, kW	2,45	2,26	1,82	2,38	2,45	3,19	2,89	2,44	2,95	2,91
Heat pump heating/cooling power consumption, kW	0,56	0,54	0,44	0,69	0,59	0,85	0,8	0,66	1,05	0,91
System SCOP ^{1,2,3} , Average climate / System SEER ^{1,2,3}	12,7			4,65		9,4			4,6	
COP/EER	4,28	4,08	4,05	3,53	4,03	3,63	3,53	3,67	2,85	3,24

¹ Rotary heat exchanger wave size "L"² Rotary heat exchanger + heat pump³ According to EN 14825 standard

RHP 1300 U

Nominal air flow, m ³ /h	1200
Nominal air flow, l/s	333,33
Panel thickness, mm	50
Unit weight, kg	260
Supply voltage, V	3~400
Maximal operating current, A	18,2 (RHP 8.1/6.6)
Maximal operating current, A	20,5 (RHP 9.2/7.6)
Filters dimensions B×H×L, mm	750×400×46
Electric power input of the fan drive at maximum flow rate, W	253
Electric air heater capacity, kW / Δt, °C	2/4,6
Refrigerant R134 A, kg	3,1
Maintenance space, mm	800



C5.1



Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	64
Supply outlet	78
Exhaust inlet	64
Exhaust outlet	76
Casing	56

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	45
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,5	15,8	16,7	17,5	18,3	22,5	23,3	24,2


indoor +22°C, 20 % RH.

Performance


Filter M5, rotary heat exchanger L,
heat pump system and electric air heater.

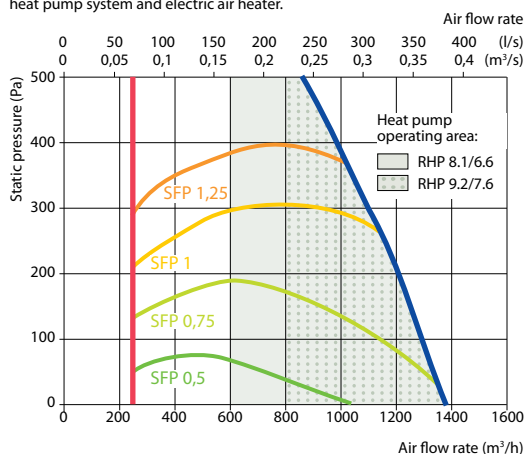

Shown as right (R1)

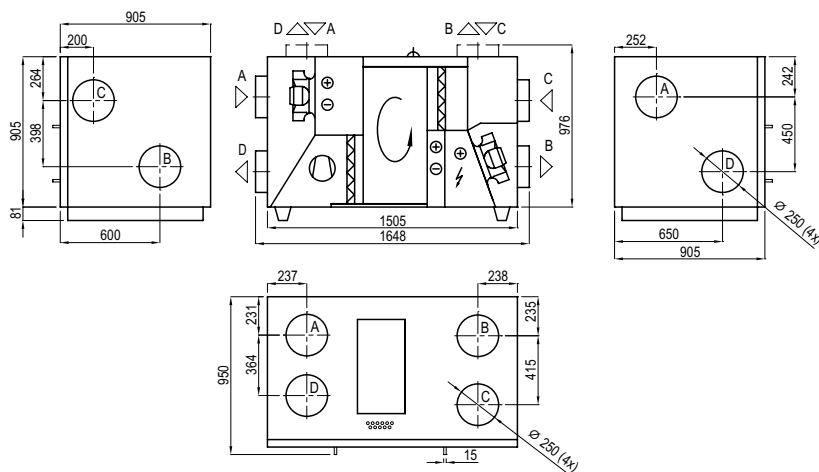


Shown as left (L1)

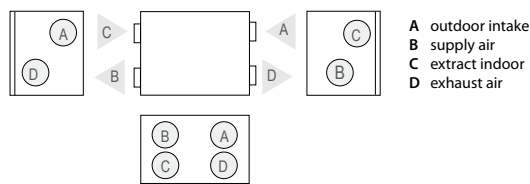


Accessories (p. 123)

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A/D AGS-250-50-600-M
	B/C AGS-250-50-900-M

Heating mode

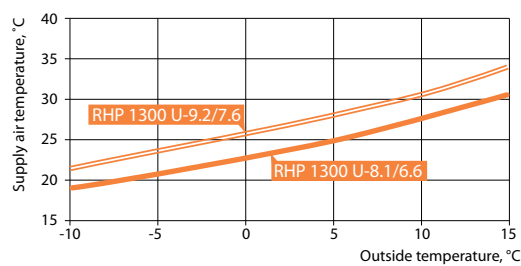

Cooling mode

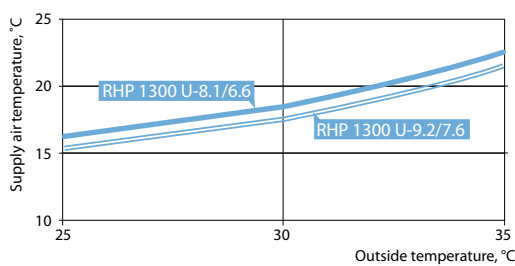

Heat pump parameters

	RHP 1300 U-8.1/6.6					RHP 1300 U-9.2/7.6				
	Heating			Cooling		Heating			Cooling	
Outdoor temperature, °C	7	2	-7	35	27	7	2	-7	35	27
Outdoor air related humidity, %	86	84	74	40	45	86	84	74	40	45
Indoor air temperature, °C	20	20	20	27	21	20	20	20	27	21
Indoor air related humidity, %	50	50	45	40	50	50	50	45	40	50
Supply air temperature, °C	26,4	24,6	21,3	19,70	13,80	28,5	26,4	22,9	18,50	13,10
Heat pump heating/cooling power, kW	3,69	3,4	2,8	3,67	3,57	4,55	4,13	3,46	4,4	4,36
Heat pump heating/cooling power consumption, kW	0,8	0,69	0,7	0,94	0,84	1,15	1,09	0,92	1,37	1,2
System SCOP ^{1,2,3} , Average climate / System SEER ^{1,2,3}	12,9			4,65		9,6			4,62	
COP/EER	4,43	4,91	3,89	3,98	5,10	3,83	3,7	3,75	3,42	3,69

¹ Rotary heat exchanger wave size "L"² Rotary heat exchanger + heat pump³ According to EN 14825 standard

RHP 1500 U

Nominal air flow, m ³ /h	1400
Nominal air flow, l/s	388,89
Panel thickness, mm	50
Unit weight, kg	260
Supply voltage, V	3~400
Maximal operating current, A	21,9
Filters dimensions B×H×L, mm	750×400×46
Electric power input of the fan drive at maximum flow rate, W	263
Electric air heater capacity, kW / Δt, °C	2 / 4
Refrigerant R134 A, kg	3,1
Maintenance space, mm	800



C5.1

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at reference flow rate

Supply inlet	59
Supply outlet	73
Exhaust inlet	60
Exhaust outlet	71
Casing	54

A-weighted sound pressure level L_{pA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	44
--------------	----


Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,0	15,4	16,3	17,2	18,1	22,5	23,4	24,3


indoor +22°C, 20 % RH.

Performance


Filter M5, rotary heat exchanger L,
heat pump system and electric air heater.

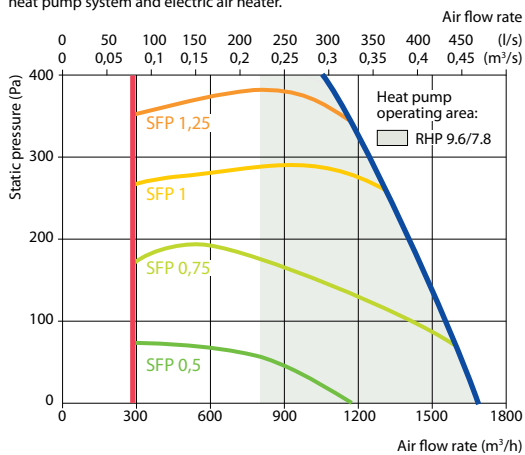

Shown as right (R1)

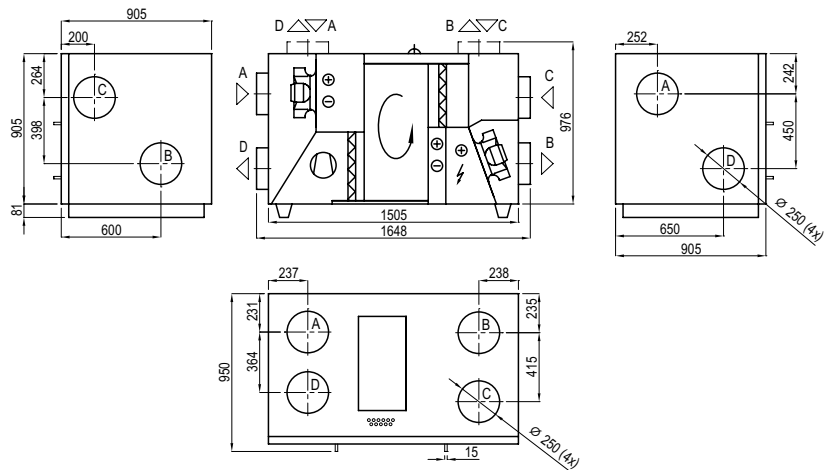


Shown as left (L1)

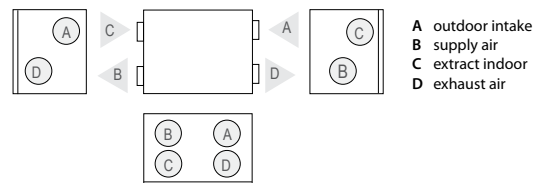


Accessories (p. 123)

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A/D AGS-250-100-600-M
	B/C AGS-250-100-900-M

Heating mode

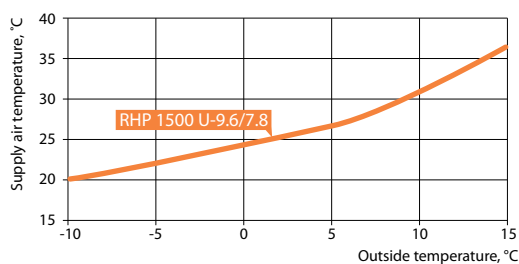

Cooling mode

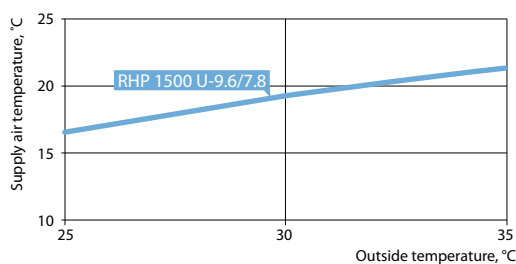

Heat pump parameters

	RHP 1500 U 9.6/7.8					
	Heating			Cooling		
Outdoor temperature, °C	7	2	-7	35	27	
Outdoor air related humidity, %	86	84	74	40	45	
Indoor air temperature, °C	20	20	20	27	21	
Indoor air related humidity, %	50	50	45	40	50	
Supply air temperature, °C	27	25	21,5	19,6	13,7	
Heat pump heating/cooling power, kW	4,71	4,3	3,57	4,51	4,7	
Heat pump heating/cooling power consumption, kW	1,14	0,98	0,99	1,34	1,16	
System SCOP ^{1,2,3} , Average climate / System SEER ^{1,2,3}		10,6		3,9		
COP/EER	4,01	4,37	3,52	3,67	3,94	

¹ Rotary heat exchanger wave size "L"

² Rotary heat exchanger + heat pump

³ According to EN 14825 standard

RHP Pro



Advantages of RHP Pro units

"Plug and Play" control system C5

Benefits: real air flow indication; thermal efficiency of the rotary heat exchanger indication; heat exchanger recovery in kW; thermal energy saving factor, SFP factor of the fans and other important information about the functioning of the unit.

Inverter compressors

Energy-efficient and silent inverter compressors enable accurate regulation and maintenance of supply air temperature.

Electronic expansion valve

For power adjustment of the integrated heat pump use an electronic EEV (electronic expansion valve), which ensures a stable supply air temperature and allows a wide range of regulation of device performance and heating/cooling capacity.

Sorption rotary heat exchanger


In RHP units sorption rotary regenerators with special 4Å zeolite coating are used, which because of their hygroscopic selective features ensure good heat and humidity exchange, so the RHP units maintain an optimum indoor climate with minimal energy consumption.

Air filters


All units are equipped with a large surface area air filters with low pressure loss, it saves energy, replacement can be less often.

PM/EC fan motors

In RHP PRO units PM (permanent magnet) and EC (electronically commutated) fan motors are used, the most efficient on the market, conforming *Ultra Premium* IE5 or *Super Premium* IE4 efficiency class.

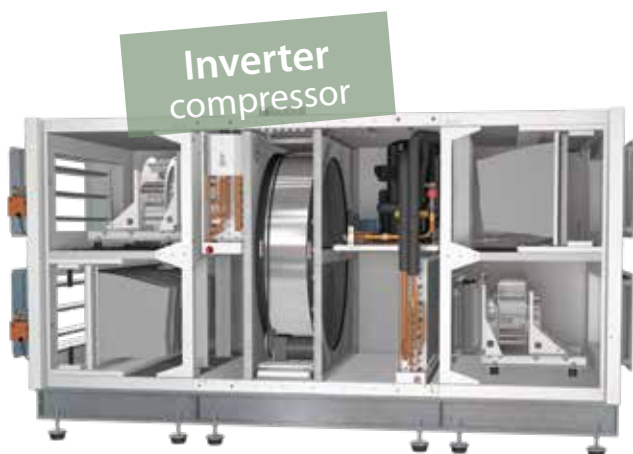

Sizes and capacities of RHP Pro units

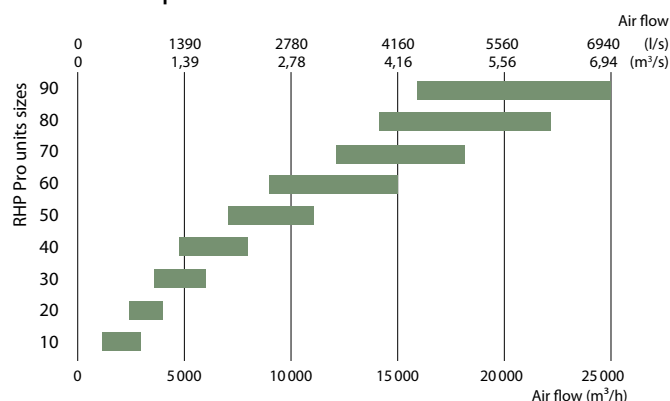

Outdoor	Indoor	Size	RHP 10	RHP 20	RHP 30	RHP 40	RHP 50	RHP 60	RHP 70	RHP 80	RHP 90
		Max air flow, m³/h	2800	4000	6000	8000	11000	15000	18000	22000	25000

Heating mode

T ¹ , °C	-7	20	Total heating capacity, kW	34	48	68	96	123	161	197	234	277
RH ¹ , %	90	40	Supply temperature, °C	24,0								
			Nominal compressor power consumption, kW	2,8	3,9	4,6	8,2	7,4	7,7	10,5	13,3	16,2
			System COP ^{2,3} , kW/kW	9,7	10,4	12,8	10,8	15,1	19,2	17,4	16,7	16,3

Cooling mode

T ¹ , °C	35	27	Total cooling capacity, kW	18	26	50	54	73	93	115	127	154
RH ¹ , %	40	50	Supply temperature, °C	20								
			Nominal compressor power consumption, kW	2,7	3,9	7,2	8,8	11,4	12,1	16,2	18,2	23,3
			System EER ^{2,3} , kW/kW	5,3	5,5	6,3	5,6	6,0	7,2	6,8	6,7	6,4

¹ – Conditions according to EN14511

² – Rotary heat exchanger wave size "L"


³ – Rotary heat exchanger + heat pump

⁴ – According to EN 14825 standard

T – Temperature, °C

RH – Relative humidity, %

Device management schedule

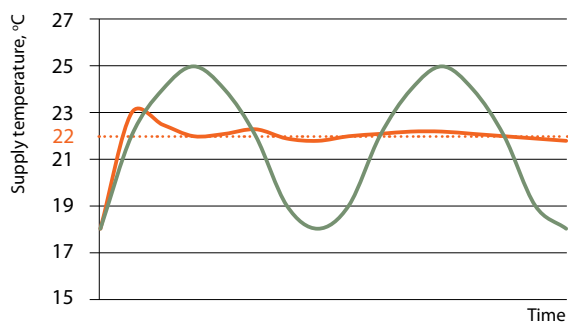


Variable speed compressors are designed in RHP Pro units. The major benefit of this type of compressor are their flexibility. The rotation speed of the compressor varies, as a result less energy is used and the minor temperature changes occur on the premises.

..... Setpoint
 — Constant speed compressor
 — Variable speed compressor

Dimensions

Size	B	H	L ^{1,1}	L ^{1,2}	L ^{1,3}	b	h	A
10	1000	1000	618	900	250	700	300	125
20	1150	1150	751	900	250	900	400	125
30	1300	1300	751	900	250	1000	500	125
40	1500	1520	751	900	250	1200	600	125
50	1700	1715	885	900	250	1400	700	125
60	1900	1920	885	900	250	1600	800	125
70	2100	2100	885	900	250	1800	900	125
80	2300	2420	1250	1500	–	2000	1000	125
90	2610	2650	1400	1500	–	2200	1100	125

Note: the electric air heaters, water heaters and coolers section length and configuration are noted in the selection program of VERSO air handling units.

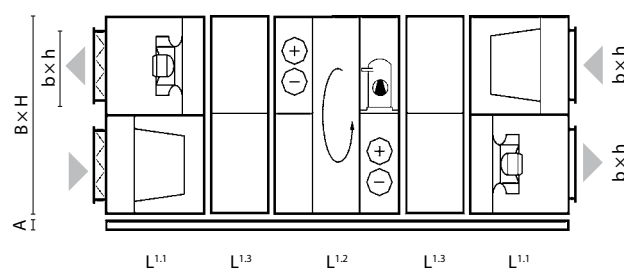





komfovent[®]

KLASIK

*Unique Custom-made
Solutions*



The widest range of options

KLASIK selection software offers the widest range of options – the dimensions of the equipment, the design solutions, the technical parameters of the heat exchangers, fans and other elements are presented there.

Energy saving components

It is possible to choose the most efficient components – non-freezing condensing or sorption rotary heat exchanger, counterflow plate heat exchanger, *Super Premium* IE4 class EC fans or *Ultra Premium* IE5 class PM fan.

Wide range

The KLASIK series offers a variety of modifications: a wide range of performance; rotary, plate or counterflow heat exchangers; water or freon heater / cooler; gas or electric heaters; adiabatic humidifier.

Sophisticated technical solutions

The KLASIK series is intended to provide complex solutions and meet all the technological requirements.

Conformity with international standards

All KLASIK units are designed and made according LST, EN (EN 13053, EN 13779, EN 1886), VDI (VDI 6022, VDI 3803/1), RLT (RLT 01) standards.

Modular construction

KLASIK units consist of modules, as a result the transportation and installation of the unit is facilitated.

Quality certificates


KLASIK selection software and units are tested in the largest independent laboratories: Eurovent, TÜV, RLT.



KLASIK

air handling units

Sizes and capacities of KLASIK units

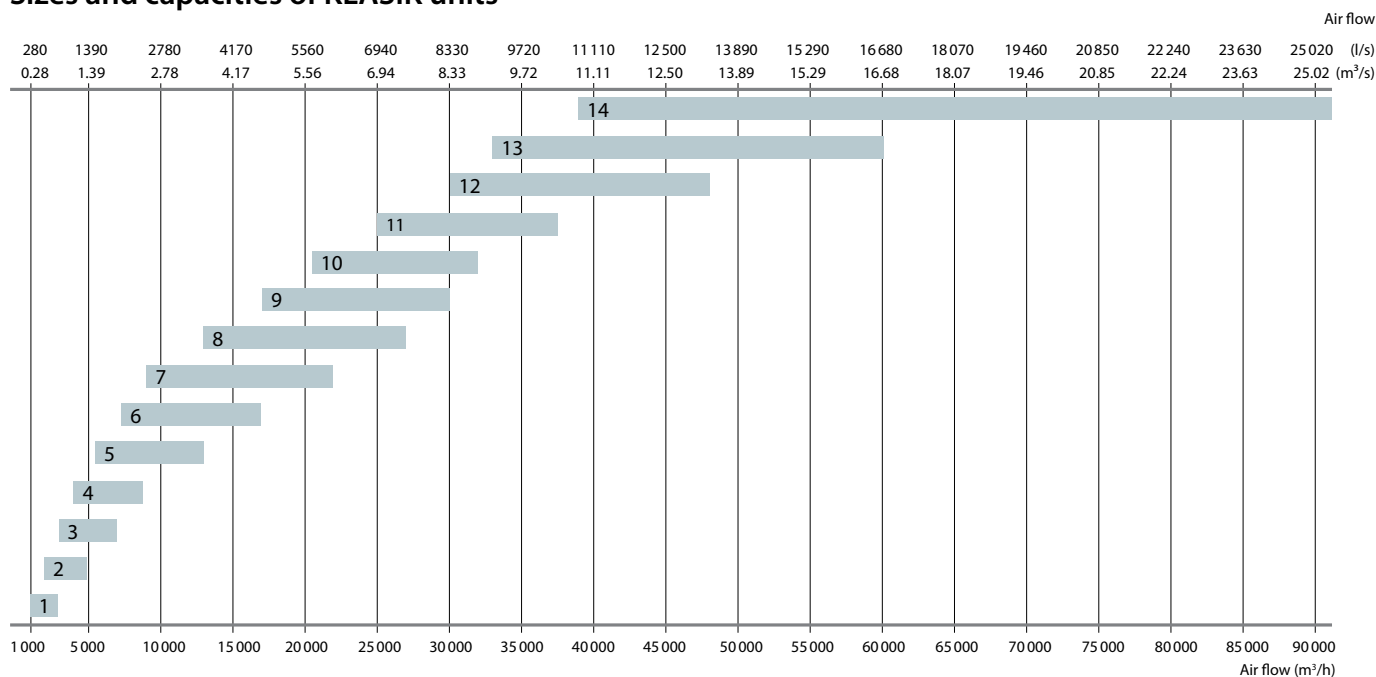

Selection software

The KLASIK air handling unit software is designed to select the most sophisticated units with specific requirements. The widest selection of components: heat exchangers – rotary, plate cross and counter-flow, run around; heaters – electric, water, DX and gas, coolers – water, DX and adiabatic.

The dimensions of the unit and other technical characteristics can be precisely adjusted according to the project requirements.



Control system C5



KLASIK air handling units can be ordered with an integrated and factory-tested C5 control system or order only automation box, which will be installed in the object. Automatic system C5 is designed for all thermodynamic processes (heating, cooling, ventilation, humidification, drainage) and has many safety and energy saving features (CAV, VAV, DCV, timers, control according to temperature, humidity, CO₂ or air quality sensors).

Unit types

Klasik R

Air handling units with a rotary heat exchanger. Temperature efficiency and energy saving up to 86 %.

On request, a low profile with two parallel rotors can be manufactured.



Klasik CF

Air handling units with a counterflow plate heat exchanger. Temperature efficiency and energy saving up to 92 % in wet conditions and up to 88 % in dry conditions.

Upon request, it is possible to manufacture a low profile with fan / filters sections located side by side.



Klasik P

Air handling units with a cross-flow plate heat exchanger. Temperature efficiency and economy of energy up to 75 % wet.

The units can be used for the heat utilization of technological equipment. There is a wide selection of different efficiency and pressure drop heat exchangers.



Klasik S

Supply or exhaust air handling unit without heat recovery.

On request, explosion-, corrosion- or high-temperature-resistant units can be ordered.



*The photo is intended for informational purposes only exact details may vary.

Klasik Ra units with run around coil heat exchanger



Specialized pipework package units LCHX for run around coil heat exchangers

- Depending on the operating conditions, the unit is filled with the corresponding concentration of ethylene glycol solution.
- Unit control signal 0 ... 10 V.

Maximum performance of the LCHX units

DN (mm)	20	25	32	40	50	65
Flow (m³/h)	1,8	3,6	6,8	11	18	25

Purpose

Ventilation units with separate flow heat exchangers are used in cases where there must be 100% of supplied and discharged air flow separation:

- the discharged air is technologically contaminated with an aggressive, pungent odour or poisonous substances;
- the risk of biological contamination (medical institutions);
- high temperature of exhaust air.

Advantages

- The supply and exhaust air sections can be separated from each other.
- Compact size.
- The heat exchanger can be integrated into existing supply – exhaust ventilation system.



KLASIK units for hygienic application

Purpose

Hygienic AHU's are used in cases when standard execution equipment does not meet the requirements and standards for hygienic equipment. It may be ventilation equipment for areas such as hospitals, clinics, surgical and outpatient clinics centres, medical products, pharmaceutical manufacturing chemicals and the pharmaceutical industry.

RLT01 general requirements for hygienic application units

General requirements	Mechanical performance	Performance data	Hygiene requirements
EN 13053	EN 13053	EN 13053	EN 13053
EN 16798-3	DIN 1751	EN 16798-3	VDI 6022
VDI 3803-1	EN 13501-1	VDI 3803-5	DIN 1946/4
RLT 01	RLT 01	RLT 01	RLT 01



Casing

- Double-sealed panels filled with insulating material.
- Insulation class A1 or A2-s1 d0.
- All materials used are durable, with no accumulated humidity that might provide a supportive medium for microorganisms reproduction.
- Interior surfaces are smooth, without adsorption properties. No porous materials are used.
- Mechanical resistance not less than D2 class.
- Tightness is not worse than class L3 (leakage allowed not more than 2 % of the nominal air flow).
- The passage through the F7 air filters shall not exceed 2 % of the nominal air flow.
- Thermal conductivity is not higher than T4.
- Cold bridges are no worse than TB3.

Air filters

- Only filters that are tested in accordance with EN 779 or EN 1822 can be used.
- Each filter must be marked accordingly. Recommended is class ISO ePM2,5 ≥ 50 % in the extract air before the heat recovery unit. In case of single-stage supply air filtering min. ISO ePM1 ≥ 50 %.
- The surface of the bag-type air filter must have at least 10 m² for 1 m² openings the area.
- Max. permitted maximum final pressure loss:
Filter class ISO ePM1 ≥ 70 % 300 Pa.
Filter class ISO ePM1 ≥ 50 % 200 Pa.
Filter class ISO ePM2,5 ≥ 50 % 200 Pa.
Filter class ISO ePM10 ≥ 50 % 200 Pa.

Heat exchangers

- The system for supplying and discharging air should be recuperated, except where there is not enough room for it or the payback time is too long.
- Depending on the quality of the exhaust air quality, such types of heat exchangers are recommended: ETA2 – rotary or plate with overpressure; ETA3 – rotary or plate with overpressure; ETA4 – Separate Flow (Run Around coil) or Heat Pipe.
- A stainless steel or aluminum condensate tray is designed. Rotary heat exchanger condensate tray is necessary in exceptional cases.
- A rotor is recommended to be fitted with a purge section.

- To reduce the need for frost it is recommended to use adiabatic cooling by humidifying exhaust air.

Dampers

- Air leakage class 2 for dampers that are closed while the system is in operation, e.g. mixing dampers or bypass dampers.
- Air velocity for dampers max. 8 m/s (except recirculation air and bypass dampers).
- The position of the damper must be visible from the outside of the damper.

Cooling coils

- Installation rails for cooling coils in stainless steel or aluminium.
- Condensate tray in stainless steel or aluminium.
- Minimum fin spacing: 2 mm for cooling coil without dehumidification; 2.5 mm for cooling coil with dehumidification.

Fans

- Fans with backward curved blades are preferred. Energy saving motors are recommended.
- Fan impeller generally protected against corrosion.
- It is recommended to use fans without belt drive (especially open impeller). Base frame of fan and motor in hot-dip galvanized steel sheeting.

Humidifier section

- Humidifiers must not be placed directly upstream of filters or attenuator (exception: steam humidifiers).
- All components must be demountable. All parts in contact with water to be accessible for inspection and cleaning and consisting of corrosion-resistant and disinfectant resistant material.
- Sealing compounds must not be of material that can be metabolised.

Sound attenuator section

- Pressure drop max. 80 Pa
- Surface quality material to be permanently abrasion-resistant and made of material that is durable when exposed to cleaning processes (e.g. glass fibre).
- Splitters to be demountable for cleaning without having to remove other parts.



* The photo is intended for informational purposes only, exact details may vary.



Casing

Standart

Air handling units of the KLASIK series have a reliable and stable design. Casing frameworks are made of aluminium profiles and solid cast aluminium corner pieces. Covering panels are made of double-skin galvanized or stainless sheet steel.

On request, casing can be painted. Fireproof 50 mm mineral wool is used as a standard.

KLASIK gaskets and sealing are used to ensure perfect casing tightness and sound insulation.

All doors are hinged and equipped with handles which can be locked. Variable accessories such as adjustable feet, inspection windows, sections lighting, etc. are available at the customers' request.

Casing classification in conformance to standard EN 1886: leakage L2; thermal transmittance T3.

Standart TB

Casing frameworks are made of aluminium profiles and have solid cast aluminium corners with thermal break system. Covering panels are made from double-skin galvanized or stainless sheet. The panels are 60 mm thickness: 50 mm mineral wool are used for thermal and sound insulation and 10 mm of polyurethane foam. Casing classification in conformance with standard EN 1886: leakage L2; thermal transmittance T2; thermal bridging factor TB3.



Filters

KLASIK units pocket synthetic or fibreglass filters with a class of filtration from G4 up to F9 are used.

Filters have big filtration surface which results in longer terms of exploitation.

Filters are fastened by a clamping mechanism which secures tightness and simplifies the filter replacement procedure.



Air dampers

Closing air dampers installed in the air handling units are produced from aluminium, or galvanized steel blades with rubber sealing.



Heat Exchanger

KLASIK air handling units can be supplied with:

Rotary heat exchanger

Temperature efficiency – up to 86 %. Depending on required temperature efficiency η (%), the height of a wave of a rotor can be made from 1.4 mm up to 1.7 mm.

Rotors may be offered of four types:

- aluminium;
- aluminium with a hygroscopic covering;
- aluminium with an epoxy paint covering on embossed rotor edges;
- aluminium with deep epoxy coating.

The drive of a rotor is supplied with the frequency converter, allowing support for an optimum heat exchanger operating mode, smoothly changing speed of rotation of a rotor. Rotary heat exchanger can be equipped with purge sector on customers' request.

Counter flow plate heat exchanger

Used in Klasik CF series units. Temperature efficiency factor – up to 92 % in wet conditions and up to 88 % in dry conditions. The plate heat exchanger is equipped with an automatic by-pass. Aluminium plates are made of an aluminium alloy resistant to sea water.

Plate heat exchanger

Temperature efficiency – up to 75 % wet.

Heat exchanger is tight, both air flows are separated, use of heat of polluted air is possible. Plate heat exchangers with aluminium lamellas are used in KLASIK units.

There is a built-in bypass with damper for heat recovery regulation and exchanger frost protection.

Each unit with plate heat exchanger is equipped with stainless steel sloping drain tray and water trap.

Run around heat exchanger

Temperature efficiency – up to 70 %.

In such system warming up the air exchanger is placed in the supply air and the cooling one – in the exhaust air.

Exchangers are connected with pipes and in this contour water and glycol solution is circulating. Air handling units with such heat recovery are used in cases when air streams must be absolutely separated or when on design features or other requirements the unit must be installed on different floors. Heat exchangers are made of copper pipes with aluminium fins.



Fans

Fans are statically and dynamically balanced according to standard ISO 1940, corresponding to class G2,5/6,3 (at the maximal rotations).

Thus, even at the maximum rotation of the fan, vibration is minimal and meets modern requirements for ventilating equipment.

Depending on air volume and required static pressure, several types of fans are used in equipment.

Plug fans with EC/PM motor

Highly efficient in all operating areas, EC motors are available in all types of KLASIK units and correspond to the IE4 premium efficiency level. High efficiency is determined by low energy consumption, high efficiency factor and the best values of the SFP factor. By using EC fans in KLASIK units the following advantages are achieved:

- extremely high efficiency up to 94 %;
- valuable energy saving up to 30 % comparing with AC in some applications;
- integrated motor controller, no need for a frequency converter;
- very smooth and silent operation;
- long-life;
- compact construction.

PM type motors correspond to the *Super Premium Efficiency* Class IE4 and ensure high efficiency in a wide operation range with reliable performance, durability, relatively low cost and electrical stability. Their operation is extremely smooth and silent, ensuring the highest efficiency, energy saving and accuracy in operation.



Coolers and Humidifiers

Water Air Coolers

Normally used with aluminium lamellae (spacing 2.5 or 3 mm) and copper pipes.

Maximum operating pressure – 21 bar.

Air cooler section assembled with stainless steel sloping drain tray and water trap manifold pipes are covered with a condensation-proof material.

Direct Evaporation Air Coolers

Normally used with aluminium lamellae (spacing 2.5 or 3 mm) and copper pipes.

Maximum operating pressure – 42 bar.

Air cooler section assembled with stainless steel sloping drain tray and water trap manifold pipes are covered with a condensation-proof material. Power of direct evaporation air cooler can be divided into stages. It is necessary to indicate this when ordering.

Adiabatic humidifiers

Application areas: museums, light industry, paper industry, textile industry, wood industry, poultry farms, data centres.

Advantages: Hygienic Certificate VDI 6022, optimal performance and minimal operating costs, wide range of sizes and performance, easy maintenance, durability.

Technical characteristics:

- Airflow from 425 to 55 000 m³/h,
- Efficiency – up to 97 % RH.





Air Heaters

Hot water air heaters

In standard version normally used air heaters with aluminium lamellae (spacing 3 or 4 mm) and copper pipes. Heater can be equipped with thread joint to connect freezing sensor. Maximum operating pressure – 21 bar. Maximum water temperature +130°C. Heated air temperature up to +40°C.

Electric air heaters

Three-phase (400V/50 Hz) stainless steel heating elements are used in production. Two level protection ensures protection from overheating. Protection class IP54 in accordance with IEC 34-5. Heated air temperature up to +40°C.



Sound attenuator section

Integrated sound attenuators or separated sound attenuators may be offered with air handling units. High performance sound attenuators as well as ventilation unit ensures high sound attenuating level and are completely insulated casing. Inside the section, a wall sound attenuator is mounted. Its elements can easily be removed through the door without using tools. The elements should be removed one by one, not as a whole block, thus providing easy dry or semi-moist cleaning for the purpose of sanitation of the ventilation system. The elements of the sound attenuator are filled with acoustic silicate cotton used for an air channel. The silicate cotton is covered with a fibreglass mat preventing cotton particles from getting into an air channel when the airflow is running at high speed. The fibreglass mat is maximally resistant to the occurrence of dust inside the air channel. Sound attenuators are available with two types of cotton: silicate cotton and polyester cotton (Dacron) with a fibre mat and polypropylene fibre covering.

Condensing gas heaters

Advantages of gas condensing heaters:

- there is no risk of freezing;
- no circulation pumps required;
- high temperature efficiency – up to 106 %;
- simpler installation;
- wide range from 28 to 115 kW.



Additional accessories

KLASIK air handling units can be outdoor type.

For such outdoor performance there is complete set enclosed consisting of:

- a protective roof,
- intake and exhaust air hoods,
- external grilles.

Also such additional elements are available: inspection window, sections lighting.



Accessories for DOMEKT, VERSO Standard, RHP units



Filters classification and standards

The introduction of the new standard ISO 16890 has established new classification based on efficiency classification system of air filters for general ventilation based upon particulate matter (PM). With the introduction of new standard, classification based on standard EN 779 becomes obsolete and familiar filter classes (M5...F9) will no longer apply. New standard classifies filters into four groups, based on particulate matter: Coarse, ePM10, ePM2,5 and ePM1. In order for a filter to fall into each category its capturing efficiency should be at least 50% of the particulate in that size range. Filter efficiency is rounded off in steps of 5 %, thus tested efficiency of 58% would resolve in 55 %. Filters which are not able to capture 50 % of PM10 dust are classified as Coarse filters.

Types of filters

Compact filters is characterized by longevity and a large filtering area. Filters have low-pressure losses – this in turn reduces power consumption. Filters are made of glass fabric with a cardboard frame, from environmentally friendly materials, which do not cause problems of utilization.

Changes to the KOMFOVENT products

For the purposes of smoother transition to the new classification all KOMFOVENT filters will carry marking of the filter class based on both standards. Filter notation used in the name of air handling units will remain unchanged filters have been tested according to ISO 16890 and their efficiency is provided in the tables.

Compact filters



Compact filters ISO 16890	Filter class EN 779:2012
Coarse 75%	G3 / G4
ePM10 50%	M5
ePM1 55%	F7



Bag filters



Bag filters ISO 16890	Filter class EN 779:2012
Coarse 65%	G3 / G4
ePM10 60%	M5
ePM10 65%	M6
ePM1 60%	F7
ePM1 85%	F9

Pipework package

Pipework Package Units (PPU) are used for water heater power regulation, i.e. for temperature control of supplied air by mixing hot water from a boiler with recycled water in a heat exchanger. The fully assembled pipework package is available for each size of the air handling unit where a hot water heater is used.

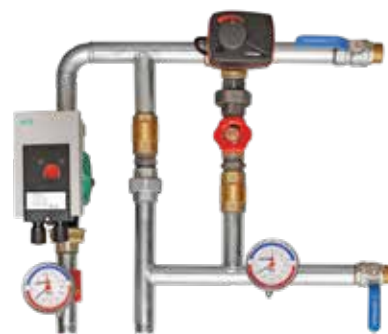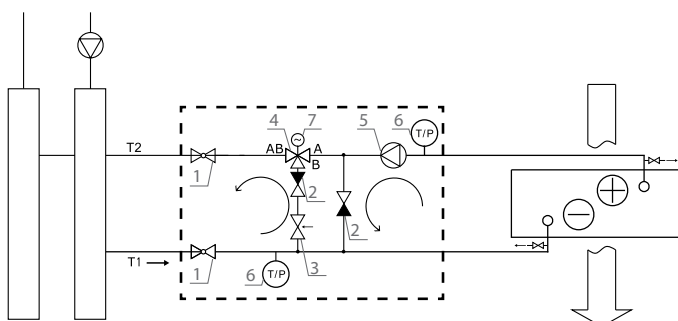

- 1. Stop valve
- 2. Return valve
- 3. Throttling valve
- 4. Control valve
- 5. Circulation pump
- 6. Manometer/Thermometer
- 7. Actuator

Unit size	Pipework Package
R 190 V	PPU-HW-3R-15-0,4-W1
R 200 V	
R 250 F	
R 400 V	
R 450 V	
R 400 H	PPU-HW-3R-15-0,4-W2
R 400 F	PPU-HW-3R-15-0,63-W1
R 500 V	
R 600 H	
R 700 V/H/F	
R 1000 V/H	
R 1300 V/H/F	PPU-HW-3R-15-1-W2
R 2000 F	
R 1500 V/H	PPU-HW-3R-15-1,6-W2
R 1700 V/H	
R 3000 F	

Unit size	Pipework Package
R 2000 V/H	PPU-HW-3R-15-2,5-W2
R 2500 H	
R 3000 V/H	
R 5000 V/H	
R 7000 H	PPU-HW-3R-20-4,0-W2
R 4000 V/H	PPU-HW-3R-25-6,3-W2
CF 150 F	PPU-HW-3R-15-0,4-W2
CF 200 V	
CF 300 V	
CF 250 F	PPU-HW-3R-15-0,4-W1*
CF 400 V	
CF 500 F	
CF 700 V	

* For outdoor temperature -4°C

Unit size	Pipework Package
CF 700 H/F	PPU-HW-3R-15-0,63-W1*
CF 1000 V/H	
CF 1000 F	PPU-HW-3R-15-1-W2*
CF 1300 V/H/F	
CF 1500 F	
CF 2500 F	
CF 1700 V/H	PPU-HW-3R-15-1,6-W2*
CF 2300 V/H	
CF 3500 V/H	PPU-HW-3R-15-2,5-W2*
S 800 F	PPU-HW-3R-15-1,6-W2
S 1000 F	
S 1300 F	PPU-HW-3R-15-2,5-W2
S 2100 F	
S 3000 F	PPU-HW-3R-25-6,3-W2

Motorized closing dampers

To protect air handling units from freezing or other external factors, motorized closing dampers must be used. They are mounted on supply and exhaust vents. There is a possibility of damper control in the automatic control system.



Unit size	Damper
R 190 V	AGUJ-M-125
R 200 V	
R 250 F	AGUJ-M-160
R 400 V/H	
R 450 V	
R 400 F	
R 600 H	AGUJ-M-200
R 500 V/H	AGUJ-M-250
R 700 V/H/F	
R 1000 U/V/H	
R 1300 U/V/H/F	AGUJ-M-315
R 1500 U/V/H	
R 2000 F	
R 1700 UH/H	SRU-M-300×400
R 2000 UH/H	
R 1700 UV/V	SRU-M-400×300
R 2000 UV/V	
R 2500 H	SRU-M-700×300
R 3000 UH/H	SRU-M-400×500
R 4000 UH/H	
R 3000 UV/V/F	SRU-M-500×400
R 4000 UV/V	

Unit size	Damper
R 5000 H	SRU-M-1000×500
R 5000 V	SRU-M-1100×300
R 7000 H	SRU-M-1200×600
RHP 400 V	AGUJ-M-160
RHP 600 U	AGUJ-M-200
RHP 800 U	AGUJ-M-250
RHP 1300 U	
RHP 1500 U	
CF 150 F	AGUJ-M-160
CF 200 V	
CF 300 V	
CF 250 F	
CF 400 V	
CF 500 F	AGUJ-M-200
CF 700 V	
CF 700 H/F	AGUJ-M-250
CF 1000 U/H/V/F	AGUJ-M-315
CF 1300 U/H/V/F	
CF 1500 F	
CF 1700 U/H/V	SRU-M-300×400
CF 2300 UH/H	
CF 2300 UV/V	SRU-M-400×300


Unit size	Damper
CF 2500 F	SRU-M-700×300
CF 3500 UH/H	SRU-M-400×500
CF 3500 UV/V	SRU-M-500×400
S 650 F	AGUJ-M-160
S 800 F	AGUJ-M-200
S 1000 F	AGUJ-M-250
S 1300 F	AGUJ-M-250
S 2100 F	SRU-M-700×250
S 3000 F	SRU-M-600×400

Control system	Actuator ON/OFF	
Komfovent C4, C6	LF230	LM230
Komfovent C5	LF24	LM24

Note:
LF damper actuator is with spring-return.
LM damper actuator is without spring-return.

Silencers

To ensure the normal noise level in the system and premises, silencers are used. There are circular and rectangular silencers of standard dimensions. An appropriate silencer can be selected using the online selection programme, which can be found on www.komfovent.com.

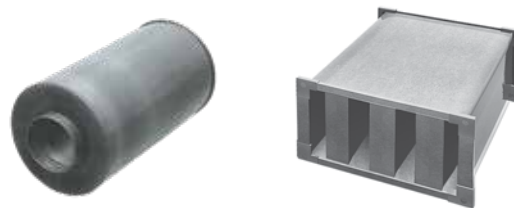

Unit size	Direction	Silencer type
R 190 V	A/D	AGS-125-50-600-M
R 200 V	B/C	AGS-125-50-900-M
R 250 F	A/D	AGS-160-50-600-M
R 400 H/V	B/C	AGS-160-50-900-M
R 450 V	B/C	AGS-160-50-900-M
RHP 400 V	B/C	AGS-160-50-900-M
R 400 F	A/D	AGS-200-50-600-M
R 600 H	B/C	AGS-200-50-900-M
RHP 600 U	B/C	AGS-200-50-900-M
R 500 H/V	A/D	AGS-250-50-600-M
R 700 H/V/F	B/C	AGS-250-50-900-M
RHP 800 U	B/C	AGS-250-50-900-M
R 1000 U/H/V	A/D	AGS-315-100-900-M
R 1300 U/H/V/F	B/C	AGS-315-100-1200-M
R 1500 U/H/V	B/C	AGS-315-100-1200-M
R 1700 U/H/V	A/D	STS-IVR3BA-600-300-700-S
	B/C	STS-IVR3BA-600-300-1250-S
R 2000 F	A/D	AGS-355-100-900-M
	B/C	AGS-355-100-1200-M
R 2000 U/H/V	A/D	STS-IVR3BA-600-400-700-S
R 3000 F	B/C	STS-IVR3BA-600-400-1250-S
R 2500 H	A/D	STS-IVR3BA-800-300-700-S
	B/C	STS-IVR3BA-800-300-1250-S
R 3000 U/H/V	A/D	STS-IVR3BA-600-500-700-S
	B/C	STS-IVR3BA-600-500-1250-S
R 4000 U/H/V	A/D	STS-IVR3BA-800-500-700-S
	B/C	STS-IVR3BA-800-500-1250-S
R 5000 H	A/D	STS-IVR3BA-1000-500-700-S
	B/C	STS-IVR3BA-1000-500-1250-S
R 5000 V	A/D	STS-IXY5BU-1250-300-700-S
	B/C	STS-11XAMR-1250-300-1250-S
R 7000 H	A/D	STS-IVR3BA-1200-600-700-S
	B/C	STS-IVR3BA-1200-600-1250-S

Unit size	Direction	Silencer type
CF 150 F	A/D	AGS-160-50-600-M
CF 200 V	B/C	AGS-160-50-900-M
CF 250 F	B/C	AGS-160-50-900-M
CF 300 V	B/C	AGS-160-50-900-M
CF 400 V	B/C	AGS-160-50-900-M
CF 500 F	A/D	AGS-200-50-600-M
CF 700 V	B/C	AGS-200-50-900-M
CF 700 H/F	A/D	AGS-250-50-600-M
RHP 1300 U	B/C	AGS-250-50-900-M
RHP 1500 U	A/D	AGS-250-100-600-M
	B/C	AGS-250-100-900-M
CF 1000 U/H/V/F	A/D	AGS-315-100-900-M
CF 1300 U/H/V/F	B/C	AGS-315-100-1200-M
CF 1500 F	B/C	AGS-315-100-1200-M
CF 1700 U/H/V	B/C	AGS-315-100-1200-M
CF 2300 U/H/V	A/D	STS-IVR3BA-600-400-700-S
	B/C	STS-IVR3BA-600-400-1250-S
CF 2500 F	A/D	STS-IVR3BA-800-300-700-S
	B/C	STS-IVR3BA-800-300-1250-S
CF 3500 U/H/V	A/D	STS-IVR3BA-800-500-700-S
	B/C	STS-IVR3BA-800-500-1250-S
S 650 F	A	AGS-160-50-600-M
	B	AGS-160-50-900-M
S 800 F	A	AGS-200-50-600-M
	B	AGS-200-50-900-M
S 1000 F	A	AGS-250-50-900-M
S 1300 F	B	AGS-250-50-1200-M
S 2100 F	A	STS-IVR3BA-800-250-700-S
	B	STS-IVR3BA-800-250-1250-S
S 3000 F	A	STS-IVR3BA-600-400-700-S
	B	STS-IVR3BA-600-400-1250-S

AGS-d-h-L
d – connecting diameter
h – insulation thickness
L – silencer's length

A outdoor intake
B supply air
C extract indoor
D exhaust air


Water and direct evaporation air coolers

The air cooler is mounted on the outside of the unit.

Casing of the cooler section corresponds to the unit's casing: galvanized steel sheets with internal mineral wool insulation of 45 mm thickness. Cooler section is assembled with a drop separator and a drain tray. Cooler control function is provided in the automatic control system of the unit.

Internal fluid – R410A, water 7/12 °C.

Air temperature in/out – 30/18 °C.



Unit size	Supply air volume, m ³ /h	Cooler's type	Capacity, kW	Air pressure drop*, Pa	Fluid pressure loss, kPa	BxHxL, mm	B1xH1, mm	Tubes connections, "/mm	Weight, kg
CF 150 F CF 200 V CF 250 F R 250 F	200	DCW-0,2-1	1,3	15	17,3	450x400x390	300x200	½	27
R 400 V CF 300 V CF 400 V	400	DCF-0,4-3	2,8	16	0,4	600x550x390	300x400	½ / 22	40
		DCW-0,4-3	2,6	30	30,7	505x550x390	300x400	½	33
R400 H/F R 450 V R 500 V CF 500 F	500	DCF-0,5-3	3,5	19	0,6	600x550x390	400x300	½ / 22	40
		DCW-0,5-3	3,3	30	52,8	600x550x390	400x300	½	35
R 600 H S 650 F	650	DCF-0,7-5	4,5	22	0,5	705x610x390	500x400	½ / 22	49
		DCW-0,7-5	3,8	22	6,1	705x610x390	500x400	½	42
R 700 V/H/F CF 700 V/H/F	700	DCF-0,7-5	4,8	22	0,6	705x610x390	500x400	½ / 22	49
		DCW-0,7-5	4,2	22	6,9	705x610x390	500x400	½	42
S 800 F S 1000 F R 1000 U/H/V CF 1000 U/H/V/F	800	DCF-0,9-6	5,5	29	0,7	705x610x390	500x400	½ / 22	49
		DCW-0,9-6	4,8	30	6,5	705x610x390	500x400	¾	45
R 1300 U/H/V/F	1200	DCF-1,2-8	8,3	43	1,5	705x610x390	500x400	½ / 22	49
		DCW-1,2-8	7,4	46	12,8			¾	45
CF 1300 U/H/V/F S 1300 F R 1500 U/H/V	1400	DCF-1,4-10	9,7	74	11,5	705x610x390	500x400	½ / 22	51
		DCW-1,4-9	8,7	61	16,7			¾	45
CF 1500 F R 1700 U/H/V CF 1700 U/H/V	1600	DCF-1,6-11	11,1	78	16,4	755x610x420	500x400	½ / 22	56
		DCW-1,6-11	10,0	65	22,2			¾	46
R 2000 U/H/V/F S 2100 F	2000	DCF-2,0-14	13,8	71	30,7	920x610x420	700x400	⅝ / 22	65
		DCW-2,0-13	12,8	60	38			¾	57
R 2000 U/H/V/F R 2500 H CF 2300 U/H/V CF 2500 F	2500	DCF-2,5-17	16,9	67	14,9	1080x670x420	800x400	⅝ / 22	79
		DCW-2,5-17	15,5	63	16,6			1	65
R 3000 U/H/V/F S 3000 F	3000	DCF-3,0-20-2	2x10,5	75	7,7	1080x670x420	800x400	⅝ / 22	79
		DCW-3,0-20	18,7	102	23			1	69
R 3000 U/H/V/F CF 3500 U/H/V	4000	DCF-4,0-27-2	2x14	77	15,1	1220x730x420	900x500	2x⅝ / 2x22	97
		DCW-4,0-27	25,2	106	38,4			1	82
R 4000 U/H/V R 5000 V/H	4500	DCF-4,5-31-2	2x15,7	79	23,5	1220x790x420	900x600	2x⅝ / 2x22	103
		DCW-4,5-30	28,8	108	62			1	87
R 7000 H	7000	DCF-7,0-48-3	3x16	100	8,5	1500x790x480	1200x600	3x⅝ / 3x22	125
		DCW-7,0-47	44,5	100	35,5	1500x790x420		1 ½	105

* with drop eliminator.

Ducted heater DH and cooler DHCW

For use with DOMEKT and VERSO Standard units on supply air duct. Also must be used mixing unit PPU or 2-way valve with modulating actuator. DOMEKT units are prepared for 0...10 V actuator control.

Construction:

- Galvanised steel casing;
- Cu/Al heat exchanger;
- Anti-condensation casing covering and condensate drain (only for DHCW).

Maximal pressure – 10 bar.

Maximal fluid temperature – 100°C.

Maximal air speed – 3 m/s.

Connection – ½".



Supply air volume, m³/h	Heater's type	Air temper. in/out °C	Internal fluid, water	Capacity, kW	Air pressure drop, Pa	Fluid pressure loss, kPa	BxHxL, mm	ØD, mm	Weight, kg
450	DH-125	10/22	60/40	1,8	44	0,4	333x293x152	125	6,15
450	DHCW-125	26/18	7/12	1,4	69	5,6	333x333x164	125	11,13
450	DH-160	10/22	60/40	1,8	44	0,4	333x293x152	160	6,15
450	DHCW-160	26/18	7/12	1,4	69	5,6	333x333x164	160	11,13
900	DH-200	10/22	60/40	3,6	101	1,7	358x318x152	200	7,04
900	DHCW-200	26/18	7/12	3,0	153	26,5	363x363x164	200	12,40
900	DH-250	10/22	60/40	3,6	49	2,3	418x378x152	250	9,30
900	DHCW-250	26/18	7/12	3,1	77	37,6	423x423x164	250	15,37
900	DH-315	10/22	60/40	3,7	20	7,1	470x510x152	315	11,8
900	DHCW-315	26/18	7/12	2,8	33	2,2	557x515x164	315	21,60
1600	DH-315	10/22	60/40	6,5	58	18,3	470x510x152	315	11,8
1600	DHCW-315	26/18	7/12	5,2	90	6,8	557x515x164	315	21,60
2000	DH-315M	10/22	60/40	8,1	98	1,3	481x518x132	315	14,39
2000	DHCW-315	26/18	7/12	6,5	133	10,5	557x515x164	315	21,60
2000	DH-355	10/22	60/40	8,1	61	16,7	600x510x152	355	13,34
2000	DHCW-355	26/18	7/12	6,6	55	11,9	605x605x164	355	25,43
2600	SVK-700x400-2R	10/22	60/40	10,5	55	8,7	817x500x100	700x400	12
3400	SVK-700x400-2R	10/22	60/40	13,8	91	13,4	817x500x100	700x400	12

Electric ducted air heater (preheater)

The electric round duct heaters are intended to be used for heating of clean air in the ventilation systems. Also, heaters can be used for heating or preheating function with air handling units.

The heaters can be supplied with or without installed electronic controller, with pressure and flow monitoring system. The heater case is made of aluzinc coated metal sheet, with sealing rubber for a tight connection with ventilation ducts system. Stainless steel heating elements are used in the heaters. All heaters are equipped with 2 overheat thermostats. Automatic reset thermostat 60°C is for controlling output air temperature, manual reset thermostat 100°C is for cutoff function in case of overheating. To carry out a manual reset, a thermostat push button is installed on a heater's cover. Minimum air speed for heaters must be not less than 1,5 m/s. Standard operating range is from -30°C up to 0°C.

Type with integrated controller and flow monitoring	Heating capacity, kW	Voltage, V
EHC-125-1,0-1f SI/FC	1,0	1 ~ 230
EHC-160-1,0-1f SI/FC	1,0	1 ~ 230
EHC-160-1,5-1f SI/FC	1,5	1 ~ 230
EHC-160-2,0-1f SI/FC	2,0	1 ~ 230
EHC-200-1,0-1f SI/FC	1,0	1 ~ 230
EHC-200-1,5-1f SI/FC	1,5	1 ~ 230
EHC-200-2,0-1f SI/FC	2,0	1 ~ 230
EHC-250-1,0-1f SI/FC	1,0	1 ~ 230
EHC-250-1,5-1f SI/FC	1,5	1 ~ 230
EHC-250-2,0-1f SI/FC	2,0	1 ~ 230
EHC-250-3,0-1f SI/FC	3,0	1 ~ 230
EHC-315-2,0-1f SI/FC	2,0	1 ~ 230
EHC-315-3,0-1f SI/FC	3,0	1 ~ 230

Accessories for unit outdoor installation

Air handling units can be installed outdoor due to thick casing insulation and easy mounting. Protective optional accessories should be used if the unit is for outdoor installation: roof, base frame, legs, grills, supply and exhaust hoods.

Supply and exhaust hoods

Unit size	Type of hood for supply air	Type of hood for exhaust air
R 1000 H R 1300 H R 1500 H	G-600×430	AHIA-315
R 1700 H R 2000 H	G_755_448_00	G_755_448_10
R 3000 H R 4000 H CF 3500 H	G_540_1115_00	G_540_1115_10
R 5000 H	VERSO-30-34-00.000.2	VERSO-30-34-00.000
R 7000 H	V-40-34-00.000.2	V-40-34-00.000
CF 1000 H CF 1300 H CF 1700 H	G-600×430	AHIA-315
CF 2300 H	G_355_870_00	G_355_870_10



Standard base frame for air handling units

Unit size	Frame type	Dimensions B×H×L, mm
R 400 H	BF_00_000_465x650	465×138×650
R 500 V	BF_00_000_590x1070	590×138×1070
R 600 H	BF_00_000_520x1130	520×138×1130
R 700 H	BF_00_000_590x930	590×138×930
R 700 V	BF_00_000_590x1070	590×138×1070
R 1000 H/V R 1300 H/V R 1500 H/V	BF_00_000_852x1355	852×138×1355
R 1700 H/V R 2000 H/V	BF_00_000_852x1485	852×138×1485
R 3000 H/V R 4000 H/V	BF_00_000_1100x2100	1100×138×2100
CF 1000 H/V CF 1300 H/V CF 1700 H/V	BF_00_000_852x1810	852×138×1810
CF 2300 H/V	BF_00_000_852x2000	852×138×2000
CF 3500 H/V	BF_00_000_1100x2500	1100×138×2500



Base frame – painted RAL7035, with legs. There is a possibility to screw the adjustable legs with a rubber sole. They are assembled and ordered separately.

Kitchen hood

(only for unit Domekt R 190, Domekt R 200)



- White colour painted
- Stainless steel



- White colour painted
- The height is only 2,6 cm

Decorative panel

(only for unit Domekt R 190, Domekt R 200)



- White colour painted
- Stainless steel

Air distribution box OSD

(only for unit Domekt R 190, Domekt R 200 for horizontal connection of ducts)



Type:
OSD-200 VE (100 mm)
OSD2-200 VE (125 mm)



Outdoor grill LD

For supply and exhaust air flows' separation.

Type:

- LD-125
- LD-160
- LD-200
- LD-250
- LD-315

(black RAL9005 or white RAL9010)

Remote unit intensity control (OVR)

OVR ("Override" – ignore) function is intended for the remote unit's control with an external accessory device. After this function is activated, the current unit's mode can be omitted and the unit starts working according to the newly set parameters. This function has the highest priority and may operate in every mode, even when the unit is switched off. This function is possible for all units by connecting simple switch, motion detector, kitchen hood, differential pressure switch or other.

Type	Parameters
Differential pressure switch DTV500	Pressure range 50 – 500 Pa One change-over contact (NO+NC) 250V AC, 1A Protection class IP54

Unit PC control (PING2) for C4 controller



An option to manage and control units by computer, when connected to the PC network or Internet.

Network module PING2 is intended for connection of air handling units KOMFOVENT to the computer network (Ethernet) or another network (RS-485).



Wireless router

Wireless router provides a simple way to connect the ventilation unit to the Internet or a local network via Wi-Fi. Suitable for situations when there is no possibility for cable connection between AHU and internet access point. The router comes with a power supply (adapter and micro USB) and a computer network (Ethernet) cable. Transmission speeds up to 300 Mbps.

Variable air volume control (C5 / C6)



VAV – control mode allows maintaining constant air pressure in ducts while the fan speed is adjusting according to pressure changes in the ventilation system correspondingly to the requirements in different premises.

Air pressure in ducts is measured by optional VAV pressure sensors installed in supply and exhaust air ducts.

Air quality control (AQ)

AQ ventilation intensity control option according to the external sensor signal. Provides ventilation intensity correction, according to the increased CO₂, humidity level, etc. A different AQ function may be set depending on the sensor type, therefore, the intensity of the unit will be regulated accordingly. User can activate this function anytime according to the demand and can also observe the premise's air quality on the panel. This function is possible for all units just by connecting one of the sensors listed below.

Type	Parameters
Wall mounted temperature – humidity sensor „SHR“	Supply voltage: 24 Vac/dc, < 1 VA Relative humidity: 0...100 %, +/- 2 % Temperature: 0...50 °C, +/- 0,5 °C Output signal: 2 x 0...10 V Protection class: IP20 Dimensions: 87 x 86 x 30 mm
Duct mounted humidity sensor "SHD"	Supply voltage: 24 Vac/dc, < 1 VA Relative humidity: 0...100 %, +/- 2 % Output signal: 2 x 0...10 V Protection class: IP54
Wall mounted CO₂ and temperature sensor "SCR"	Supply voltage: 24 Vac/dc, < 2 VA CO ₂ : 0...2000 ppm, +/- 40 ppm Temperature: 0...50 °C, +/- 0,5 °C Output signal: 2 x 0...10 V Protection class: IP20 Dimensions: 87 x 86 x 30 mm
Duct mounted CO₂ and temperature sensor "SCD"	Supply voltage: 24 Vac/dc, 2 VA CO ₂ : 0...2000 ppm, +/- 40 ppm Temperature: 0...50 °C, +/- 0,5 °C Output signal: 2 x 0...10 V Protection class: IP54 Dimensions: 105 x 104 x 155 mm
Wall mounted air quality and temperature sensor "SQR"	Supply voltage: 24 Vac/dc, < 2 VA VOC: 450...2000 ppm (CO ₂ equivalent) Temperature: 0...50 °C, +/- 0,5 °C Output signal: 2 x 0...10 V Protection class: IP20 Dimensions: 87 x 86 x 30 mm
Duct mounted air quality and temperature sensor "SQD"	Supply voltage: 24 Vac/dc, < 2 VA VOC: 450...2000 ppm (CO ₂ equivalent) Temperature: 0...50 °C, +/- 0,5 °C Output signal: 2 x 0...10 V Protection class: IP54 Dimensions: 105 x 104 x 155 mm

Electric wiring of air handling units

When the air handling unit is installed, the user should just connect it to the mains power supply and install one temperature sensor in the supply air duct, and in case of need extend the connecting cable of the control panel.

The units with a hot water air heater are provided with extra connecting cables for a heating damper drive, a pump, and an air damper drive. If the air handling unit voltage is ~230 V;

50 Hz it is necessary to install the socket with grounding of corresponding capacity. If the voltage is ~400 V; 50 Hz, the cable of electrical power supply is connected to the main switch, which is located on the unit's outside wall.

The air handling units power supply cable types are specified in the table.

Unit size	Power supply cable
R 190 R 200 R 250 R 400 R 450 R 500 R 600 R 700	3×1,5 mm ²
R 1000 E	5×1,5 mm ²
R 1300 E R 1500 E R 1700 E R 2000 E R 2500 E R 3000 E R 5000 W R 7000 W	5×2,5 mm ²
R 4000 E R 5000 E	5×6 mm ²
R 1000 W R 1300 W R 1500 W R 1700 W R 2000 W R 2500 W	3×1,5 mm ²
R 3000 W R 4000 W	5×1,5 mm ²
RHP 400 RHP 600	3×1,5 mm ²
RHP 800	5×2,5 mm ²
RHP 1300 RHP 1500	5×4 mm ²

Unit size	Power supply cable
CF150 CF 200 CF 250 CF 300 CF 400 CF 500 CF 700	3×1,5 mm ²
CF 1000 E CF 1300 E CF 1500 E CF 1700 E CF 2300 E	5×2,5 mm ²
CF 2500 E	5×4 mm ²
CF 1300 W CF 1500 W CF 1700 W CF 2300 W	3×1,5 mm ²
CF 3500 W	5×1,5 mm ²
S 650 E/3	3×2,5 mm ²
S 650 E/6	5×1,5 mm ²
S 800 E/6 S 800 E/9 S 1000 E/9 S 1300 E/9	5×2,5 mm ²
S 1000 E/15 S 1300 E/15 S 2100 E/15	5×6 mm ²
S 2100 E/22,5	5×10 mm ²
S 800 W S 1000 W S 1300 W S 2100 W	3×1,5 mm ²
S 3000 W	5×1,5 mm ²

Control panel	Connection cable for control panel (10 m)
C6.1, C6.2, C5.1, C4.1	4×0,22 mm ²

Unit marking and ordering samples:

DOMEKT-R-450-V-L1-F7/M5-C6-L/A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series: DOMEKT
- ② Type of heat exchanger: R – rotary; CF – counterflow; S – supply unit
- ③ Unit size: 150, 190, 200, 250, 300, 400, 450, 500, 600, 650, 700, 800, 1000
- ④ Duct connection: V – vertical; H – horizontal; F – ceiling
- ⑤ Inspection side: R1; R2; L1; L2
- ⑥ Air filter class: F7/M5; M5/M5
- ⑦ Controller: C6, C6M, C4
- ⑧ Heat exchangers characteristic: L/A; L/AZ; ER (enthalpy counterflow plate heat exchanger)

VERSO-R-1300-UH-E-L1-F7/M5-C5.1-SL/A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series: VERSO
- ② Type of heat exchanger: R – rotary; CF – counterflow; S – supply unit
- ③ Unit size: 1000, 1300, 1500, 1700, 2000, 2100, 2300, 2500, 3000, 3500, 4000, 5000, 7000
- ④ Duct connection: UH – universal/horizontal; UV – universal/vertical; H – horizontal; V – vertical; F – ceiling
- ⑤ Heater type: E – electric; W – water; HCW – heater-cooler; DX – changeover
- ⑥ Inspection side: R1; R2; L1; L2
- ⑦ Air filter class: F7/M5
- ⑧ Control system with panel: C5.1
- ⑨ Rotary characteristic: L/A; SL/A; L/AZ


VERSO-RHP-600-3.7/3-UH-L1-F7/M5-C5.1-L/AZ

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series: VERSO
- ② Type: RHP
- ③ Unit size: 400, 600, 800, 1300, 1500
- ④ Heating / cooling capacity: 3.7/3
- ⑤ Duct connection: UH – universal/horizontal; UV – universal/vertical; V – vertical
- ⑥ Inspection side: L1; L2; R1
- ⑦ Air filter class: F7/M5; F7/F7; M5/M5
- ⑧ Control system with panel: C5.1
- ⑨ Rotary characteristic: L/AZ

Inspection side:

← supply air

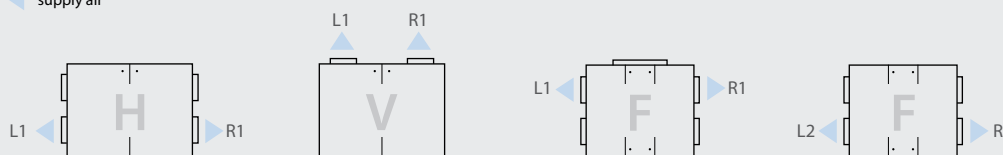

Inspection side is determined by the supply air direction, looking at the unit from the user's side.

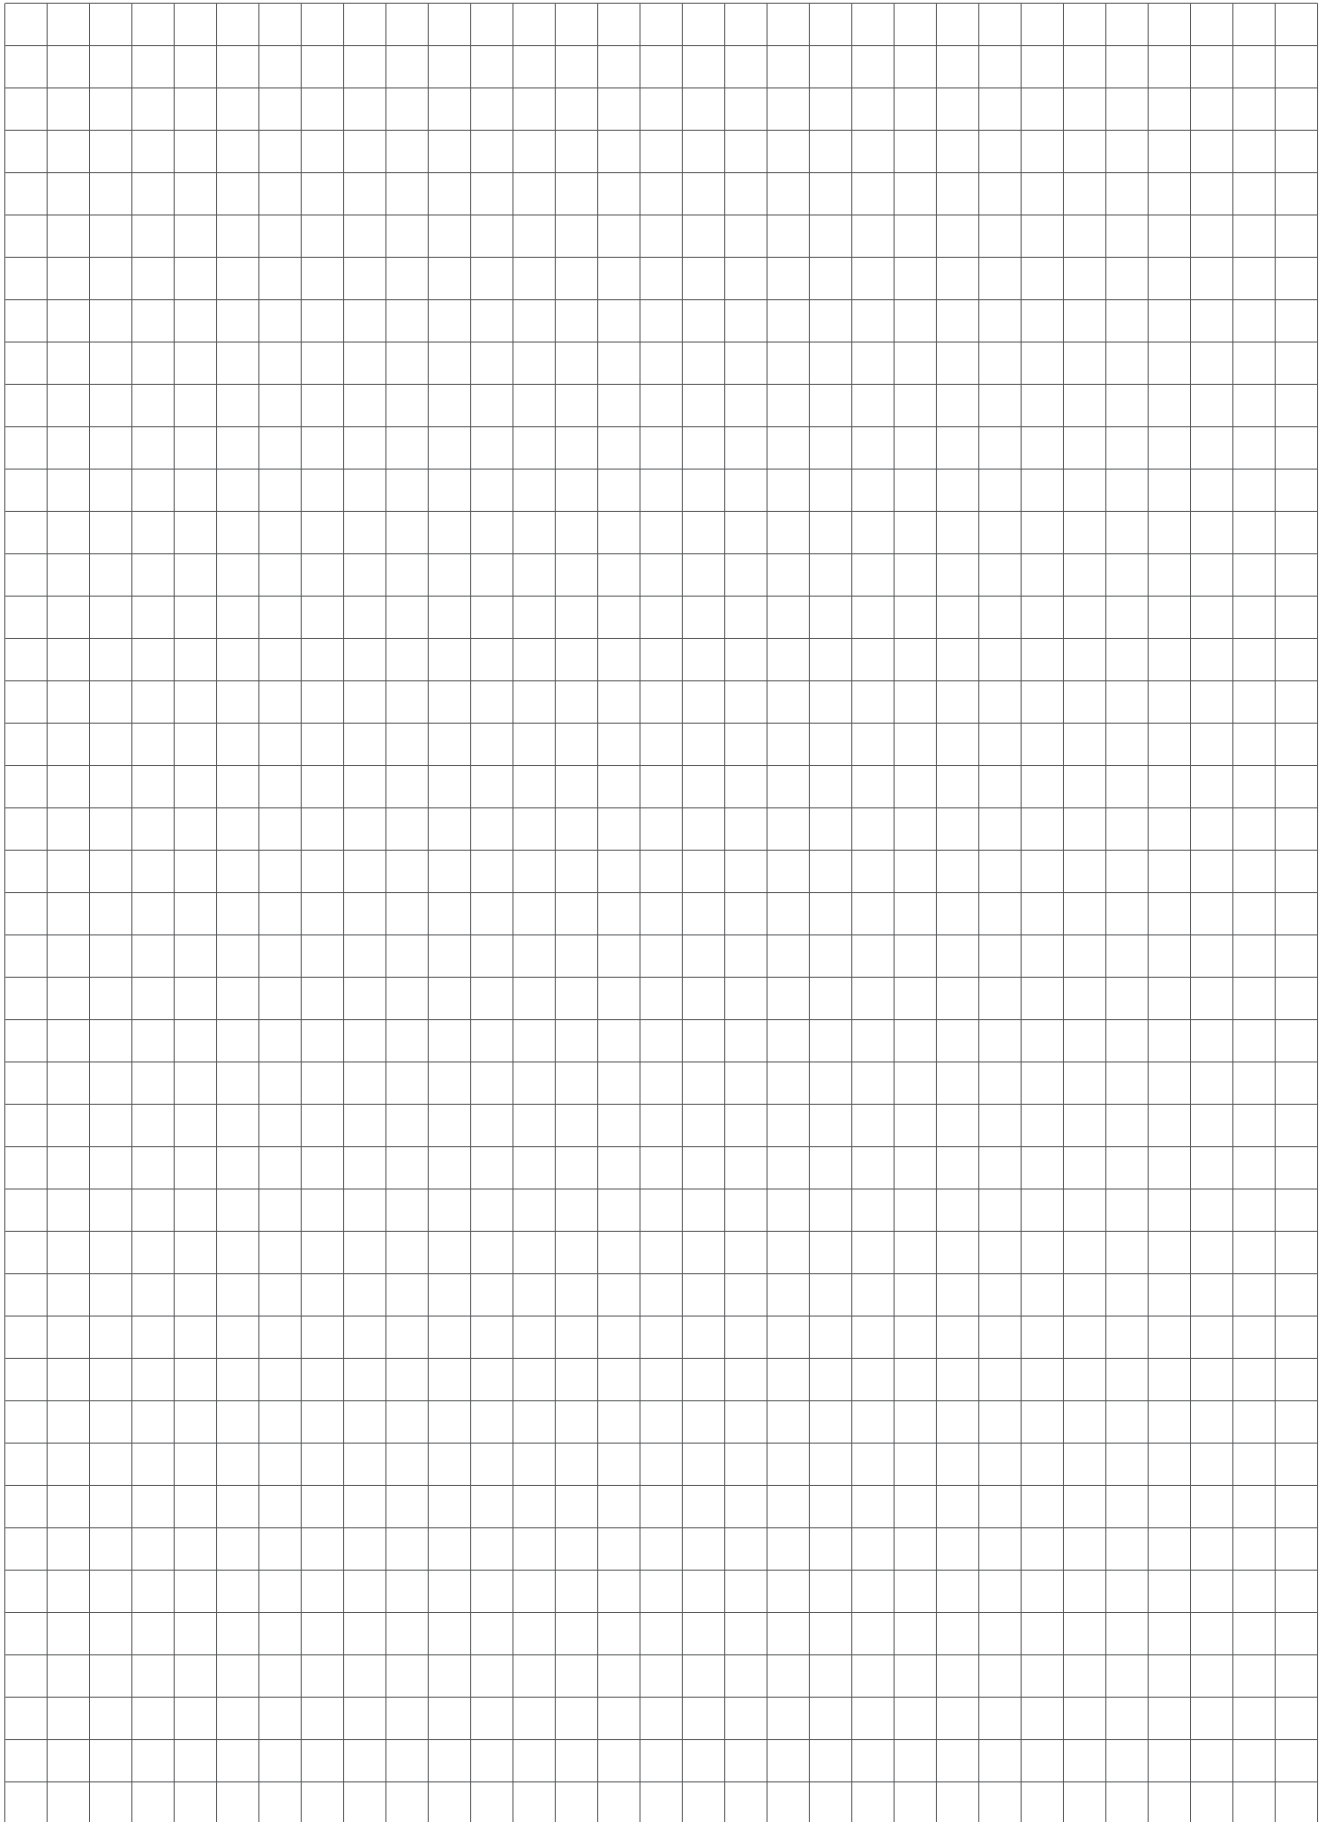

komfovent[®]

UAB KOMFOVENT

Ozo str. 10
LT-08200 Vilnius
Lithuania
info@komfovent.com
www.komfovent.com

2020-12