

New weatherproof loadcentres

- Compliant to AS/NZS 61439.3
- IP65 and IK10 ratings
- Robust design for outdoor use
- Equipped with busbar comb pin type
- Transparent door
- Optional locking mechanism
- UV tested EN 60068-2-5



nhp.com.au | nhpnz.co.nz



1300 647 647 | 0800 647 647




sales@nhp.com.au | sales@nhp-nz.com

The new versatile range of weatherproof loadcentres from NHP has an IP65 rating and is suitable for indoor and outdoor applications.

The loadcentre range offers a choice between 4 to 36 modules, with a transparent door which opens up to 180°, and meets the most recent regulatory requirements of AS/NZS 61439.3. The whole consumer unit (or just the front panel) can be rotated, easily changing the door opening side.

In the multi-row versions, the centre distance of the DIN rails can be varied from 150 mm to 125 mm. The frame is extractable for quick and easy bench cabling, and it is possible to anchor the cable ties to special eyeholes on the frame.

- 1. Box for wall mounting
- 2. Reversible front panel
- 3. Blue transparent door
- 4. Fixed support for DIN rail
- 5. DIN rail
- 6. Wall fastening brackets
- 7. Plugs, protection class II
- 8. Terminal block carriers
- 9. Terminal blocks with screw coupling
- 10. Finish or closure elements (lock and key optional)
- 11. Reversible panels

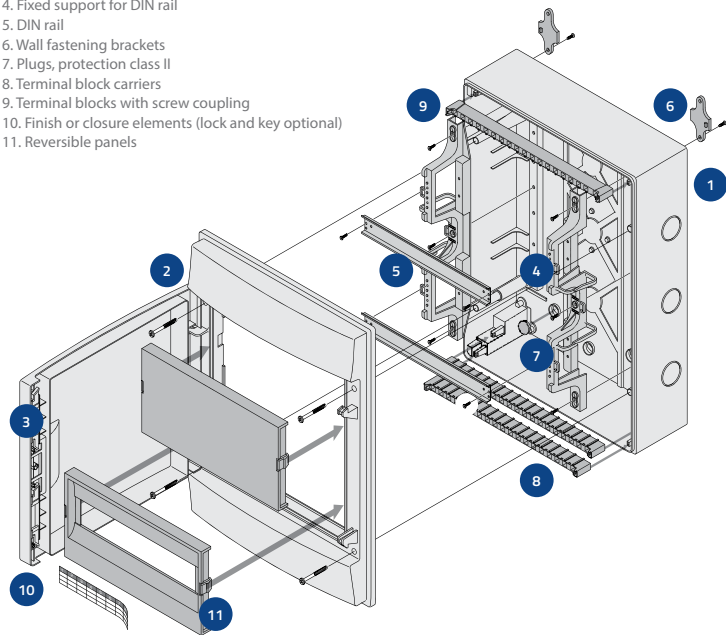


Enclosures


ITEM DESCRIPTION	CATALOGUE NUMBER	MODULES	EARTH BAR WAYS	NEUTRAL BAR WAYS	DIMENSIONS (mm)
4 WAY LOADCENTRE	NWP4	4			152 x 117 x 202
8 WAY LOADCENTRE	NWP8	8	9	9	232 x 155 x 250
12 WAY LOADCENTRE	NWP12	12	14	14	320 x 155 x 250
24 WAY LOADCENTRE (2 ROWS OF 12)	NWP24	24	24	24	320 x 155 x 435
36 WAY LOADCENTRE (3 ROWS OF 12)	NWP36	36	24	24	320 x 155 x 600

Accessories


ITEM DESCRIPTION	CATALOGUE NUMBER
ENCLOSURE WALL FIXING BRACKETS (QTY 4)	NWPWFBRKT
JUNCTION UNIT 28mm EACH	NWPJNU
ENCLOSURE LOCKING DEVICE WITH KEY	NWPLD

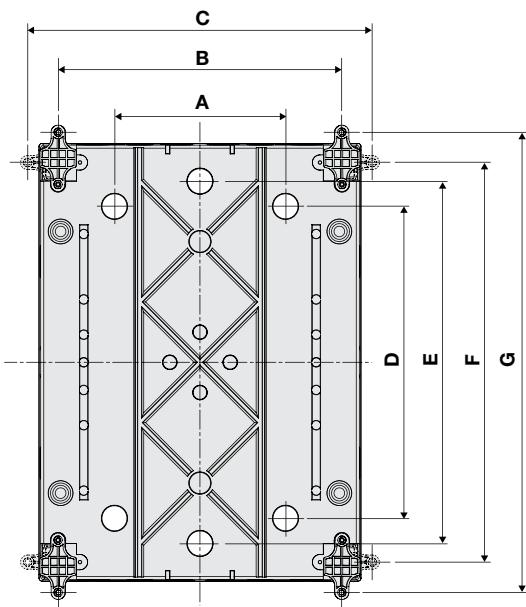

Plugs, protection class II

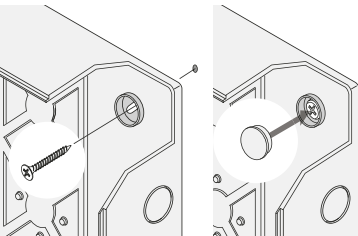

Exterior brackets for wall fastening

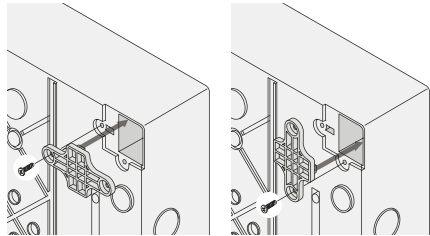

	A	B	C*	D	E	F	G*
4M		113	173		140	163	223.5
8M	90	194	254.5	180		212	272.5
12M	170	282.5	343	180		212	272.5
24M	170	282.5	343	310	360	397	457.5
36M	170	282.5	343	475	525	562	622.5

*When used with wall fixing brackets