

Introducing Fill Pro

High-capacity, powerhouse dispenser combines speed, style and precision.

- BRITA's most powerful water dispenser with the highest cooling capacity – perfect for busy restaurants, bars, hotels, large offices and events
- Choice of four refreshing water types: unchilled and chilled still, chilled semi-sparkling and sparkling
- Stylish, brushed stainless steel cased unit as a countertop or freestanding installation with no unsightly tanks, bottles or hoses
- Precision vessel positioning on drip tray guides and accurate portion control without a drop of water waste. Hit the button, walk away, collect
- TwinFilling doubles service efficiency by filling two bottles or glasses simultaneously

Fill Pro

High-capacity, powerhouse dispenser combines speed, style and precision.



TwinFilling efficiently fills two bottles/glasses simultaneously



Our water dispensers produce 86% less CO₂ emissions than pre-bottled water and 64% less than bottled water dispensers

BottleGuard to easily position bottles/glasses on the drip tray for precise filling

SmoothFinishing
portion control to fill bottles/glasses without overflow

ThermalGate™
powerful thermal-disinfection feature



BRITA CLARITY Protect filter preserves minerals in water while removing unwanted substances


[Watch our Video on Youtube](#)



Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net

 **BRITA**





Two installation options:
• Floorstanding
• Countertop



Fill T-Tap/Fill Pro



Technical data



Model	Fill still + sparkling				
Design / Type	tap system: without drip tray	tap system: with countertop drip tray	tap system: with integrated drip tray	countertop	base cabinet
Installation scenario	surfaces with existing drip trays, e.g. bars with a waste water connection.	surfaces made of materials difficult to drill (glass, stone, concrete, metal).	surfaces relatively easy to drill, e.g. for a waste water connection.	suitable where there is limited space below the countertop.	flexible installation in diverse scenarios, independent of existing counters, etc.
Types of water					



Configuration options

For installation without waste
water connection

waste water container

Specifications					
Cooling capacity	50–250 regular users				
Unit dimensions (W x H x D)	tap: 290 x 544 x 128 mm undercounter appliance (cooler): 302 x 603 x 483 mm			401 x 544 x 563 mm	base cabinet: 400 x 910 x 565 mm base plate: 520 x 4 x 564 mm
Dispensing height	383 mm	345 mm	376 mm	345 mm	
Weight	tap: 5.1 kg undercounter appliance (cooler): 40 kg	tap: 5.1 kg undercounter appliance (cooler): 40 kg	tap: 5.1 kg undercounter appliance (cooler): 40 kg	42 kg	base cabinet: 22 kg base plate: 10 kg
Max. power consumption	529 W	529 W	529 W	529 W	
Max. flow rate	2 l/min				

CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:

- particles such as microplastics and sand
- per- and polyfluoroalkyl substances (PFAS)
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

CLARITY Protect reduces:

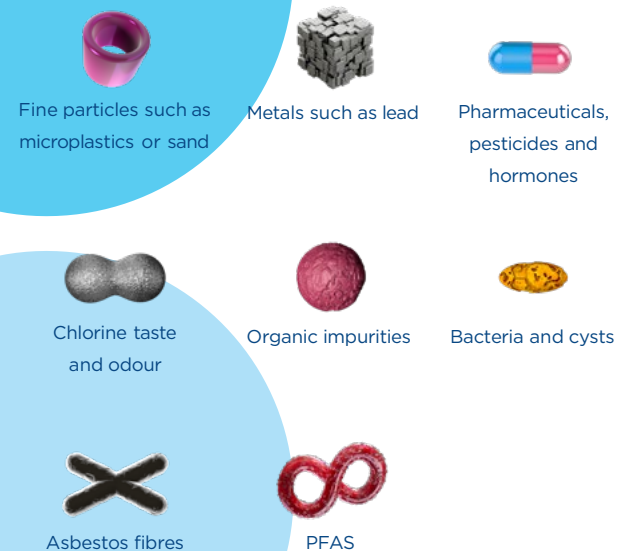

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net



The right balance
Preserves minerals
in water

**Activated carbon
filtration**
Reduces substances
that impair taste and
odour

Pre-filter
Removes particles



Hollow fibre membrane
Nominal pore size of
0.15µm filters out
99.999% of bacteria
and 99.95% of cysts

Filter capacity:
Protect: 11,500 l

Exceptionally clean,
safe water

Protects equipment
lowering dispenser
maintenance costs



CLARITY Protect



Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of PFAS	> 99% (NSF 53 testet by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-20)
Reduction of cysts	99.95% (NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm