

# Isolators

Loop-powered binary output

Ex i field circuit

9176/20-15-00s Art. No. 222180



- Suitable for solenoid valves and signalling devices
- Two-channel variants reduce the amount of space required
- No need for a separate auxiliary power supply

MY R. STAHL 9176A



The Series 9176 binary outputs transmit binary signals for the intrinsically safe operation of Ex i solenoid valves, indicator lamps and horns. The devices do not require a separate auxiliary power supply as they are powered by the control circuit. The intrinsically safe outputs are galvanically separated from the inputs. The two-channel variants are characterised by galvanically separated channels.

## Technical Data

### Explosion Protection

|                                 |                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application range (zones)       | 2                                                                                                                                                                                                                                                   |
| Ex interface zone               | 0, 1, 2, 20, 21, 22                                                                                                                                                                                                                                 |
| IECEX gas certificate           | IECEX BVS 13.0012 X                                                                                                                                                                                                                                 |
| IECEX gas explosion protection  | Ex nA [ia Ga] IIC T4 Gc                                                                                                                                                                                                                             |
| IECEX dust certificate          | IECEX BVS 13.0012 X                                                                                                                                                                                                                                 |
| IECEX dust explosion protection | [Ex ia Da] IIIC                                                                                                                                                                                                                                     |
| ATEX gas certificate            | BVS 04 ATEX E 075 X                                                                                                                                                                                                                                 |
| ATEX gas explosion protection   | II 3 (1) G Ex nA [ia Ga] IIC T4 Gc                                                                                                                                                                                                                  |
| ATEX dust certificate           | BVS 04 ATEX E 075 X                                                                                                                                                                                                                                 |
| ATEX dust explosion protection  | II (1) D [Ex ia Da] IIIC                                                                                                                                                                                                                            |
| FMus certificate                | FM16US0122X                                                                                                                                                                                                                                         |
| cFM certificate                 | FM16CA0067X                                                                                                                                                                                                                                         |
| Marking cFMus                   | Class I, Div. 2, Groups A,B,C,D;<br>Class I, Zone 2, Group IIC<br>AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G;<br>Class I, Zone 0, [AEx ia]/[Ex ia] IIC<br>T4 Mounting vert. at Ta = 70°C , or horizontal Ta = 60°C<br>See Doc. 91 766 01 31 1 |
| Certificates                    | ATEX (BVS), Brazil (ULB), Canada (FM), China (NEPSI), IECEx (BVS), Korea (KTL), SIL (exida), USA (FM)                                                                                                                                               |
| Ship approval                   | CCS, EU RO MR (DNV)                                                                                                                                                                                                                                 |
| Declaration of conformity       | ATEX (EUK), China (CCC)                                                                                                                                                                                                                             |

### Safety Data

|                            |         |
|----------------------------|---------|
| Max. voltage $U_o$         | 27.6 V  |
| Max. current $I_o$ (Ex ia) | 86.5 mA |
| Max. current $I_o$ (Ex ib) | 44 mA   |
| Max. power $P_o$           | 596 mW  |

#### Safety Data

|                                                                        |                                                                             |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Max. permissible external capacity $C_o$ for IIC                       | 0.085 $\mu$ F                                                               |
| Max. permissible external inductance $L_o$ for IIC                     | 1.8 mH                                                                      |
| Max. permissible external capacity $C_o$ for IIB                       | 0.667 $\mu$ F                                                               |
| Max. permissible external inductance $L_o$ for IIB                     | 17 mH                                                                       |
| Internal capacitance                                                   | 1.1 nF                                                                      |
| Internal inductance                                                    | Negligible                                                                  |
| Max. voltage $U_o$ parallel                                            | 27.6 V                                                                      |
| Max. power $P_o$ parallel                                              | 1192 mW                                                                     |
| Max. current $I_o$ (Ex ia) paral.                                      | 173 mA                                                                      |
| Max. current $I_o$ (Ex ib) paral.                                      | 88 mA                                                                       |
| Internal capacitance parallel                                          | 2.2 nF                                                                      |
| Internal inductance parallel                                           | negligible                                                                  |
| Safety-related max. voltage                                            | 253 V                                                                       |
| Intrinsically safe limiting values inductance $L_o$ /capacitance $C_o$ | Max. connectable inductance $L_o$ /capacitance $C_o$<br>2 parallel channels |
| IIC $L_o$ [mH]<br>$C_o$ [ $\mu$ F]                                     |                                                                             |
| IIB $L_o$ [mH]<br>$C_o$ [ $\mu$ F]                                     | 2,5 mH<br>0.665 $\mu$ F                                                     |
| IIIC $L_o$ [mH]<br>$C_o$ [ $\mu$ F]                                    | 2.500 mH<br>0.665 $\mu$ F                                                   |

#### Electrical Data

|                           |              |
|---------------------------|--------------|
| Number of channels        | 2            |
| Internal resistance $R_i$ | 320 $\Omega$ |

#### Auxiliary Power

|                              |                                  |
|------------------------------|----------------------------------|
| Auxiliary power              | without                          |
| Auxiliary power consumption  | 0.5 W + ( $I_a \times 37$ mW/mA) |
| Polarity reversal protection | Yes                              |

#### Galvanic Isolation

|                              |                 |
|------------------------------|-----------------|
| Test voltage as per standard | EN IEC 60079-11 |
| Ex i input to Ex i input     | 500 V AC        |
| Test voltage as per standard | EN 50178        |
| Input to input               | 350 V AC        |

#### Input

|                       |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Input                 | In accordance with EN 61131-2                                                  |
| Input voltage for ON  | 18 – 31.2 V                                                                    |
| Input voltage for OFF | 0 – 5 V                                                                        |
| Control Power $P_E$   | 0.5 W+ ( $I_A \times 37$ mW/mA)<br>(with $I_A$ = max. required output current) |


#### Output

|                                   |       |
|-----------------------------------|-------|
| Output open-circuit voltage $U_a$ | 25 V  |
| Max. output current $I_{a \max}$  | 29 mA |

## Output

|                                |                                      |
|--------------------------------|--------------------------------------|
| Max. output current $I_a$ note | Parallel channels: 58 mA             |
| Internal resistance $R_i$ note | 320 $\Omega$ /parallel: 160 $\Omega$ |
| Output residual ripple         | < 100 mV                             |
| Output switching frequency     | $\leq 10$ Hz                         |
| Switching delay ON/OFF         | $\leq 50$ ms                         |
| Switching delay OFF/ON         | $\leq 18$ ms                         |
| Switching state indication     | Yellow "OUT" LED                     |

9176/.0-15-00 output characteristic

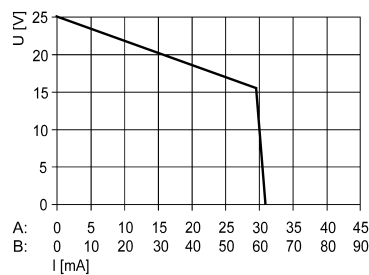At  $U_N$ : -20 to +60 °CX axis ( $I_a$  [mA])

A: Characteristic curve for each channel

B: Characteristic curve for channel 1, parallel channel 2 (only types 9176/20-...-...)

## Ambient Conditions

|                               |                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------|
| Ambient temperature           | -20 °C ... 70 °C (Single device)<br>-20 °C ... 60 °C (Group assembly)                                          |
| Ambient temperature           | -4 °F ... +158 °F (Single device)<br>-4 °F ... +140 °F (Group assembly)                                        |
| Note                          | Installation conditions influence the ambient temperature.<br>Please observe the "Cabinet installation guide". |
| Storage temperature           | -40 °C ... 80 °C                                                                                               |
| Storage temperature           | -40 °F ... +176 °F                                                                                             |
| Maximum relative humidity     | 95%                                                                                                            |
| Use at the height of          | < 2000 m                                                                                                       |
| Electromagnetic compatibility | Tested to the following standards and regulations: EN 61326-1 For use in industrial areas;<br>NAMUR NE 21      |

## Mechanical Data

|                                     |           |
|-------------------------------------|-----------|
| Degree of protection (IP)           | IP30      |
| Degree of protection (IP) terminals | IP20      |
| Fire resistance (UL 94)             | V0        |
| Enclosure material                  | Polyamide |
| Grid dimension                      | 17.6 mm   |
| Width                               | 17.6 mm   |
| Width                               | 17.6 mm   |
| Width, inches                       | 0.69 in   |
| Height                              | 114.5 mm  |
| Height                              | 114.5 mm  |
| Height in inches                    | 4.51 in   |
| Length                              | 108 mm    |
| Length in inches                    | 4.25 in   |
| Weight                              | 185 g     |
| Weight                              | 0.41 lb   |

## Mounting / Installation

|               |                            |
|---------------|----------------------------|
| Mounting type | DIN rail NS35/15, NS35/7.5 |
|---------------|----------------------------|

Isolators




Loop-powered binary output  
Ex i field circuit  
9176/20-15-00s    Art. No. 222180


Mounting / Installation

|                                    |                        |
|------------------------------------|------------------------|
| Mounting orientation               | Vertical<br>Horizontal |
| Connection type                    | Screw terminal         |
| Min. rigid conductor cross section | 0.2 mm²                |
| Max. rigid conductor cross section | 2.5 mm²                |
| Min. flex conductor cross section  | 0.2 mm²                |
| Max. flex conductor cross section  | 2.5 mm²                |
| Connection cross-section AWG       | 24 ... 14              |

Technical Drawings – Subject to Alterations



9176/0-15-00 output characteristic

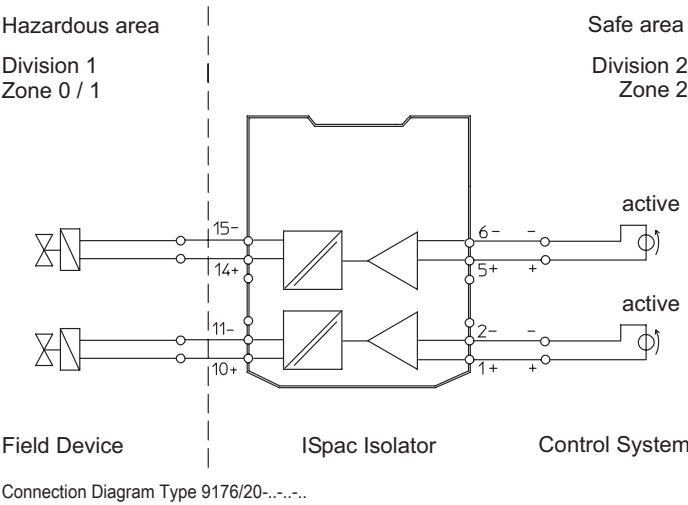

Accessories

Transparent cover



For 91xx ISpac modules  
Yellow, transparent  
Clear identification of the device for SIL applications.  
(Packaging unit: 10 pieces)

Art. No.

200914

Spare Parts

Screw terminal



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: green

Art. No.

112817



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: black

112816

# Isolators

Loop-powered binary output

Ex i field circuit

9176/20-15-00s Art. No. 222180

STAHL

## Screw terminal

## Art. No.



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: blue

112818

## Screw terminal with test tap

## Art. No.



3-pole plug with test tap, screw connector  
thread: M3  
stripping length: 7 mm  
colour: black

113005




3-pole plug with test tap, screw connector  
thread: M3  
stripping length: 7 mm  
colour: blue

113004

## Spring clamp terminal

## Art. No.



3-pole plug with test tap, spring clamp connection  
stripping length: 10 mm  
colour: green

112825



3-pole plug with test tap, spring clamp connection  
stripping length: 10 mm  
colour: black

112824



3-pole plug with test tap, spring clamp connection  
stripping length: 10 mm  
colour: blue

112826

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.