



#### Color Variants

VI462113

Width 60 cm

VI462113

Vario flex induction cooktop 400 series

Width 60 cm

Can be combined perfectly with other Vario appliances of the 400 series

Stainless steel frame

Flex function for combining the rectangular cooking areas

Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width

Frying sensor function for temperature control in pans

Easy control of all functions with bicoloured display

Solid stainless steel control knob

Precision crafting of 3 mm stainless steel

For surface mounting with a visible edge or for flush mounting

#### Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.

Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

#### Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

#### Safety

2-stage residual heat indicator.

Operation indicator.

Pot detection.

Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

#### Characteristics

Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
4
Type of control setting devices
Min. required niche size for installation (HxWxD)
57 x 568-570 x 491-493
Width of the appliance
590
Dimensions (HxWxD)
57 x 590 x 520
Dimensions of the packed product (HxWxD)
123 x 875 x 610
Net weight
17.2
Gross weight
18.7
Residual heat indicator
separate
Location of control panel
External control
Type of external control possibility
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Length electrical supply cord
150
EAN code
4242006289812
Electrical connection rating
Gas connection rating
Fuse protection
2*16
Voltage
220-240
Frequency
50; 60

#### Consumption and connection features

2023-01-19

Page 1

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 17.

#### Connection

Total connected load 7.4 KW.


Connecting cable 1.5 m without plug.

Installation of the control knob; flush installation

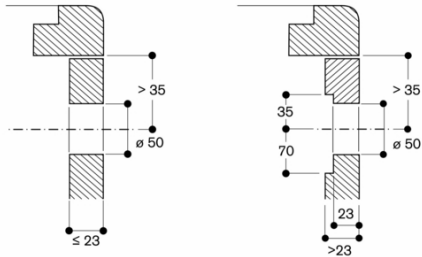


measurements in mm


Installation of the control knob; surface mounting

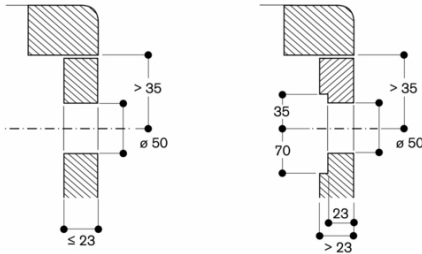

measurements in mm

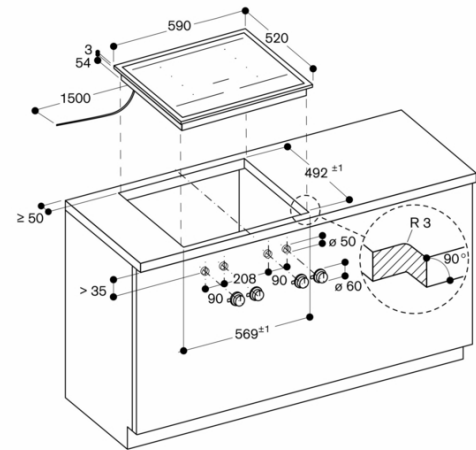


measurements in mm

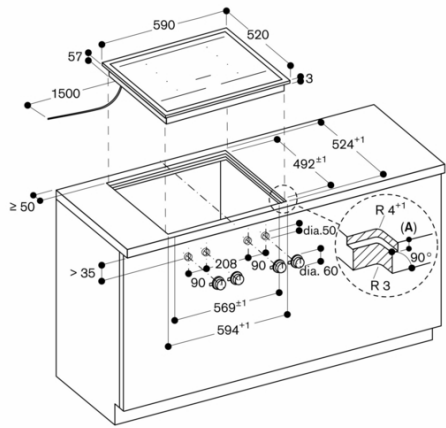

A: 3.5<sup>0.5</sup>

measurements in mm

Longitudinal section

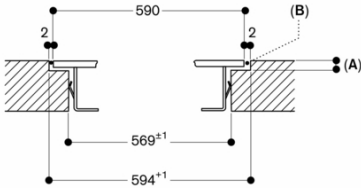


A: 3.5<sup>0.5</sup>

B: Fill with silicone


measurements in mm

View from above



measurements in mm

Cross-section

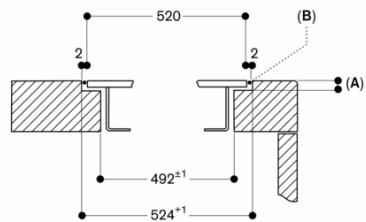

A: 3.5<sup>0.5</sup>

B: Fill with silicone

measurements in mm