

# Avantco GDC-49-HC 53" Black Customizable Swing Glass Door Merchandiser Refrigerator with LED Lighting

Item #178GDC49HCB



## Technical Data

|                          |                |
|--------------------------|----------------|
| Width                    | 53 1/8 Inches  |
| Depth                    | 31 7/8 Inches  |
| Height                   | 83 7/8 Inches  |
| Power Cord Length        | 96 Inches      |
| Interior Width           | 50 Inches      |
| Left Door Opening Width  | 22 7/8 Inches  |
| Right Door Opening Width | 22 7/8 Inches  |
| Shelf Width              | 24 Inches      |
| Interior Depth           | 28 5/16 Inches |
| Shelf Depth              | 25 3/16 Inches |

## Features

- Features (2) self-closing, anti-fog, dual-pane tempered glass swing doors with magnetic gaskets
- Interior LED lighting illuminates product; back-lit exterior top panel attracts customers' attention
- 8 adjustable shelves with price tag strip on each shelf
- Easy-to-use digital temperature controls
- 115V; 1/2 hp compressor; R-290 refrigerant


## Certifications



## Technical Data

|                      |                             |
|----------------------|-----------------------------|
| Interior Height      | 53 1/4 Inches               |
| Amps                 | 6 Amps                      |
| Phase                | 1 Phase                     |
| Voltage              | 115 Volts                   |
| Wattage              | 690 Watts                   |
| Access Type          | Doors                       |
| BTU (LBP)            | 1365 BTU                    |
| Capacity             | 39.9 cu. ft.                |
| Capacity (per Shelf) | 88 lb.                      |
| Color                | Black                       |
| Compressor Location  | Bottom Mounted              |
| Door Style           | Swing                       |
| Door Type            | Glass                       |
| Features             | Customizable LED Lighting   |
| Hinge Location       | Left<br>Right               |
| Horsepower           | 1/2 hp                      |
| Installation Type    | Freestanding                |
| Interior Color       | White                       |
| Number of Doors      | 2 Doors                     |
| Number of Shelves    | 8 Shelves                   |
| Plug Type            | NEMA 5-15P                  |
| Refrigerant Capacity | 3.5 oz.                     |
| Refrigerant Type     | R-290                       |
| Sections             | 2 Sections                  |
| Starting Amps        | 18 Amps                     |
| Starting Wattage     | 1512 Watts                  |
| Temperature Range    | 33 - 40 Degrees F           |
| Type                 | Merchandising Refrigeration |

## Plan View

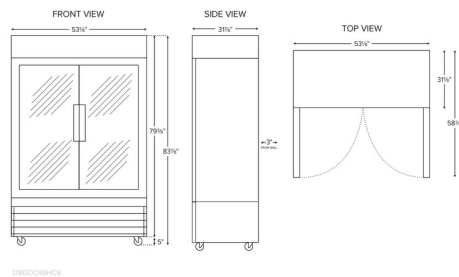



## Notes & Details

Increase your sales of "grab and go" items like bottled tea and soda, or pre-packaged sandwiches and salads with this Avantco GDC-49-HC 53" black merchandising refrigerator! Designed with sharp looks and usability in mind, this unit is the perfect display for your products with its sleek black finish and a lighted top graphics area. And, since the housing is made from black-coated steel, you can be sure that it will provide superior durability. Additionally, it boasts 2 anti-fogging, dual-pane tempered glass swing doors to ensure that customers always have a clear view of your products, while 8 epoxy-coated steel shelves help you stay organized. Each shelf can hold up to 90 lb. of product. Plus, the shelves easily adjust to accommodate changing inventory and menus. Interior LED lighting on the right side also works to illuminate and further merchandise your products.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/2 hp compressor that runs on R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed in place using polyurethane insulation. Other helpful features include self-closing aided by magnetic gaskets, automatic defrosting, and a digital temperature control. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).