


ITEM NO. :B3216-2BU-J

ASSEMBLY INSTRUCTIONS

1. Place the lamp body (A) on the canopy (B) and secure with the the nuts (C).
2. Install the mounting plate (D) on the outlet box by using the screws (E).
3. Loosen the hex nuts around the bolts (F) and screw in or unscrew the bolts from the junction box to get the right length for installation.
4. Connect the fixture wire to the circuit wire by wire nuts (G), black wire with live wire, white wire with neutral wire, ground wire with ground wire.
5. Fix the lamp body (A) to the mounting plate (D) by the ball nuts (H).
6. Put the lampshade (J) around the lamp holder, put the silicone washer (K) around the lamp holder to protect the glass shade, and secure the shade with a socket ring (L).
7. Screw the bulb (M) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

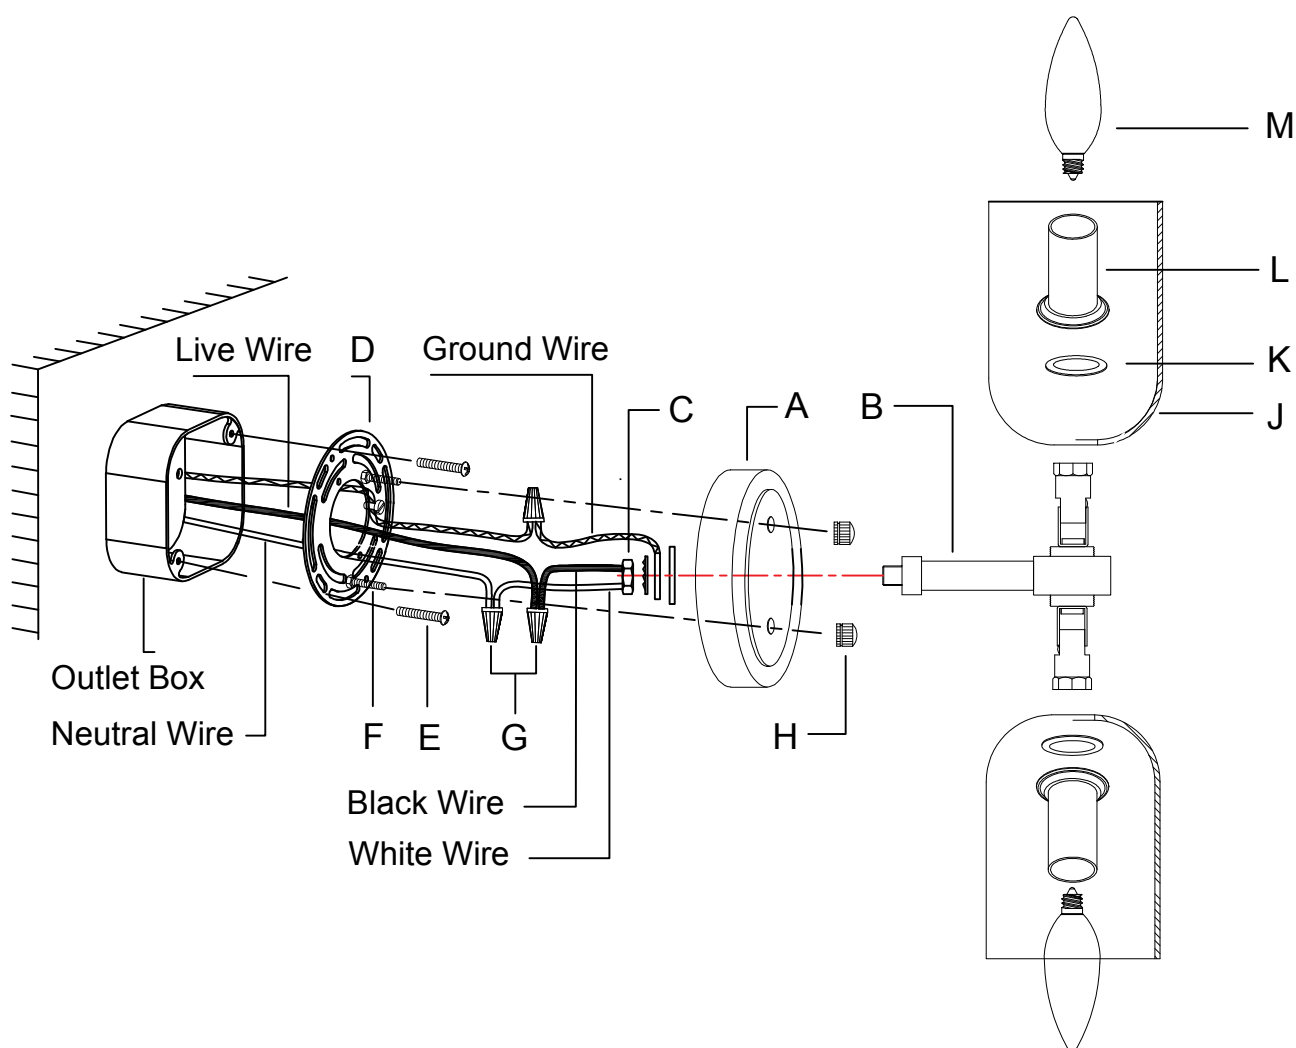

In view of thermal expansion and contraction, avoid securing the glass shade too tight when screwing the socket ring into the lamp holder, or you will break the glass shade.