

GR Series

MODEL GRJ85

BARRIER FREE, PEDESTAL MOUNTED
DRINKING FOUNTAIN

STANDARD FEATURES

- ADA Compliant
(when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- 12 gage, heavy duty stainless steel, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty stainless steel, vandal resistant
- Vandal resistant stainless steel bottom plate

SUGGESTED SPECIFICATIONS

Model GRJ85 is a barrier free, pedestal mounted, vandal resistant, round drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a green powder coated 12 gage, heavy duty stainless steel pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20 - 105 psig. Fountain is certified to ANSI A117.1. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Options Notes:

¹ See separate option sheet.

² This option is not available freeze-resistant.



Model GRJ85 Shown

MODEL:

(Must Specify)

- | | |
|--------------------------------|-----------------------------|
| ☐ GRJ84 | Satin stainless finish |
| ☐ GRJ85 | Green powder-coated (Shown) |
| ☐ GRJ86 | Red powder-coated |
| ☐ GRJ87 | Blue powder-coated |

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- | | |
|--------------------------------|---|
| ☐ -CH30 | Child height, 30" bubbler height |
| ☐ -FRU1 | Freeze resistant, 1 valve ¹ |
| ☐ -FRU2 | Freeze resistant, 2 valves ¹ |
| ☐ -FRU3 | Freeze resistant, 3 valves ¹ |
| ☐ -FS | Foot spray |
| ☐ -HB1 | Hose bibb, compression, with hose threaded outlet/VB ^{1 2} |
| ☐ -HB2 | Hose bibb, loose key, with hose threaded outlet/VB ^{1 2} |
| ☐ -HB3 | Hose bibb, loose key, vandal resistant, with hose threaded outlet/VB ^{1 2} |
| ☐ -IGM | In-ground 14" mounting |
| ☐ -JF1 | Jug filler, spigot, self-closing valve with plain end ^{1 2} |
| ☐ -JF2 | Jug filler, pushbutton, self-closing valve with plain end ¹ |
| ☐ -LSR | Bowl with Leaf and Debris Strainer ¹ |
| ☐ -NP1 | Non-pollutable, freeze resistant, 1 valve |
| ☐ -NP2 | Non-pollutable, freeze resistant, 2 valves |
| ☐ -NP3 | Non-pollutable, freeze resistant, 3 valves |
| ☐ -PF | Pet fountain receptor ¹ . |



Recyclable
Product



Water
Conserving
Product

Product Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Complies
with the
following
standards:



Federal
Public Law
111-380
(No Lead)

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com



Member of
MORRIS GROUP
INTERNATIONAL

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GR Series

MODEL GRJ85

ACCESSIBLE DRINKING FOUNTAIN SINGLE HEIGHT

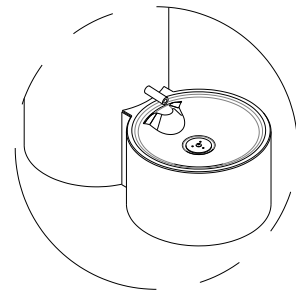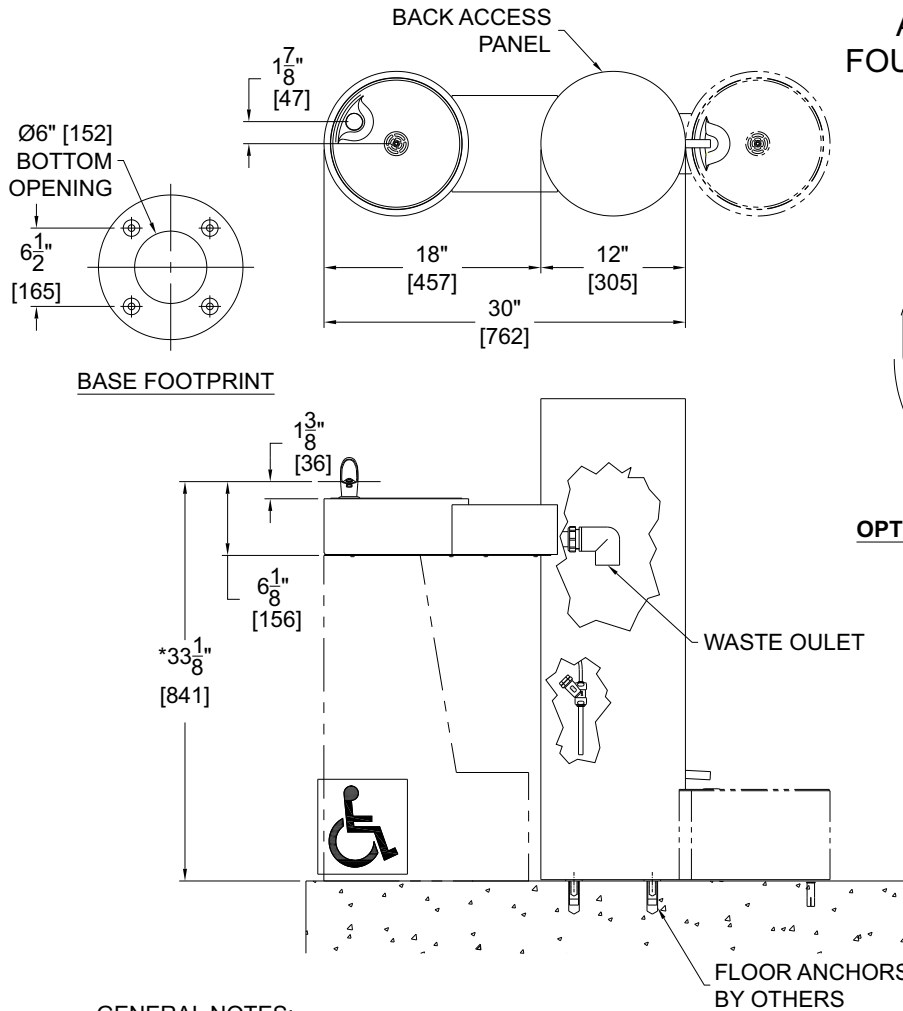

**OPTIONAL -PF PET FOUNTAIN
DETAIL**

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. STANDARD ADA ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD ADA HEIGHT MODEL AVAILABLE.
3. STOP VALVE NOT PROVIDED.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit www.murdockmfg.com for most current specifications.