



**the  
t.bone**

free solo  
active antenna splitter

Thomann GmbH  
Hans-Thomann-Straße 1  
96138 Burgebrach  
Germany  
Telephone: +49 (0) 9546 9223-0  
Internet: [www.thomann.de](http://www.thomann.de)

17.01.2022, ID: 314056 (V4)

## Table of contents

<b>1</b>	<b>General notes.....</b>	<b>4</b>
<b>2</b>	<b>Safety instructions.....</b>	<b>6</b>
<b>3</b>	<b>Features and scope of delivery.....</b>	<b>8</b>
<b>4</b>	<b>Installation and starting up.....</b>	<b>9</b>
<b>5</b>	<b>Connections and controls.....</b>	<b>13</b>
<b>6</b>	<b>Technical specifications.....</b>	<b>16</b>
<b>7</b>	<b>Protecting the environment.....</b>	<b>18</b>

# 1 General notes


This user manual contains important information on safe operation of the device. Read and follow all safety notes and all instructions. Save this manual for future reference. Make sure that it is available to all persons using this device. If you sell the device, include the manual for the next owner.

Our products are subject to a process of continuous development. We therefore reserve the right to make changes without notice.

## Symbols and signal words

This section provides an overview of the symbols and signal words used in this user manual.

Signal word	Meaning
<b>DANGER!</b>	This combination of symbol and signal word indicates an immediate dangerous situation that will result in death or serious injury if it is not avoided.
<b>NOTICE!</b>	This combination of symbol and signal word indicates a possible dangerous situation that can result in material and environmental damage if it is not avoided.

Warning signs	Type of danger
	<p>Warning – danger zone.</p>

free solo

## 2 Safety instructions

### Intended use

This device is used in wireless transmission systems to distribute and amplify the incoming antenna signals. Use the device only as described in this user manual. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.

### Safety



#### **DANGER!**

#### **Danger for children**

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts (e.g. knobs or the like) from the unit. They could swallow the pieces and choke! Never let children unattended use electrical devices.



**NOTICE!**

**Operating conditions**



This device has been designed for indoor use only. To prevent damage, never expose the device to any liquid or moisture. Avoid direct sunlight, heavy dirt, and strong vibrations. Only operate the device within the ambient conditions specified in the chapter 'Technical specifications' of this user manual. Avoid heavy temperature fluctuations and do not switch the device on immediately after it was exposed to temperature fluctuations (for example after transport at low outside temperatures). Dust and dirt inside can damage the unit. When operated in harmful ambient conditions (dust, smoke, nicotine, fog, etc.), the unit should be maintained by qualified service personnel at regular intervals to prevent overheating and other malfunction.



**NOTICE!**

**External power supply**



The device is powered by an external power supply. Before connecting the external power supply, ensure that the input voltage (AC outlet) matches the voltage rating of the device and that the AC outlet is protected by a residual current circuit breaker. Failure to do so could result in damage to the device and possibly the user. Unplug the external power supply before electrical storms occur and when the device is unused for long periods of time to reduce the risk of electric shock or fire.

### 3 Features and scope of delivery

This appliance is used when multiple radio links are to be operated with a single antenna pair.

The following features characterize the device:

- Amplifying the high frequency signal of a pair of antennas and distribution to  $4 \times 2$  antenna outputs in the frequency ranges of 470 MHz to 608 MHz, 614 MHz to 694 MHz and 823 MHz to 832 MHz.
- Central 12 V power supply for up to four units
- 19" rack mountable

Included accessories: 12 V power adapter, 2 UHF omni-directional antennas, 10 BNC cables.



## 4 Installation and starting up

Unpack and check carefully there is no transportation damage before using the unit. Keep the equipment packaging. To fully protect the product against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.

Create all connections while the device is off. Use the shortest possible high-quality cables for all connections. Take care when running the cables to prevent tripping hazards.

### **Rack mounting**

The unit has been designed for rack mounting in a standard 19-inch rack; it occupies one rack unit.

### **Notes on radio transmission**

Before you start, make sure that the frequencies of the connected wireless systems are legitimate in the respective country and check whether the operation must be registered with the responsible authority. For further information on that refer to the manual of the wireless systems.

### **Attaching and connecting antennas.**

Attach the supplied antennas to appropriate positions, such as the PA rack. To improve the transmission quality and to adapt to the spatial conditions, the antennas are rotatable and swivelling. Position the antennas so that all used transmitters (e.g., wireless microphones, body-pack transmitters) are within radio range. Install a BNC cable from both antennas to one of the antenna inputs each of the device.

### **Setting up the radio connection**

Connect one antenna output pair of the device each to the two antenna inputs of a wireless system. To do so, use the supplied BNC cables.

## Connecting the power supply



### NOTICE!

#### External power supply

The device is powered by an external power supply. Before connecting the external power supply, ensure that the input voltage (AC outlet) matches the voltage rating of the device and that the AC outlet is protected by a residual current circuit breaker. Failure to do so could result in damage to the device and possibly the user.

Unplug the external power supply before electrical storms occur and when the device is unused for long periods of time to reduce the risk of electric shock or fire.

Connect the 12 V outputs of the device to the 12 V power supply inputs of the wireless systems. To do so, use the supplied power cords.


Connect the power adapter to the unit and then plug the power adapter into the power outlet.

## Taking system in operation

Now switch on the device and the connected wireless systems.


### Example

The following illustration shows how to connect the device to the optionally available paddles and to four wireless systems. Instead of the paddles, you can also connect the device to the antennas included in the delivery.

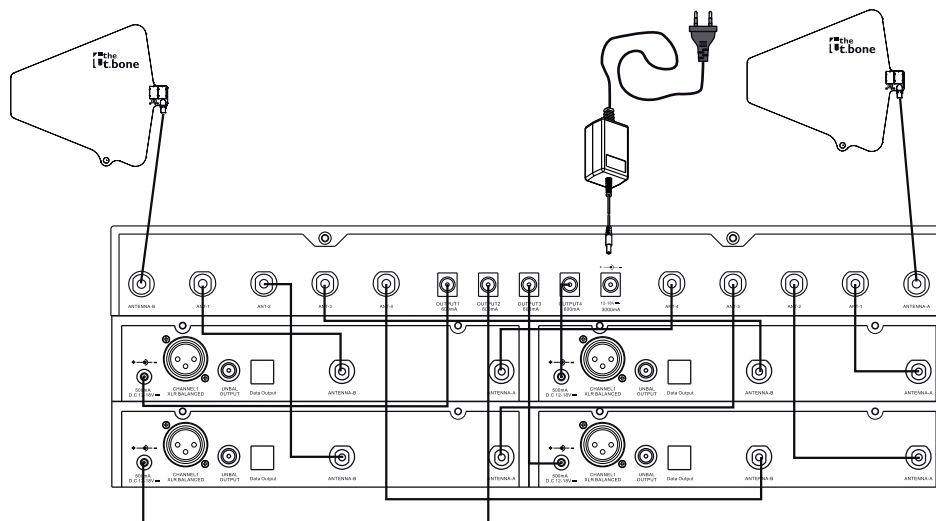

## 5 Connections and controls

### Front panel

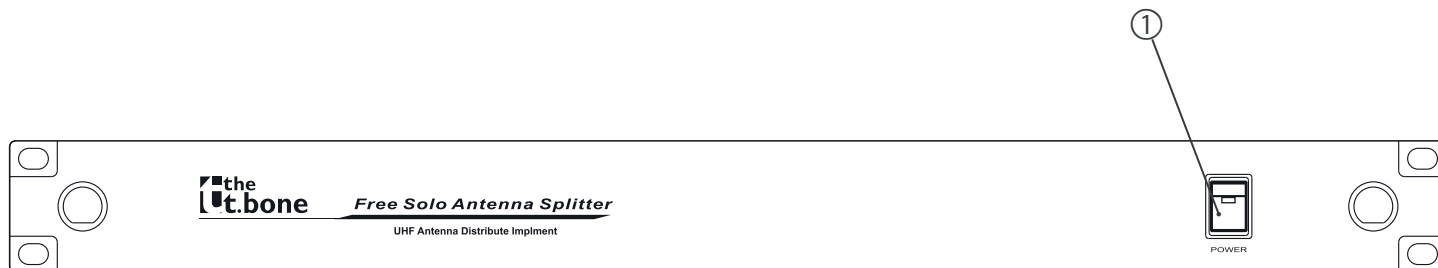

1


**[POWER]**

Main switch. Turns the device on and off.

free solo

**th.mann**  
MUSIC IS OUR PASSION

## Rear panel

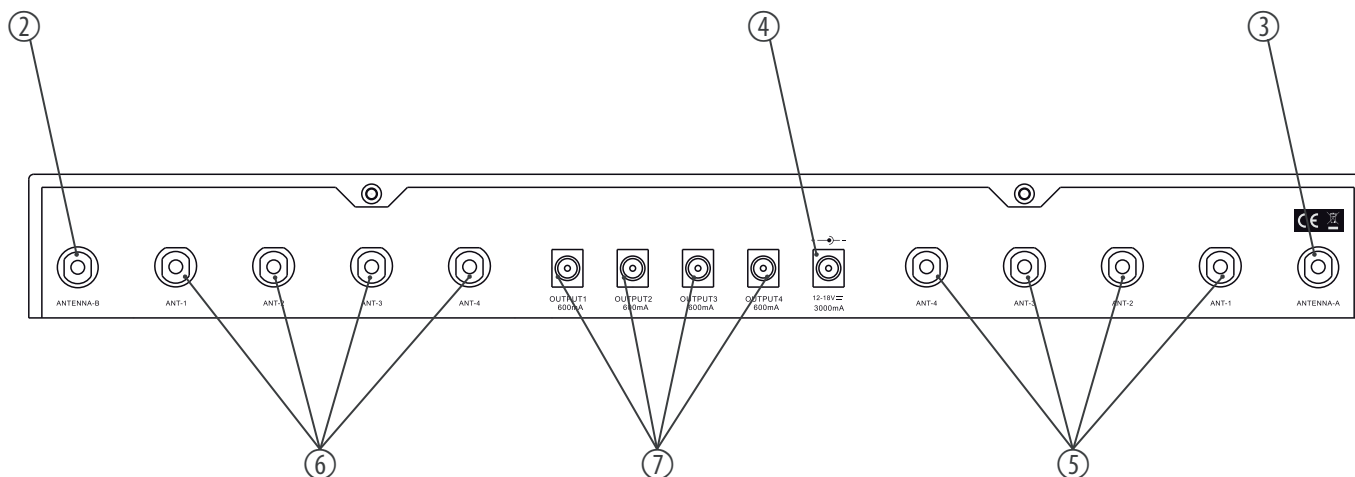

2, 3	<i>[ANTENNA-A], [ANTENNA-B]</i> BNC chassis connectors for cable connection to the supplied UHF omni-directional antennas.
4	Socket for connecting the supplied power adapter.
5, 6	<i>[ANT-1] ... [ANT-4]</i> BNC chassis connectors for cable connection to the connected wireless systems
7	<i>[OUTPUT1] ... [OUTPUT4]</i> Power supply connections for the connected wireless systems. The power supply for the connected wireless systems is active even when the antenna splitter is off.

## 6 Technical specifications

Input connections	Power supply	1 × socket for connecting the plug-in power supply
	Antenna / booster	2 × BNC inputs (9V DC for active antennas / booster)
Input impedance		50 Ω
Output connections	Power supply of the connected wireless systems	4 × DC out socket, 600 mA
	Wireless systems	2 × BNC chassis socket
Output impedance		50 Ω
Frequency response	470 MHz ... 608 MHz, 614 MHz ... 694 MHz, 823 MHz ... 832 MHz	
Transmission power	15 dBm	
Antenna gain	3 dB (+/-3 dB)	
Power supply	External power adapter, 100 - 240 V ~ 50/60 Hz	



Operating voltage	12 V...18 V $\overline{\text{---}}$ / 3000 mA, centre positive	
Installation	19", 1 RU	
Dimensions (W × H × D), without antenna	410 mm × 45 mm × 160 mm	
Weight	2 kg	
Ambient conditions	Temperature range	0 °C...40 °C
	Relative humidity	20 %...80 % (non-condensing)

### Further information

Component type	Antenna splitter
----------------	------------------

## 7 Protecting the environment

### Disposal of the packaging material



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

### Disposal of your old device



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.



