



# QUICK START

POLY STUDIO X52 WITH  
DISPLAY CLAMP




[poly.com/support/studio-x52/dc](https://poly.com/support/studio-x52/dc)

## MANAGEMENT SOFTWARE

**POLY LENS**  
[poly.com/lens](https://poly.com/lens)

## TOOL



## CONTENTS




(2) M4 × 8 mm  
Flat Head Screw




HDMI 2 m (6.6 ft)\*



Ethernet Network Cable 4.6 m (15 ft)\*



Display Clamp

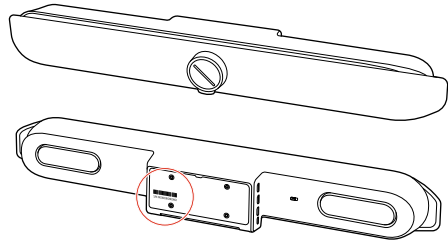



Poly Studio X52 and Power Supply\*




S/N XXXXXXXXXXXXXXX

\*Not supplied in the Studio X52 Display Clamp Accessory Kit


1

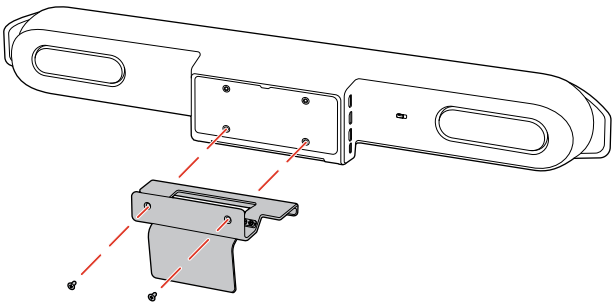


2

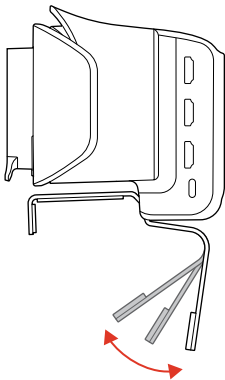

3

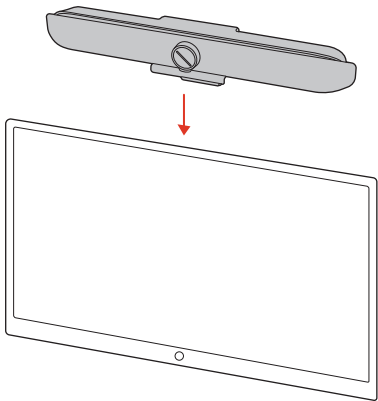


4

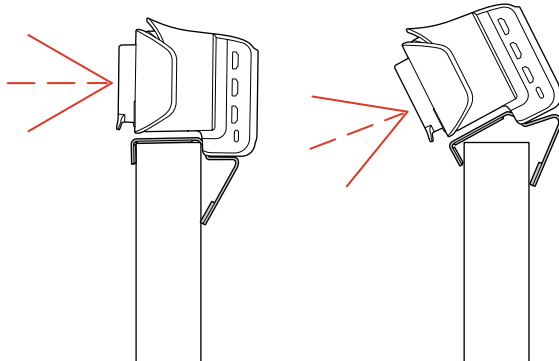

CAUTION




5

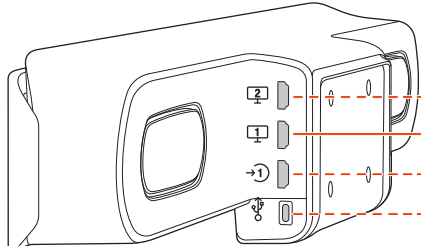

HDMI Out – Display 2  
HDMI Out – Display 1  
HDMI In – Device Mode/  
Content Sharing  
USB-C – Device Mode

RJ11 – Expansion Microphone  
(2) USB-A Accessories  
RJ45 – Ethernet  
AC Power

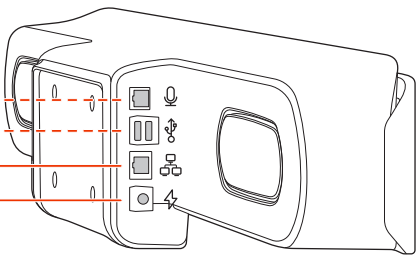

— Cable included  
- - - Cable not included



[poly.com/support/studio-x52](https://poly.com/support/studio-x52)



Recyclable where  
facilities exist

Frequency and transmit power for radio-enabled products only:  
Frequency Range      Maximum Transmit Power  
2.412GHz - 2.462GHz      19.41 dBm e.i.r.p  
5.180GHz - 5.725GHz      20.19 dBm e.i.r.p

© 2023 Poly. All trademarks are the property of their respective owners.



1725-87989-001C 02.23  
Studio X52 Model P033