

PM09FDS3



Colour range

Body



Stainless
steel - SS


Finishes





Satin


Configuration


6 burners + fry top**



 Double ring Dual burner
5,0 kW / 0,3 kW

 Fry Top plate double burner
3 kW / 0,6 kW
1,8 kW / 0,4 kW

 Big burner
3 kW / 0,6 kW

 Small burner
1,8 kW / 0,4 kW

Ovens

Primary oven: OV 80 E3 TFT S

General features

- Energy class A+
- Operating temperature 30-320°C
- Programmer electronic touch TFT
- Electronic temperature control
- Cooking probe
- Lighting double internal light
- Automatic light switch-on when door opens
- Full glass oven door
- Soft-closing door
- Door glass with triple glass (EN60335-2-6-11.101)
- High density insulation
- Ventilation cooling tangential
- Child safety
















Cavity features

- Muffle with easy clean enamel
- Internal dimensions (W×H×D) 64,5×36,5×41 cm
- Capacity 97 L
- Steam discharge controlled with dry or moist cooking option
- Folding grill heating element
- Rotisserie spit diagonal
- Thermostat with electronic probe



Consumptions

• Maximum input	2,75 kW
• Top electrical heating element	1200 W
• Bottom electrical heating element	1350 W
• Electric grill	2150 W
• Circular heating element	2100 W

Functions

 Pizza function	 Defrosting	 Multiple fan cooking
 Multiple moist fan cooking	 Intensive cooking	 Wet intensive cooking
 Fan grill cooking	 Grill cooking	 Cooking from above
 Wet cooking from above	 Cooking from below	 Wet cooking from below
 Normal static cooking	 Wet static cooking	 ECO cooking

Technical drawing & dimensions



PM096DS3



Colour range

Body




Stainless
steel - SS

Finishes



Satin

Configuration



Double ring Dual burner
5,0 kW / 0,3 kW



Double ring burner
4,3 kW / 1,8 kW




Big burner
3 kW / 0,6 kW



Small burner
1,8 kW / 0,4 kW

6 burners



Ovens

Primary oven: OV 80 E3 TFT S

General features

- Energy class A+
- Operating temperature 30-320°C
- Programmer electronic touch TFT
- Electronic temperature control
- Cooking probe
- Lighting double internal light
- Automatic light switch-on when door opens
- Full glass oven door
- Soft-closing door
- Door glass with triple glass (EN60335-2-6-11.101)
- High density insulation
- Ventilation cooling tangential
- Child safety


Cavity features

- Muffle with easy clean enamel
- Internal dimensions (W×H×D) 64,5×36,5×41 cm
- Capacity 97 L
- Steam discharge controlled with dry or moist cooking option
- Folding grill heating element
- Rotisserie spit diagonal
- Thermostat with electronic probe



Consumptions

- | | |
|-------------------------------------|---------|
| • Maximum input | 2,75 kW |
| • Top electrical heating element | 1200 W |
| • Bottom electrical heating element | 1350 W |
| • Electric grill | 2150 W |
| • Circular heating element | 2100 W |

Functions

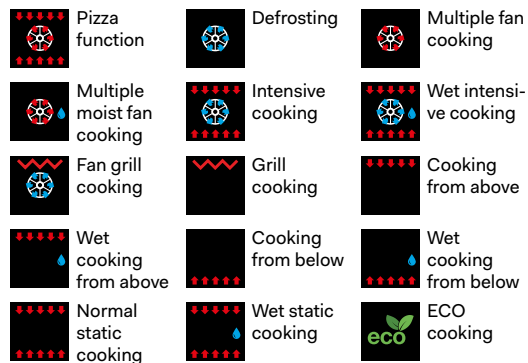

Technical drawing & dimensions



PMI09S3



Colour range

Body



Stainless
steel - SS



Matt
black - MK


Finishes



Satin

Configuration

Induction



Induction zone
Bridge
Ø 180+180 mm
3 kW / 1,85 kW
+3 kW / 1,85 kW

Induction zone
Ø 145 mm
2,2 kW / 1,4 kW

Induction zone
Ø 180 mm
3 kW / 1,85 kW

Induction zone
Ø 210 mm
3,7 kW / 2,3 kW

Ovens

Primary oven: OV 80 E3 TFT S

General features

- Energy class A+
- Operating temperature 30-320°C
- Programmer electronic touch TFT
- Electronic temperature control
- Cooking probe
- Lighting double internal light
- Automatic light switch-on when door opens
- Full glass oven door
- Soft-closing door
- Door glass with triple glass (EN60335-2-6-11.101)
- High density insulation
- Ventilation cooling tangential
- Child safety


Cavity features

- Muffle with easy clean enamel
- Internal dimensions (W×H×D) 64,5×36,5×41 cm
- Capacity 97 L
- Steam discharge controlled with dry or moist cooking option
- Folding grill heating element
- Rotisserie spit diagonal
- Thermostat with electronic probe

Consumptions

- Maximum input 2,75 kW
- Top electrical heating element 1200 W
- Bottom electrical heating element 1350 W
- Electric grill 2150 W
- Circular heating element 2100 W

Functions

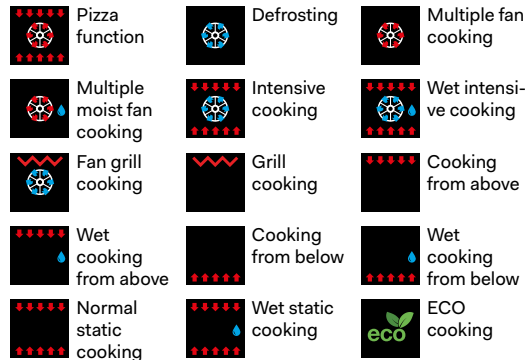

Technical drawing & dimensions

