


380mm

140mm

Packaging Contents

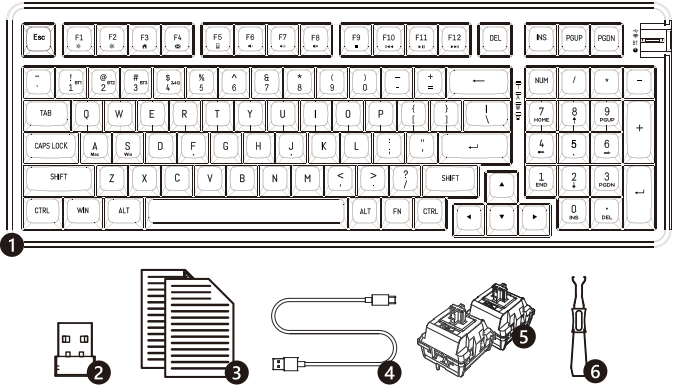

1. Keyboard

2. Receiver

3. Manual

4. High quality data cable

5. Mechanical shaft*2pcs

6. Pull key shaft two in one

darkFlash

DF98

Gasket Structure
Mechanical Keyboard

User Manual

FCC ID:2BEA7-DF98RGB-USB

ANY PROBLEM?

Please sent to support@darkflash.com

Warranty: 1 Year

Keyboard Specification

System : Mac OS X10.4 + Win XP/7 above

Light : Non-light / RGB colorful

Keys num : 98

Battery : 1200mAh / 4000mAh

Size : 387.5*143.1*32.7±5mm (not included keycap)


Connect : Wired + 2.4G wireless + BT

Keycap : ABS two-color injection molding

Keyboard connection method

Rotate encoder mode.

Power off • Bluetooth mode • 2.4G mode • Wired mode



Bluetooth Connection

Bluetooth name: (DF98 BT3.0)(DF98 BT5.0)


Bluetooth Pairing:
Rotate the encoder to the BT state.
Short press FN+1/2/3 to switch to BT 1/2/3 mode,
then long press "FN+1/2/3" for 3s for code pairing.



2.4G Wireless Connection



Wired Instructions

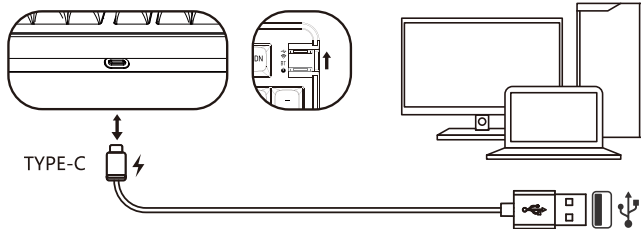

Keyboard Illuminated (Only for RGB Version)

FN F6c

Restore default

FN F6a

Increase brightness

FN F6b

Switch RGB lighting effect

FN F6d

Decrease brightness

FN F6e

Change RGB lighting direction

FN F6f

Reduce RGB lighting speed

FN F6g

Change RGB lighting color

FN F6h

Increase RGB lighting effect speed

Combination Function Keys

FN F1

Screen dimming

FN F2

Screen lighting

FN F3

Homepage

FN F4

E-mail

FN F5

Calculator

FN F6

Volume decrease

FN F7

Volume increase

FN F8

Mute

FN F9

Stop

FN F10

Previous track

FN F11

Play / Pause

FN F12

Next track

Supplementary Explanation

System Switching

1. Short press FN+A to switch to MAC system mode, MAC indicator light on.

2. Short press FN+S to switch to WIN system mode, MAC indicator light off.

Indicator Light Indication Method


Separate indicator lights on the keyboard, including NUM light, CAPS lock light, MAC system light, and low-voltage/charging light.

(1). First indicator light: Num light (white).

(2). Second indicator light: Caps light (white).

(3). Third indicator light: MAC system light (white) turns on when switching to MAC system, off when switching to WIN.

(4). Fourth indicator light: Low voltage/charging light (white). Remains on during charging. Turns off when fully charged. Flashes slowly when voltage is below 3.3V to indicate low voltage. Flashes slowly for 5 seconds after button release when battery is low. Continuously flashes slowly until keyboard shuts down if button is kept pressed.



FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.