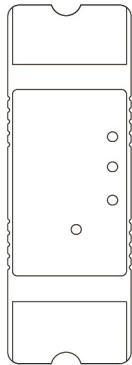# Three Mode WiFi Switch

MODEL:7-32V Switch

Parameters:

Input voltage：DC/AC 7V~32V
Max.Current:2200W/10A/Gang
Wi-Fi Standard:Wi-Fi 2.4ghz b/g/n
Working temperature: -20℃~70℃
Material: ABS
Size: 116*38*25mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You have the correct WiFi PWD.
- You smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

working principle

APP iOS/Android   ROUTER   G2

User Guide

❶ Start with "EWelink" APP.

❷ Register an EWelink account.

❸ If you have EWelink acconunt. just login.

❹ Power up.

ON/OFF operating principle:
The connected appliances work/stop through live wire power on/off.

Input 7~32V AC/DC

Model switch

/pairing button
/RF pairing button
/Manual switch

/Network indicator(Red light)
/Power indicator(Blue light)

NC
COM
NO
NC
COM
NO

self-locking 1

AC 90V-250V/10A
DC 0-30V/10A

Input DC 7-32V

self-locking 2

AC 90V-250V/10A
DC 0-30V/10A

Input DC 7-32V

On the device, the default call is closed and can be set to call or maintain in the APP change.

Add device flow to mobile APP

❶ After installation,power the device and long press pairing button(anyone) for 5 seconds until Network indicator blinks quickly(blinking twice and on).

❷ Tap ➕ on EWelink app.

❸ Select Quick Pairing. *special cases You can try compatibility Model (AP)*

Quick Pairing

❹ Input your WiFi password.


Tenda_50ED00

❺ Name your device.

Bedroom light

❻ When the network indicator is on,the device is online.

❼ Click the on/off buttons on the APP can control device,Manual control seitch also can be display real-time on the APP.

APP Function

Smart Switch 1004

/Rename/OTA/Share
/Logs/Inching Settings
/Delete device

For single/repeat timer.   For fast single countdown timer.

Remote control matches the code

Matching:
① hold RF pairing button for 3 seconds you want to match ,until blue light is on .
② then long press remote control button you want to match.
③ loosen the remote control buttons, matching success

Clear code:
Long press the RF pairing button for 15 seconds , loosen the RF pairing button until the RF pairing indicator is off.
* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING

Enter the homepage of App,click the icon in the lower right corner of the interface to enter.
"Message" >hits" Guide" . "Profile" >hits" Ewelink support"

If none of the above is resolved,please open it with another phone.Personal hotspot,try to readd.