


家居移门/趟门阻尼缓冲滑轮-安装步骤

SLIDING ROLLER WITH SOFT CLOSING PULLEY-INSTALLATION PROCEDURE

1 门板开槽尺寸

Door slotting dimension


注：该产品用于明装时，门板无需开槽。
(Remark: When this product is used for external installation, no cutting or grooving needed on the door panel)

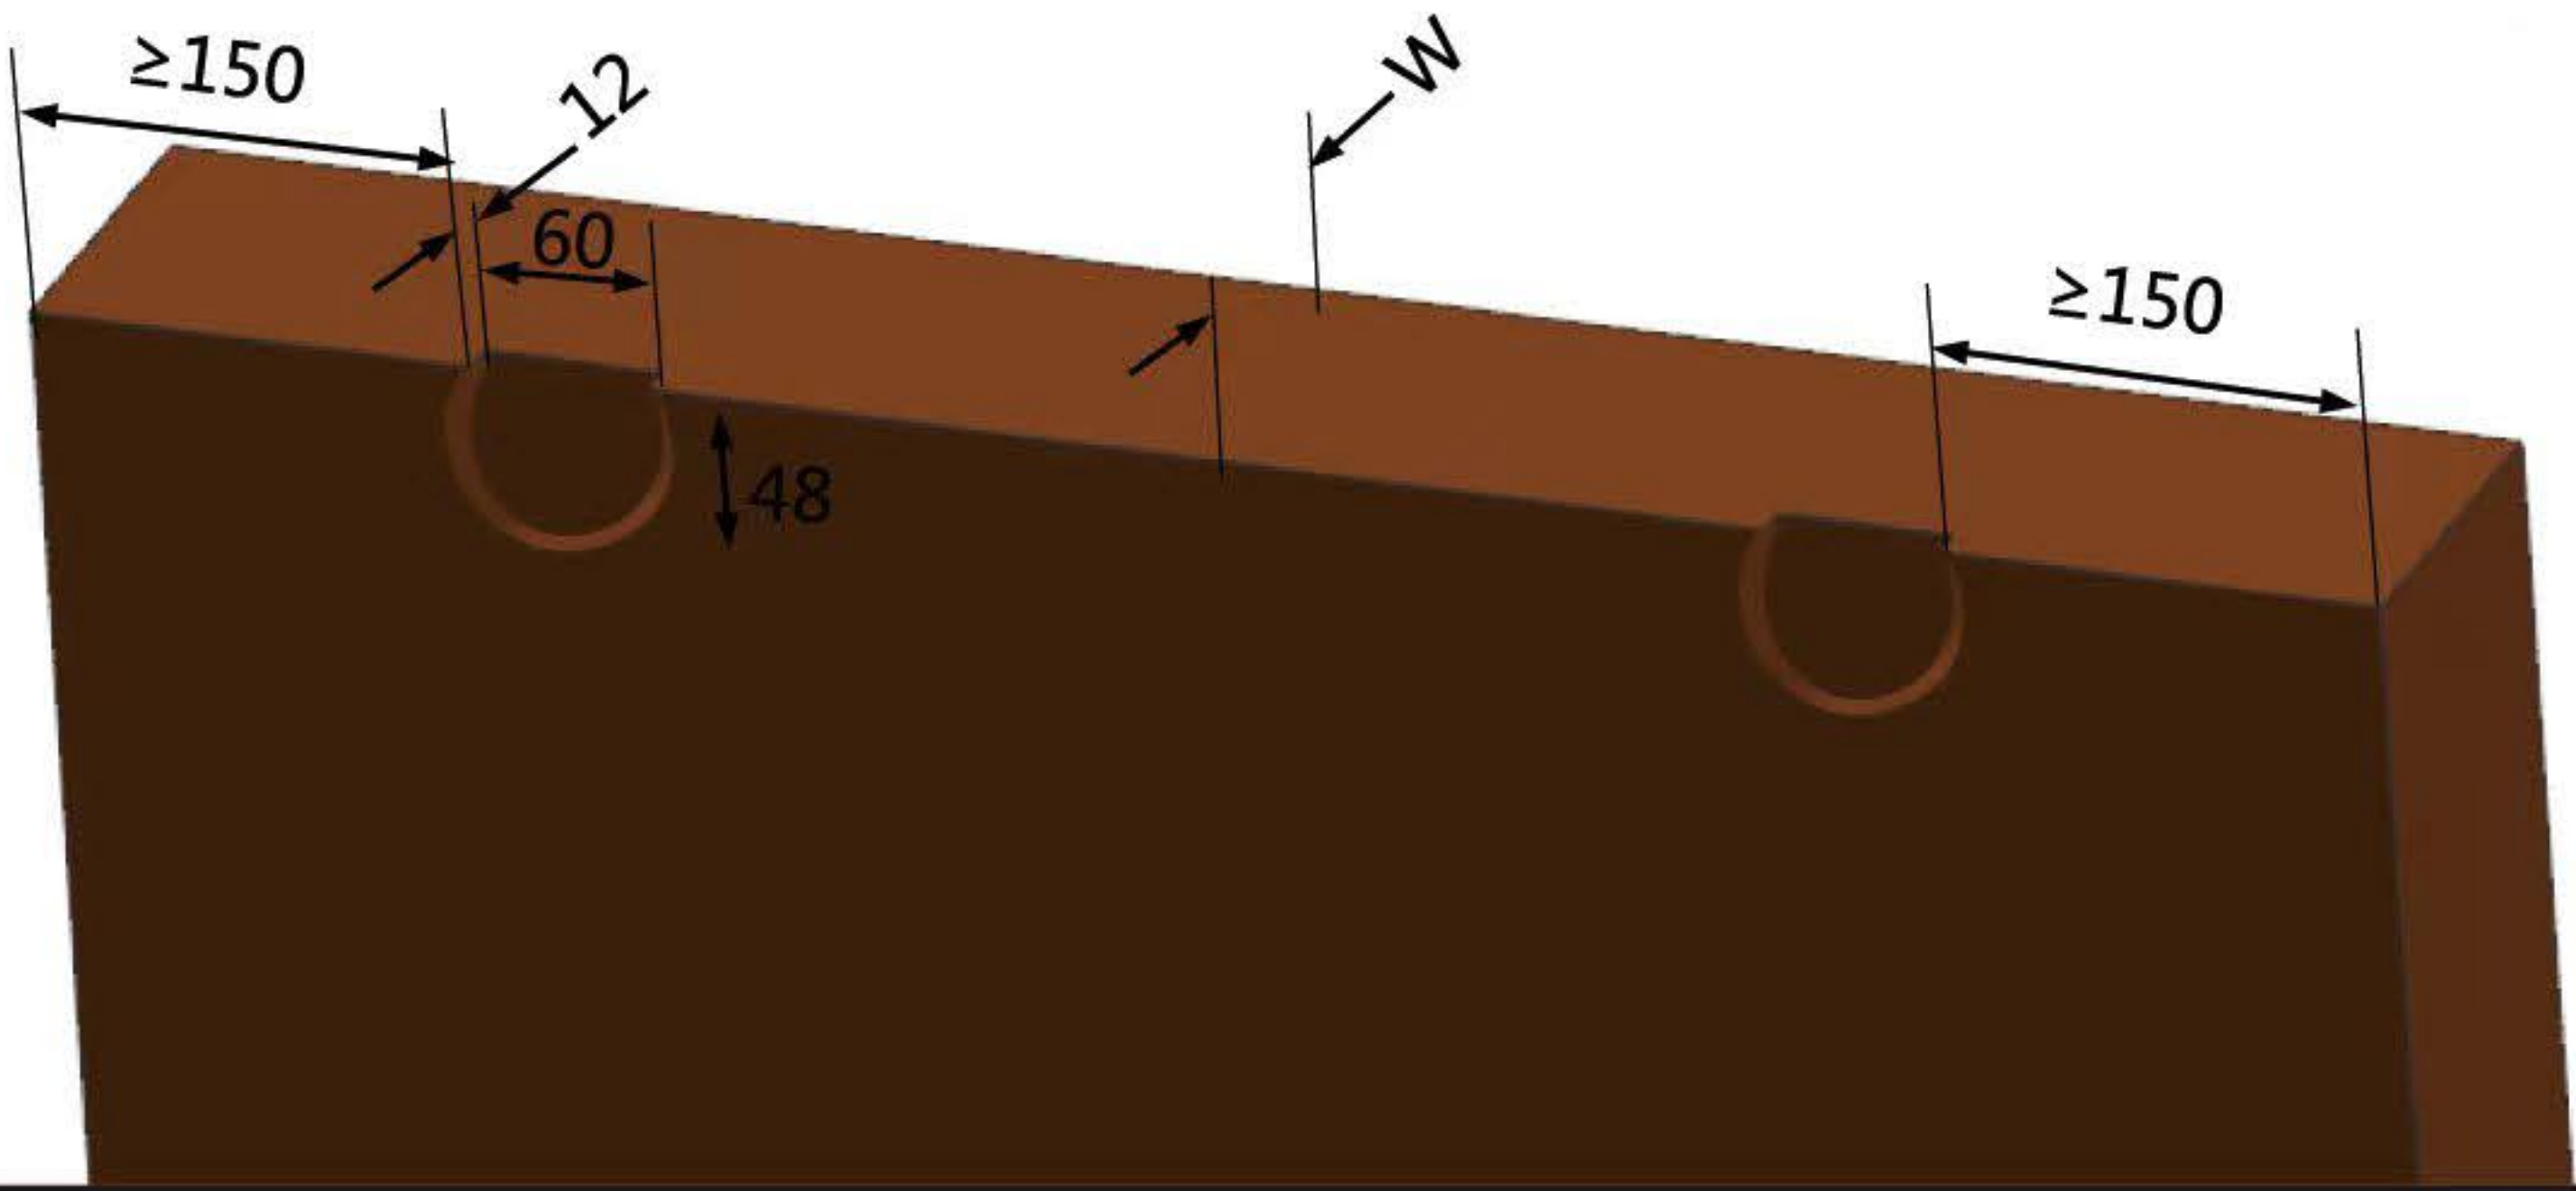


2 门槽开槽尺寸

Gate slot slotting dimension

暗装
Concealed installation

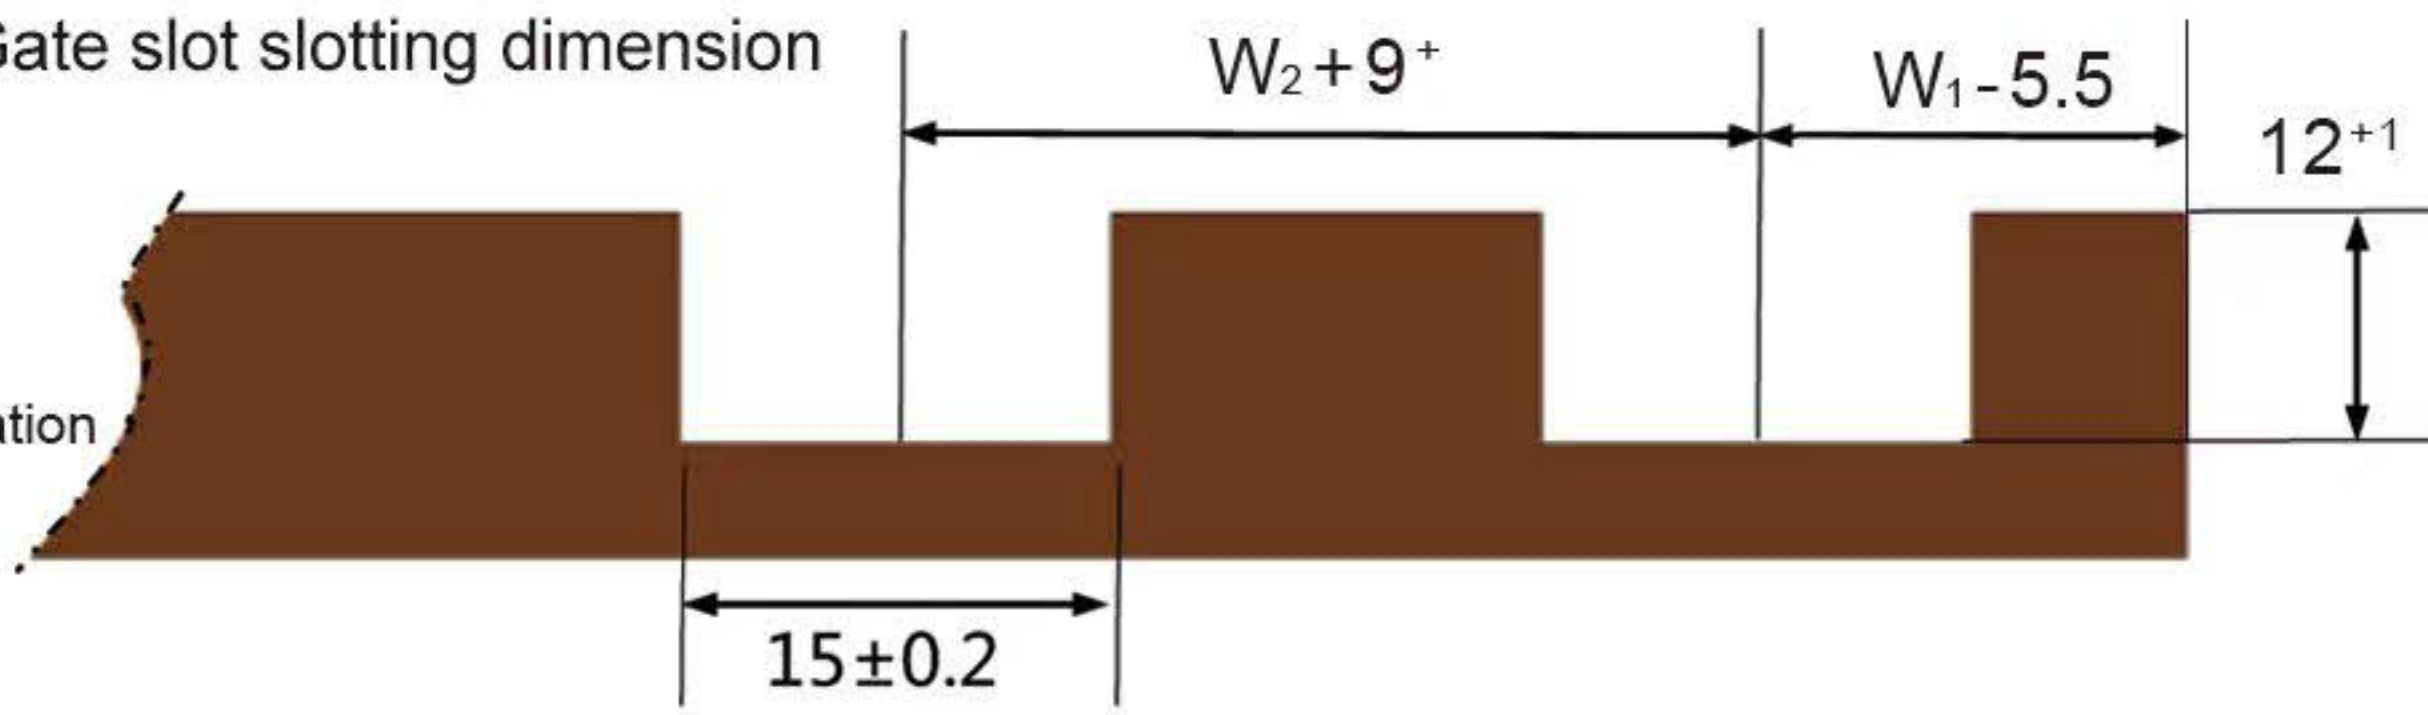


明装
External installation

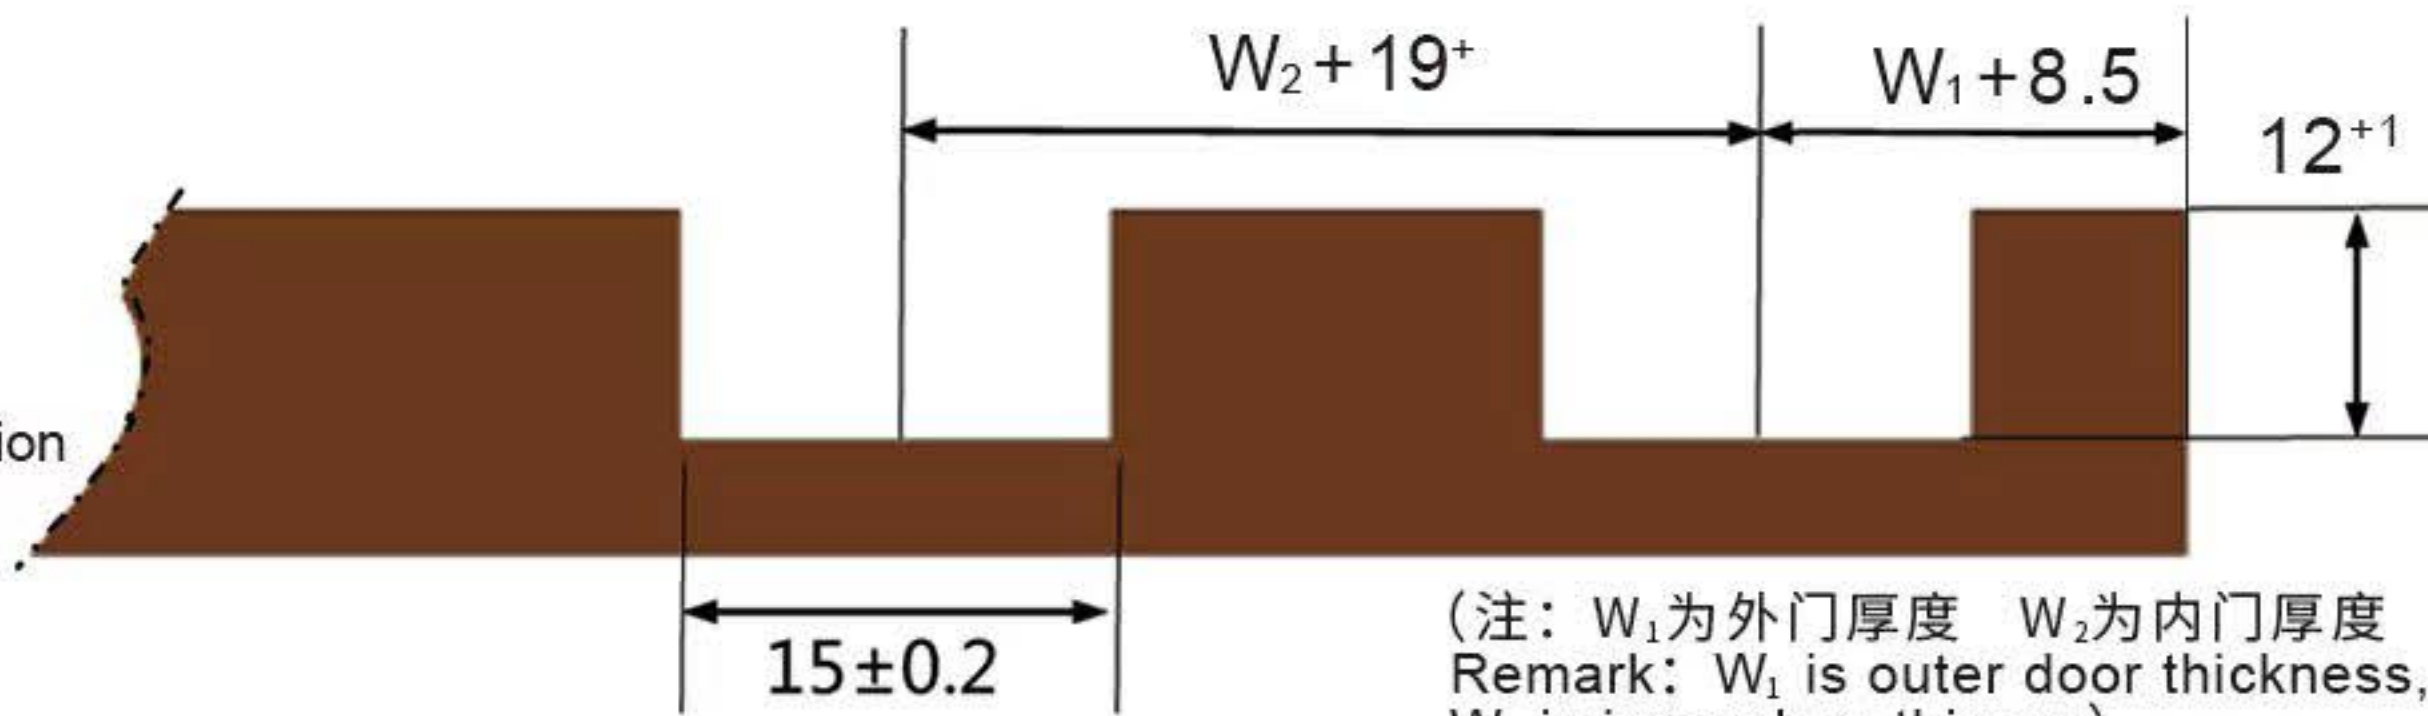

(注：W₁为外门厚度 W₂为内门厚度
Remark: W₁ is outer door thickness, W₂ is inner door thickness)


3 上滑轮安装

Upper pulley instalation

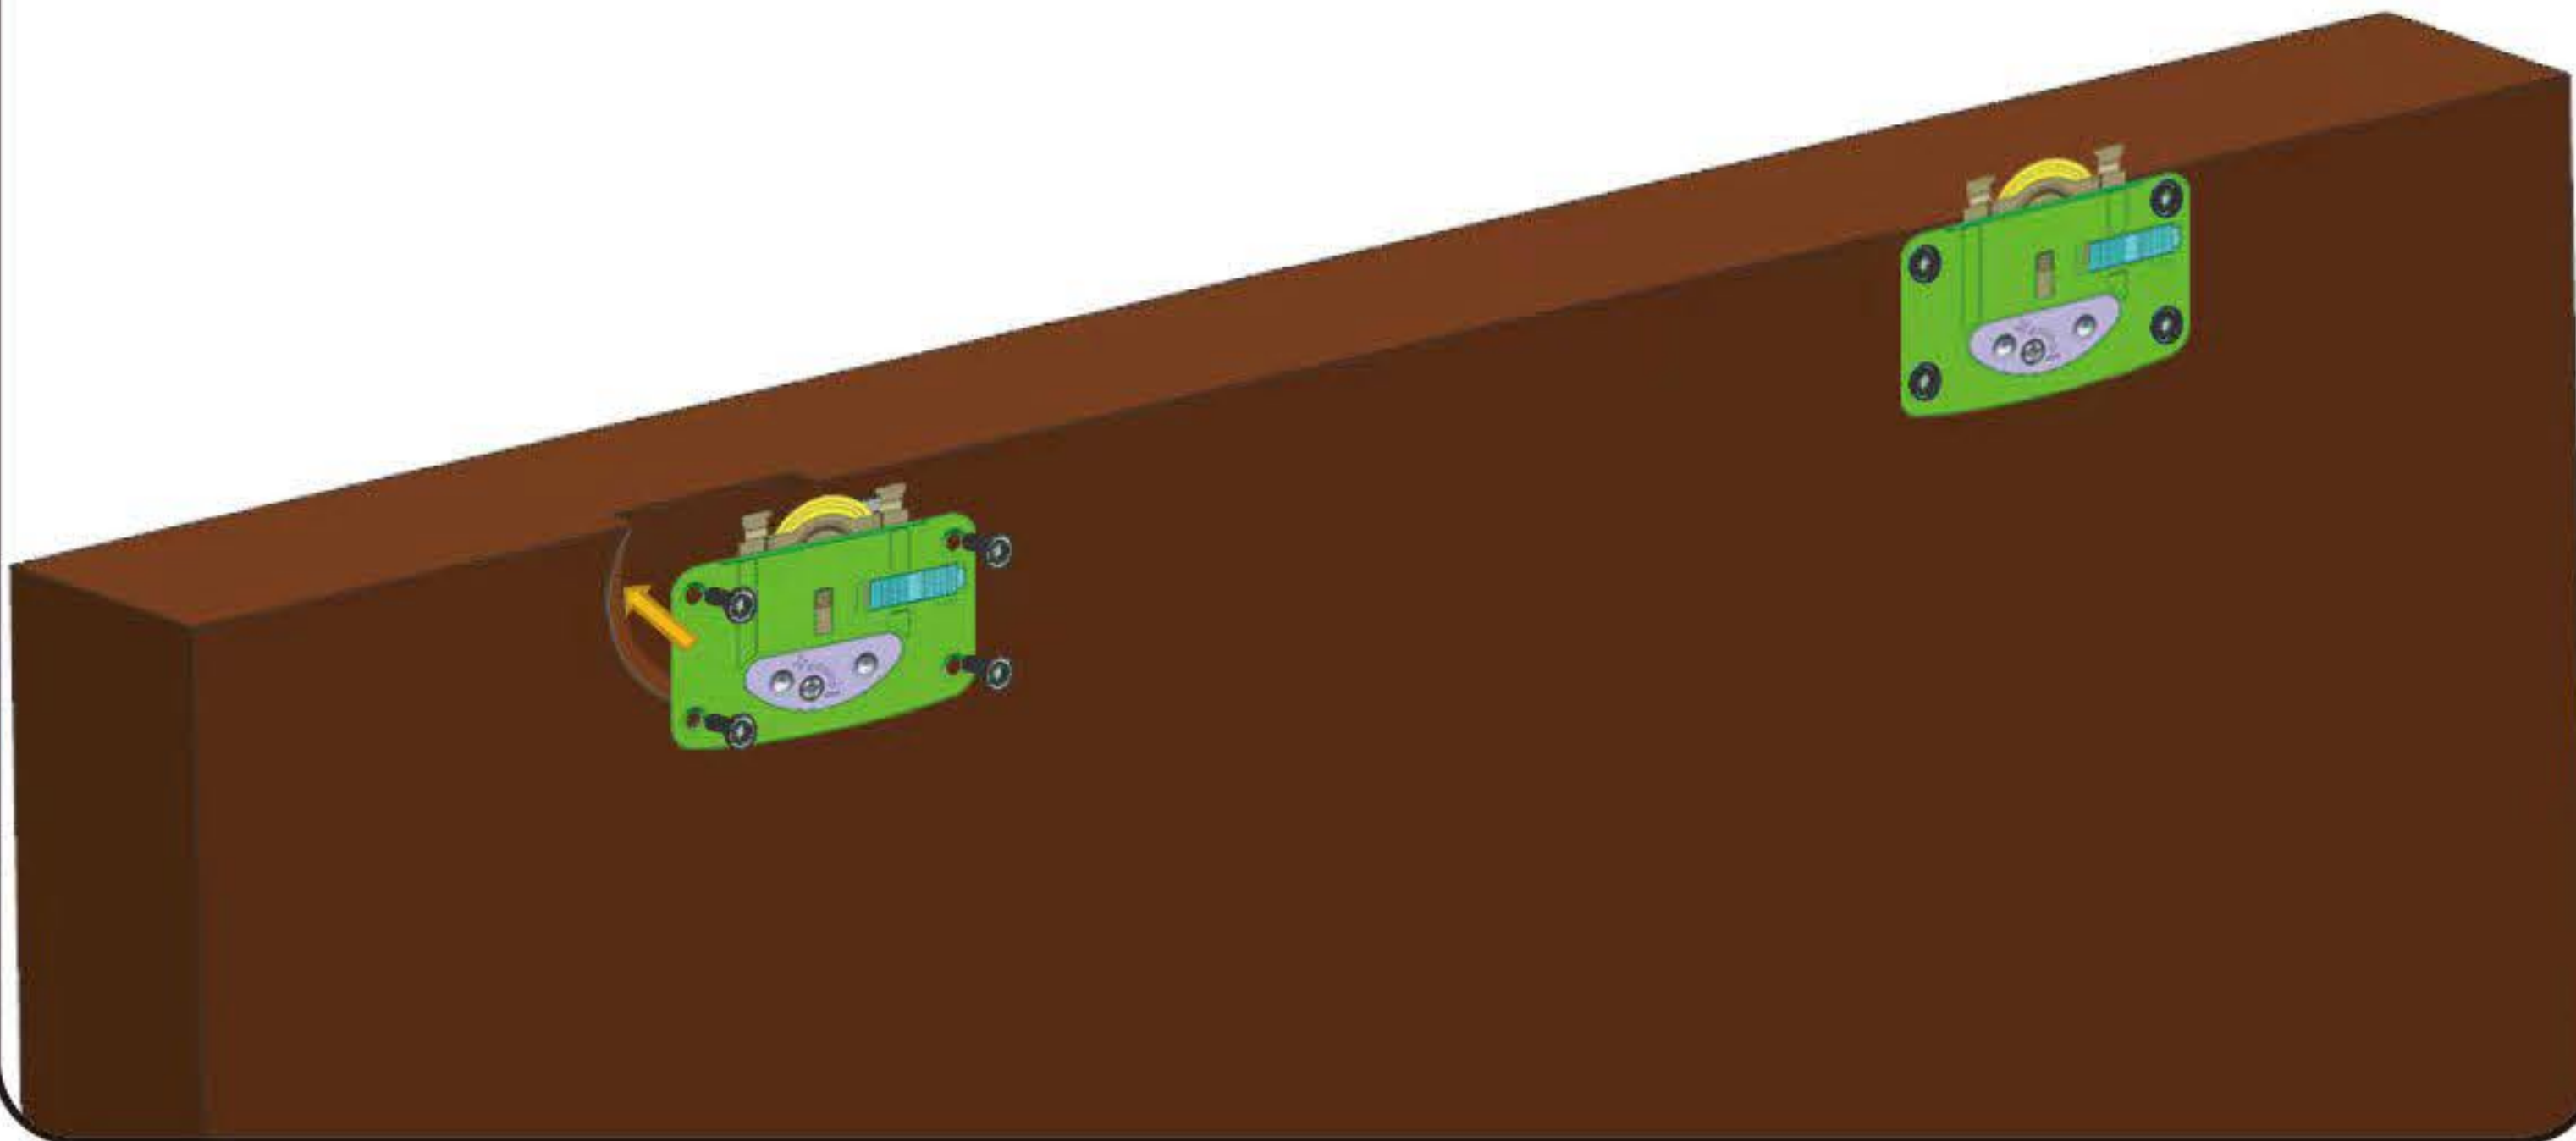


4 下滑轮安装

Lower pulley instalation

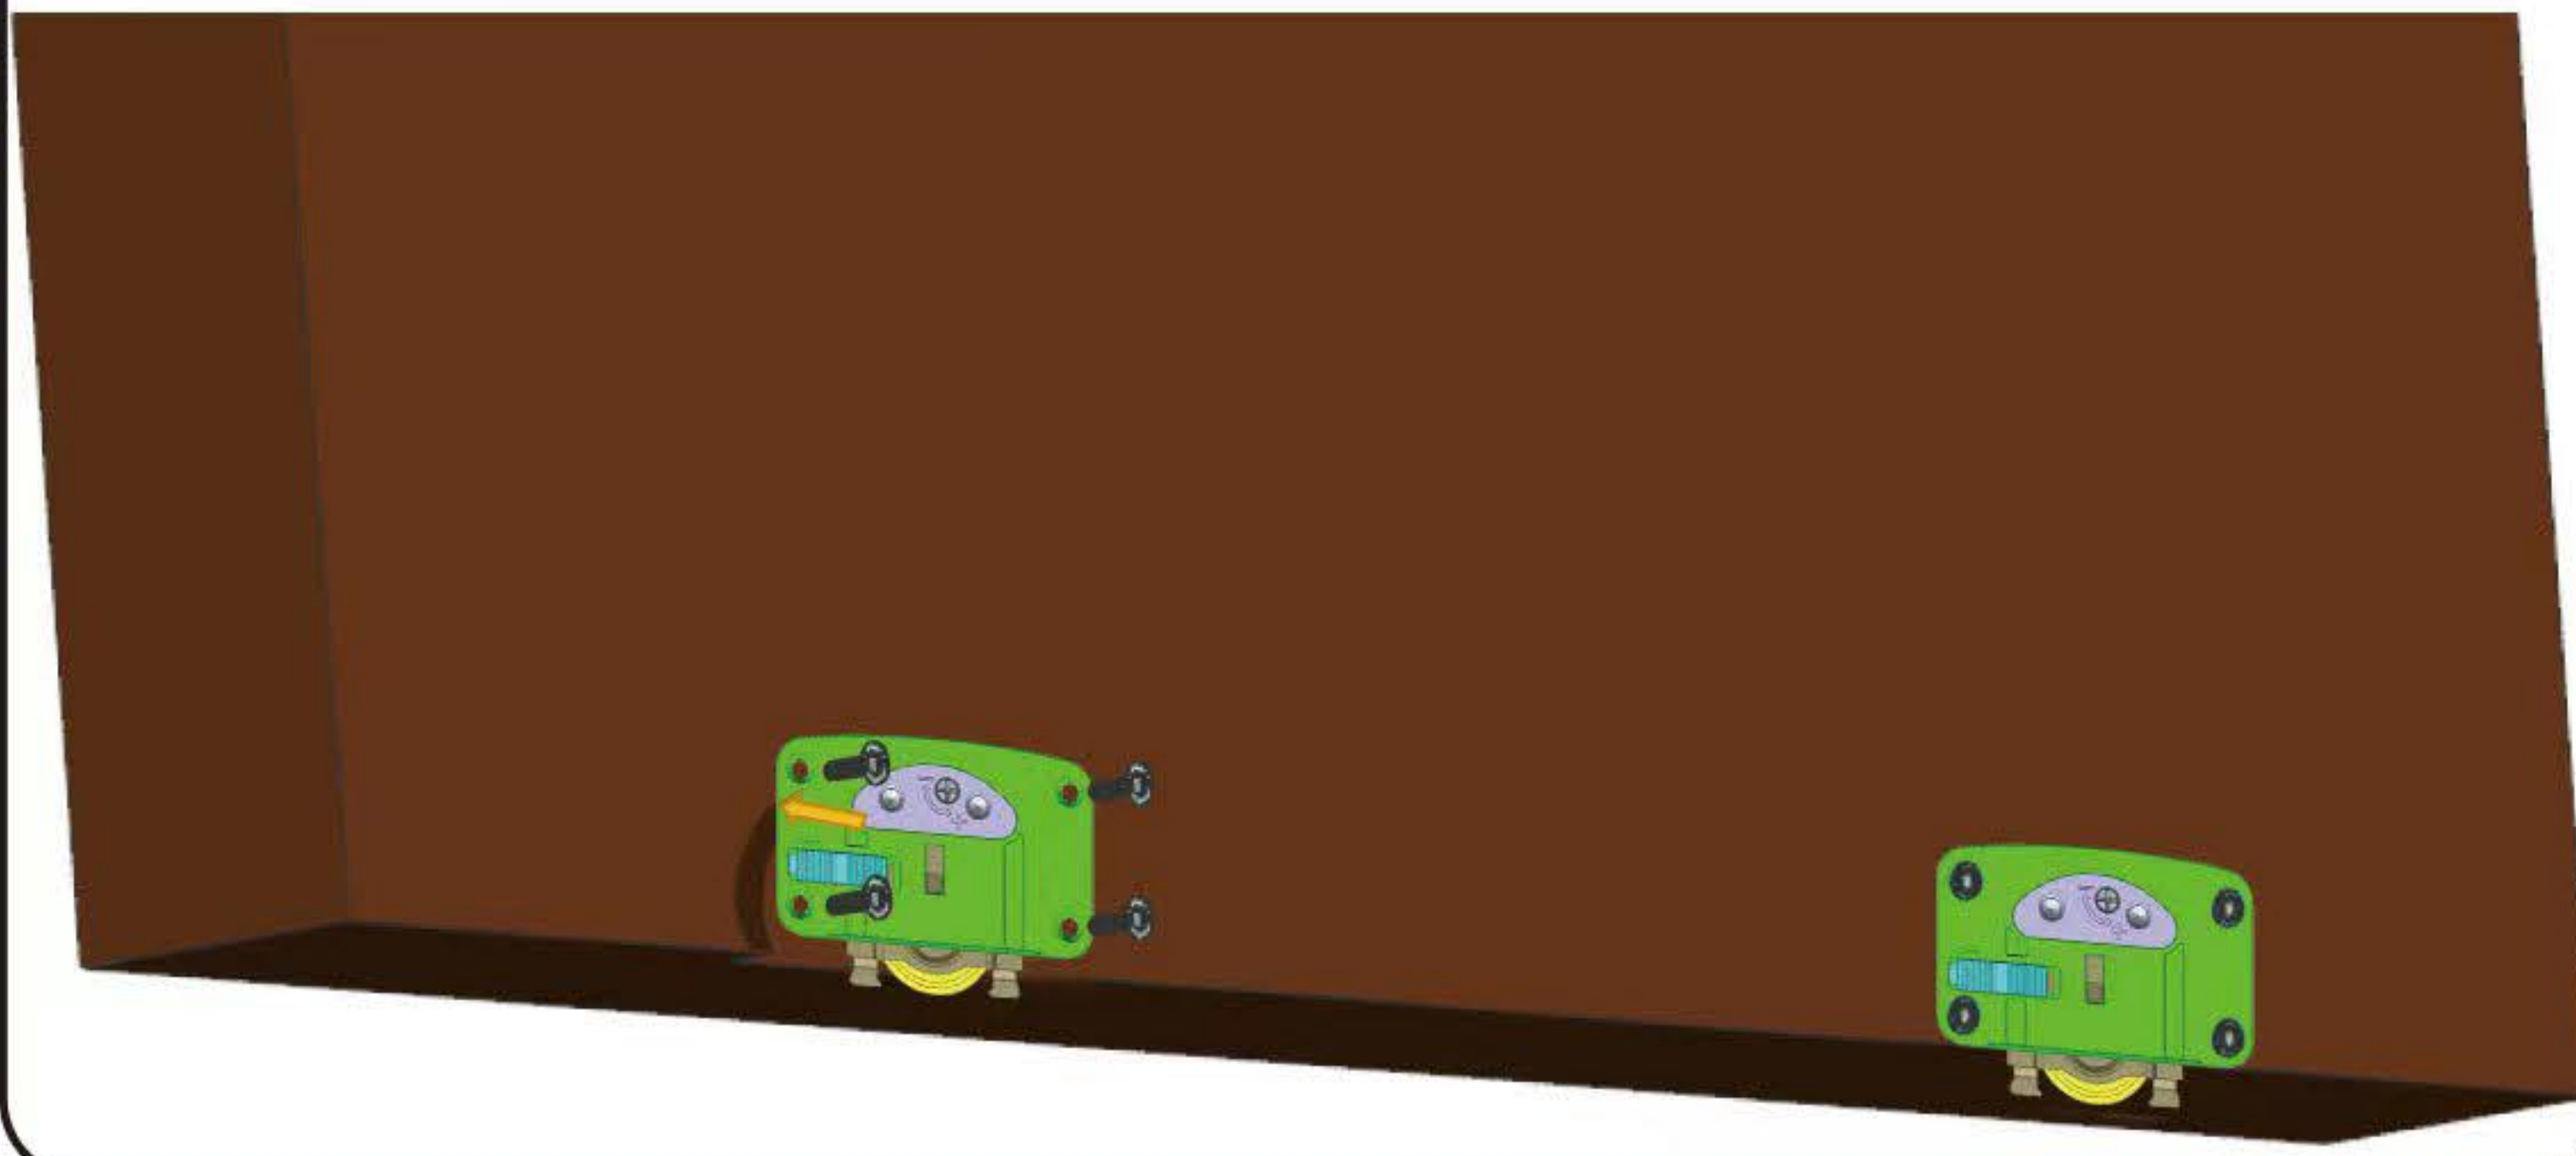

5 缓冲器入铝轨道安装

Buffer enters orbit installation

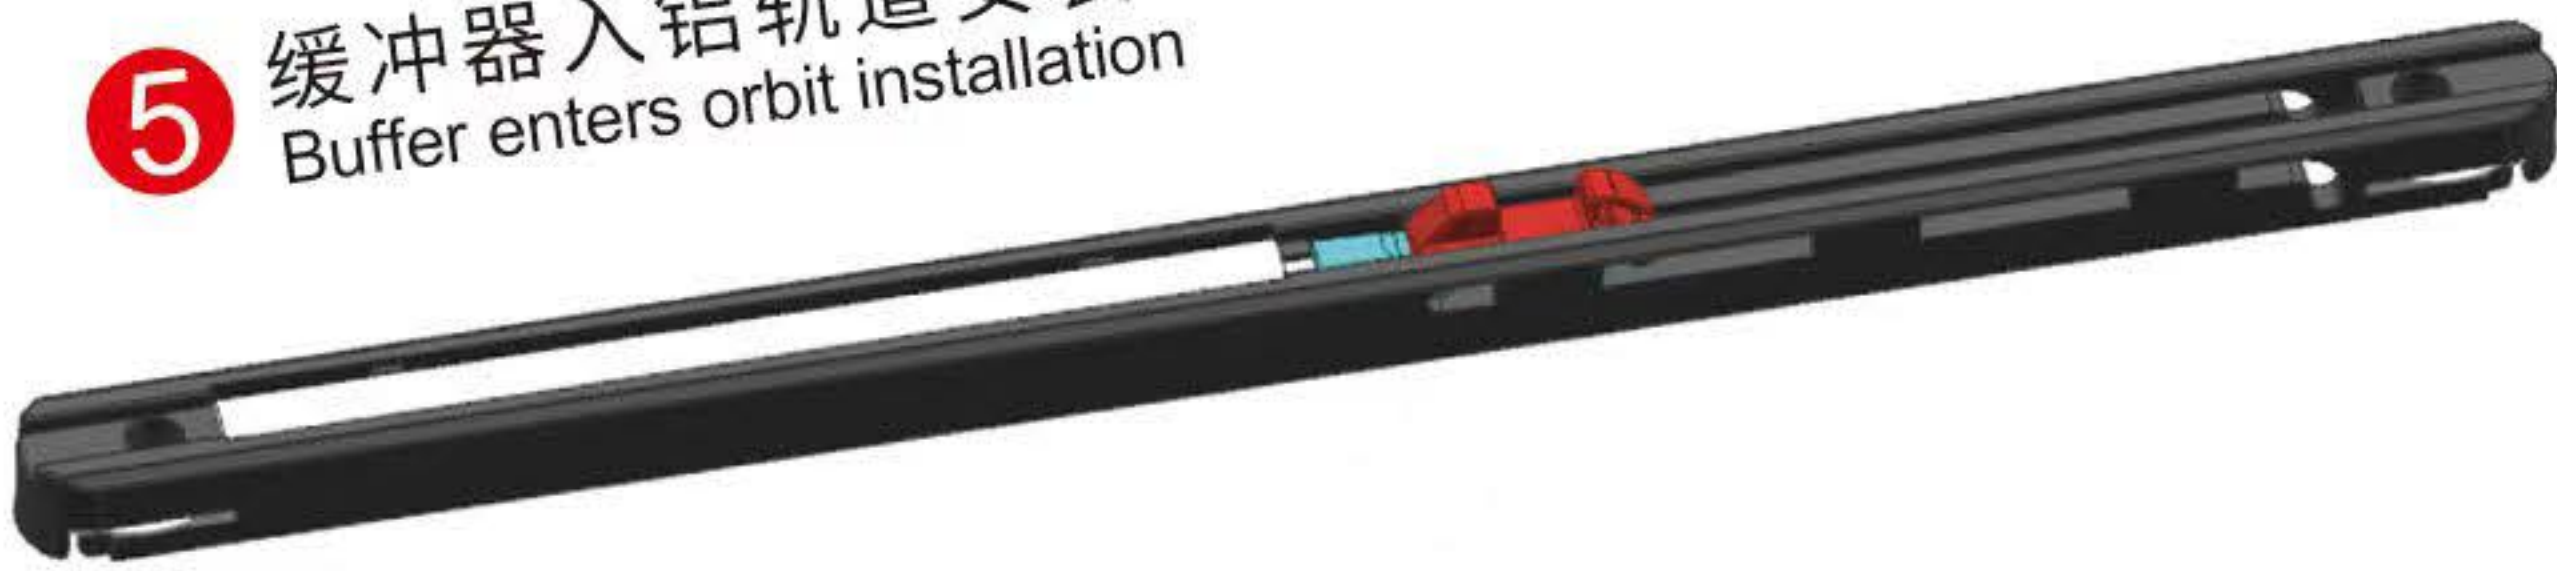



6 铝轨道堵头安装

Ending cap installation



7 铝轨道入门槽安装

The track is fitted into the door groove.

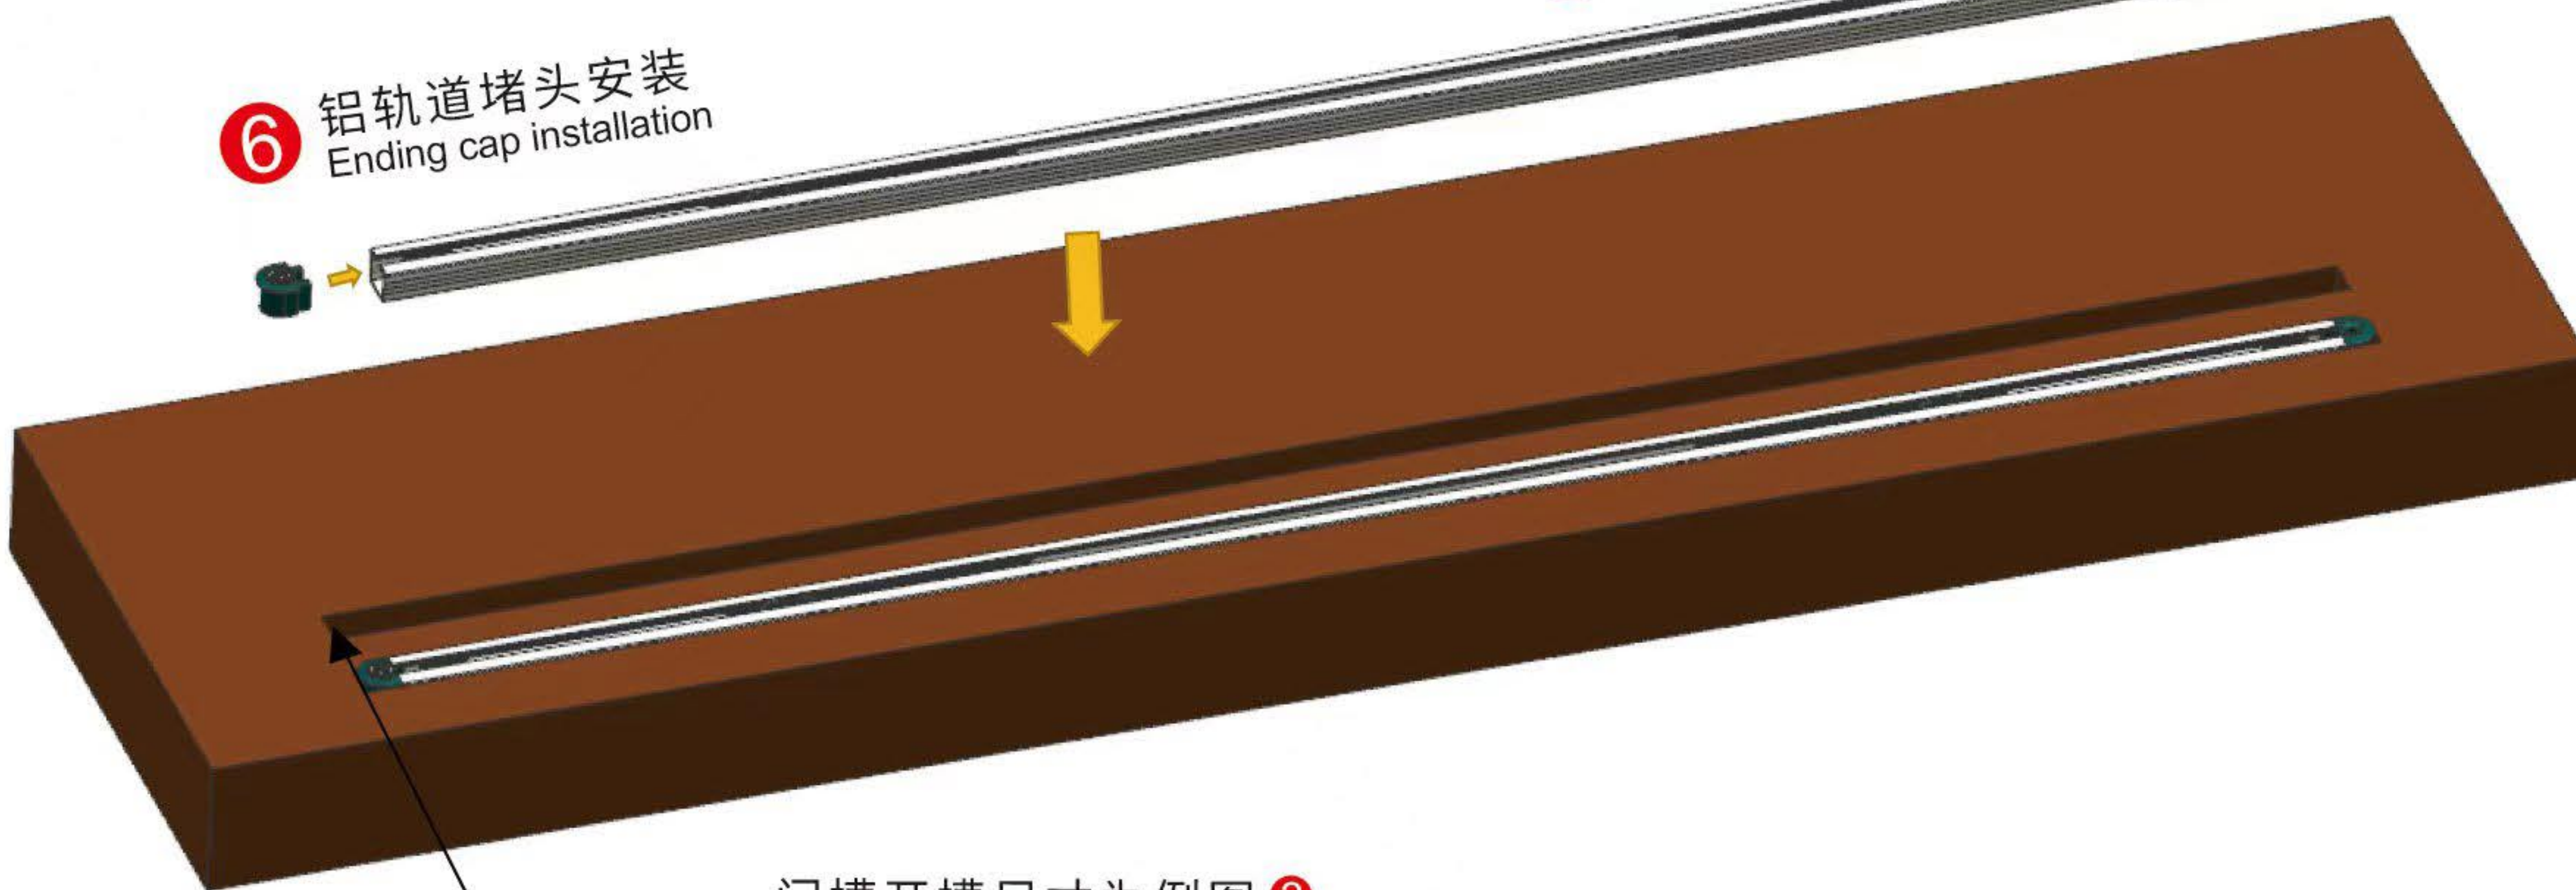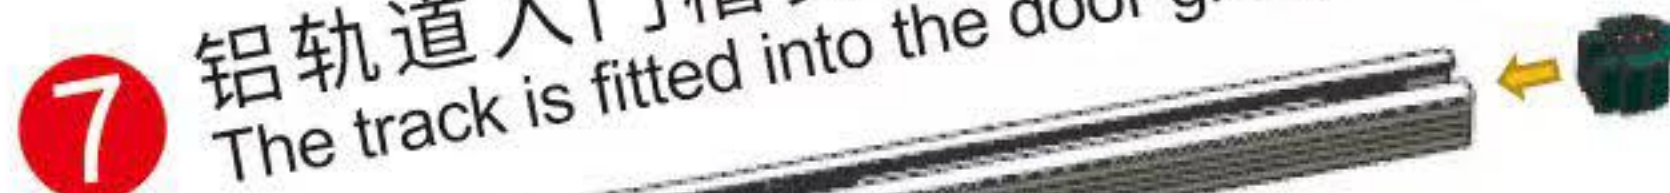

门槽开槽尺寸为例图 2
Gate slot slotting dimension is 2