

# 家居移门/趟门阻尼缓冲滑轮-安装步骤

## SLIDING ROLLER WITH SOFT CLOSING PULLEY-INSTALLATION PROCEDURE


1

门板开槽尺寸

Door slotting dimension

注：该产品用于明装时，门板无需开槽。

(Remark: When this product is used for external installation, no cutting or grooving needed on the door panel)

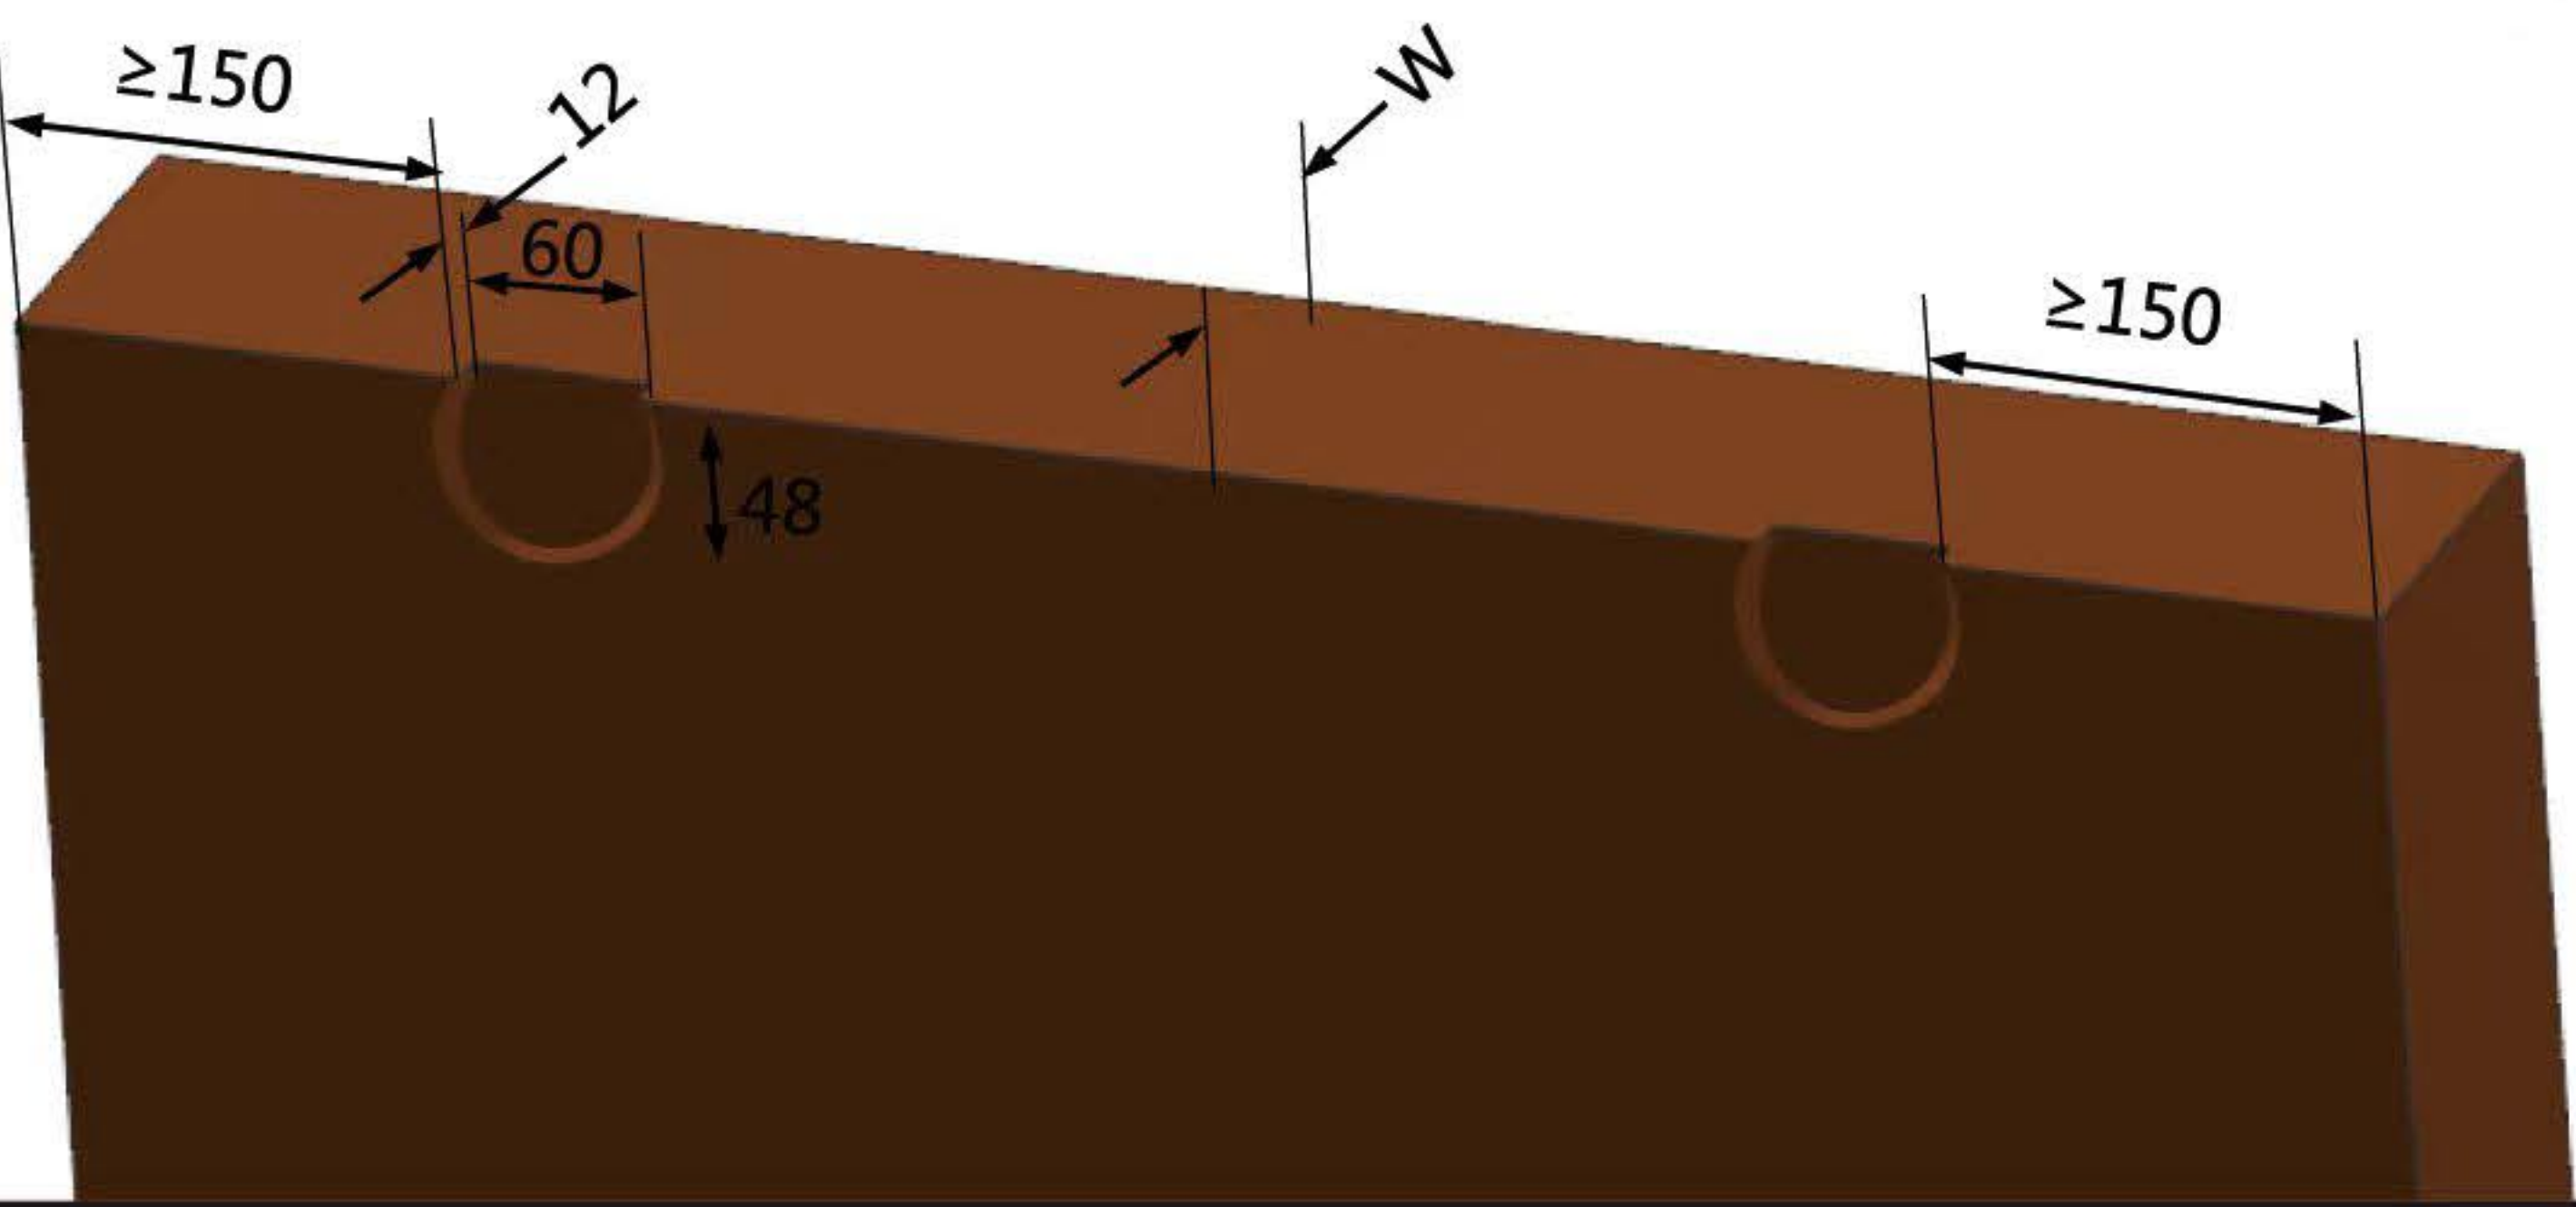

2

门槽开槽尺寸


Gate slot slotting dimension

暗装

Concealed installation

明装

External installation

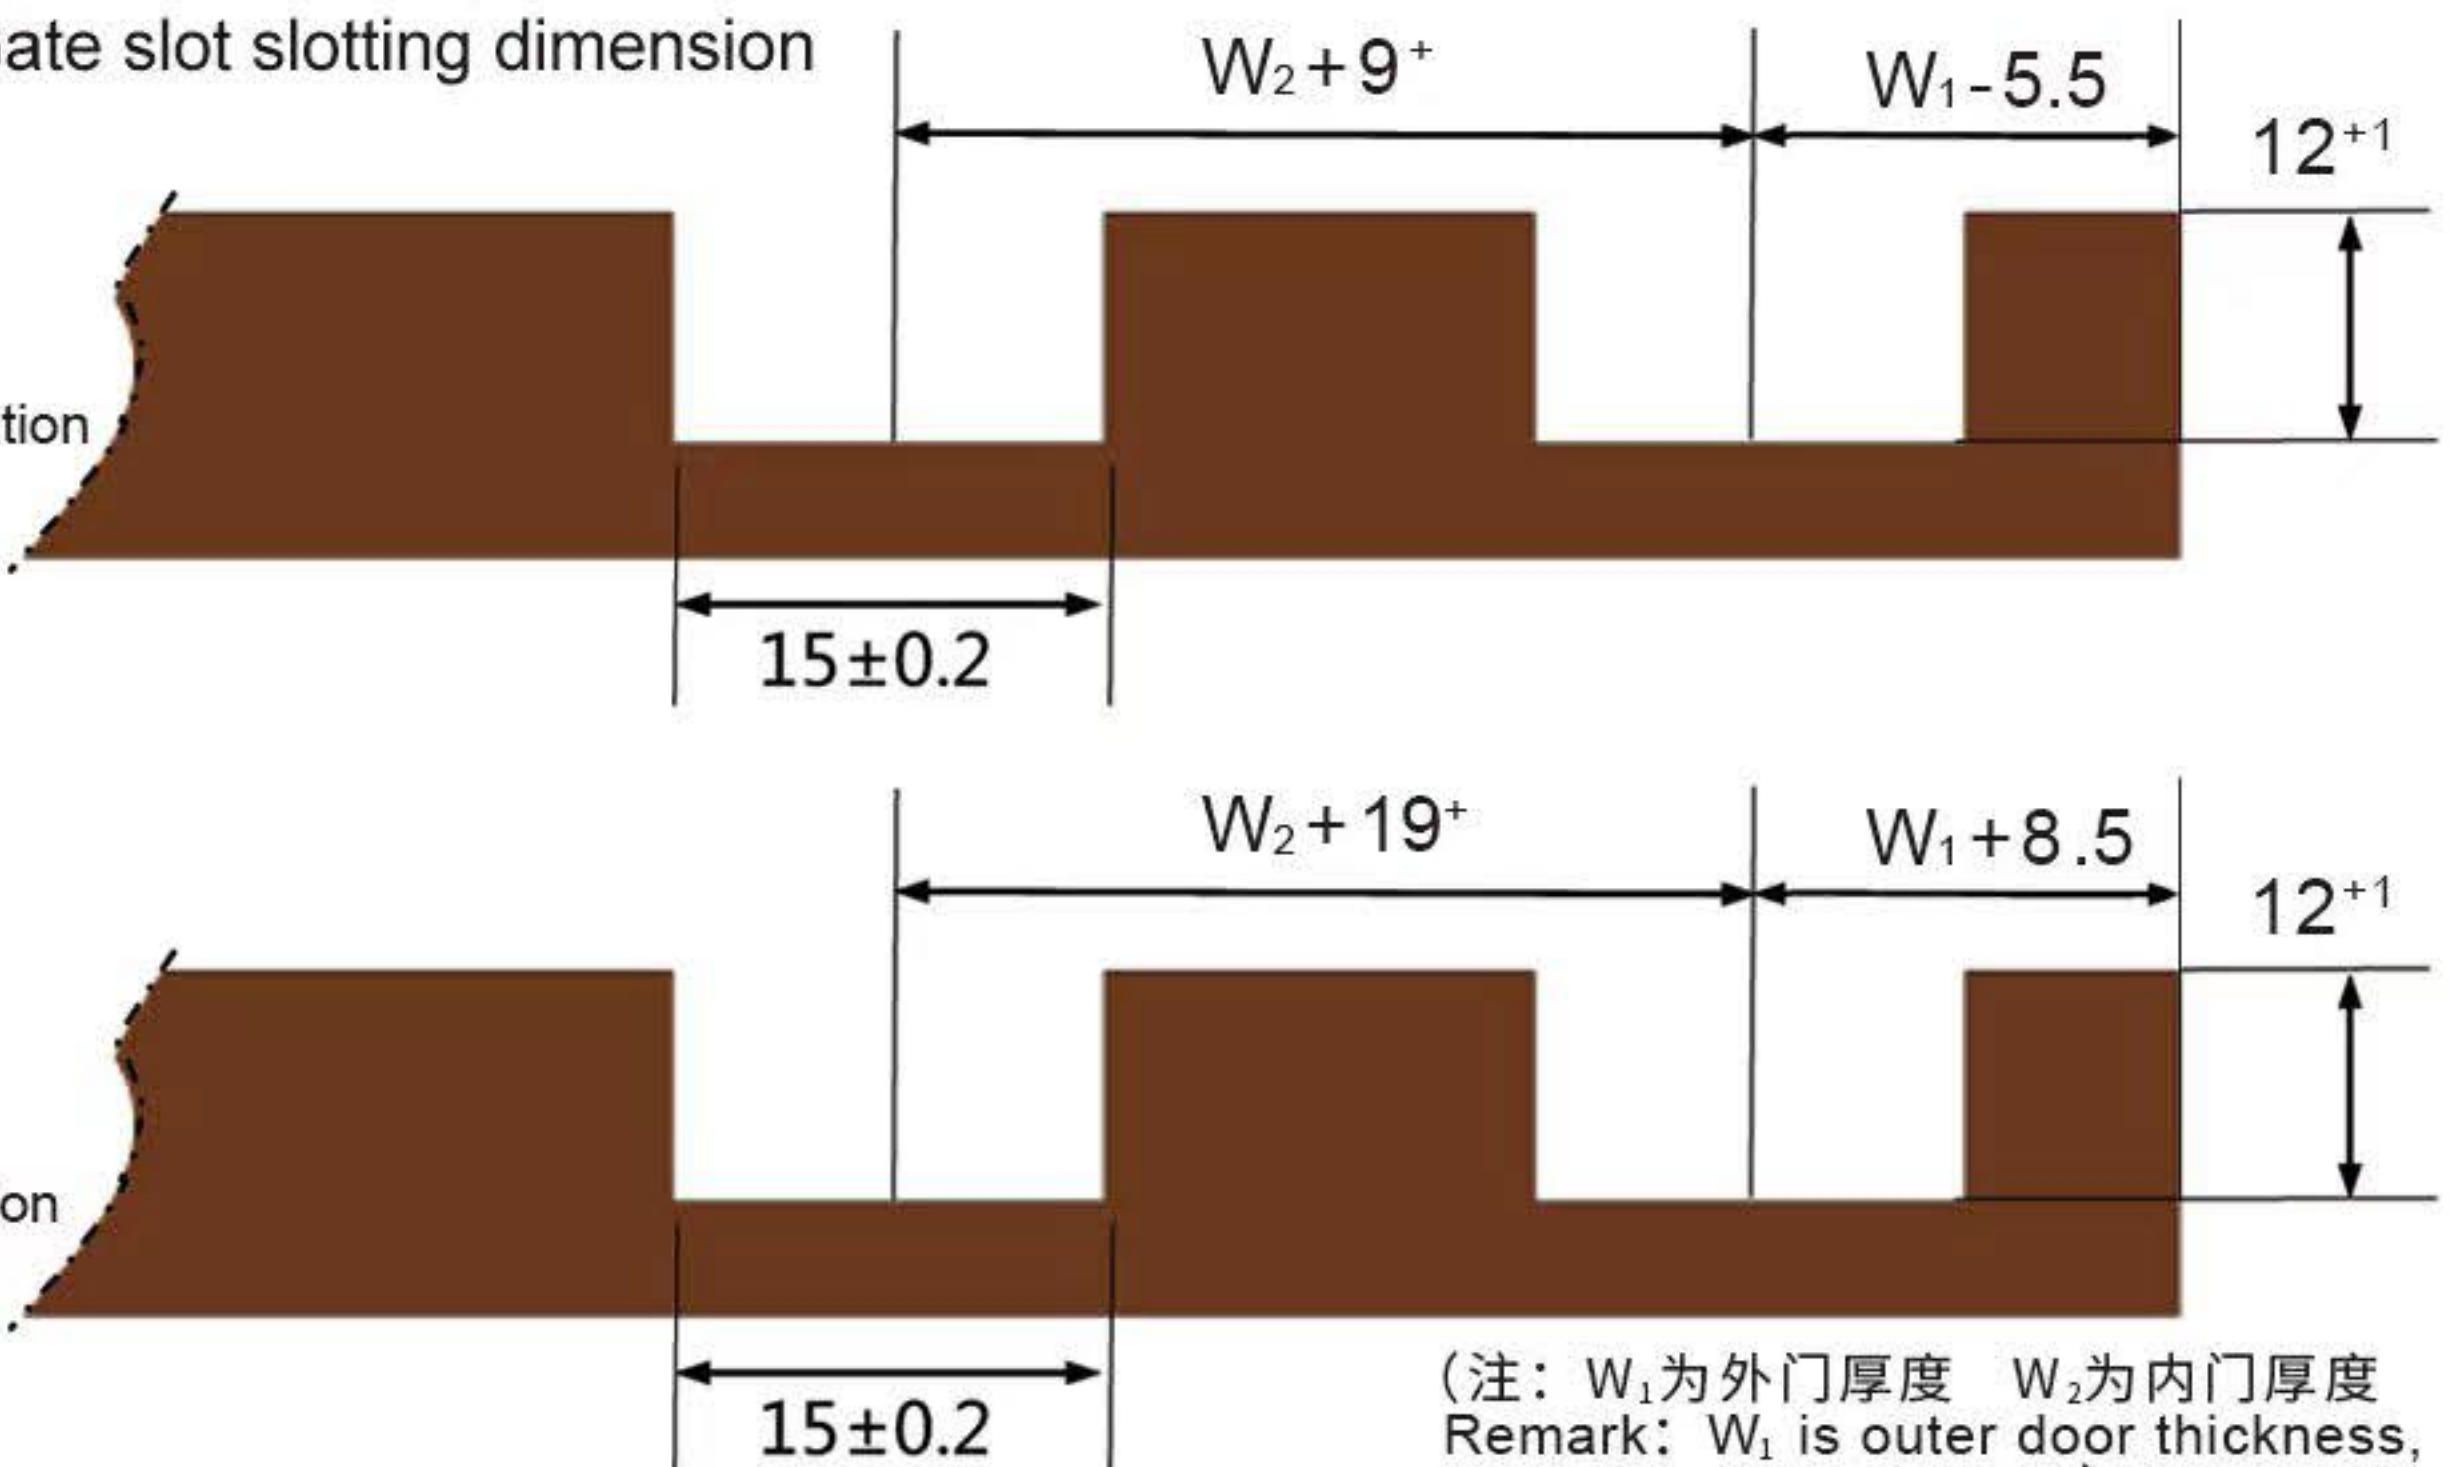


(注：W<sub>1</sub>为外门厚度 W<sub>2</sub>为内门厚度

Remark: W<sub>1</sub> is outer door thickness, W<sub>2</sub> is inner door thickness)

3

上滑轮安装


Upper pulley instalation

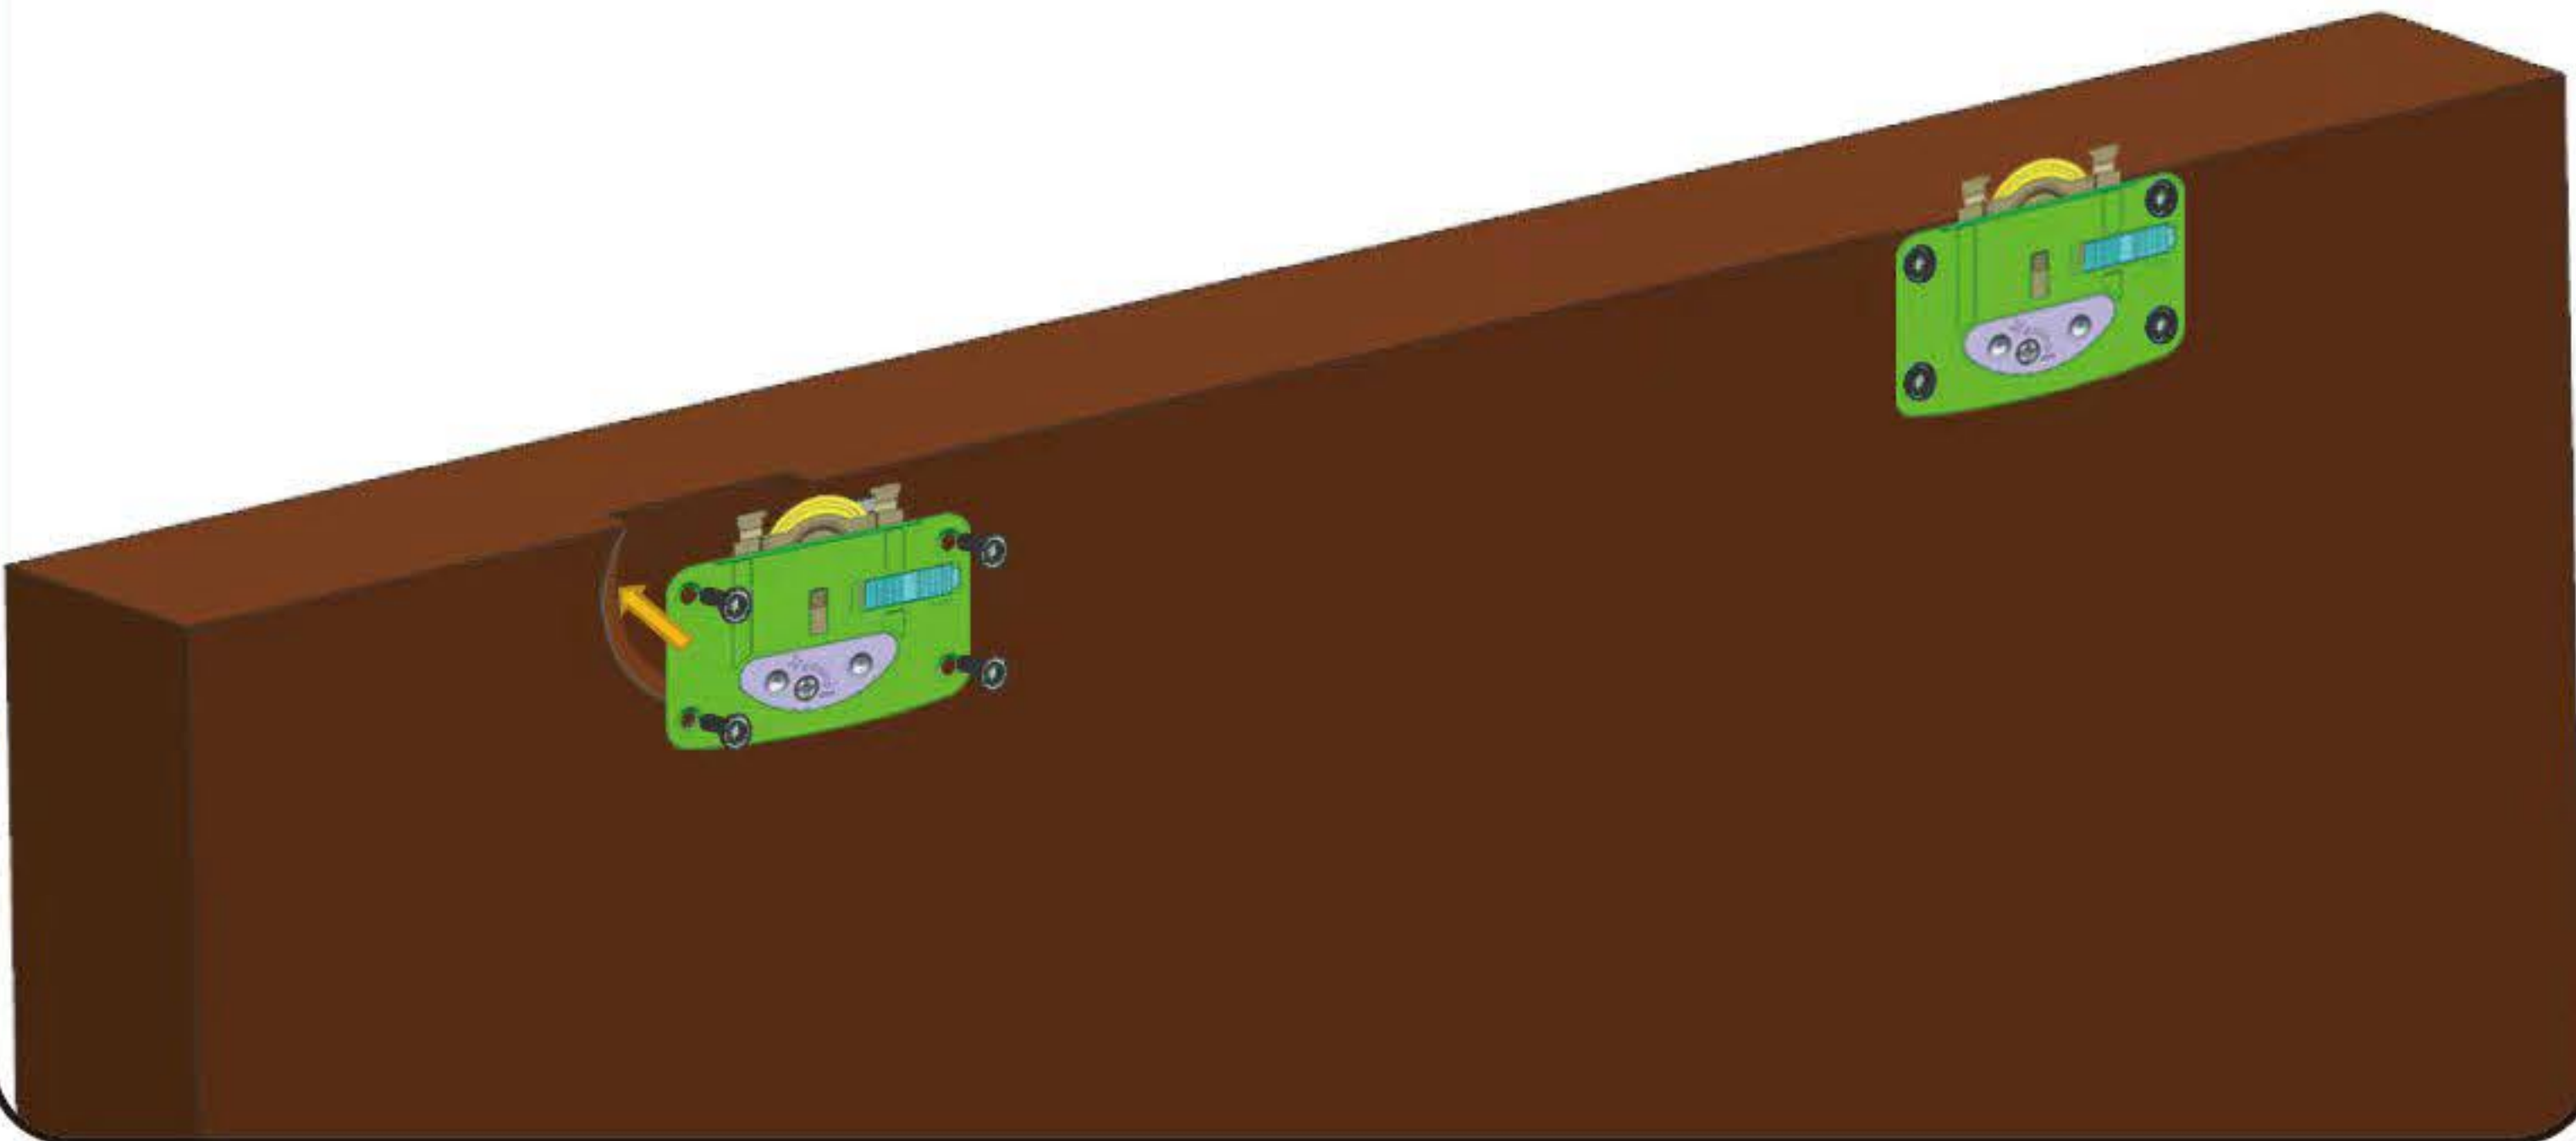

4

下滑轮安装

Lower pulley instalation

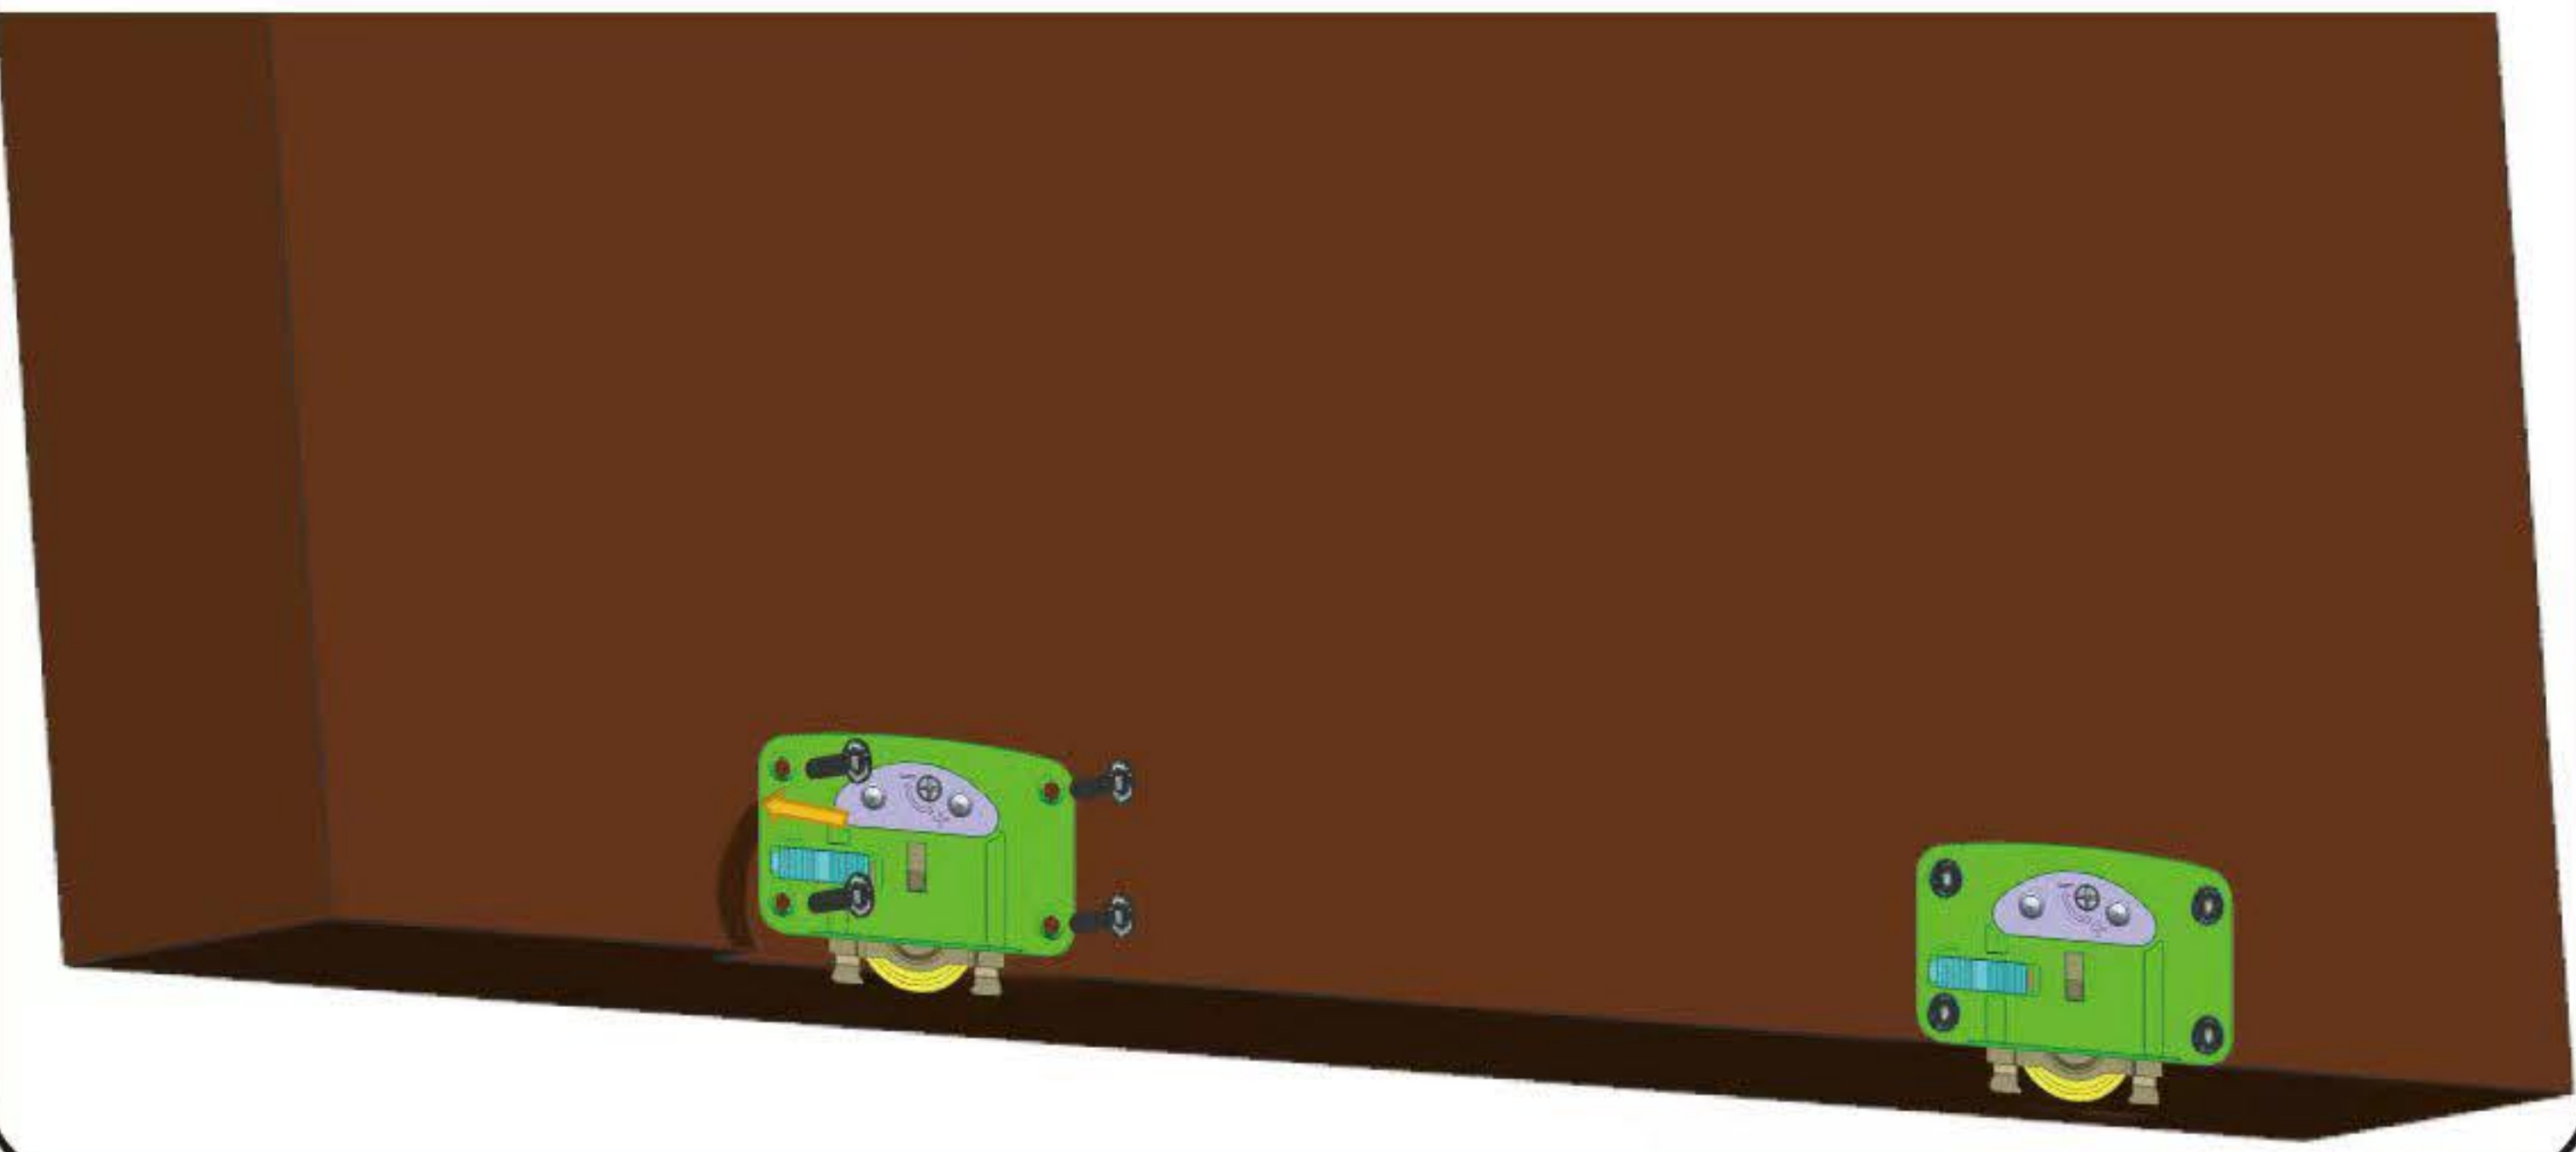

5

缓冲器入铝轨道安装

Buffer enters orbit installation

6


铝轨道堵头安装

Ending cap installation

7

铝轨道入门槽安装

The track is fitted into the door groove.

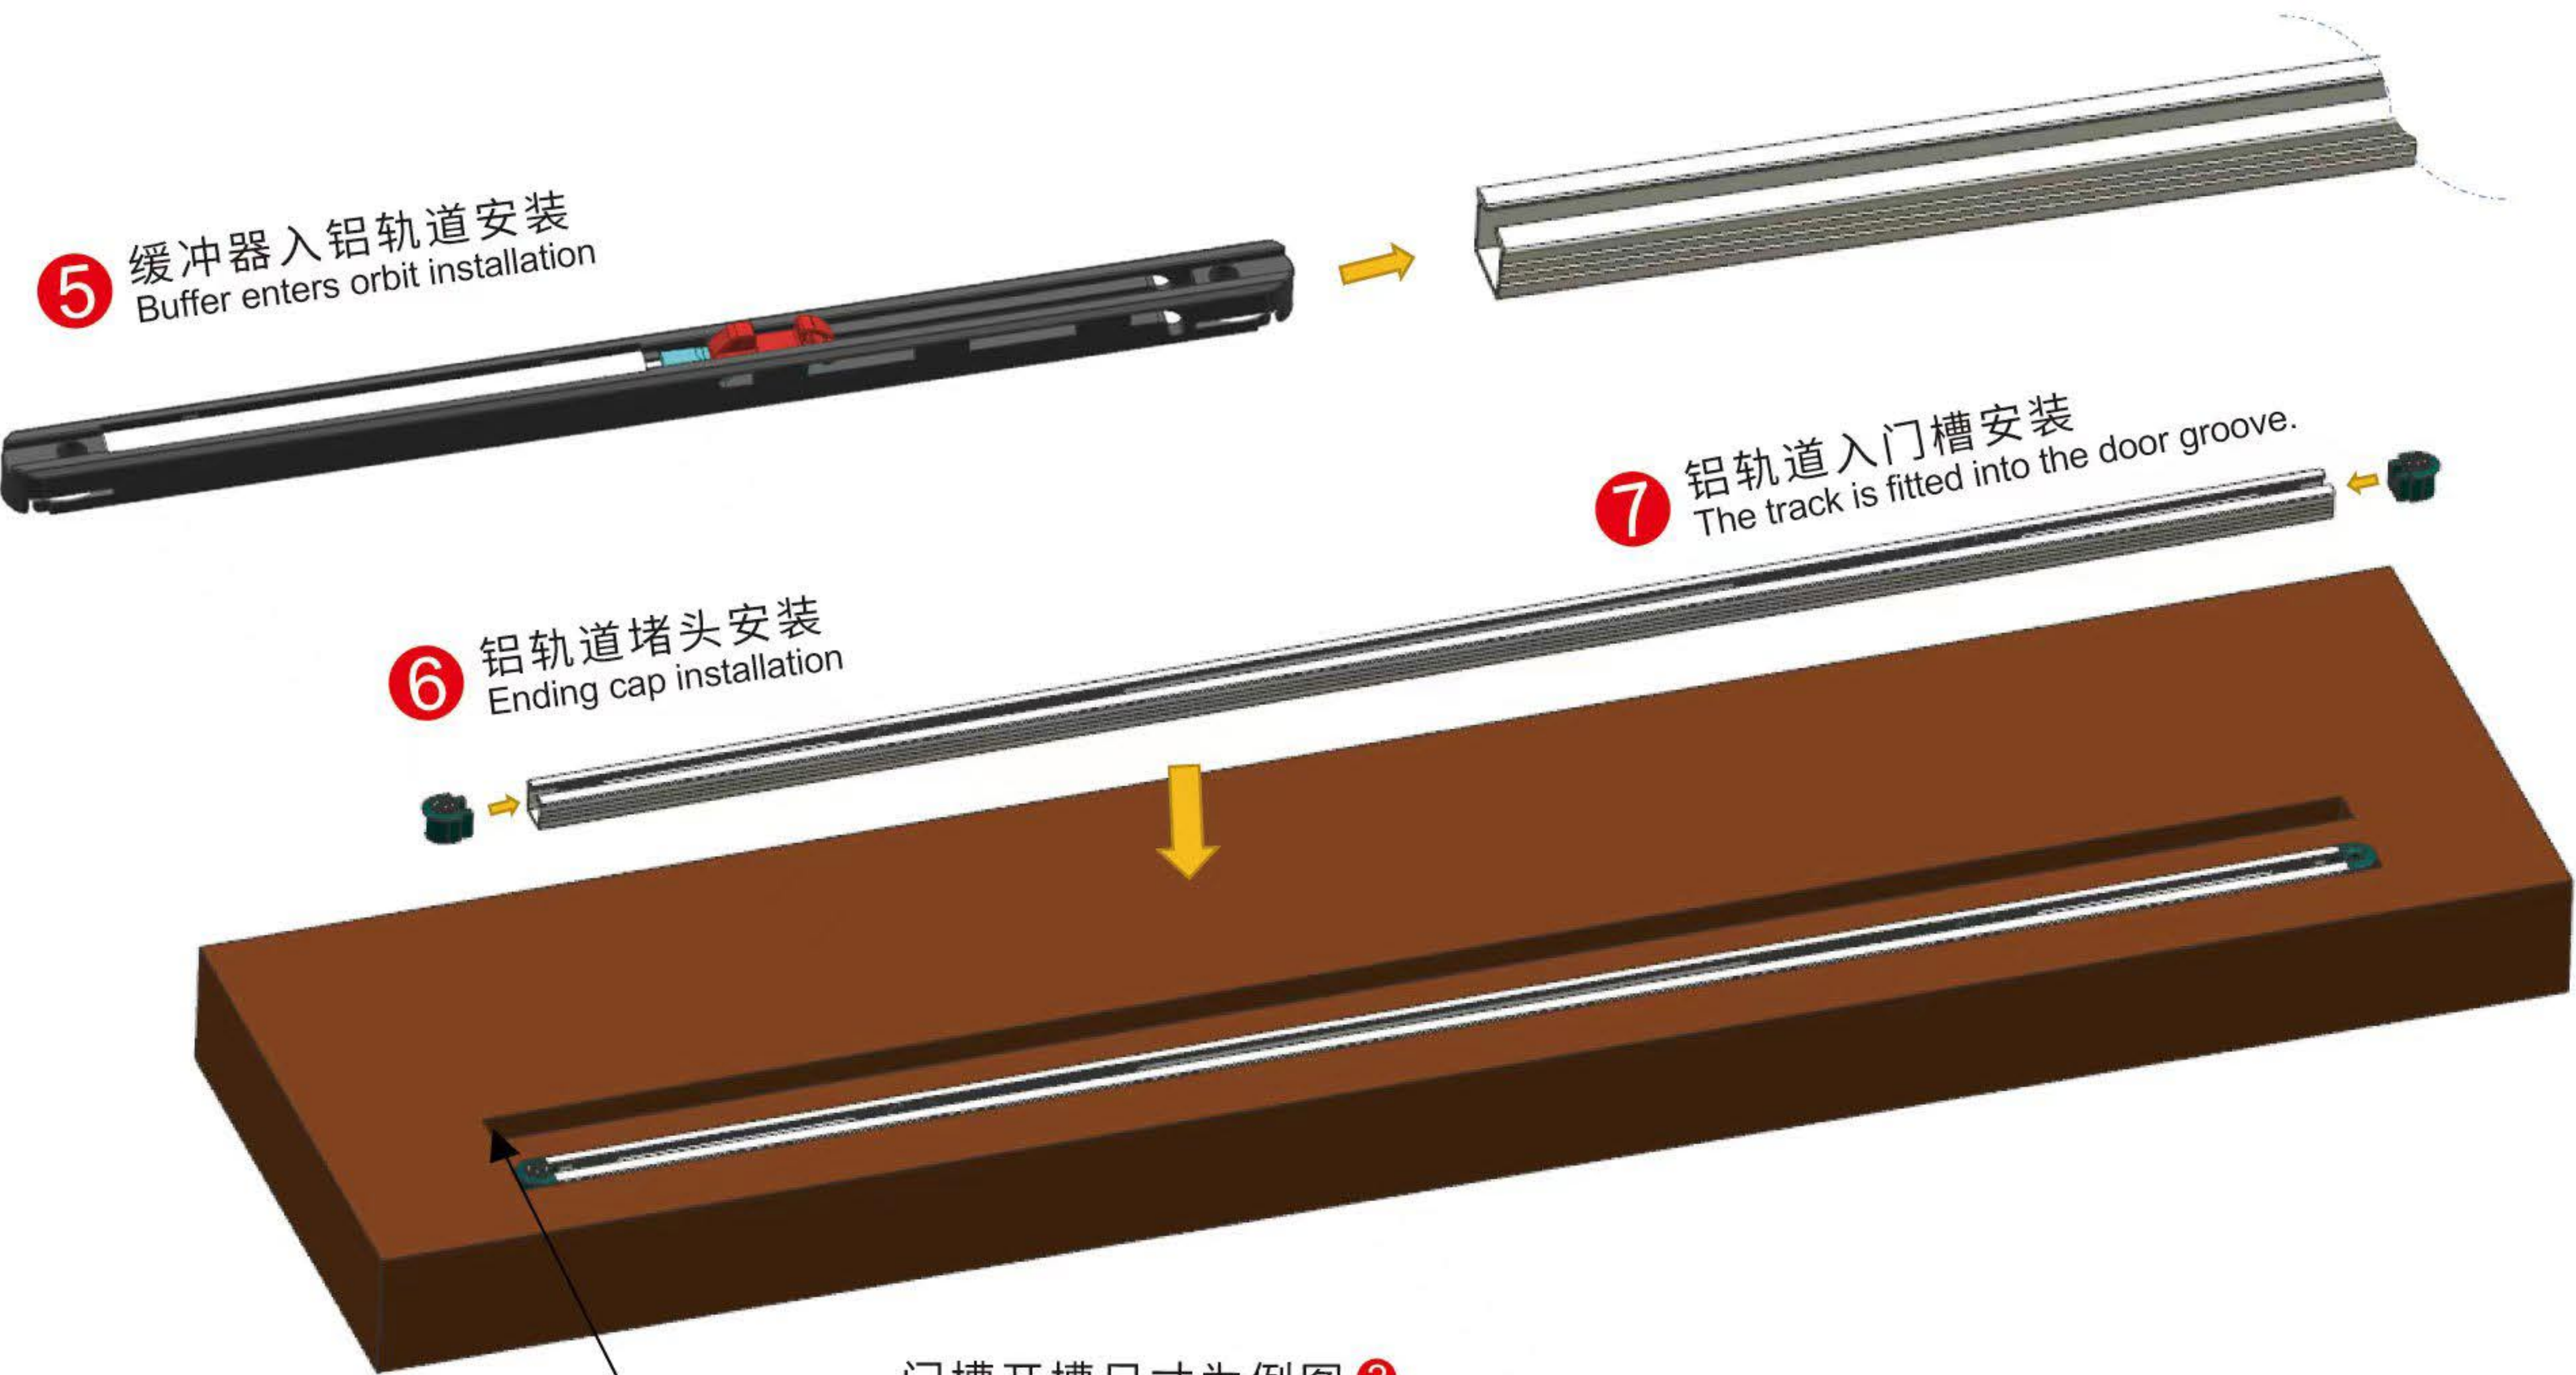

门槽开槽尺寸为图 2

Gate slot slotting dimension is 2