



2021
AUDIO
PRODUCT
GUIDE

ABOUT US

Since Ecler's birth back in 1965, we have always developed our professional audio catalogue trying to listen to you. Today Ecler still keeps this aim untouched. We understand that these days technology, quickly changing, must be a flexible tool to provide global and integral audio solutions, more than just individual products. Looking for a complete audiovisual experience, we expand our product offer introducing Ecler Video Systems and Ecler Acoustics to enhance our sound experience.

We keep focusing on innovation and design, both essential. And we spot how they really add value: amazing features combined with a user-friendly and ergonomic approach for the end-user, the non-technical character of the story, but indeed the main one.

We realize that today AV integration has become a growing and solid market, frequently encouraging companies towards a global scope, which requests for global audio partners, as we are.

A global green awareness is, happily, growing as well. We are proud of being part of this vital commitment, taking care of the planet with products designed for energy-saving and manufactured with sustainable policies.

Ecler is ready to offer you a quality sound solution for every audio installation and integration challenge you may face up. This was the goal, and we honestly think it's been achieved.

Ecler. Innovating with you.



OUR VALUES

EXPERIENCE



We have extended the warranty of all our products to 3 years. Reliability is a must. Every Ecler product is designed to deliver a long, solid and failure-free working life, even in extreme use conditions, thereby guaranteeing low MTBF (Mean Time Between Failures) ratios. We individually test 100% of our products, avoiding the typical random samples testing procedures in the industry. This leads us entirely TRUSTWORTHY manufacturing quality. Ecler is an ISO 9001 certified company

INNOVATION



Ecler firmly believes that INNOVATION is essential in providing the market with pro-audio solutions that require a pioneer approach.

WiSpeak products with the latest wireless technology, EclerNet proprietary hardware&software platform, or the new matrixes DANTE™ with its peripherals are clear examples of our achievements.

ERGONOMICS



Versatility. Our products have been designed to meet the technical and user requirements of a wide range of applications and environments. A good example is our WPNETTOUCH digital remote controller for the EclerNet range of products: a touchscreen based device that can be tailored to graphically control and manage a whole installation, exactly meeting each end user profile and needs. Ecler cares about control interfaces being as much user friendly as possible.

DESIGN



Ecler has been the first pro audio company to partner with the famous Italian industrial designer Giugiaro (www.italdesign.it). The results of our collaboration are the loudspeaker cabinet series AUDEO and the WPa & WPNET remote wall panel controls.

GREEN



We are really committed with the planet's health, energy saving and CO2 emission reduction. Energy Star certification, SPM Technology, class D amplifiers, switching power supplies and autostandby function provide our electronics with higher efficiency and lower energy wasting. Recycling materials and using non-contaminant components are also top priorities in our green crusade.

GLOBAL




Our philosophy is to provide our customers with a global solution. Firstly, this involves offering an extensive range of products under one single and solid roof. Secondly, to operate in more than 70 countries. People are one of our chief assets: a wide distribution network, relational marketing, product specialists, our own projects department, technical assistance service, training and cooperation... all with a view to better understanding what is required from our company and our SERVICE. Because global customers deserve a global solution. One supplier, a global partnership.

OUR PHILOSOPHY

Ecler catalogue includes several product technology levels in order to offer installers and end users complete and efficient solutions, ranging from basic and budget-minded ones to sophisticated, ergonomic and integration-friendly ones.


The innovative nature that represents us, is reflected in a wide range of software-managed devices: premium digital products like matrices, amplifiers, audio managers, audio players, streaming receivers, control panels, mobile apps (Pilot, Ecler UCP, RePLAYER) and Audio Over IP (DANTE) compatible devices that share our software management platforms (EclerNet and EclerCOMM), embed third-party integration and control protocols (TP-NET, CA-NET) and offer full customization to each project single requirement.



•ECLER ESSENTIALS: A product range where we preserve the essence of ECLER in terms of reliability, quality and features at a very attractive price point. Each product reference that belongs to this range contains at the beginning the following “e” prefix = essential and its own series logo (in that way ESSENTIALS can be easily identified within Ecler product range).



•ECLER ENGINEERING: Define your Project goals and our Project’s Department will design the best solution. Providing highly specialized tools to predict the end results, right from the construction project and onwards to completion. Using Ecler FAST (Flexible Audio System Tool) mobile app you will be able to know a list of our products to achieve an optimal sound system by answering simple questions about your project.

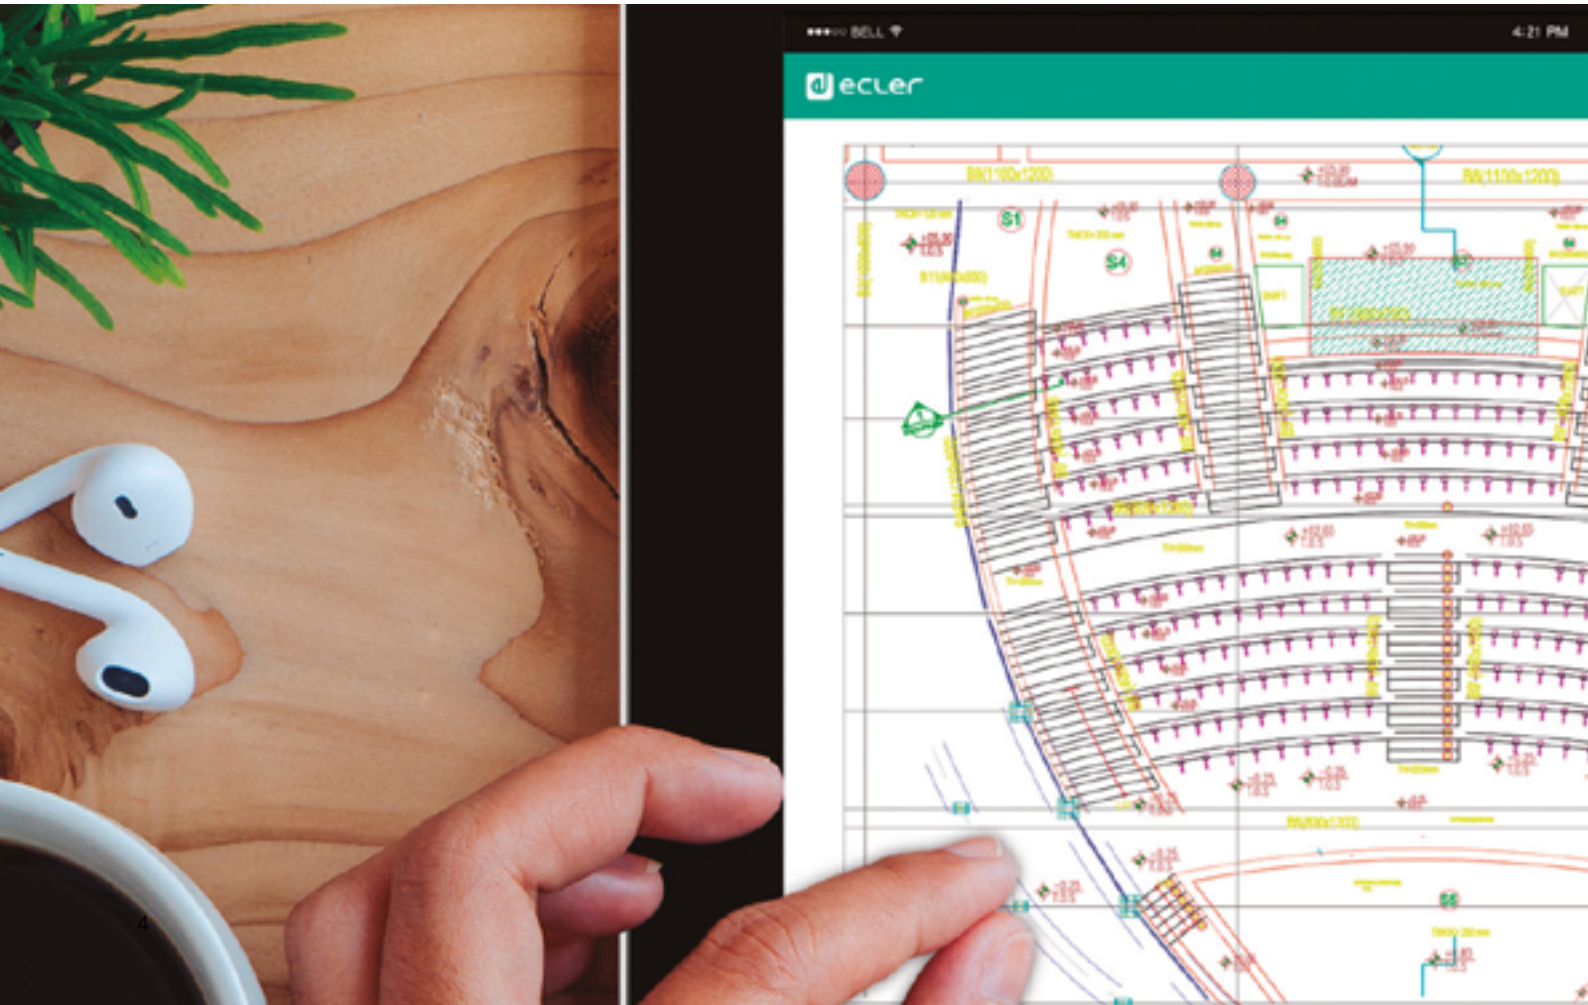

INDEX

AV SOLUTIONS

RETAIL

CORPORATE

HOSPITALITY

EDUCATION

SPORTS & WELLNESS

HOUSE OF WORSHIP

LEISURE

1. WISPEAK (WIRELESS PRO AUDIO)

2. SOUND SOURCES

3. ANALOGUE PREAMPLIFIERS & MIXERS

4. DIGITAL MATRIXES AND PROCESSORS

5. AMPLIFIERS

6. LOUDSPEAKERS

7. REMOTE CONTROLS AND INTERFACES

8. ACCESSORIES

06

06

12

16

20

22

24

25

28

30

36

40

54

69

92

100

1.1 WIRELESS TRANSMITTER

1.2 WIRELESS RECEIVERS

2.1 MICROPHONES

2.2 AUDIO PLAYERS

3.1 INSTALLATION PREAMPS. & MIXERS

4.1 DIGITAL MATRIXES

4.2 DIGITAL AUDIO MANAGERS

4.3 DIGITAL PROCESSORS

5.1 LOW IMPEDANCE

5.2 HIGH IMPEDANCE

5.3 MIXING AMPLIFIERS

5.4 COMPACT AMPLIFIERS

6.1 IN-CEILING

PAINTING LOUDSPEAKERS

6.2 CABINETS

6.3 SPECIALIZED

6.4 COMPACT PA SYSTEMS

7.1 ANALOGUE PAGING STATIONS

7.2 DIGITAL CONTROLS & PANELS

7.3 ANALOGUE CONTROLS & PANELS

8.1 PRODUCT ACCESSORIES

8.2 AUDIO CABLES AND OTHERS

8.3 LOUDSPEAKERS HARDWARE

06

12

16

20

22

24

25

28

29

30

32

36

40

40

50

52

54

60

64

67

69

73

74

86

90

92

92

94

98

100

100

101

102

ACCESSORIES COMPATIBILITY CHART

ALPHABETICAL ORDER PRODUCTS

104

106



RETAIL


SUPERMARKETS / STORES / MALLS



Shenyang Outlet (China)

RETAIL

RETAIL SHOP

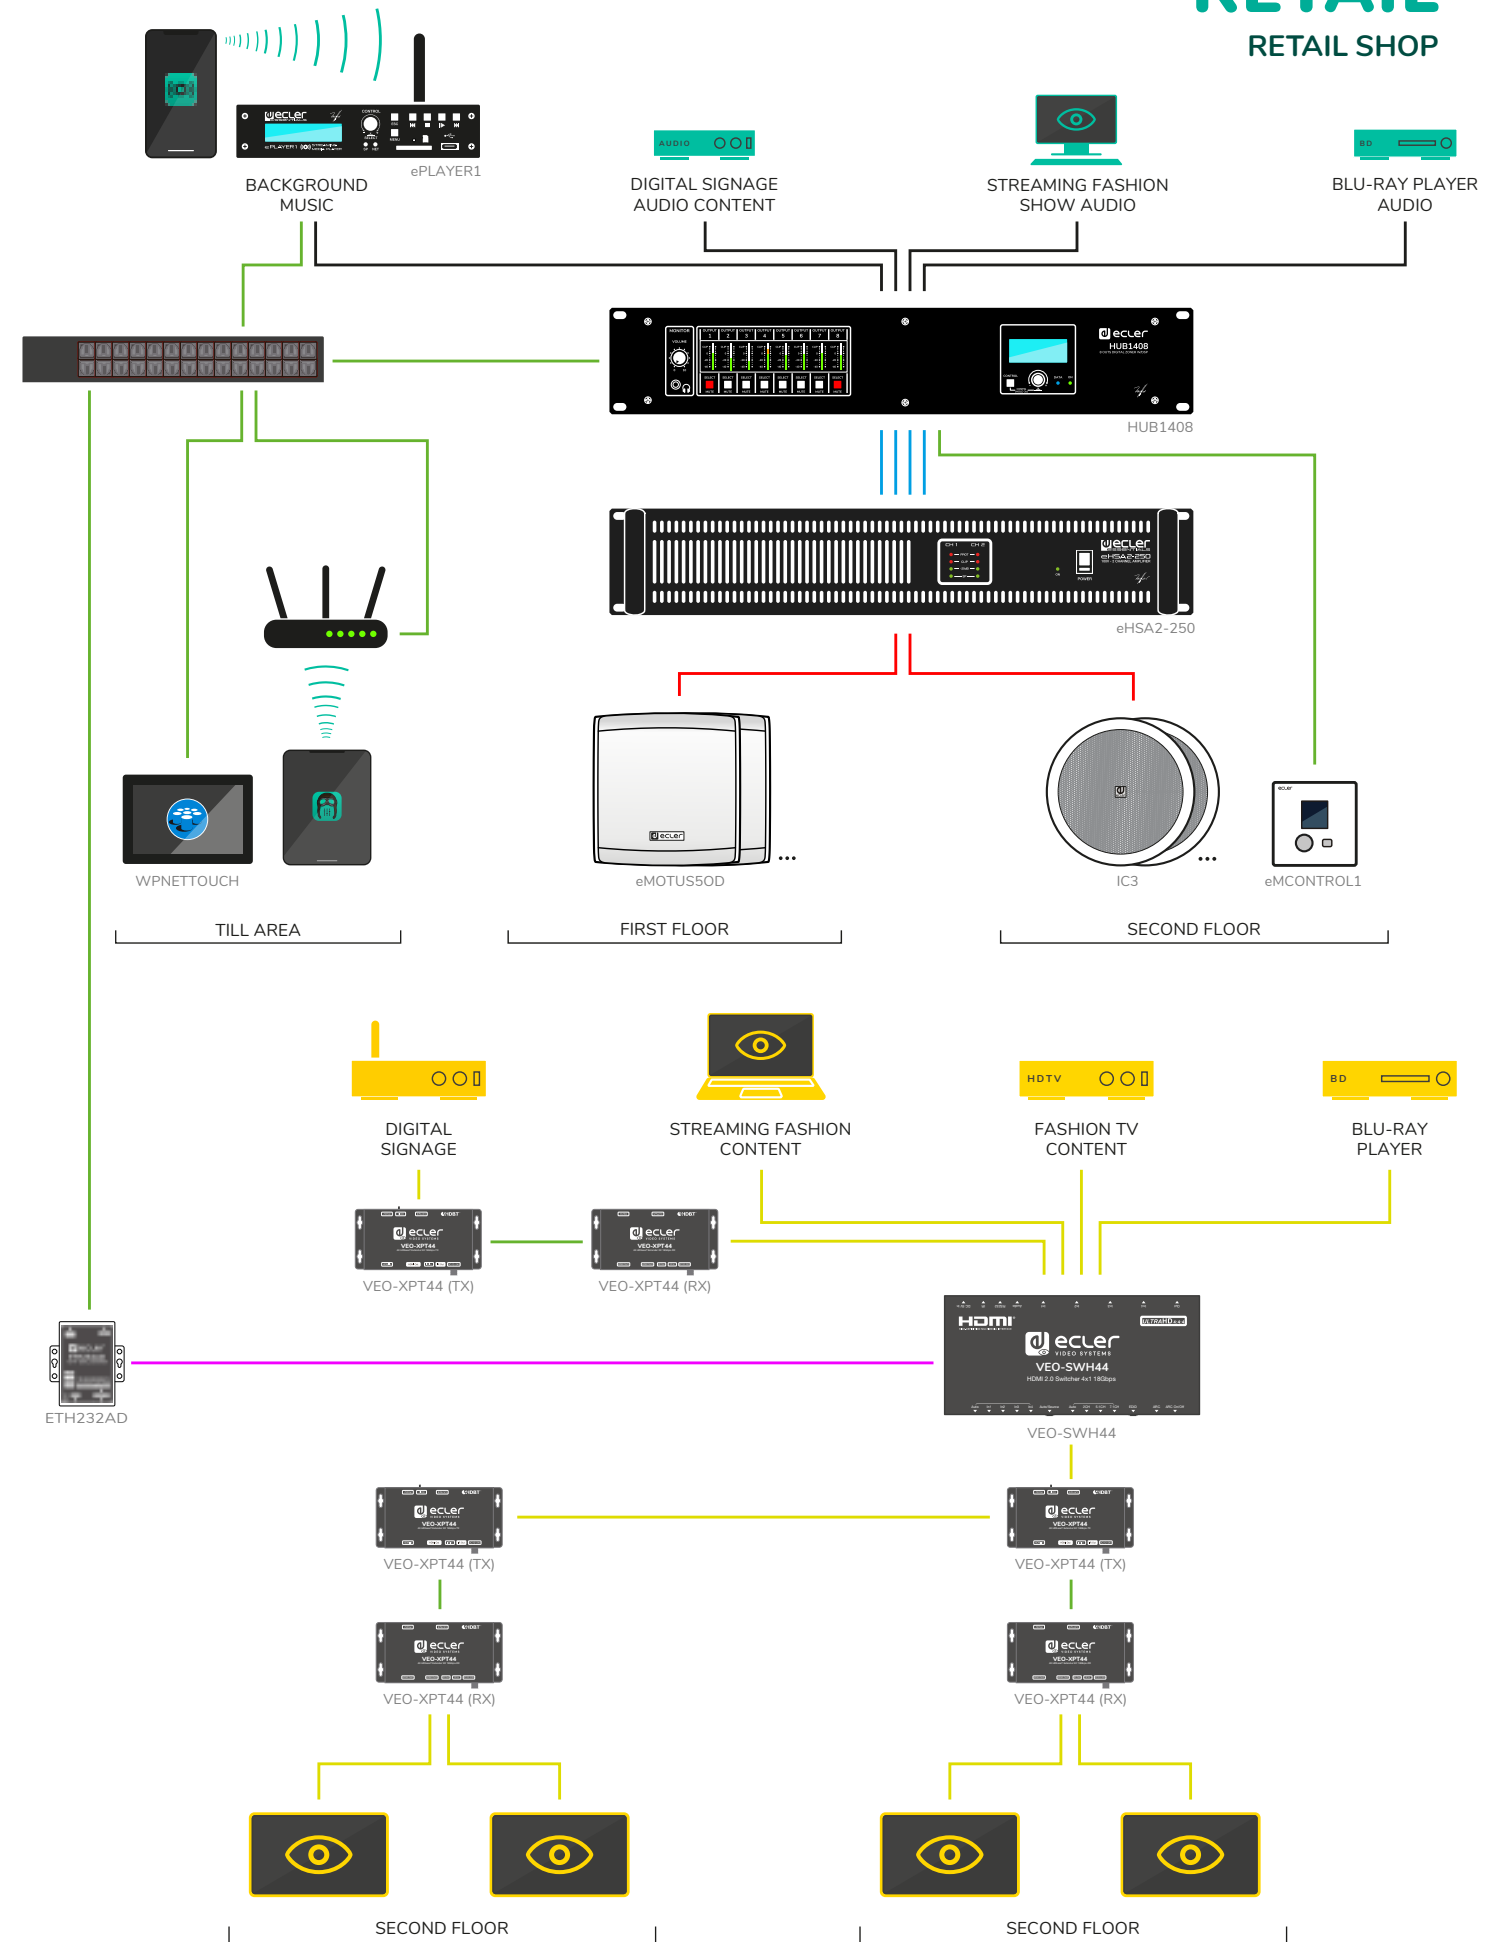



MANGO, Madrid (Spain)





Benetton, Madrid & Barcelona (Spain)



STRADIVARIUS, Madrid (Spain)

RETAIL SUPERMARKETS

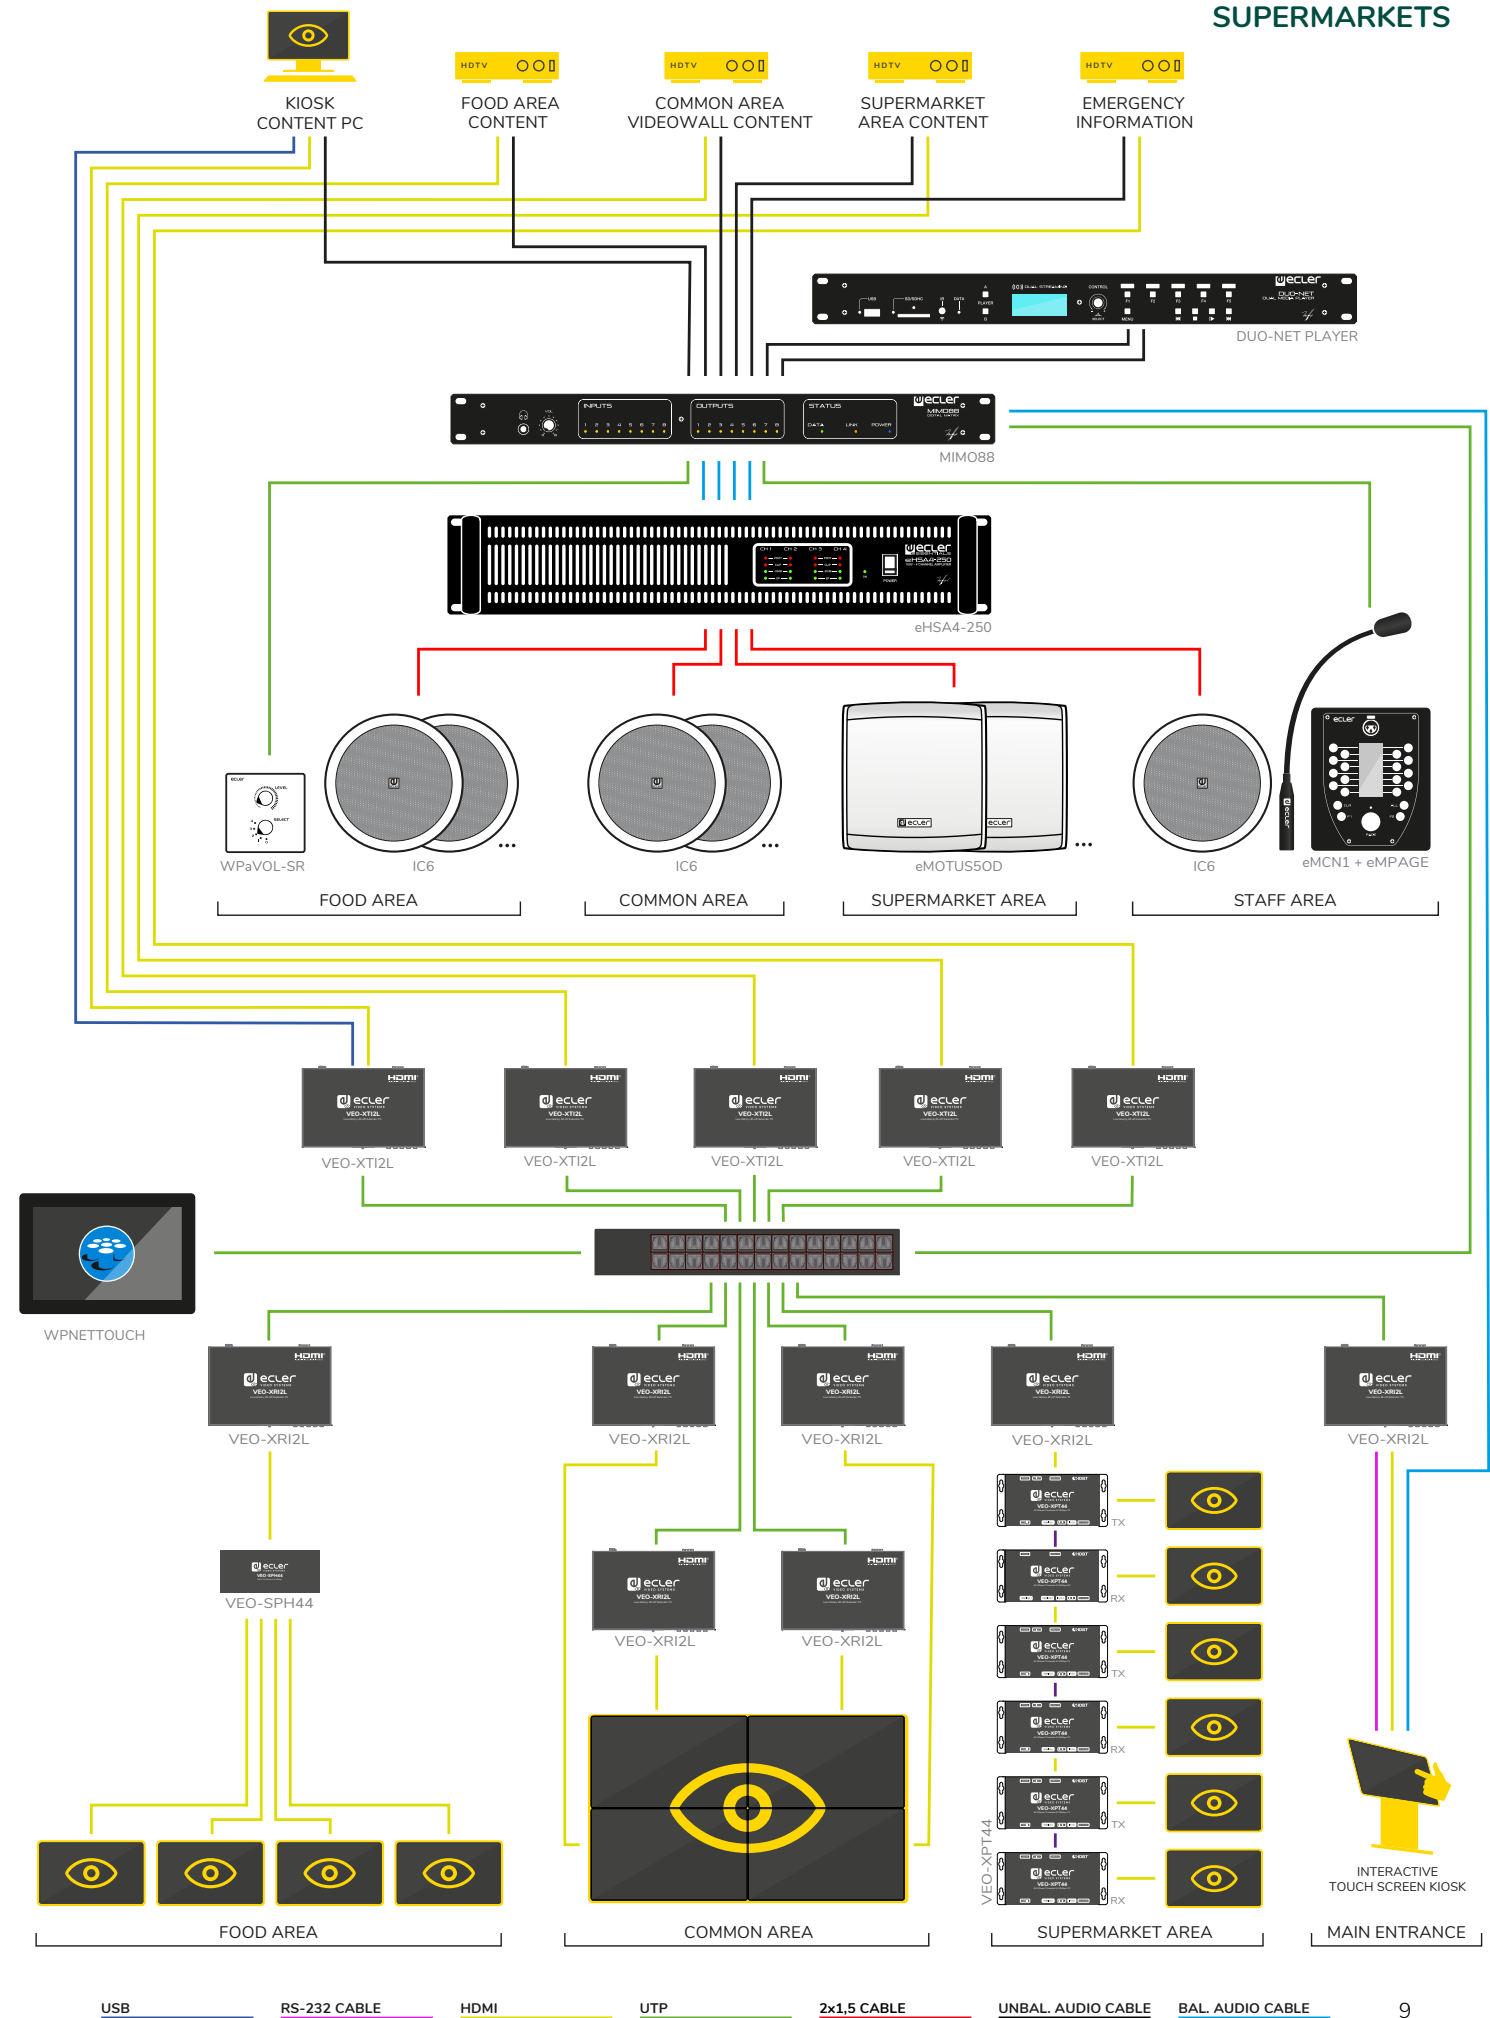

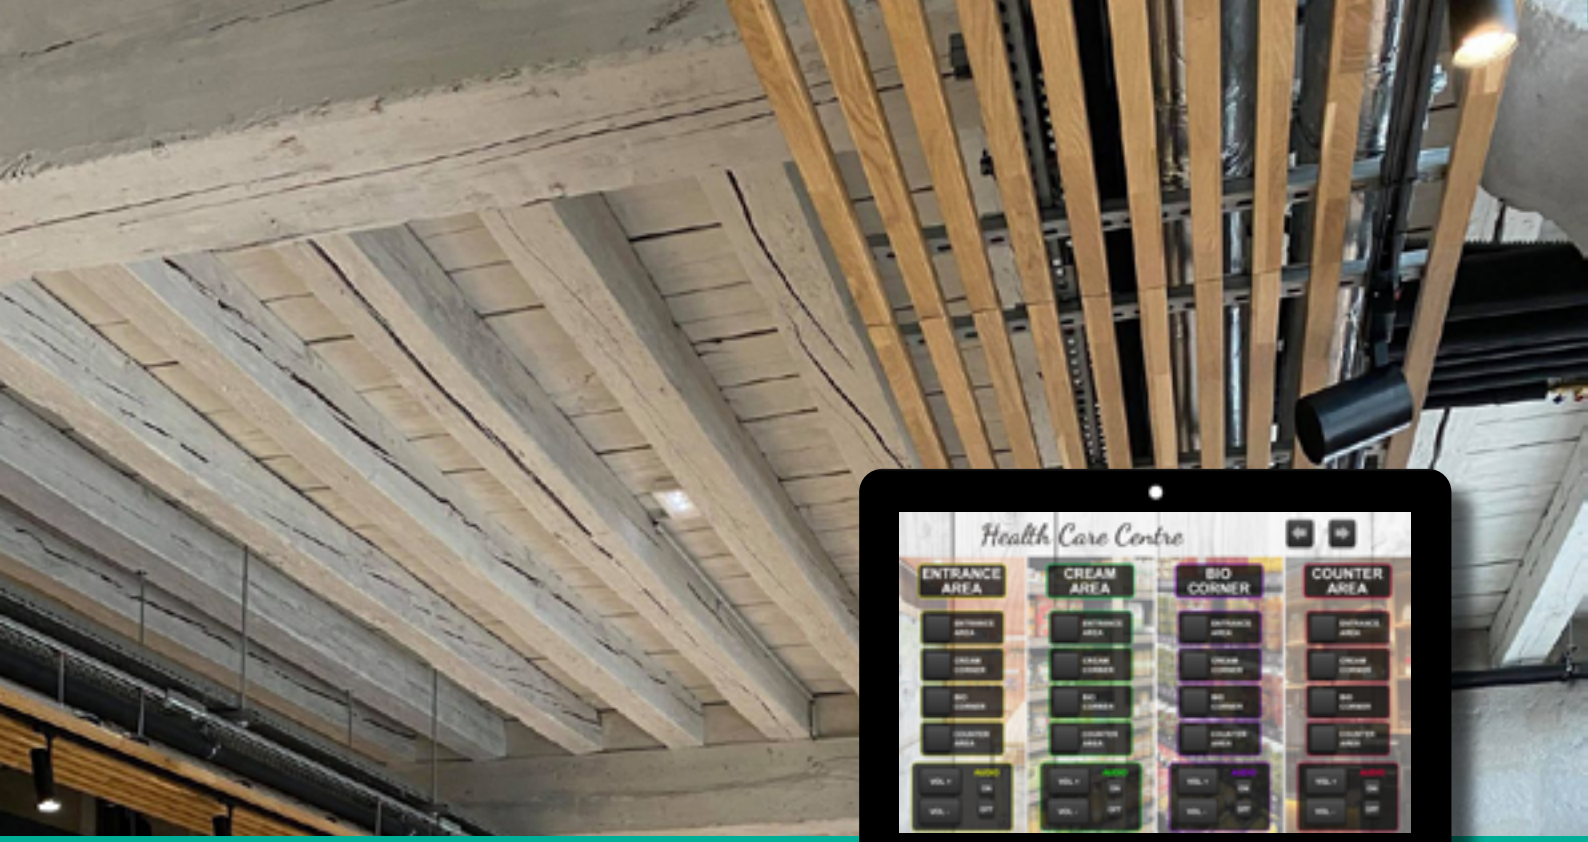


RETAIL


PHARMACIES / HEALTH CENTERS / BIO MARKETS



Grand Hotel Dieu Market, (France)

RETAIL BIO MARKET

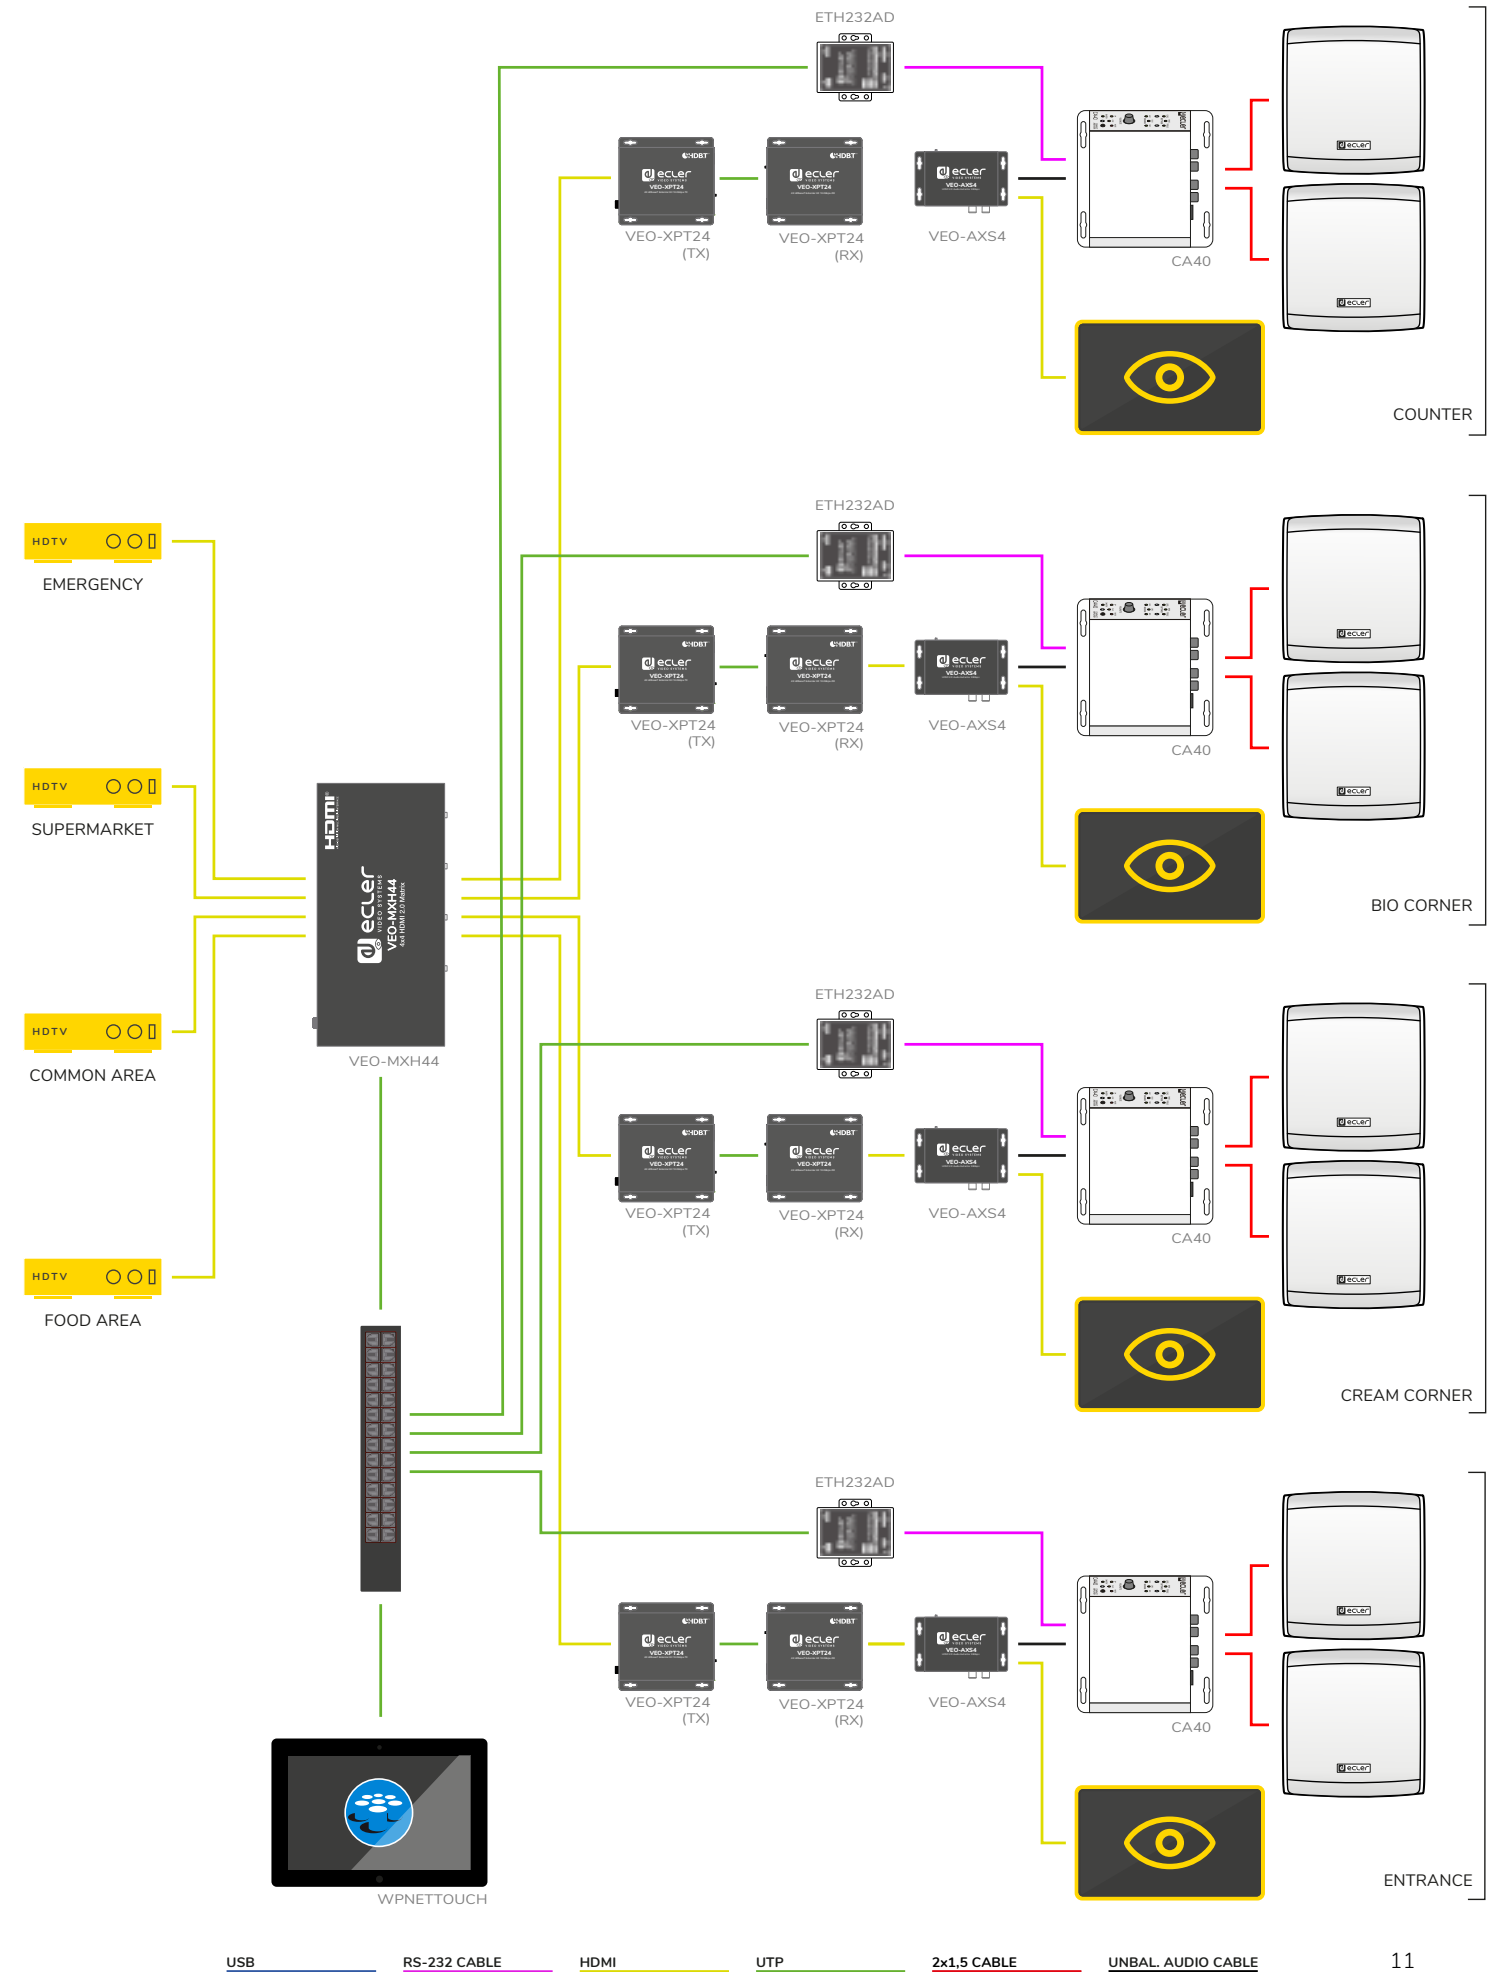

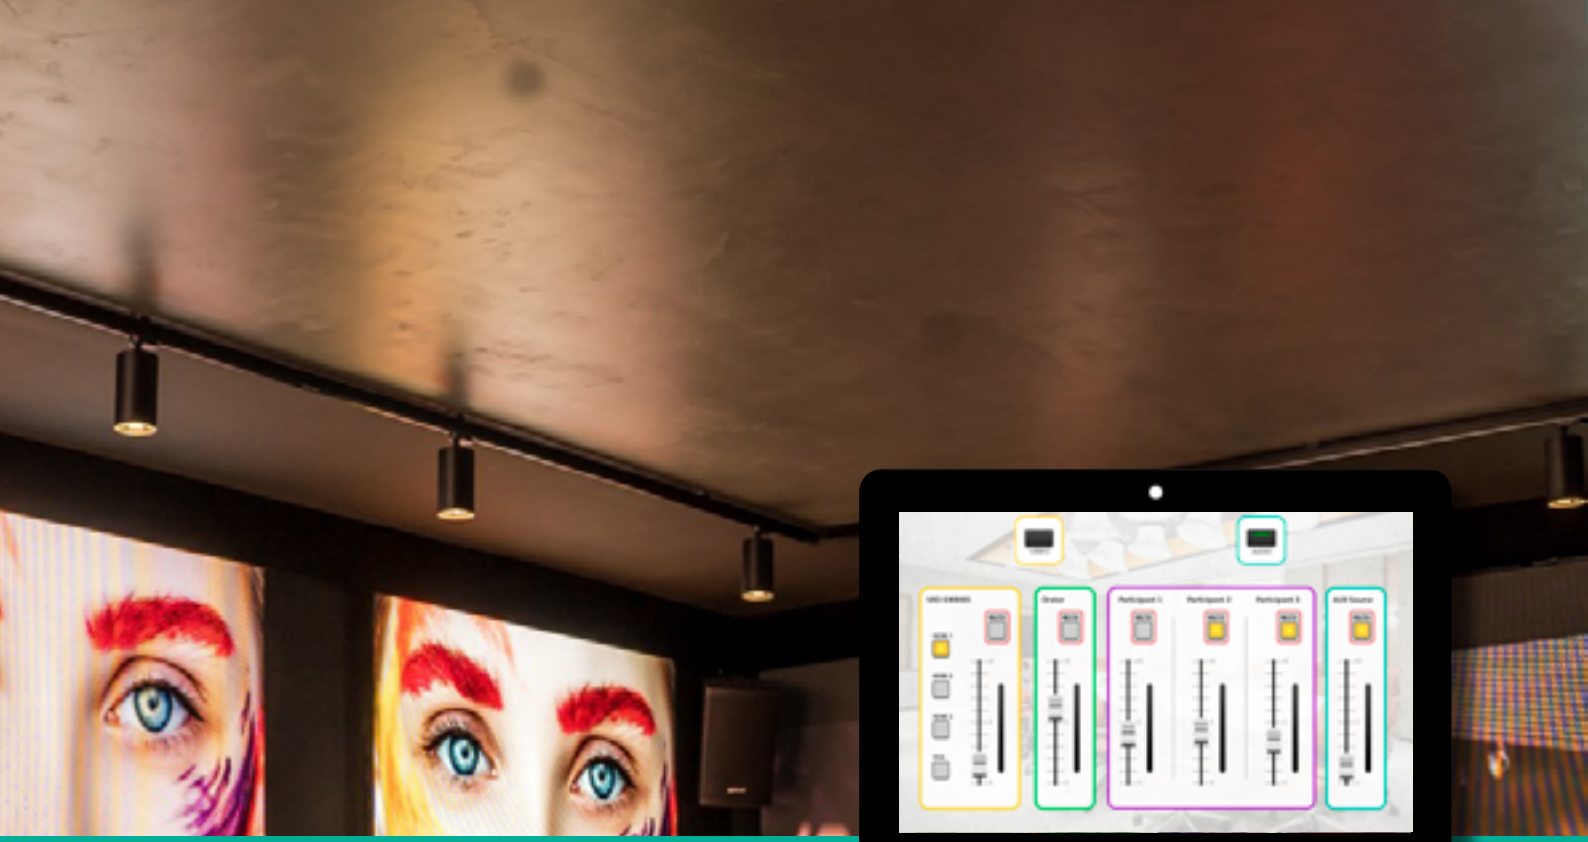

CORPORATE

OFFICE BUILDINGS / OFFICES, MEETING OR BOARD ROOMS / COMMON AREAS




STATIM (Poland)


CORPORATE

HUDDLE ROOM

1 ROOM CONFIGURATION

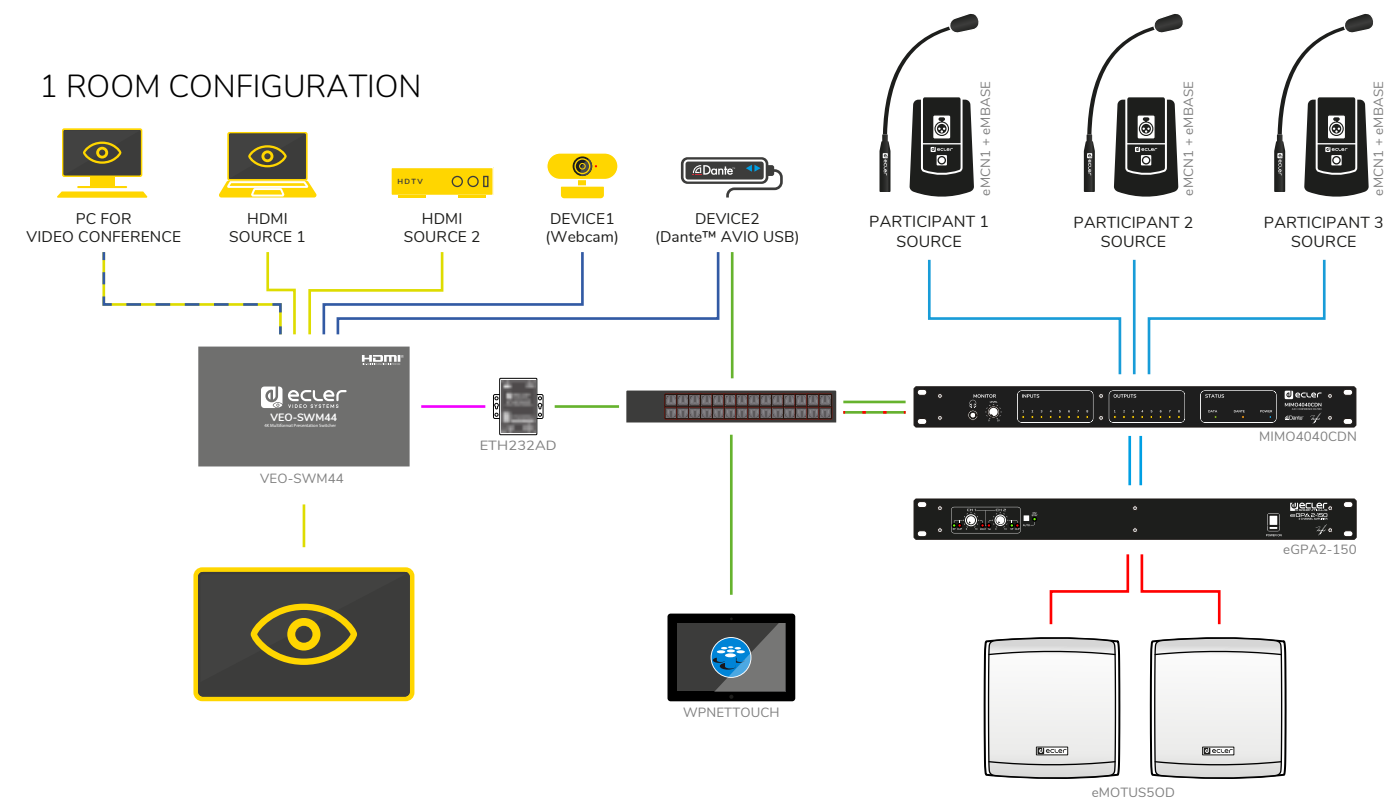

4 ROOMS CONFIGURATION

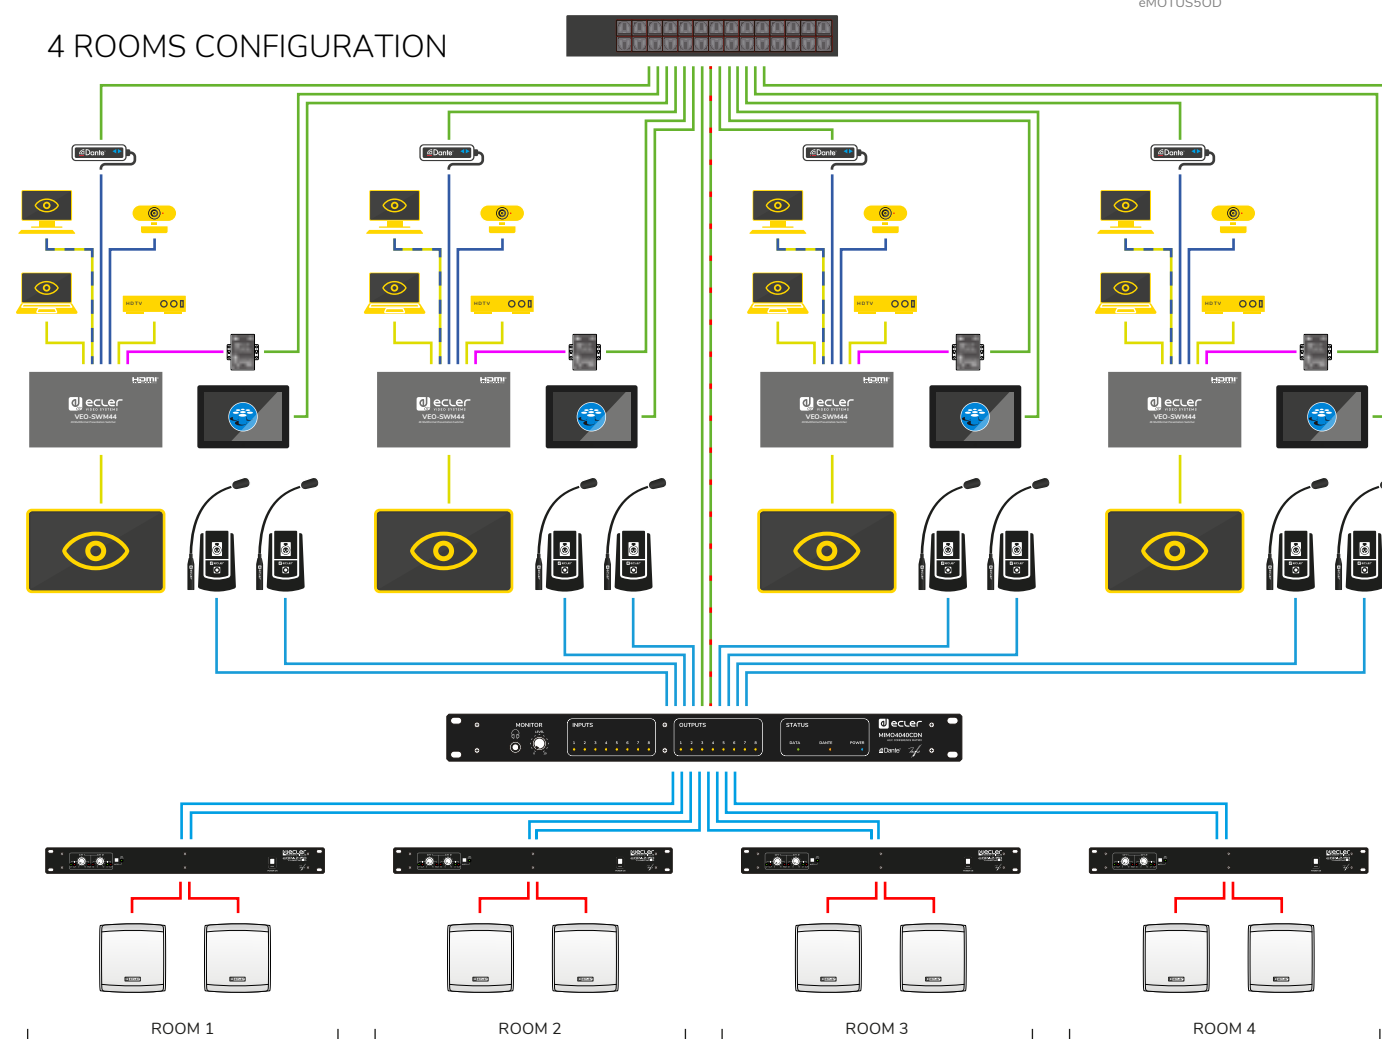

USB-C USB RS-232 CABLE HDMI UTP UTP (@Dante network) 2x1.5 CABLE BAL. AUDIO CABLE



Workland (Estonia)




Volvo Car, Warsaw (Poland)



Burda internacional (Poland)

CORPORATE CONFERENCE ROOM

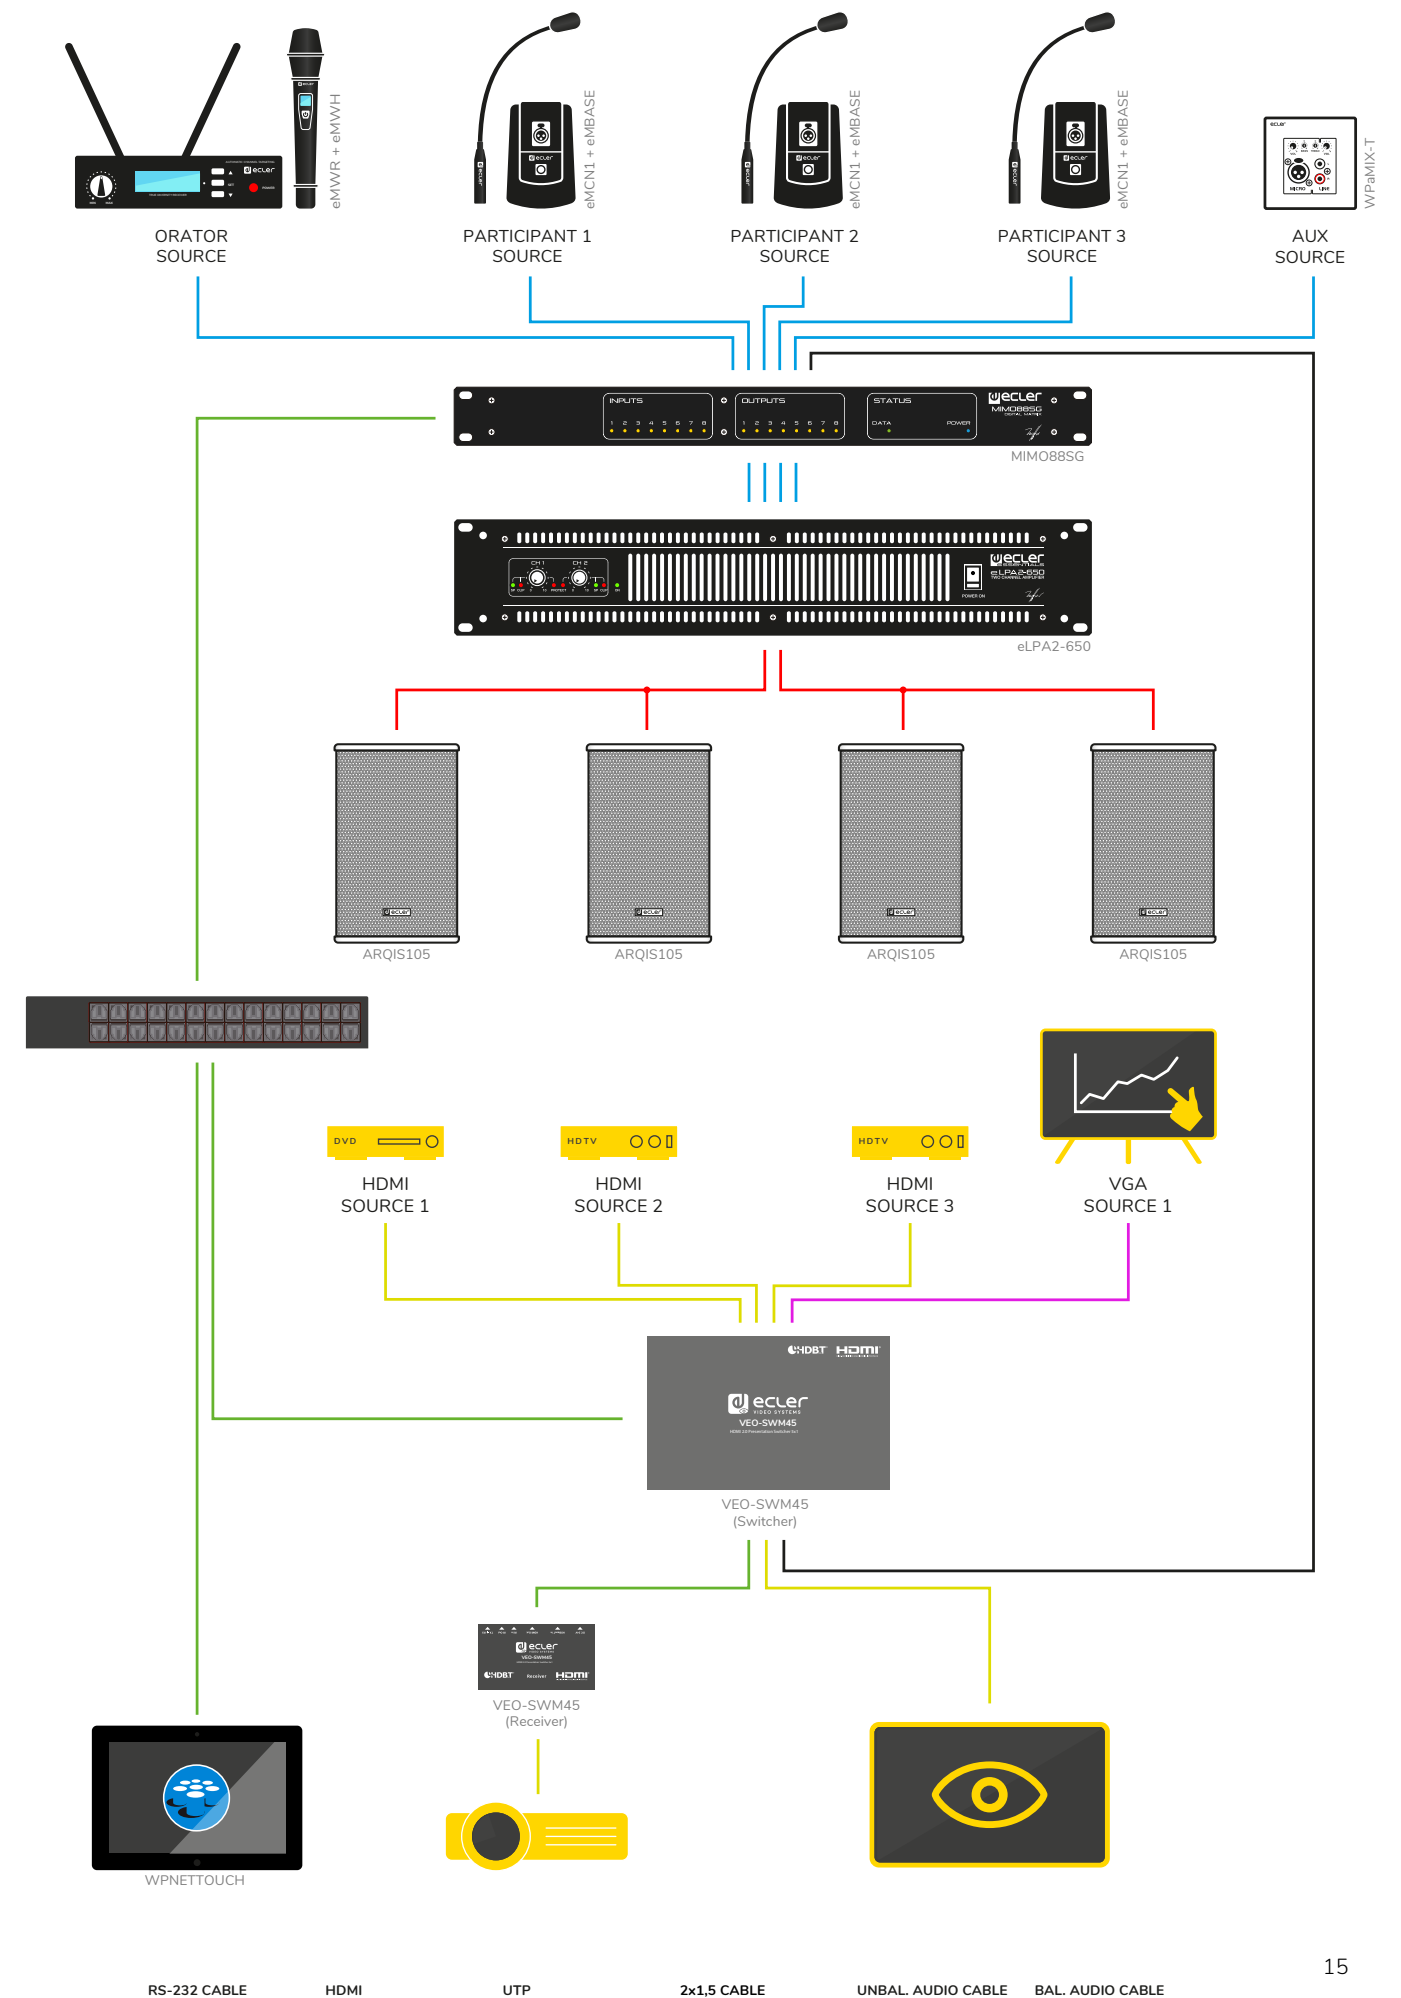



HOSPITALITY


HOTELS / CAFÉS / RESTAURANTS / CAMPSITES



Six Senses Kocatas Mansions, Istanbul (Turkey)

HOSPITALITY

MULTIZONE HOTEL

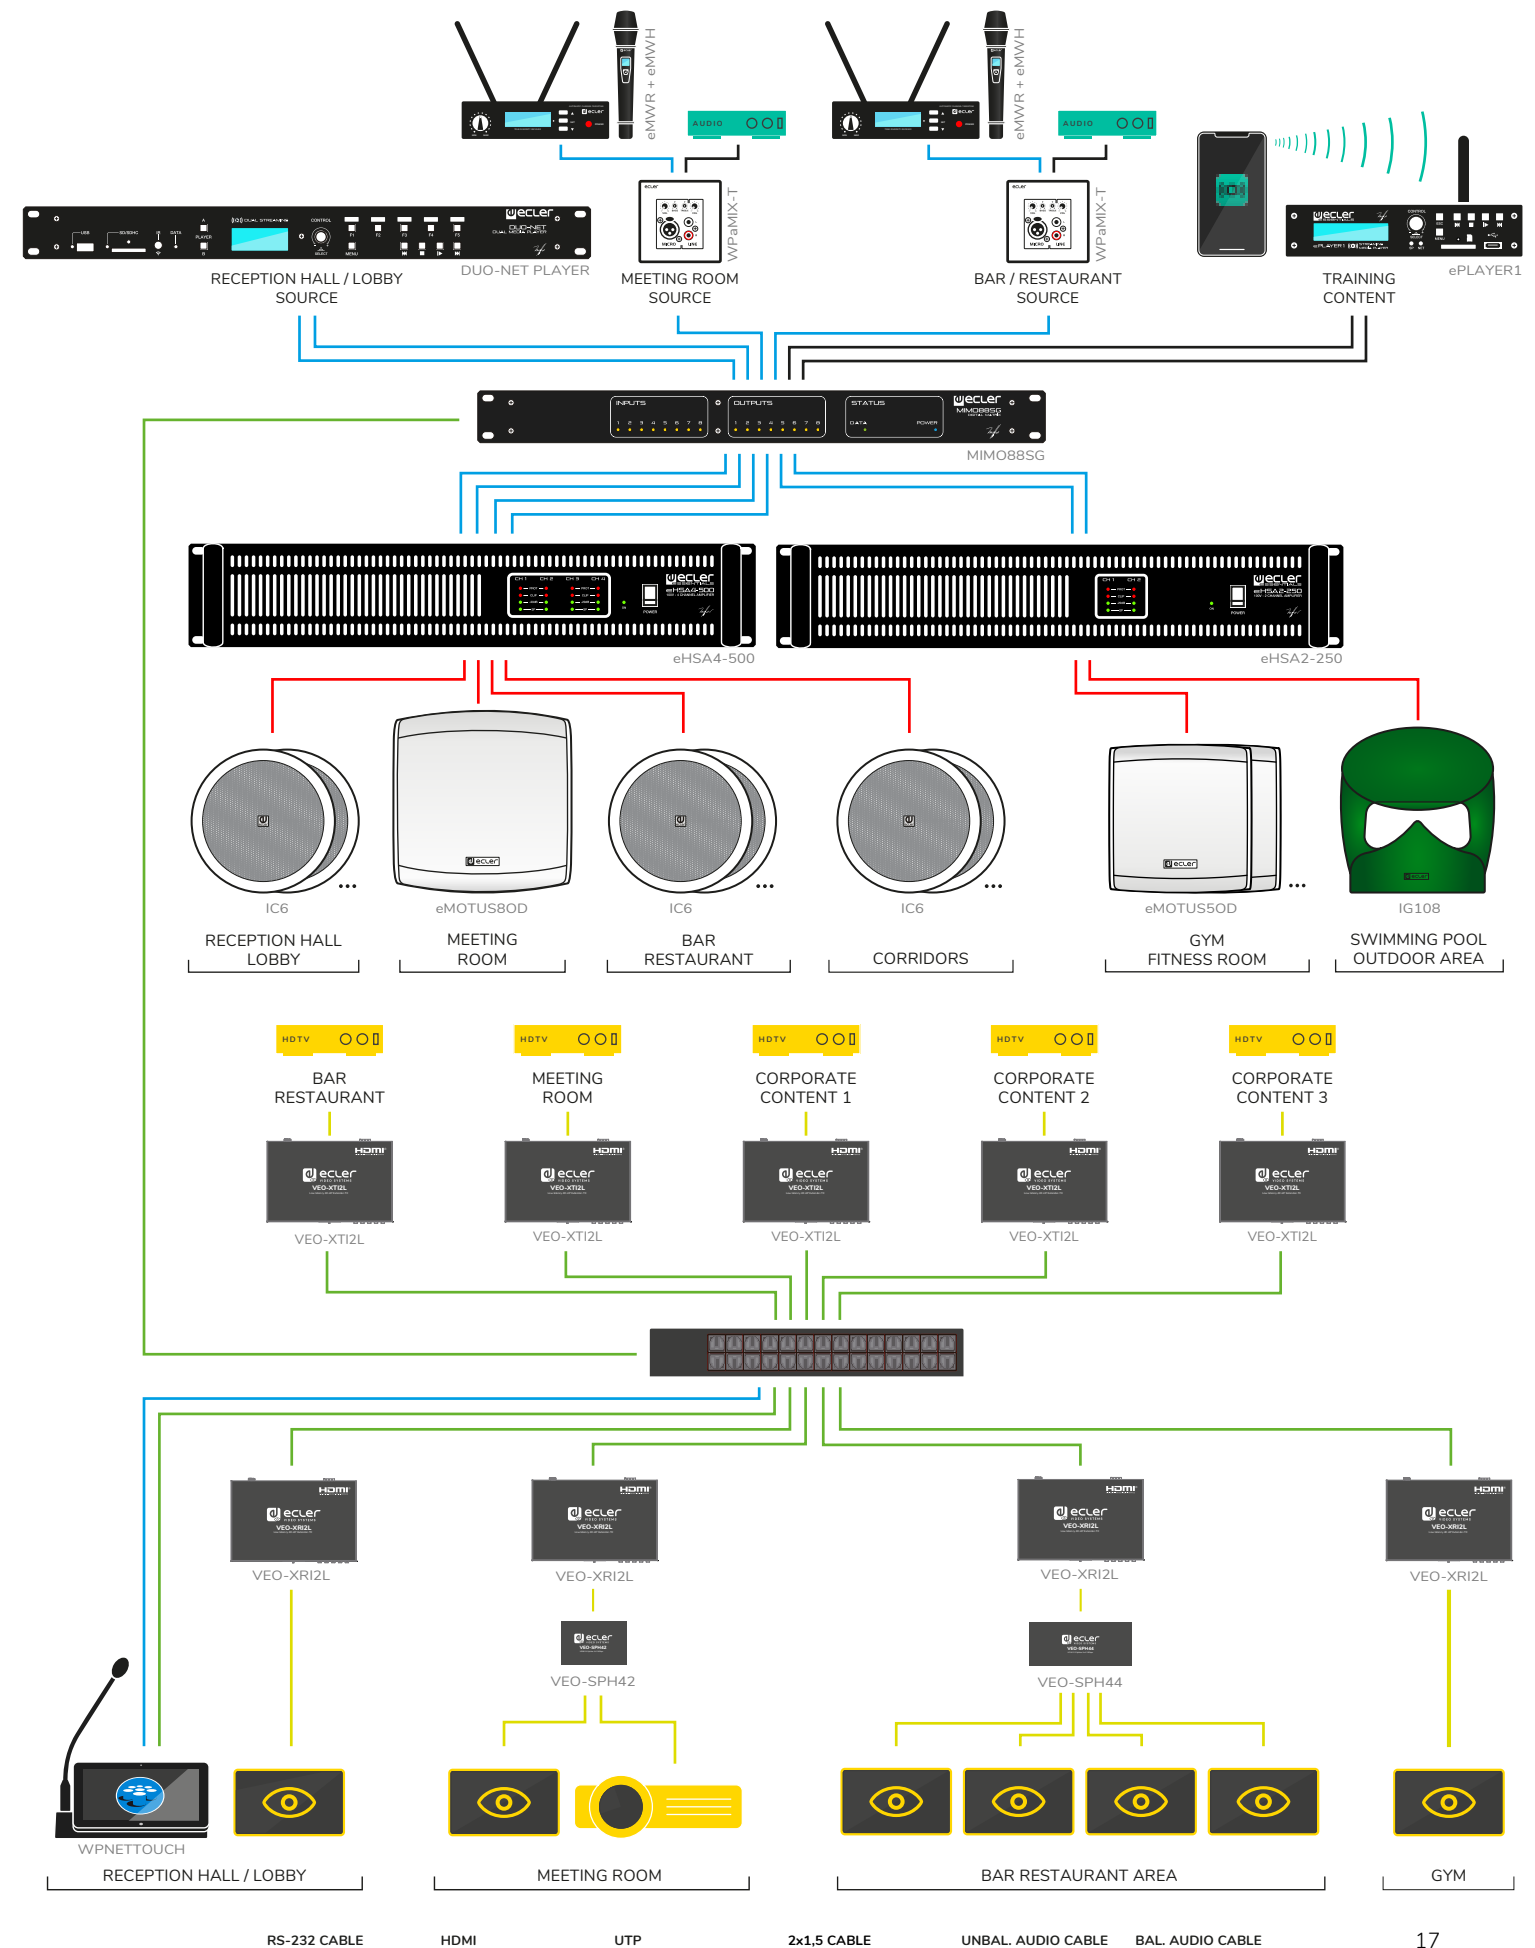



Blanchette Soho, London (UK)




Caesar Garden Resort, Lindos (Greece)



Hotel Sheraton, Istanbul (Turkey)

HOSPITALITY


5 ZONE RESTAURANT

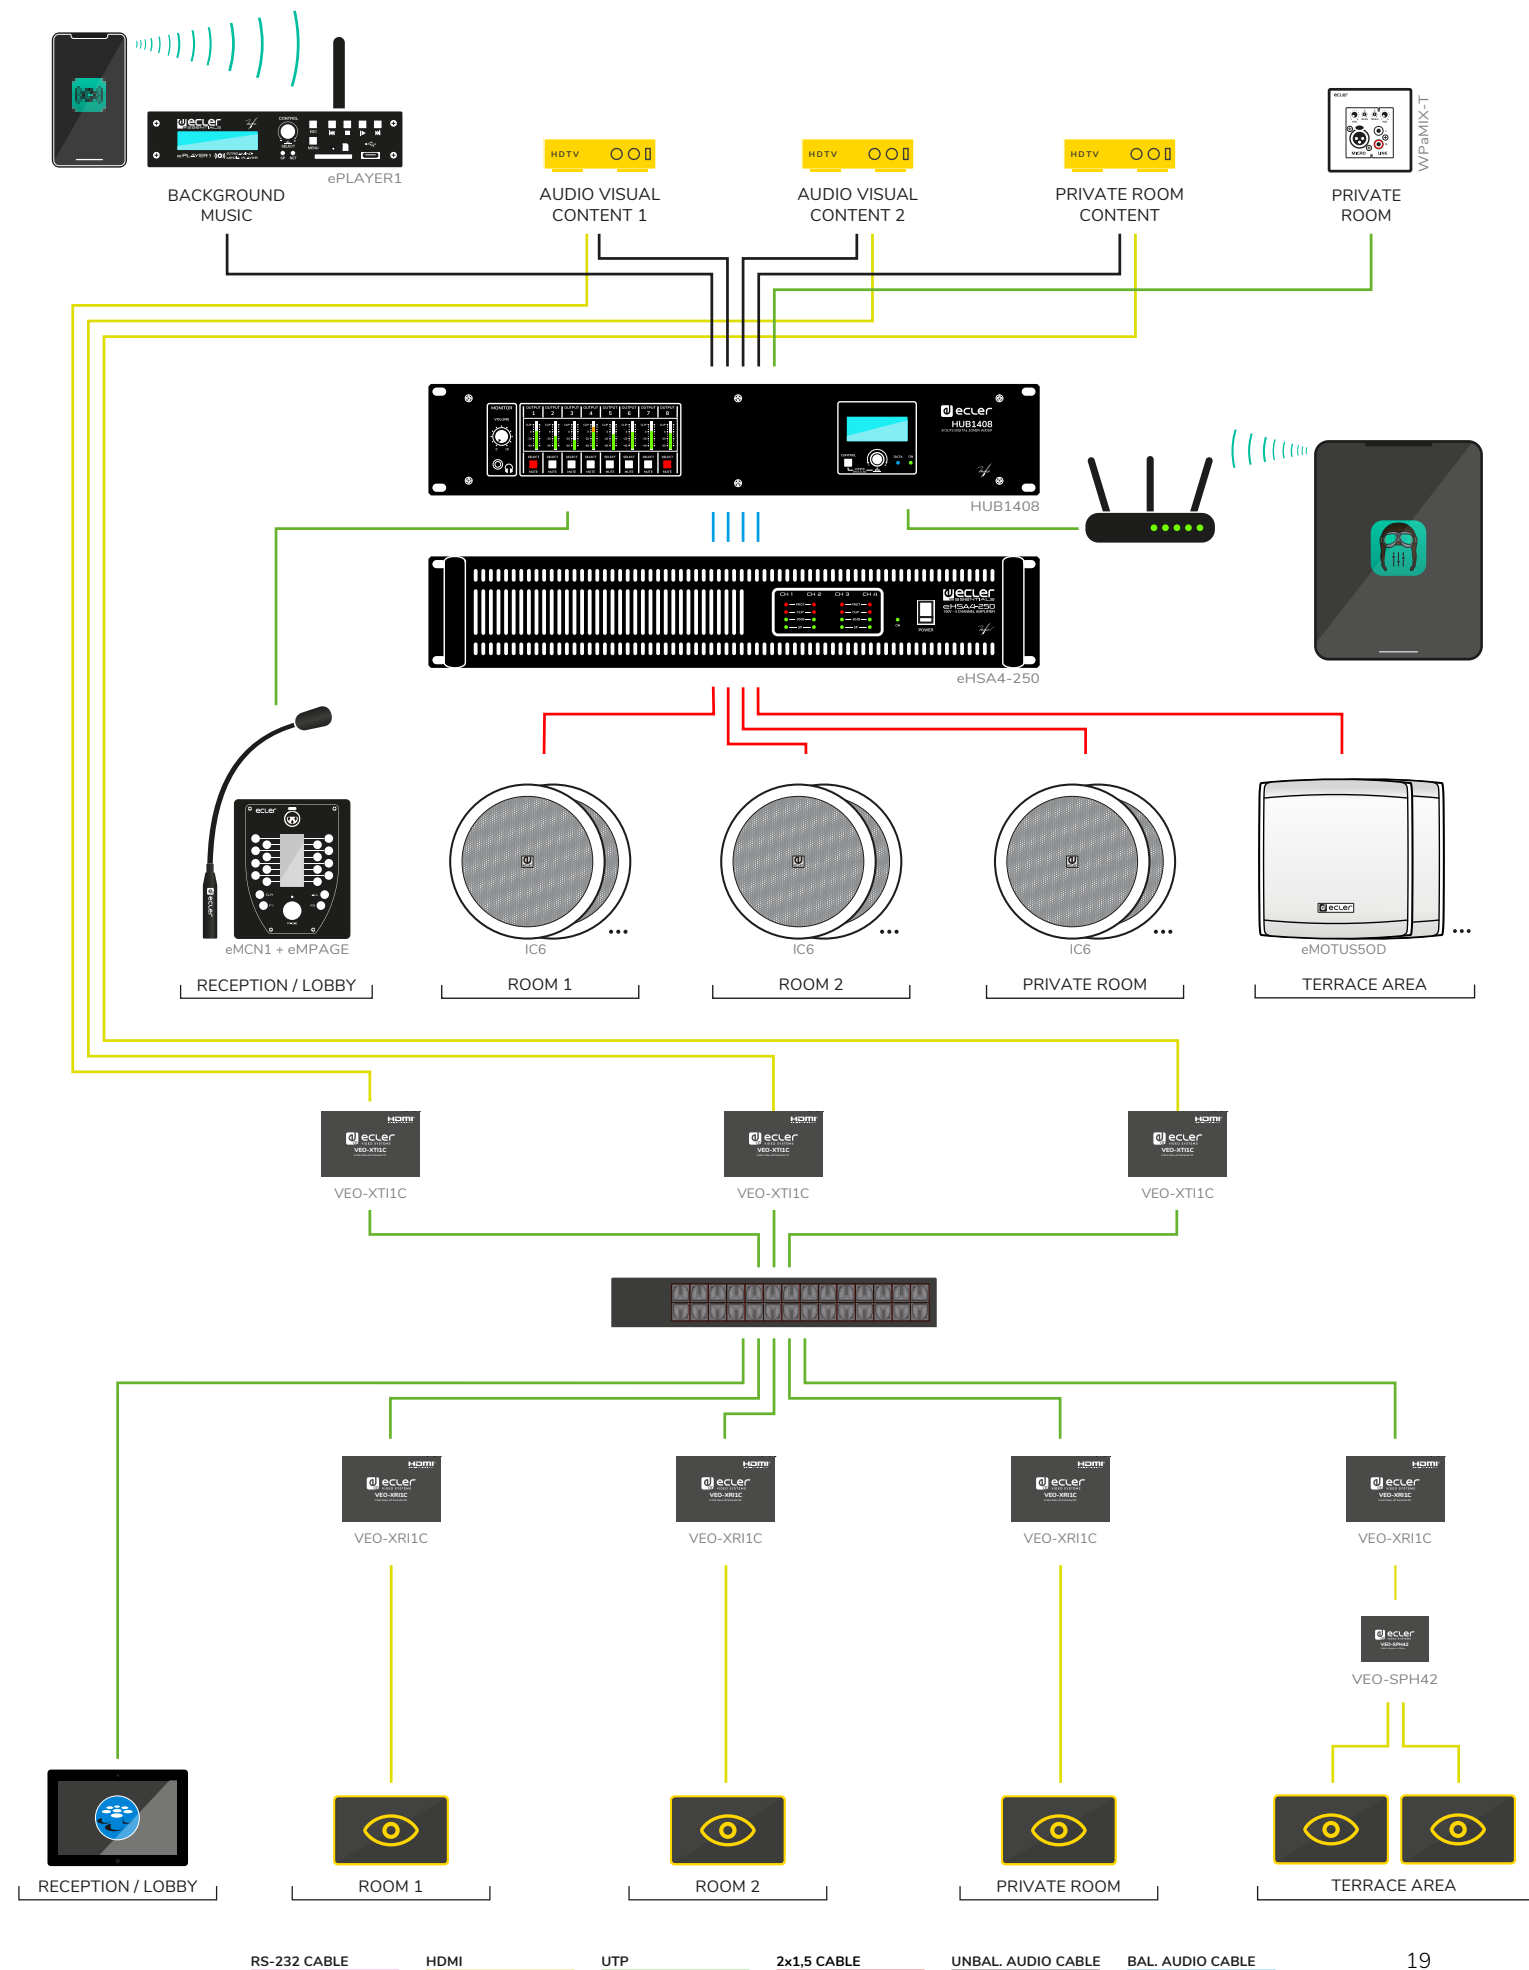



EDUCATION


SCHOOLS / CLASSROOMS / UNIVERSITIES / INSTITUTES

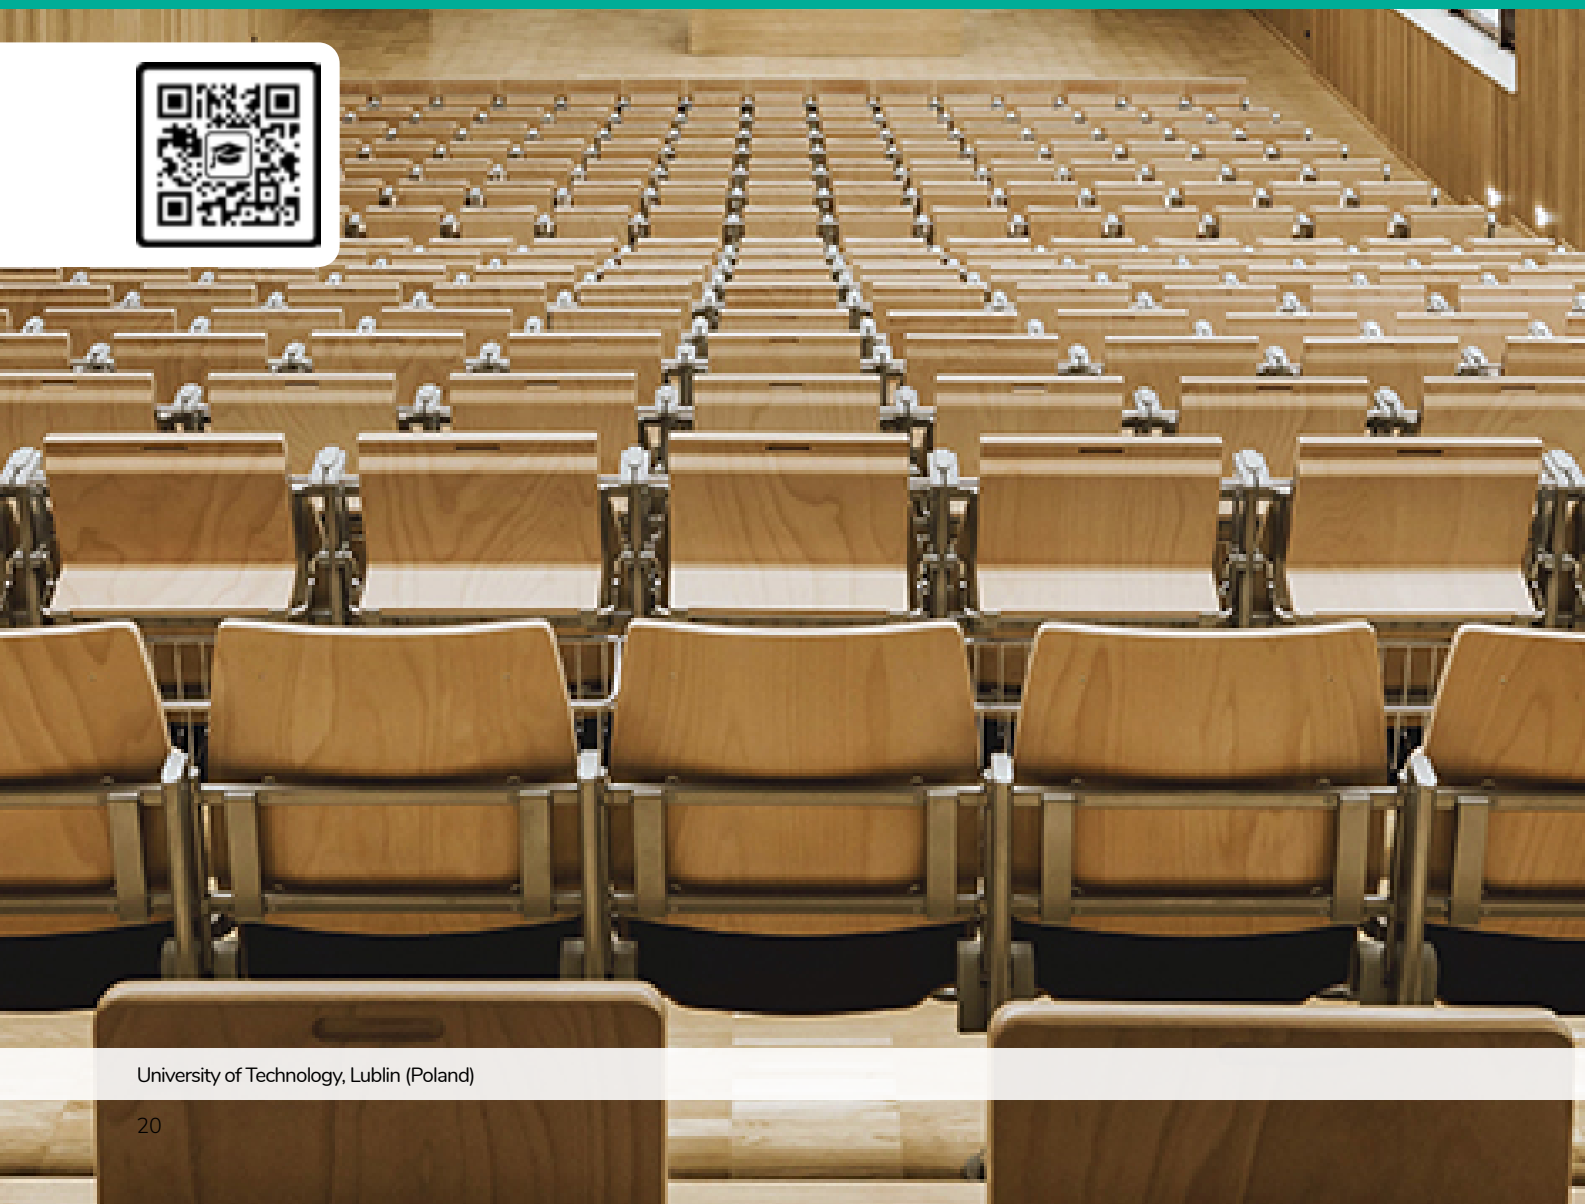

University of Technology, Lublin (Poland)

EDUCATION

EDUCATION CENTER

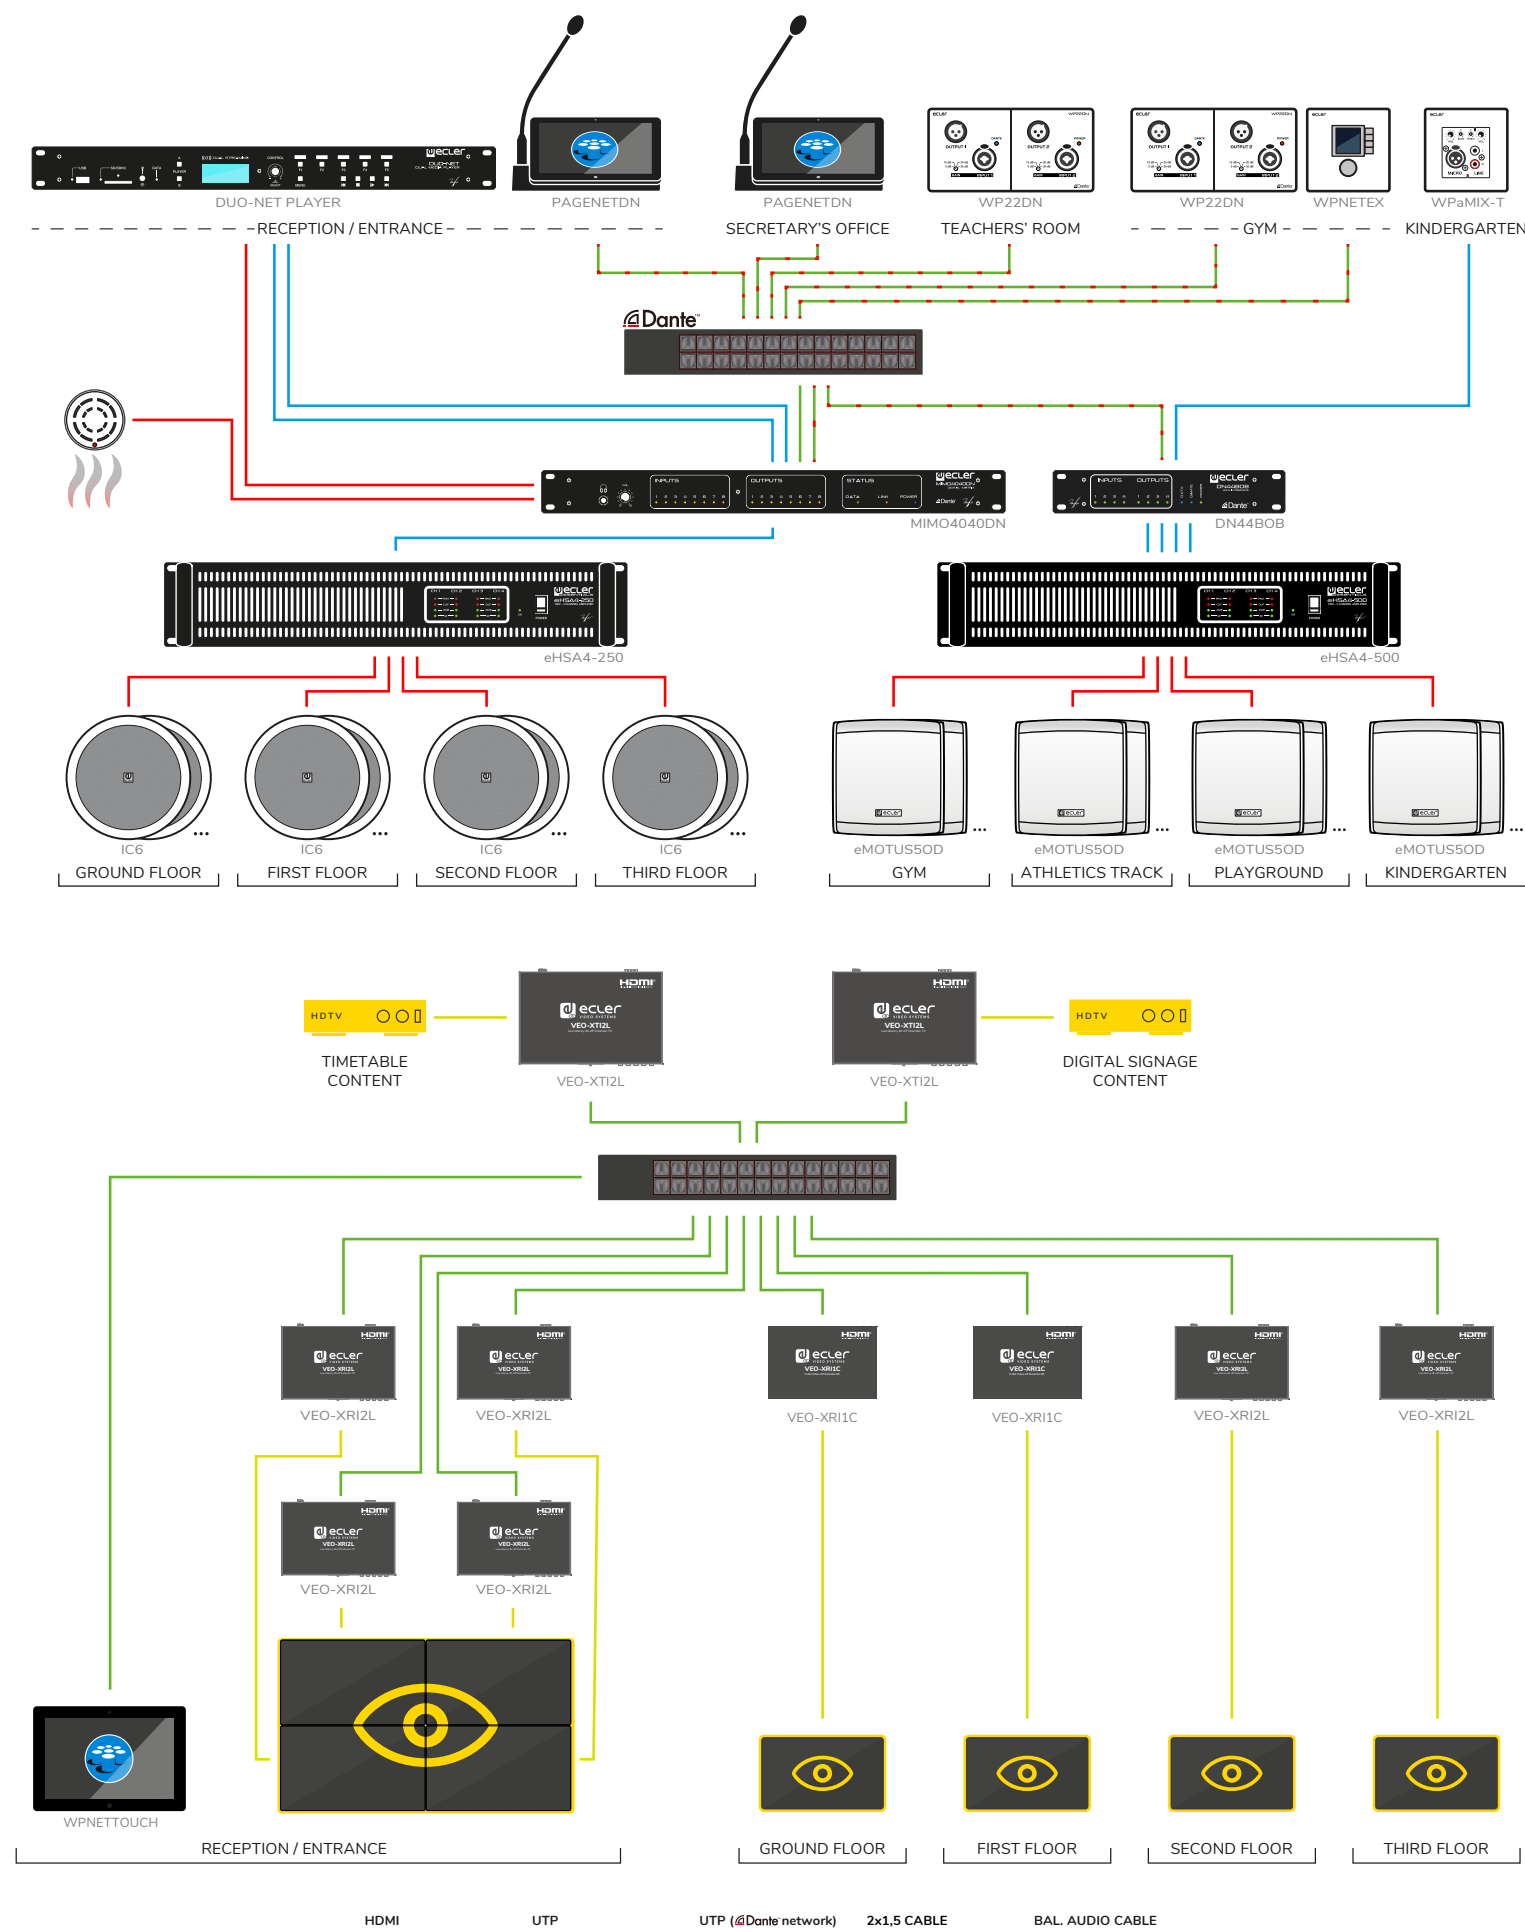



GYM / TRAINING CENTERS / STADIUMS / SPAS / PHYSIOTHERAPY FACILITIES / SPORTS CENTERS



22

MULTIZONE GYM





HOUSE OF WORSHIP

CHURCHES / MOSQUES / SINAGOGUES / HINDU TEMPLES

LEISURE

MUSEUMS / PUBS AND BARS / PARKS / OPEN AREAS



Onze Lieve Vrouwebasiliek, Maastricht (Netherlands)

Teatro Liceu, Barcelona (Spain)



ECLERNET, 10 YEARS OF AV EXPERIENCES

10 YEARS INNOVATING FOR THE BEST PRO A/V SYSTEM BUILDING PLATFORM

EclerNet celebrates 10 years of creating amazing AV experiences around the world. EclerNet ecosystem has been developed thinking on the AV system integrators, installers, and end users.

EclerNet Manager is the software application that lets users build a digital audio system, including hardware devices from Ecler.

Click on the panel image to download the UCP panel templates for your projects. Use the UCP v2 app to control panels from your mobile device via WIFI.

CONTROL YOUR A/V INSTALLATION

Once the project file that stores the audiovisual system configuration is created and saved, the **EclerNet Manager** application also include UCPs (User Control Panels), which are graphical control screens, customised for the needs of each remote user.

The software allows to create custom graphical user interfaces to control and monitor "real world" parameters like volumes, mutes, source selection, GPIs, GPOs.

COMPATIBLE

Identifiable and configurable device in an EclerNet project

INTEGRABLE

Integrable and controllable device in an EclerNet project through IP or RS-232 commands with ETH232AD accessory

BUILDING A DIGITAL AUDIO-VIDEO SYSTEM HAS NEVER BEEN SO EASY!

CUSTOMIZED CONTROL PANELS WITH YOUR IMAGES / LOGOS

SCHEDULE THE FUNCTIONING OF YOUR INSTALLATION THROUGH EVENTS AND PRESETS

REMOTE CONTROL FROM YOUR MOBILE DEVICE

A SOLID AND CONTINUOUSLY IMPROVING PLATFORM

THIRD PARTY CONTROL DRIVERS

SET UP AN AUDIO, VIDEO AND CONTROL SYSTEM



Luis Hinojar (Sales Director):
The software platform EclerNet has been a real driving force towards our expansion into more than 70 countries. It's intuitive and user friendly network design has attracted installers and AV integrators from all over the world.

David Loza (Chief Technical Officer)
With our experience and knowledge of the existing offers to digital ecosystems, we focused on creating our own! Combining a powerful tool with a genuine philosophy and friendly approach to the design, programming and start up of system integrators. All with the end user experience as our goal.



Domingo Melé (Head of R & D)
EclerNet is an AV control platform which has scored highly, far surpassing early expectations. We have successfully produced a piece of software that can be used in numerous types of installations. Despite having been in the market for 10 years, its full potential is yet to be taken advantage of.





WiSPEAK (WIRELESS PRO AUDIO)
Wireless Transmitter
CORE

APPLICATIONS



CORE

WiSpeak
WIRELESS PRO AUDIO



Ecler WiSpeak CORE is the transmitter device that communicates with all the receiver devices to create a WiSpeak wireless network, and takes the role of the Master Unit. Together with TUBE and CUBE, provides a simple and fast wireless installation with up to 500m² coverage.

KEY FEATURES

- 3 audio inputs available:
 - Analogue stereo, unbalanced. 2 x RCA connectors
 - Analogue stereo, balanced. 2 x Euroblock 3p connectors
 - Bluetooth®, class 1 (up to 25 meters range, maximum)
- 1x WiSpeak wireless audio signal transmitted (a mono conversion of the selected input)
- 1x AUX OUT analogue signal available (a copy of the transmitted WiSpeak signal). It can be used for linking the unit to external audio devices, like amplifiers, mixers or subwoofer units
- Maximum number of receivers under control per transmitter device = 24 units. The network can be extended by linking a new transmitter to an existing receiver
- Front panel controls for source (input) selection and general (Master) volume control
- 12 meters maximum range, open space, for the WiSpeak wireless network (from the transmitter to each receiver, star topology)
- Front panel PAIR key: it allows pairing the receivers to the transmitter quickly and easily, for a basic set up of the WiSpeak system.
- External, universal Power Supply (100-240VAC 50-60Hz)
- Compatible with WiSpeak grip app for set up and control functions (available for Android and iOS), using Bluetooth® connection

	CORE
Inputs	IN1: Balanced, Stereo, Euroblock IN2: Unbalanced, Stereo, RCA BT: Bluetooth wireless
Outputs	RF Channels 1 & 2 AUX OUT: Analog, Mono, Balanced, Euroblock
Audio Channels	WiSpeak CH 1&2
Frequency Band	U-NII 5.1 – 5.8GHz (supported worldwide)
Dimensions (WxHxD)	225x120x40mm / 8.9"x4.7"x1.6"
Weight	0.8kg / 1.76 lb

WiSPEAK (WIRELESS PRO AUDIO)
Wireless Receivers
TUBE / CUBE



APPLICATIONS



WiSpeak grip app



CUBE



TUBE

WiSpeak
WIRELESS PRO AUDIO

Ecler WiSpeak TUBE/CUBE is a self-powered 3"/5" loudspeaker with wireless audio reception and control capabilities under the control of the Master unit.

TUBESMA is a surface mount adapter to allow installing a TUBE unit in locations where there is no available lighting rail.

KEY FEATURES

- Lighting rail mount compatible (Compatible light rails: 4 wire 3 circuit track system such as Global Track Pro, Eutrac or compatibles)
- Universal, internal power supply, taking mains AC from the lighting rail bracket (100-240VAC 50-60Hz)
- External AC wire included (CUBE)
- 1x WiSpeak wireless audio signal received, from the transmitter it is paired to
- 1x AUX OUT analogue signal available (a copy of the received WiSpeak signal). It can be used for linking the unit to external audio devices, like amplifiers, mixers or subwoofer units
- Back panel UNPAIR control and LED indicators
- 12 meters maximum range, open space, for the WiSpeak wireless network (from the transmitter to each receiver)
- Available in white (RAL 9003) and black colour (RAL 9005)

	TUBE	CUBE
Inputs	RF Wireless Audio	RF Wireless Audio
Outputs	Internal Loudspeaker: Analog, Mono, Self powered AUX OUT: Analog, Mono, Balanced, Euroblock	Internal Loudspeaker: Analog, Mono, Self powered AUX OUT: Analog, Mono, Balanced, Euroblock
Audio Channels	WiSpeak CH 1&2	WiSpeak CH 1&2
Frequency Band	U-NII 5.1 – 5.8GHz (supported worldwide)	U-NII 5.1 – 5.8GHz (supported worldwide)
Dimensions (WxHxD)	96mmx110mm / ø3.8"x4.3" (without arm)	173x180x185mm / 6.81"x 7.08"x7.28"
Weight	0.8kg / 1.76 lb	2,4 kg / 5.29 lb

ACCESSORIES



TUBESMA



SOUND SOURCES
Handheld & Desktop Microphones

eMHH1 / eMCN1 / eMCN2 / eMBASE

APPLICATIONS



ACCESSORIES

eMHH1:



MBSTAND



MDSTAND

eMHH1 is an affordable handheld dynamic microphone, with a robust design that makes it ideal for voice applications. It comes with a microphone stand adapter and 6 metres XLR-Jack cable.

eMCN1 is a condenser gooseneck microphone, with a perfect profile for message, speech and conferencing applications. Total length = 35 cm. It includes anti-pop wind-screen cover.

eMCN2 is a condenser gooseneck microphone, with a perfect profile for message, speech and conferencing applications. Total length = 55 cm. It includes anti-pop wind-screen cover.

eMBASE is a desktop connection base for the eMCN1 and eMCN2 microphones, as well as for other microphones with standard XLR connector. It includes ON / OFF switch that enables / disables the microphone signal.

eMHS1BG / eMICFIT2 / eMWR / eMWH / eMWE

SOUND SOURCES
Headset Microphones & Wireless Systems



APPLICATIONS



eMHS1BG is a headset condenser mini-microphone in beige colour and with a very light and comfortable format for the user. It includes 3 different connectors: mini-XLR 4-pin, mini-XLR 3pin and mini-jack, compatible with the eMWE UHF wireless belt-pack unit. It includes anti-pop wind-screen cover and transport case.

eMICFIT2 is a robust headset condenser microphone, including a water and sweat resistant treatment, ideal for sport and fitness applications. It performs an easy adjustment of the gooseneck and a discrete, light and comfortable design in combination with a robust and solid body. It features a mini-XLR 4-pin connector, compatible with the eMWE UHF wireless belt-pack unit. It includes anti-pop wind-screen cover and rigid case.

eMWR is a wireless UHF 823-832MHz microphone receiver, compatible with the eMWE (belt-pack) and eMWH (handheld) microphone transmitters. It includes power supply, rack-mount kit, antennas and unbalanced jack-jack cable.

eMWH is a wireless UHF 823-832MHz handheld microphone transmitter, compatible with the eMWR receiver. It includes a transport bag.

eMWE is a wireless UHF 823-832MHz belt-pack transmitter compatible with the mini-XLR microphones, like the eMHS1BG, eMICFIT2, and the eMWR receiver. It includes a transport case.



SOUND SOURCES
Streaming and Local Media Audio Player
ePLAYER1



APPLICATIONS



ePLAYER1 is a compact audio player with a stereo output that can play music contents from local storage media (USB/SD card), Internet streams or digital sharing streams (DLNA and Airplay compatible).

KEY FEATURES

- Single-deck audio player
- Stereo output, RCA connectors and mini-jack
- Internet streaming receiver
- Digital sharing streams receiver (DLNA and Airplay)
- Local media player (from USB and SD card slots)
- Front panel LCD display and local controls
- Programmable and controllable via front panel, embedded web app and Ecler Gallery
- Calendar events trigger, synchronization of contents hosted in the cloud (Cloud Disk Sync) and execution of “scripts” (files of instructions written by the user, Lua language – www.lua.org).
- Compatible with the JSON protocol

ACCESSORIES
1UHRMKIT:



	ePLAYER1
Audio outputs	1 x stereo unbalanced, LINE level, RCA type + minijack
Communication Interfaces	1 x Ethernet (RJ45), 1 x WiFi, 2 x GPI (0-10 VDC)
Local media	USB, SD/SDHC
Others	RTC included, 120 hours aprox.
Dimensions (WxHxD)	200x44(1 RU)x120mm / 7.87"x1.73"x4.72"
Weight	800 g / 1.76 lb

SOUND SOURCES
Remote Management Platform for Ecler Players /Remote Control Application
Ecler GALLERY / RePLAYER




APPLICATIONS



Ecler GALLERY

Ecler GALLERY features an online platform for Ecler audio player management. Supervise your player’s connectivity status, make changes in the reproduction lists and calendars, set up basic or advance configurations, group your devices and much more. Everything could be done remotely. Sign up for Ecler Gallery account at www.eclergallery.com and discover all its possibilities. Compatible with ePLAYER1.

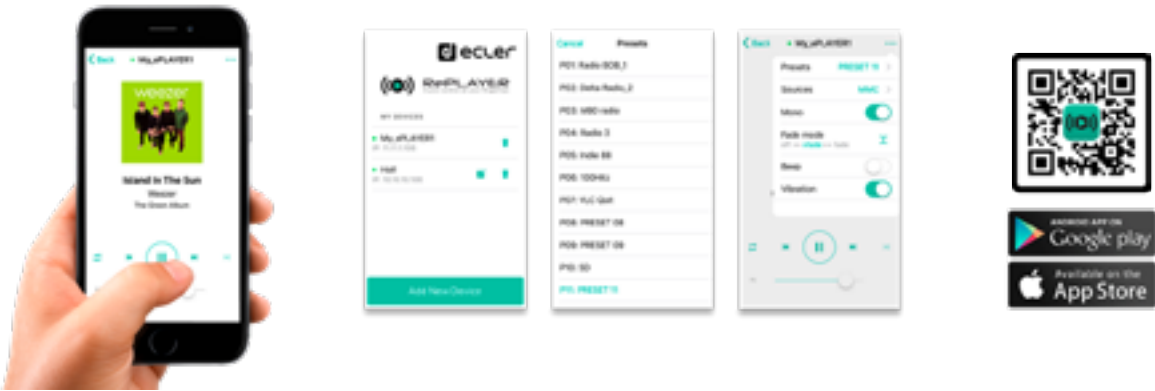

RePLAYER is an Android/iOS application for remote controlling basic user functions of Ecler Essentials ePLAYER1 streaming media players. These basic functions include preset and audio source selection, volume control, playback control (PLAY/PAUSE, NEXT, PREV) and other settings such as repeat mode, mono/stereo or fade mode. All this in a simple to use application, with an intuitive design. Music control at your fingertips.



SOUND SOURCES
Audio Player BT
eSAS-BT

APPLICATIONS



eSAS-BT



eSAS-BT Controller

eSAS-BT is a stereo audio source including FM tuner, USB slot, SD slot and BT connection.

KEY FEATURES

eSAS-BT:

- Audio player with BT
- USB, SD, FM tuner and BT connection
- 2xRCA unbalanced output (stereo)
- 2xXLR balanced output (stereo)
- Accessories included

	eSAS-BT
Audio outputs	1 x stereo unbal. + 1 x stereo bal.
Audio inputs	-
Local media	USB, SD, FM tuner, BT conection
Accessories included	IR remote control + FM antenna + 2x RCA cables + rack-mount bracket
Dimensions (WxHxD)	435x44(1RU)x132mm / 17.13"x1.73"x5.20"
Weight	1,4 kg / 3.09 lb



Compatible

SOUND SOURCES
Dual Audio Player
DUO-NET PLAYER



APPLICATIONS



DUO-NET PLAYER Controller



DUO-NET PLAYER



DUO-NET PLAYER is a double audio sound source that features full EclerNet compatibility.

KEY FEATURES


- 2 independent media players, each one linked to a dedicated stereo output
- Compatible with mp3, ogg, AAC, WAV and FLAC audio formats
- SD and USB slots for local storage media contents
- Ethernet interface (RJ45 connector) for EclerNet and TP-NET control, Internet streaming reception and networked media playback
- Fully programmable and controllable via EclerNet software
- UCP (User Control Panels) remote control system, compatible with WPNETTOUCH and third-party client devices (iOS®, Windows® and Android®)
- 4 GPI ports (General Purpose Inputs) to trigger events
- Integrated RTC (Real-Time Clock) and NTP (Network Time Protocol) synchronization, for scheduled events triggering
- IR remote control for basic end-user control
- Priority media (emergency, advertising, etc.) over program audio

	DUO-NET PLAYER
Audio outputs	2 x stereo balanced, LINE level, Euroblock type
Communication Interfaces	1 x Ethernet (RJ45), 1 x RS-232 (DB9), 4 x GPI (Euroblock)
Local media	USB, SD/SDHC
Remote control	Included IR remote control
Dimensions (WxHxD)	482,6x44(1 RU)x120mm / 19"x1.73"x4.72"
Weight	1,8 kg / 3.97 lb

ACCESSORIES




WPNETTOUCH



ANALOGUE PREAMPLIFIERS & MIXERS
Installation Analogue Mixers
eSAM Series

APPLICATIONS



KEY FEATURES

- eSAM Series:**
- 19" installation mixer
 - MIC/LINE ST inputs & LINE ST inputs (eSAM603: additional MIC input)
 - eSAM402 & eSAM702: 1 main mix output and one AUX/REC additional output.
 - eSAM603: 1 ST/2 MONO main mix output and one MONO output. One AUX/REC additional output
 - eSAM402 & eSAM702: 3 band tone control section
 - eSAM603: 2 x 3-band tone control section (A/B and C)
 - Talkover (priority) function assignable from each MIC/LINE input over the mix
 - Micro sensitivity level can be adjusted on the back panel
 - +18V Phantom Power available for all MIC inputs
 - MUTE port for external dry contact triggering

ACCESSORIES




MPAGE1r



WPaMIX-T

ANALOGUE PREAMPLIFIERS & MIXERS
Installation Analogue Mixers
SAM Series



APPLICATIONS



KEY FEATURES

- SAM Series:**
- 4 (SAM412T) / 6 (SAM612T) input channels, 2 main outputs 19" installation mixers
 - Micro sensitivity level can be adjusted on the back panel
 - +18V Phantom Power available in all "MIC" inputs
 - Direct micro input on front panel, channel 1
 - Includes a talkover assigned to MIC/LINE 1
 - Three-band tone controls for each channel, accessible with a screwdriver
 - Vu-meter for the mix signal (SAM412T)
 - 1 ST main output
 - AUX/REC output
 - Direct access to the mixing bus
 - Remote MUTE control
 - Mono/stereo switch

	SAM412T	SAM612T
Inputs	4 MIC/ST LINE + 1 ST MIX	6 MIC/ST LINE + 1 ST MIX
Outputs	2 MAIN ST + 1 REC	1 MAIN ST + 1 AUX/REC
Tone control	Bass, mid & treble (per input)	Bass, mid & treble (per input)
Remote control	MUTE contact	MUTE contact
Dimensions (WxHxD)	482,6x44(1RU)x195mm / 19"x1.73"x 7.67"	482,6x44(1RU)x195mm / 19"x1.73"x 7.67"
Weight	2,4 kg / 5.29 lb	2,0 kg / 4.41 lb


ACCESSORIES



MPAGE1r




WPaMIX-T



eCOMPACT4BT/COMPACT8

APPLICATIONS



eCOMPACT4BT
Bluetooth®



COMPACT8

KEY FEATURES

eCOMPACT4BT:

- Analogue mixer with 4 channels, 19" rack installation or desktop
- 4 mic inputs, one of them with Talkover function. 48V Phantom power
- Bluetooth® Class 1 wireless connection (up to 25m range in ideal conditions)
- Selectable high-pass filter ($f_c = 100\text{Hz}$)
- 3-band tone control (treble, mid and bass)
- Send to alternative output (ALT OUT) per channel.
- USB port for charging mobile devices
- Rack mount accessory included

COMPACT8:

- Universal 8 channel laptop and 19" installation rack mixer
- 3 PHONO/LINE inputs
- 11 Stereo Line RCA inputs plus AUX (RCA) inputs in front panel
- 8 MIC (COMBO connector) inputs. Phantom power
- 2 independent outputs (XLR3 and RCA)
- Additional REC output
- 3 band tone control featuring Mids 300Hz-6,5kHz semi-parametric equalization


	eCOMPACT4BT	COMPACT8
Channels	4 with independent gain & 45mm fader	8 with independent gain & 60mm fader
Inputs	6 ST LINE + 1 ST mini-Jack + 4 MIC + Bluetooth® connection	12 ST LINE + 8 MIC + 3 PHONO/LINE
Outputs	2 MAIN ST + 2 ALT ST + 1 SUB + 1 PHONES	2 MAIN ST + 1 REC + 1 Headphones
Tone control	Bass, mid & treble (per channel)	Bass, mid & treble (per channel)
Dimensions (WxHxD)	440x132(3RU)x125mm / 17.32"x5.19"x4.92"	482,6x177 (4RU)x221,6mm / 19"x6.97"x8.72"
Weight	3,0 kg / 6.61 lb	5,2 kg / 11.46 lb

ACCESSORIES



WPaMIX-T


GENIO



APPLICATIONS



GENIO

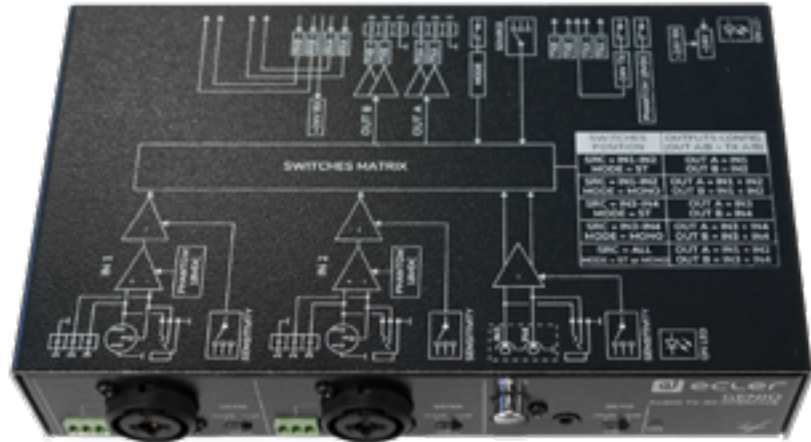


GENIO is an analogue audio balancer, receptor and emitter device (2 channel for sending + 2 channels for receiving). Each GENIO unit can perform simultaneously as emitter and receptor which means 2 signals could be sent and received at the same time in each unit.

KEY FEATURES

- Analog audio balancer-transmitter-receiver equipment (2 send channels + 2 receiver channels)
- 1/2 RU format
- Universal external PSU, multi-plug
- 1 duplicate format ST input: mini-jack and double RCA
- 2 balanced mono inputs, combo format
- 1 balanced ST output with local connectors, being able to select different combinations of inputs for this output
- The same balanced output, 2 channels, is available in RJ45 connector for delivery via a CAT5 over long distances, received in a remote unit
- The same unit has another RJ45 port for 2-channel reception coming from the remote unit
- One of the 2 units can send remote power to your linked unit, by the transmission cable (TX port)

	GENIO
Inputs	4 (2 mono balanced, 1 ST unbalanced)
Outputs	2 (balanced)
Phantom Power	+18VDC
Communication Interfaces	TX Port (RJ-45) RX Port (RJ-45/Euroblock), analog audio + remote power
Dimensions (WxHxD)	200x44(1RU)x130mm / 7.87"x1.73"x5.12"
Weight	750 gr / 1.65 lb




DIGITAL MATRIXES AND PROCESSORS
Dante™ Digital Matrix
MIMO7272DN



Compatible

APPLICATIONS



MIMO7272DN



ACCESSORIES



WPNETTOUCH



PAGNETDN



WP22DN



WPNET4KV/8K/EX



WPaMIX-T



WPa Series

MIMO7272DN is a digital matrix including a native (full DSP) matrix of 64x64 input and output audio channels total size. Incorporating audio over IP technology, MIMO7272DN allows digital audio transmission using a Local Ethernet network, suppressing cabling distance limitations. MIMO7272N is also capable of executing EclerNet projects embedded into its processor and electronics engine, acting as a UCP (User Control Panels) server within an EclerNet devices network.


KEY FEATURES

- 64 x 64 digital audio channels native matrix, with a total of 72x72 audio inputs / outputs support:
 - 8 MIC / LINE analog audio inputs
 - 8 LINE analog audio outputs
 - 64 Dante™/ AES67 input channels
 - 64 Dante™/ AES67 output channels
- 8 GPI ports
- 8 GPO ports
- 2 Dante™ interfaces (primary and secondary), available for configuration of redundant Dante™ networks
- 1 Ethernet programming and control interface (EclerNet, UCP, TP-NET and WPNET series control panels)
- 1 serial control port, RS-232 (TP-NET)
- Embedded project manager and server of the project's integrated UCP panels
- Connection of all peripherals directly via EtherNet network, and without local wiring (remote controls WPNET series, PAGNETDN paging station, WP22DN wall panel Dante™/ AES67 interface, etc.)
- Available only with Standard firmware version (no Conference version available)

	MIMO7272DN
Inputs	8 analog + 64 Dante (64 inputs native matrix)
Outputs	8 analog + 64 Dante (64 outputs native matrix)
Communication Interfaces	1 Ethernet + 1 RS232
Remote control	8 GPI + 8 GPO ports
Dimensions (WxHxD)	482,6x44(1RU)x266,5mm / 19"x1.73"x10.49"
Weight	3,25 kg / 7.16 lb

DIGITAL MATRIXES AND PROCESSORS

MIMO7272DN




APPLICATIONS




MIMO7272DN



EclerNet Manager

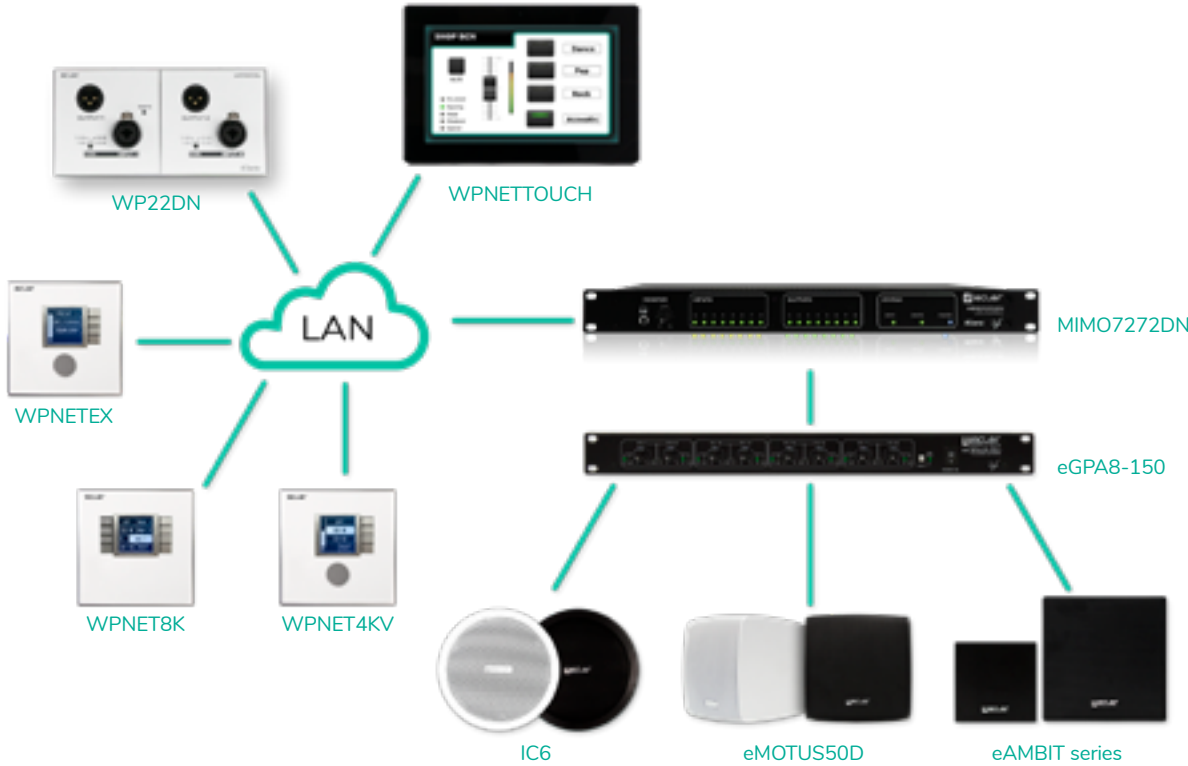




DIGITAL MATRIXES AND PROCESSORS
Dante™ Digital Matrix
MIMO4040CDN



Compatible

APPLICATIONS



MIMO4040CDN



ACCESSORIES



WPNETTOUCH



WP22DN



WPNET4KV/8K/EX



WPaMIX-T



WPa Series

MIMO4040CDN is a digital audio matrix including a native (full DSP) matrix of 40x40 input and output audio channels total size, specially designed for conference rooms. It includes functions such as AUTOMIXER or FEEDBACK KILLER by default, as well as up to 8 microphone channels with AEC (Acoustic Echo Canceling) processing activated by software licenses.


KEY FEATURES

- 40 x 40 digital audio channels native matrix, with a total of 40x40 audio inputs / outputs support:
 - 8 MIC / LINE analog audio inputs
 - 8 LINE analog audio outputs
 - 32 Dante™/ AES67 input channels
 - 32 Dante™/ AES67 output channels
- 8 GPI ports
- 8 GPO ports
- 2 Dante™ interfaces (primary and secondary), available for configuration of redundant Dante™ networks
- 1 Ethernet programming and control interface (EclerNet, UCP, TP-NET and WPNET series control panels)
- 1 serial control port, RS-232 (TP-NET)
- Embedded project manager and server of the project's integrated UCP panels
- Connection of all peripherals directly via EtherNet network, and without local wiring (remote controls WPNET series, PAGENETDN paging station, WP22DN wall panel Dante™/ AES67 interface, etc.)


	MIMO4040DN
Inputs	8 analog + 32 Dante
Outputs	8 analog + 32 Dante
Communication Interfaces	1 Ethernet + 1 RS232
Remote control	8 GPI + 8 GPO ports
Dimensions (WxHxD)	482,6x44(1RU)x266,5mm / 19"x1.73"x10.49"
Weight	3,25 kg / 7.16 lb

DIGITAL MATRIXES AND PROCESSORS



MIMO4040CDN




APPLICATIONS

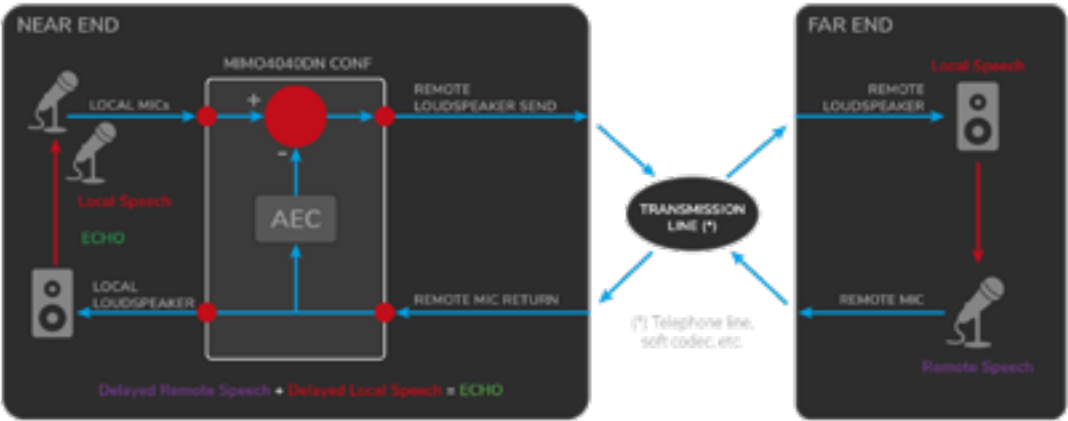

AEC conceptual scheme

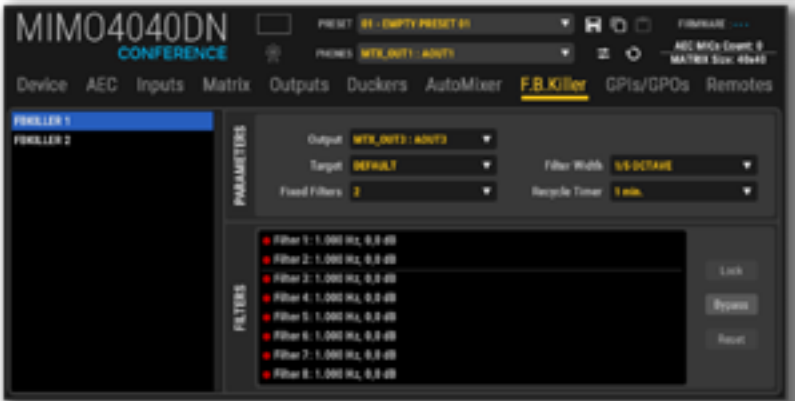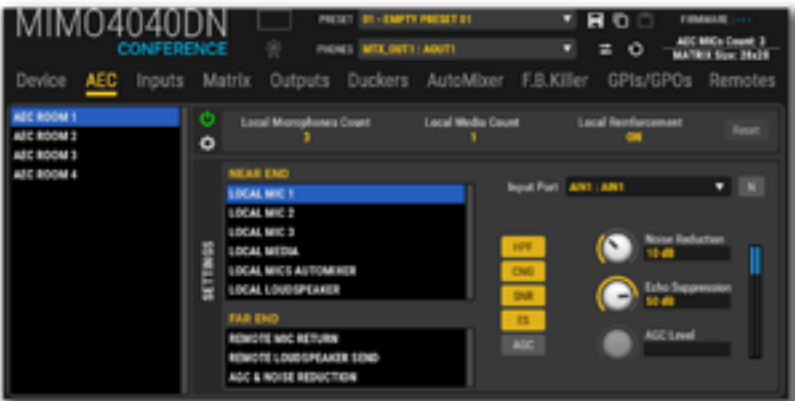

EclerNet Manager MIMO4040CDN Features



APPLICATIONS



MIMO88



MIMO88SG



MIMO1212SG

ACCESSORIES



WPNETTOUCH



eMPAGE



PAGENETDN



WPNET4KV/8K



WPaMIX-T




WPa Series

KEY FEATURES

- Fully programmable and controllable via EclerNet software
- Linkable to a second unit to become a 16x16 matrix (MIMO88)
- MIMO88SG: 8x8 digital matrix (not expandable)
- MIMO1212SG: 12x12 digital matrix (not expandable)
- UCP (User Control Panels) remote control system, compatible with WPNETTOUCH and third-party devices, such as computers, tablets, smartphones, etc.
- TP-NET protocol compatible, for third-party control systems integration
- DSP processing: signal generator, delays, full parametric EQ filters at inputs and outputs, inputs noise gate, level, mute, phase, vu-meters, outputs compressor / limiter, ducking (priority & overriding), virtual and physical paging stations management, automatic mixer function, presets save & recovery, scheduled events triggering, etc.
- FREQUENCY SHIFTER function to avoid acoustic feedback (Larsen Effect), available for each INPUT channel

	MIMO88	MIMO88SG	MIMO1212SG
Inputs	8 MIC/LINE Bal. (Euroblock)	8 MIC/LINE Bal. (Euroblock)	12 MIC/LINE Bal. (Euroblock)
Outputs	8 Bal. (Euroblock) + 2 Monitor (Euroblock)	8 Bal. (Euroblock)	12 Bal. (Euroblock)
Communication Interfaces	1 Ethernet + 1 RS232	1 Ethernet + 1 RS232	1 Ethernet + 1 RS232
Remote control	8 GPI + 8 GPO + 2 Digital control bus	8 GPI + 1 Digital control bus	12 GPI + 1 Digital control bus
Dimensions (WxHxD)	482,6x44(1RU)x266,5mm / 19"x1.73"x10.5"	482,6x44(1RU)x266,5mm / 19"x1.73"x10.5"	482,6x44(1RU)x266,5mm / 19"x1.73"x10.5"
Weight	3,5 kg / 7.72 lb	3,5 kg / 7.72 lb	3,5 kg / 7.72 lb



APPLICATIONS




MIMO CONFERENCE

MIMO CONFERENCE has been especially designed for those applications that involve conferencing, microphone automatic mix processing and feedback loops (Larsen effect) cancellation. MIMO Conference shares the same hardware of the standard MIMO version, including a specific firmware upgrade with tailored DSP resources for automix and conference purposes. Included in EclerNet Manager pack. Compatible with MIMO88, MIMO88SG and MIMO1212SG.

KEY FEATURES

MIMO CONFERENCE:

- AUTOMIXER processing module:
- 2 microphone managing modes:
 - NOMA ("Number of Open Microphones Attenuated")
 - EXCLUSIVE
- Full set of working parameters: MAX. NOMA, LAST ON, PRIORITY, THRESHOLD DEPTH, etc.
- FEEDBACK KILLER (2 modules)
 - 2 automatic notch filter banks
 - 8 notch filters included in each bank
 - Fixed / dynamic filters free configuration
 - Filter WIDTH, RECYCLE TIMER, LOCK, RESET and BYPASS parameters
- 4 working mode presets



DIGITAL MATRIXES AND PROCESSORS
Digital Zoner
HUB1408/HUB1616



APPLICATIONS



HUB1408



HUB1616



HUB1408/ HUB1616 is a digital audio zoner programmable through integrated web server (HANGAR), with multiple control functions. Intuitive and easy to configure thanks to its Predefined Setups.

KEY FEATURES

- Programming and control by integrated web server HANGAR and standard web browser (no additional software required).
- Control from the front panel and user remote control by:
 - eMCONTROL1 wall panels (up to 8)
 - eMPAGE paging consoles (up to 2)
 - Ecler pilot application, compatible with Android and iOS: control graphic panels set to user requirements
 - TP-NET protocol for control and integrating with third party systems

- Control available, by zone (output): selection of audio source (input), volume adjustment and MUTE, and 3 band tone adjustment.
- Audio over audio priority function with two levels: inputs MIC/LINE attenuate or completely mute the sound content present (programme audio) in specific target zones: emergency messages, warnings, etc., in Talkover mode or Pager
- MUTE port can be activated by closing the external dry contact, affecting programmed outputs to this effect
- Available DSP: frequency shifter, link stereo, delay, crossover filters, graphic EQ, compressor/limiter and much more

	HUB1408	HUB1616
Inputs	4 MIC/LINE + 2 ST LINE + 8 Remote Mono LINE	4 MIC/LINE + 4 ST LINE + 8 Remote Mono LINE
Outputs	8 Bal. (Euroblock)	16 Bal. (Euroblock)
Communication Interfaces	1 Ethernet + 1 RS232	1 Ethernet + 1 RS232
Remote control	8 ports (RJ45)	8 ports (RJ45)
Dimensions (WxHxD)	482,6x88(2RU)x200mm / 19"x3.46"x7.87"	482,6x88(2RU)x200mm / 19"x3.46"x7.87"
Weight	3,7 kg / 8.16 lb	3,7 kg / 8.16 lb

ACCESSORIES



eMPAGE




WPaMIX-T




eMCONTROL1

DIGITAL MATRIXES AND PROCESSORS
Android/iOS Application
Ecler pilot




Scalable & editable panels (compatible with smartphones, tablets & desktop devices)

Ecler pilot
Multi user control system

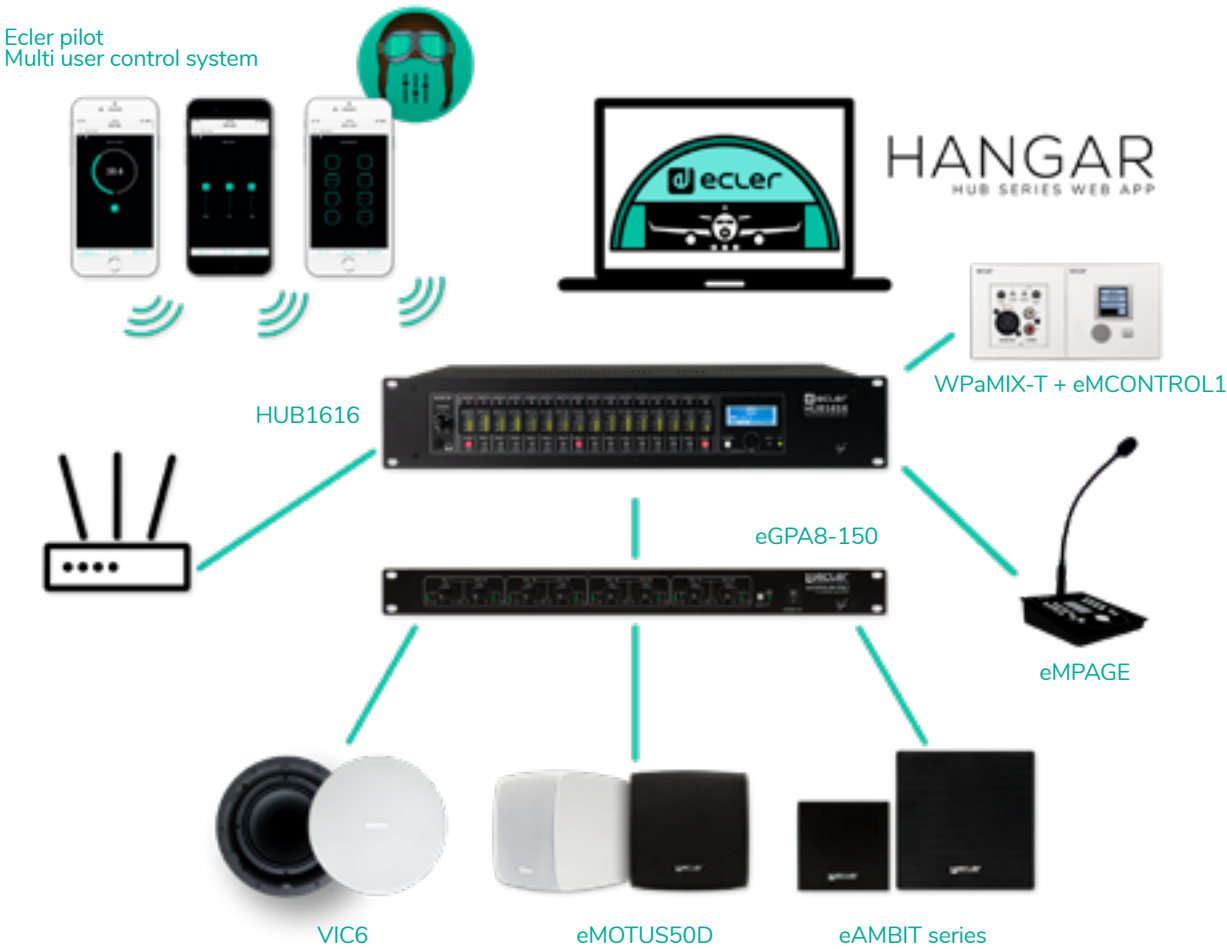

Ecler pilot is an end-user remote control application to manage one or several installation zones. Each end-user grants a customised access via his/her credentials, getting access to a closed list of control panels which have been previously decided by the HUB Administrator. Each control panel can include volume & mute controls and/or audio sources selection keys and/or 3-band tone controls.



DIGITAL MATRIXES AND PROCESSORS
Dante™ Digital Interface
DN44BOB




Compatible



Integrable

DIGITAL MATRIXES AND PROCESSORS
Digital Mixer
DAM614



APPLICATIONS



APPLICATIONS



DN44BOB



DN44BOB is a 4 inputs and 4 outputs DANTE (Audio Over IP) Break Out Box. It allows to convert 4 analogue audio signals into 4 DANTE channels and send them into an Ethernet LAN, as well as to take 4 DANTE channels from the Ethernet network and convert them to analogue audio signals.

KEY FEATURES

- Ethernet, interface, DANTE audio and EclerNet compatible
- 4 MIC/LINE balanced inputs, with Phantom Power and 3 sensitivity levels, Euroblock connector
- 4 balanced LINE Outputs, Euroblock connector
- 4 GPI ports (0-10VDC)
- 4 GPO ports, NO / NC
- Rack-mount kit included: 1UHRMKIT + PUM3

	DN44BOB
Inputs	4 MIC/LINE Bal. (Euroblock)
Outputs	4 Bal. (Euroblock)
Communication Interfaces	1 Ethernet (Dante audio & EclerNet)
Remote control	4 GPI + 4 GPO
Dimensions (WxHxD)	241x44(1RU)x152mm / 9.48"x1.73"x5.98"
Weight	1,1 kg / 2.42 lb



DAM614

DAM614 is a fully programmable audio digital mixer. It includes 6 audio inputs and 4 audio outputs, front panel inputs and outputs level controls. Its 4 outputs can be used as mono independent zones or coupled as stereo zones. Regarding inputs, the first 2 are stereo LINE inputs, and the 3rd, 4th, 5th and 6th ones are MIC/LINE ready, being possible to use them independently (mono) or as stereo-coupled inputs.

KEY FEATURES

- DSP @ 24 bits / 48kHz
- Front panel LCD display
- 6 front panel input control digital knobs (one per input)
- 4 front panel output control digital knobs (one per output)
- 4 front panel keys, for parameters adjustment and menus navigation
- Processing:
 - Independent level control for each input and output
 - Independent mixer for each output zone
 - Crossover filters available for each output
 - Independent 10 band graphic EQ for each output
 - Independent and adjustable High-pass filter available for MIC/LINE inputs
 - 2 level priority PAGER / DUCKER function, triggered by MIC/LINE inputs
 - Independent Noise Gate function for MIC/LINE inputs
 - Independent Feedback Suppressor Function for MIC/LINE inputs
 - Adjustable delay time for 2 outputs

	DAM614
Inputs	2 ST LINE + 4 MIC/LINE
Outputs	4 Bal. (Euroblock)
Communication Interfaces	1 RS232 (EclerCOMM & CA-NET)
Remote control	4 RJ45 ports (0-10VDC) + 1 MUTE
Dimensions (WxHxD)	482,6x44(1RU)x120mm / 19"x1.73"x4.72"v
Weight	2,0 kg / 4.41 lb

ACCESSORIES



MPAGE1r



WPaMIX-T

ACCESSORIES



MPAGE4




ETH232AD



WPa Series




WPaMIX-T



NXA Series



NXA Series



APPLICATIONS



NXA4-400



NXA6-200



NXA is a series of a powered digital audio managers that stays halfway between a digital matrix and a multichannel amplifier. An "all-in-one" digital audio device that becomes a complete audio solution.

KEY FEATURES

- NXA4-80 / NXA4-200 / NXA4-400 models: 4 analogue audio inputs x 4 powered audio outputs (80/200/400 W per channel, respectively). 4 GPI ports
- NXA6-80 / NXA6-200 models: 6 analogue audio inputs x 6 powered audio outputs (80/200 W per channel, respectively). 6 GPI ports
- Class D amplifiers (eco friendly)
- Auto stand-by function (eco friendly)
- 100% silent (fanless convection cooling system)
- Health self-test mode function, with FAULT RELAY (for an external redundancy system)
- Integrated anti-clip system
- Integrated DSP processor. Main features:
 - Inputs mixer independent per channel (all inputs available)
 - VOLUME, MUTE, SOLO, PHASE INVERSION, MAX. VOL limit and MIN.VOL limit, LP and HP Crossover filters, parametric EQ filters bank, Ducker, Delay, Compressor and more settings configurable per channel.
 - Ethernet interface, compatible with EclerNet Manager platform and UCP remote control system
 - RS232 Interface
 - TP-NET third-party remote control (compatible with CRESTRON®, AMX®, RTI®, VITY®, etc.)

ACCESSORIES



WPNETTOUCH



WPNET4KV/8K



WPa Series

	NXA4-80	NXA4-200
1 channel @ 4Ω (RMS)	85W	202W
1 channel @ 8Ω (RMS)	51W	121W
All channels @ 4Ω (RMS)	66W	168W
2 bridged channels @ 8Ω (RMS)	160W	383W
Dimensions (WxHxD)	482,6x88(2RU)x373mm / 19"x3.46"x14.68"	482,6x88(2RU)x373mm / 19"x3.46"x14.68"
Weight	8,6 kg / 18.96 lb	11,1 kg / 24.47 lb



NXA4-80



NXA4-200



NXA4-400




NXA6-80



NXA6-200



	NXA4-400	NXA6-200
1 channel @ 4Ω (RMS)	416W	218W
1 channel @ 8Ω (RMS)	230W	126W
All channels @ 4Ω (RMS)	330W	163W
2 bridged channels @ 8Ω (RMS)	760W	399W
Dimensions (WxHxD)	482,6x88(2RU)x373mm / 19"x3.46"x14.68"	482,6x88(2RU)x373mm / 19"x3.46"x14.68"
Weight	15,6 kg / 34.39 lb	12,9 kg / 28.43 lb



DIGITAL MATRIXES AND PROCESSORS
Digital Loudspeaker Managers
ALMA24 / ALMA26

APPLICATIONS



ALMA24



ALMA26



ALMA24/ALMA26 is a digital loudspeaker manager in a 1RU stand-alone processor.

KEY FEATURES

ALMA24:

- 24 bits / 48 kHz DSP processing
- USB interface and EclerCOMM Manager compatibility
- DSP processing:
 - GAIN, MUTE, POLARITY, etc., per input or output
 - 8 parametric EQ filters per input / 8 parametric EQ filters per output
 - Butterworth, Linkwitz-Riley or Bessel Crossover filters at inputs and outputs (up to 48 dB / oct)
 - Inputs and outputs delay
 - Peak & RMS compressor / limiter at inputs & outputs, including make-up gain
 - 2 LINK groups (output channels link)

ALMA26:

- 24 bits / 48 kHz DSP processing
- 2x20 characters front panel LCD display
- 4 front panel configuration keys + digital encoder
- USB interface and EclerCOMM Manager compatibility
- DSP processing:
 - GAIN, MUTE, POLARITY, etc., per input or output
 - 4 parametric EQ filters per input / 8 parametric EQ filters per output
 - Butterworth, Linkwitz-Riley or Bessel Crossover filters at outputs (up to 48 dB / oct)
 - Inputs and outputs delay
 - Compressor / limiter at outputs, including make-up gain
 - 3 LINK groups (output channels link)

ACCESSORIES



WPaVOL

	ALMA24	ALMA26
Inputs	2 XLR	2 XLR
Outputs	4 XLR	6 XLR
Communication Interfaces	2 GPI	2 GPI
Remote control	No	Yes
Dimensions (WxHxD)	482,6x44(1RU)x120mm / 19"x1.73"x4.72"	482,6x44(1RU)x120mm / 19"x1.73"x4.72"
Weight	1,8 kg / 3.97 lb	1,8 kg / 3.97 lb

3rd PARTY
**CONTROL
DRIVERS**
AVAILABLE



WE INCREASE COMPATIBILITY
WITH OTHER BRANDS

Programming control system will no longer be a headache. Even if you don't know the TP-NET / CA-NET protocols, you can now easily install any control system in your project.

Multiply integration options and user friendly configurations.

ecler.com



APPLICATIONS



eLPA2-350



eLPA is a stereo amplifier series delivering 350/650/950/1400 W. eLPA series brings all the classic, well-known reliability and amplification quality of ECLER to a new light-weight format that is versatile and affordable.

KEY FEATURES

- 2 analogue audio inputs x 2 powered audio outputs
- Ultra light technology
- Built-in crossover filter (eLPA2-350)
- Efficient progressive ventilation system
- Rotary input attenuation controls that are easily accessible on the front panel
- POWER ON, SIGNAL, CLIP y PROTECT LED indicators
- Efficient short-circuit, overheat and DC signal protection system
- Permanently activated built-in anti-clip circuit
- Balanced inputs via XLR3 connectors. In addition, eLPA2-350 model includes Jack 6,35mm and RCA inputs.
- Amplified outputs with terminal-type connectors and Speakon® connectors

	eLPA2-350	eLPA2-650
1 channel @ 4Ω (RMS)	345W	630W
1 channel @ 8Ω (RMS)	200W	340W
2 Bridged Channels @ 8 Ω (RMS)	560W	1220W
Internal crossover	Yes	No
Dimensions (WxHxD)	482,6x88(2RU)x266mm / 19"x3.46"x10.47"	482,6x88(2RU)x266mm / 19"x3.46"x10.47"
Weight	5,5 kg / 12.12 lb	6,0 kg / 13.23 lb



eLPA2-650



eLPA2-950



eLPA2-1400



	eLPA2-950	eLPA2-1400
1 channel @ 4Ω (RMS)	950W	1400W
1 channel @ 8Ω (RMS)	500W	770W
2 Bridged Channels @ 8 Ω (RMS)	1840W	2600W
Internal crossover	No	No
Dimensions (WxHxD)	482,6x88(2RU)x266mm / 19"x3.46"x10.47"	482,6x88(2RU)x304mm / 19"x3.46"x11.97"
Weight	6,2 kg / 13.67 lb	6,3 kg / 13.89 lb



APPLICATIONS



eGPA2-150



eGPA2-300



eGPA is a multichannel amplifiers (class D) series. Auto stand-by function and fanless design, 100% silent. Thermal and overload protections. Anti-clip system.

KEY FEATURES

- Euroblock input and output connectors
 - High efficiency, auto standby function and convection cooling (fanless, 100% silent)
 - BRIDGE mode ready
- Thermal protection
 - Overload protection
 - Anti-clip system

	eGPA2-150	eGPA2-300
1 channel @ 4Ω (RMS)	148W	310W
1 channel @ 8Ω (RMS)	74W	165W
All channels @ 4Ω (RMS)	145W	310W
2 bridged channels @ 8Ω (RMS)	290W	600W
Dimensions (WxHxD)	482,6x44(1RU)x161mm / 19"x1.73"x6.34"	482,6x44(1RU)x221mm / 19"x1.73"x8.7"
Weight	2,7 kg / 5.95 lb	3,4 kg / 7.49 lb

ACCESSORIES



CNXEBLINK4

eGPA Series



eGPA4-150



eGPA8-150



eGPA2-150

eGPA2-300

eGPA4-150

eGPA8-150

	eGPA4-150	eGPA8-150
1 channel @ 4Ω (RMS)	148W	148W
1 channel @ 8Ω (RMS)	74W	74W
All channels @ 4Ω (RMS)	145W	145W
2 bridged channels @ 8Ω (RMS)	290W	290W
Dimensions (WxHxD)	482,6x44(1RU)x221mm / 19"x1.73"x8.7"	482,6x44(1RU)x341mm / 19"x1.73"x13.42"
Weight	3,7 kg / 8.15 lb	6,5 kg / 14.33 lb



AMPLIFIERS
High-efficiency Stereo Amplifiers
GPA Series

APPLICATIONS



GPA2-400ES



GPA2-800



GPA2-400ES:



GPA2-800:



GPA is a series of stereo amplifiers that become a perfect and affordable option in many audio projects. A very high efficiency and an auto standby function provide these amplifiers with a true green profile.

KEY FEATURES

- 2 analogue audio inputs x 2 powered audio outputs
- Euroblock output and speakon connectors
- 2 REMOTE volume ports (0-10VDC), compatible with WPa series wall panels
- High efficiency, auto standby function and convection cooling (fanless, 100% silent)
- BRIDGE mode ready
- Thermal protection
- Overload protection
- Anti-clip system
- Volume control knobs on front panel with protection cap, against undesired manipulation

	GPA2-400ES	GPA2-800
1 channel @ 2Ω (RMS)	-	1000W
1 channel @ 4Ω (RMS)	390W	640W
1 channel @ 8Ω (RMS)	280W	347W
2 bridged channels @ 8Ω (RMS)	700W	1150W
Dimensions (WxHxD)	482,6x88(2RU)x373mm / 19"x3.46"x14.68"	482,6x88(2RU)x423mm / 19"x3.46"x16.65"
Weight	10,4 kg / 22.93 lb	13,5 kg / 29.76 lb

ACCESSORIES



WPa Series



The Green Facts

Environmentally Sustainable AV

ENERGY CONSERVATION

■ Ecler maximises energy conservation by utilising SPM Technology (patented by ECLER) in our amplifiers. Switching Power Mosfet technology is more efficient (73%) than bipolar transistors and conventional mosfets. The benefit of SPM technology is that most of the consumed power is converted into real audio power and less energy is wasted (via heat & processing)

HIGHER EFFICIENCY

- Ecler ensures higher efficiency (more than 90%), lower weight (30% average) and smaller heatsinks (6 times smaller) by using class D amplification technology (Pulse Width Modulation), both in the stand-alone format devices and our integrated self-powered speakers and mixers
- Higher efficiency (up to 92%) by using Power Factor Correction (PFC) in many of our digital amplifiers. Few audio manufacturers integrate PFC in their products
- All the above technologies applied to Ecler's products have two immediate environmental advantages:
 - The amplifier's power consumption is significantly reduced
 - The air conditioning power required to keep an installation in proper working condition is also reduced

ENERGY SAVING

- Energy saving during the transportation thanks to the ultra-light weight and compact sizes of the latest generations of amplifiers
- Higher efficiency (up to 92%) by using Power Factor Correction (PFC) in many of our digital amplifiers. Few audio manufacturers integrate PFC in their products
- Many of Ecler's products include the Auto Standby function, which again drastically reduces the power consumption (usually below 3 Watts), in this case during the periods the device is not utilizing full functionality

NO CONTAMINANT COMPONENTS

- Ecler avoids the use of contaminant components and ensures recycling benefits are realised after the product lifetime, fulfilling ROHS (Restriction of Hazardous Substances) and WEEE (Waste Electrical and Electronic Equipment) regulations
- Ecler enforces careful selection and disposal procedures of the electronic waste in all our production processes to guarantee minimal environmental impact

RECYCLED MATERIAL

- Ratio of recycled material in packaging is 70%. This 70% recycled carton ratio ensures that the final result fulfils our drop & transportation test standards: Although recycled carton is weaker than fibre based products, we insist on the maximum % of recyclable material while still ensuring the packing endurance target. Apart from this ratio, our outer carton packing is always 100% recyclable at the end of its use
- Our packaging providers have raw material suppliers that follow a sustainability policy to help ensure that the total forest surface in Europe grows every year

www.ecler.com





AMPLIFIERS
High Impedance Multichannel Amplifiers
eHSA Series

APPLICATIONS



eHSA is a multichannel amplifier with high impedance powered outputs. They are lightweight, versatile and affordable amplifiers.

KEY FEATURES

- Euroblock output connectors
- Thermal protection
- Overload protection
- Anti-clip system eHSA2-150/4-60/4-150
- High efficiency, auto stand-by function and convection cooling (fanless, 100% silent)
- Volume control knobs on front panel
- High and low impedance outputs (eHSA4-60 only)
- Link-channel buttons: allows to replicate the input channel signal in the adjacent one (eHSA4-60 only) eHSA2-250/500 & eHSA4-250/500
- 2 mono balanced inputs (Euroblock terminals) with stack outputs
- Selectable HPF (Cut-off freq. = 75Hz)
- Volume control trimmers on rear panel

	eHSA2-150	eHSA4-60	eHSA4-150
1 channel @ 70/100V (RMS)	145W	60W	145W
All channels @ 70/100V (RMS)	142W	60W	140W
Dimensions (WxHxD)	482,6x44(1RU)x221mm / 19"x1.73x8.70"	482,6x44(1RU)x280mm / 19"x1.73x11.21"	482,6x44(1RU)x341mm / 19"x1.73x13.42"
Weight	6,1 kg / 13.44 lb	7,8 kg / 17.19 lb	10,5 kg / 23.14 lb

AMPLIFIERS

eHSA Series



	eHSA2-250	eHSA2-500	eHSA4-250	eHSA4-500
1 channel @ 100V	250W	500W	250W	500W
All channels @ 100V	250W	500W	250W	450W
Dimensions (WxHxD)	482,6x88(2RU) x365mm / 19"x3.46"x14.37"	482,6x88(2RU) x365mm / 19"x3.46"x14.37"	482,6x88(2RU) x373mm / 19"x3.46"x14.68"	482,6x88(2RU) x365mm / 19"x3.46"x14.37"
Weight	6,2 kg / 13.67 lb	6,3 kg / 13.89 lb	7 kg / 15.43 lb	7,6 kg / 16.75 lb



AMPLIFIERS
High Impedance Amplifiers
HSA Series

APPLICATIONS



HSA300



HSA2-400ES



HSA300:



HSA300 is a single channel amplifier with direct 100 V line (high impedance) output.
HSA2-400ES is a stereo amplifier with low and high impedance powered outputs.

KEY FEATURES

HSA300:

- 1 mono balanced input
- 1 output (100V line level)
- Euroblock connectors
- SPM 100 amplification Technology - Channel N (no 100V output transformers used):
 - Improved frequency response (specially at the low-end)
 - Great efficiency
 - Low weight

HSA2-400ES:

- 2 mono balanced inputs (XLR and Euroblock terminals)
- 2 x 400 W RMS output (4Ω and 70/ 100V line level)
- Euroblock output connectors
- 2 REMOTE volume ports (0-10VDC), compatible with WPa series wall panels
- Energy Star® Certification
- High efficiency, auto stand-by function and convection cooling (fanless, 100% silent)

	HSA300	HSA2-400ES
1 channel @ 70/100V(RMS)	302W (100V)	450W
1 channel @ 4Ω (RMS)	-	390W
1 channel @ 8Ω (RMS)	-	280W
Dimensions (WxHxD)	482,6x88(2RU)x285mm / 19"x3.46"x11.22"	482,6x88(2RU)x373mm / 19"x3.46"x14.68"
Weight	HxWxD: 88 (2RU)x482,6x285mm / 8,4 kg / 18.51 lb	16,4 kg / 36.15 lb

ACCESSORIES



WPa Series

AMPLIFIERS
Flexi-power Amplifier
HZA4-120F



APPLICATIONS



HZA4-120F



HZA4-120F is a four MERGING channel amplifier with direct 100 V line (high impedance) outputs. It integrates ECLER's proprietary SPM 100 Technology - Channel N.

KEY FEATURES

- 4 mono balanced inputs
- 4 amplified outputs (100V line level)
- 4 volume remote control ports (0 - 10 VDC)
- Euroblock connectors
- SPM 100 amplification Technology - Channel N (no 100 V output transformers used):
 - Improved frequency response (specially at the low-end)
 - Convection cooling (100% silent and increased reliability)
 - Great efficiency
 - Low weight
- Auto stand-by function after 2 minutes without audio input signals, with instantaneous auto-recovery
- Thermal protection
- Overload protection
- Anti-clip system
- Volume control knobs on front panel with protection cap, against undesired manipulation
- Every 2, 3 or 4 adjacent channels can be merged, adding their ouput power and managing their signal routing and volume control as a single merged channel

	HZA4-120F
1 channel @ 100V(RMS)	114W
2 merged channels @ 100V (RMS)	195W
3 merged channels @ 100V (RMS)	290W
4 merged channels @ 100V (RMS)	356W
Dimensions (WxHxD)	482,6x88(2RU)x392mm / 19"x3.46"x15.43"
Weight	13,6 kg / 29.98 lb

ACCESSORIES



WPa Series



AMPLIFIERS
Mixing Amplifiers
eHMA Series

APPLICATIONS



eHMA60



eHMA120



eHMA250



eHMA series is the perfect integral solution for budget and user-friendly professional audio projects.

KEY FEATURES

- Mixer + amplifier
- MIC & MIC/LINE inputs
- High & Low impedance outputs
- Auto-standby function
- Fanless, 100% silent
- Talkover function available
- 2-band tone controls for mix output
- MUTE port
- External power supply included (eHMA60 and eHMA120)
- Rack mount kit included

	eHMA60	eHMA120	eHMA250
1 channel @ 4Ω (RMS)	66W	95W	250W
1 channel @ 70/100V(RMS)	60W	95W	250W
Inputs	2 MIC/LINE + 1 MIC	2 MIC/LINE + 1 MIC + 1 LINE	2 MIC/LINE + 2 MIC + 2 LINE
Outputs	1 Hi-Z + 1 Lo-Z	2 Hi-Z + 1 Lo-Z + 1 AUX/REC	4 Hi-Z + 1 Lo-Z + 1 AUX/REC
Dimensions (WxHxD)	200x44(1RU)x150mm / 7.87"x1.73"x5.90"	435x44(1RU)x120mm / 17.13"x1.73"x4.72"	435x44(1RU)x220mm / 17.13"x1.73"x8.7"
Weight	1,9 kg / 4.18 lb	2,9 kg / 6.39 lb	3 kg / 6.61 lb

ACCESSORIES



MPAGE1r

eHMA250:



WPa Series



CA200Z:
Integrable

AMPLIFIERS
Mixing Amplifiers

HMA120 / CA200Z

APPLICATIONS



HMA120



CA200Z



CA200Z Controller



HMA120:



CA200Z:



KEY FEATURES

HMA120:

- 2 balanced microphone input
- 3 line inputs for music sources
- Integrated audio player with USB and SD CARD slots
- Music program selector on the front panel: LINE1, LINE2, LINE3, MEDIA (integrated player)
- Noise gate and two-level priority system (Talkover 1 and Talkover 2) for MIC1 and MIC2/LINE inputs
- Independent level controls on the front panel
- 2-band EQ for MIC1 and MIC2/LINE and MUSIC signal
- REMOTE port for connecting WPa series wall panels, 0 - 10VDC (source selection and volume)
- MUTE port Auxiliary Output
- Auto Stand-by function

CA200Z:

- 4 LINE ST & 2 MIC audio inputs, with independent routing and levels for outputs A and B
- 2 x 70 WRMS @ 4 Ω audio outputs
- STEREO, MONO, BRIDGE or independent ZONES A/B working modes
- 2-level Talkover / Pager priority system
- AUX A/B LINE output
- RS-232 interface for external (third-party) remote control. CA-NET protocol compatible
- 2 REMOTE ports included, compatible with WPa series (0-10 VDC): zone A / zone B volume and source / preset selection
- IR receiver (IR remote control included)
- Auto stand by function

	HMA120		CA200Z
1 channel @ 8Ω (RMS)	84W @ 8Ω / 110W @ 4Ω	1 channel @ 8Ω (RMS)	38W @ 8Ω / 70W @ 4Ω
1 channel @ 70/100V(RMS)	110W	2 bridged channels @ 8Ω (RMS)	97W
Inputs	3 LINE + 1 MIC/LINE + 1 MIC + Media player (USB + SD)	Inputs	4 LINE + 2 MIC
Outputs	1 Hi-Z + 1 Lo-Z + 1 AUX	Remote control	IR + 2 RJ45 + RS232 (Ecler-COMM & CA-NET)
Dimensions (WxHxD)	210x88(2RU)x230mm / 8.26"x3.46"x9.05"	Dimensions (WxHxD)	210x88(2RU)x230mm / 8.26"x3.46"x9.05"
Weight	6,0 kg / 13.23 lb	Weight	2,3 kg / 5.07 lb

ACCESSORIES



2UHRMKIT



WPa Series



MPAGE1r

CA200Z:



ETH232AD



TR2-70




MPAGE4



AMPLIFIERS
Dante™ interface amplifier
eCA DANTE™ Series

APPLICATIONS

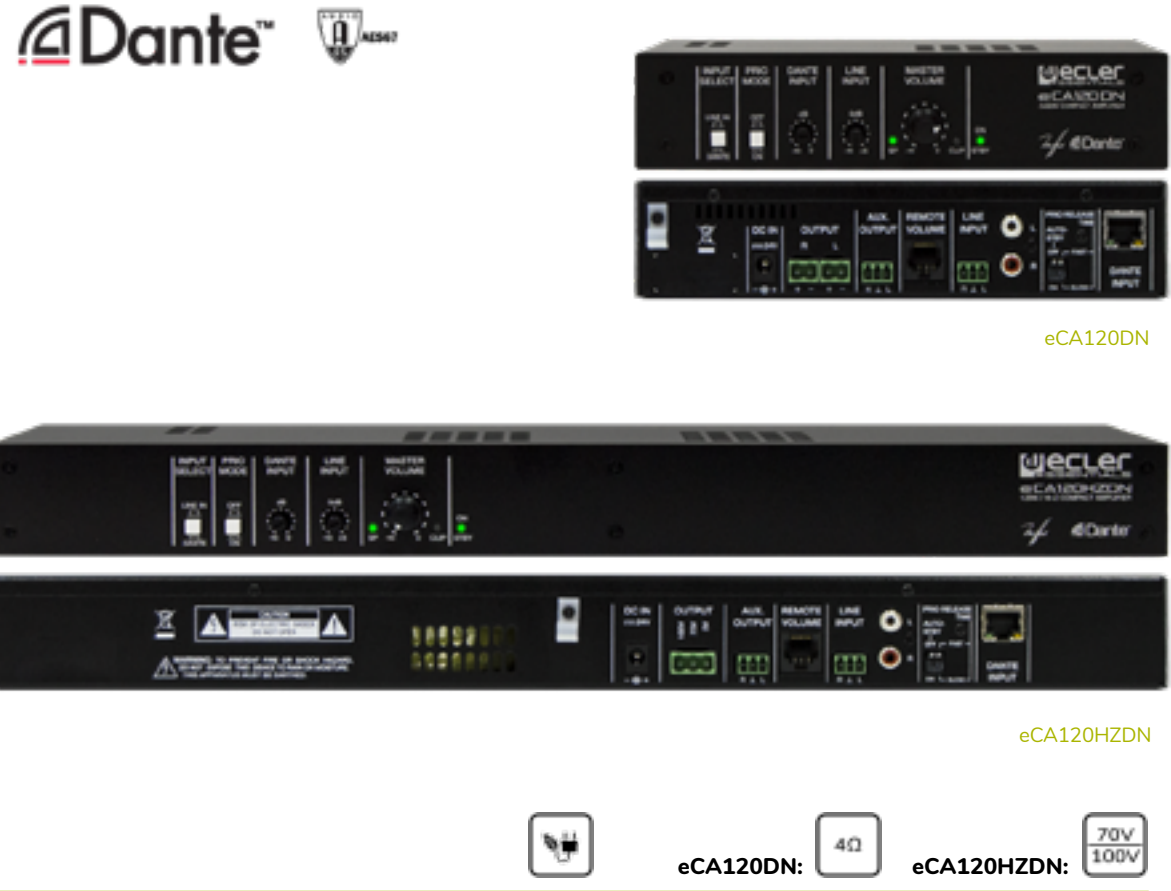

eCA120DN is a 2 x 60 WRMS @ 4Ω high efficiency (class D) stereo compact amplifier.
eCA120HZDN is a 120 WRMS @ 100V efficiency (class D) mono compact amplifier for high impedance lines, with the same features than eCA120DN.

KEY FEATURES

- 2 x 60 W RMS @ 4 Ω output (eCA120DN)
- 1 x 120W RMS @ 100V output (eCA120HZDN)
- 1 x auxiliary audio output (Euroblock connector), for connecting to a sub-woofer unit e.g.
- 1 x unbalanced stereo input (LINE INPUT), with dual RCA connector and 3-in Euroblock connector
- 2 x Dante™ audio input (DANTE INPUT), with RJ-45 connector
- Selectable PRIORITY FUNCTION with selectable priority signal: the analogue audio input (LINE INPUT) can be selected as priority signal over the Dante™ audio input (DANTE INPUT), or vice versa.
- Priority release time adjustment (FAST / SLOW).
- Selectable AUTO STANDBY function: in the absence of an audio signal the unit automatically goes into STANDBY mode, minimizing power consumption.
- Gain adjust of audio inputs on front panel (trimmers)
- Local volume control by knob
- Remote volume control (RJ-45 connector.) via WPa wall-panel control series (0-10 VDC).
- Lightweight, silent, high-performance amplifier (fan-free convection cooling)
- External, universal power supply (included)

ACCESSORIES



WPa Series



1UHRMKIT

	eCA120DN	eCA120HZDN
1 channel @ 4Ω (RMS)	68W	-
1 channel @ 70/100V(RMS)	-	98W
Inputs	1 LINE ST + 2 Dante	1 LINE ST + 2 Dante
Remote control	1 RJ45	1 RJ45
Dimensions (WxHxD)	200x44(1RU)x120mm / 7.87"x1.73"x4.72"	435x44(1RU)x120mm / 17.12"x1.73"x4.72"
Weight	0,9 kg / 1.98 lb	2,8 kg / 6.17 lb

AMPLIFIERS
Compact Amplifiers
eCA Series

APPLICATIONS



eCA120/eCA120Hz is a stereo micro-amplifier, in a very compact format and a light and silent (fanless) design.

KEY FEATURES

- External, universal power supply (CE/UL/CCC)
- AUTO STANDBY function: in the absence of an audio signal the unit automatically goes into STANDBY mode, minimizing power consumption
- Light and silent (fanless) design
- 1 unbalanced stereo line input (LINE IN / STACK), with dual RCA connector and 3-pin Euroblock connector
- Local volume control by knob
- Remote volume control by WPa series wall panel (0-10VDC)

	eCA120	eCA120HZ
1 channel @ 4Ω (RMS)	68W	-
1 channel @ 70/100V(RMS)	-	106W
Inputs	1 LINE ST	1 LINE ST
Remote control	1 RJ45	1 RJ45
Dimensions (WxHxD)	190x48x90mm / 7.48"x1.89"x3.54"	190x48x190mm / 7.48"x1.89"x7.48"
Weight	600 g / 1.32 lb	2,3 kg / 5.07 lb

ACCESSORIES



WPa Series



AMPLIFIERS
Compact Amplifiers
CA Series



APPLICATIONS



CA40/CA120/CA120HZ is a stereo amplifier with a tiny size but amazing remote control features: serial RS-232 port, IR receiver and 0-10 VDC remote port. It's an ideal solution in those audiovisual applications which require integration with external control devices: education classrooms, meeting rooms, multimedia presentations, retail shops, etc.

KEY FEATURES

- Compact amplifier
- Digital local control, encoder type
- Infrared remote control included
- Remote control compatible with WPaVOL and WPaVOL-SR wall panels (0-10 VDC)
- RS-232 control port compatible with EclerCOMM software and CA-NET protocol
- MUTE port for external muting of the unit when an evacuation system must be activated
- Presets / sources management via RS-232 or 0-10 VDC remote control port
- AUTO STANDBY function
- Light and silent (fanless) design

	CA40	CA120	CA120HZ
1 channel @ 4Ω (RMS)	22W	68W	-
1 channel @ 70/100V(RMS)	-	-	96W
Inputs	2 LINE ST + 1 MIC	2 LINE ST + 1 MIC/LINE ST	2 LINE ST + 1 MIC/LINE ST
Remote control	1 RJ45 + IR + RS232 (EclerCOMM & CA-NET)	1 RJ45 + IR + RS232 (EclerCOMM & CA-NET)	1 RJ45 + IR + RS232 (EclerCOMM & CA-NET)
Dimensions (WxHxD)	155x45x155mm / 6.10"x1.77"x6.10"	160x48x210mm / 6.29"x1.88"x8.26"	160x48x325mm / 6.29"x1.88"x12.79"
Weight	650 g / 1.43 lb	950 g / 2.09 lb	2,9 kg / 6.39 lb

ACCESSORIES



ETH232AD



MPAGE1r



WPa Series

LOUDSPEAKERS
In-Ceiling/In-Wall Loudspeakers
eIC Series



APPLICATIONS



eIC52MS



eIC51FM



eIC51FM Fast mount system



eIC52



eIC5154



eIC52MS



eIC52MS



eIC5154:



eIC51FM / eIC52 / eIC5154 / eIC52MS is a cost-effective in-ceiling installation loudspeaker with a great sound performance.

KEY FEATURES


- Built-in audio transformer for 70/100 V use
- EN54-24 Certified (eIC5154)
- Suitable for installations exposed to extreme humidity and/or temperature (eIC52MS)
- EASE Win file available

	eIC51FM	eIC52	eIC5154	eIC52MS
RMS power / Program power (8Ω)	6 W	20W / 40W	-	20 / 35W
Woofer / tweeter	4,5" / -	5,25" / 0,75"	5" / -	5" / 1"
Power selector	3/6 W @ 100V 1,5/3W @ 70V	3/6 W @ 100V	0,38/0,75/1,5/3/6 W @ 100V	-
SPL 1W/1m	91 dB	86 dB	92 dB	89 dB
Dimensions (ø internal x ø external x D)	145x160x54mm / 5.7"x6.3"x2.1"	164x202x65mm / 6.45"x7.95"x2.56"	158x180x147mm / 6.22"x7.08"x5.78"	120x165x60mm / 4.72"x6.49"x2.36"
Weight	0,5 kg. / 1.1 lb	1,0 kg / 2.20 lb	1,2 kg / 2.64 lb	0,6 kg / 1.32 lb



LOUDSPEAKERS
In-Ceiling/In-Wall Loudspeakers
IC Series / IW103

APPLICATIONS

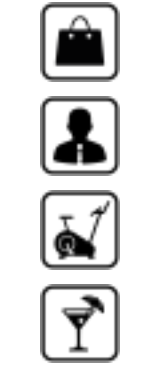

IC3 / IC6 / IC8 in ceiling/in wall loudspeaker is the perfect option for 70/100 V and low impedance sound solutions. IC series provide excellent sound quality thanks to their infinite baffle philosophy and a top-performance high frequency transducer.

IW103 is a 3" in-ceiling / in-wall installation loudspeaker featuring a rectangular and discreet design.

KEY FEATURES

IC Series:

- ABS speaker
- Built-in audio transformer for 70/100 V use
- Polypropylene woofer that resists heat and humidity
- Front grill may be removed for painting
- Aluminium front grill, rust-proof
- Clip-type input terminals and low impedance / high impedance power tap selector (IC3: connection strip)
- Cutting and painting templates included
- Support system with 3 rotating tabs
- IC3 available in black (RAL9004) and white (RAL9003) finish

- IC6 available in black (RAL9005) and white (RAL9010) finish
- IC8 available in white finish (RAL9010)
- EASE Win file available

IW103:

- Rectangular shaped loudspeaker for in-ceiling/in-wall installation
- 3" woofer
- 15W/30W @ 100V selector
- Spring loaded input terminals
- White finish (RAL9003)
- EASE Win file available

	IC3	IC6	IC8	IW103
RMS power / Program power (8Ω)	10W / 20W	40W / 80W	60W / 120W	-
Woofer / tweeter	3" / -	6" / 1"	8" / 1"	3" / -
Power selector @ 100V	1,5/3/6 W	2,5/5/7,5/15 W	5/7,5/15/30 W	15/30 W
SPL 1W/1m	90dB	88 dB	89 dB	83 dB
Dimensions (ø internal x ø external x D)	82x100x95mm / 3.22"x3.93"x3.74"	178x204x73mm / 7"x8.03"x2.87"	220x245x91mm / 8.66"x9.64"x3.58"	(WxHxD) 110x165x80mm / 4.33"x6.49"x3.14"
Weight	520 g / 1.14 lb	1,5 kg / 3.30 lb	2,3 kg / 5.07 lb	900 g / 1.98 lb

ACCESSORIES

PKIC Series:




PKIC Series

LOUDSPEAKERS
In-Ceiling/In-Wall Loudspeakers
VIC Series



APPLICATIONS

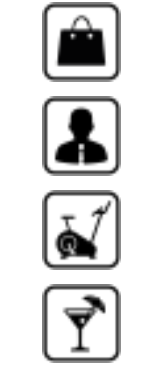

Ecler's line of **VIC** ceiling loudspeakers features a careful selection of components in a user-friendly design that seeks speed and versatility of installation on any surface, while maintaining excellent sound quality.

The X models include a back can and tile bridge.

KEY FEATURES

VIC6/VIC6X:

- 2-way false ceiling loudspeaker
- 6,5" polypropylene woofer
- 0,5" steerable tweeter
- Output 40WRMS@8Ω

VIC8/VIC8X:

- 2-way false ceiling loudspeaker
- 8" polypropylene woofer
- 0,5" steerable tweeter
- Output 60WRMS@8Ω

VICSB8/VICSB8X:

- False Ceiling Subwoofer Unit
- 8" polypropylene woofer
- Output 80WRMS@8Ω
- Crossover included

- EASE Win file available
- Available in white (RAL9010) and black (RAL9005) with AVICRG6/8 accessory

	VIC6/6X	VIC8/8X	VICSB8/SB8X
RMS power / Program power(8Ω)	40W / 80W	60W / 120W	80W / 160W
Woofer / tweeter	6,5" / 0,5"	8" / 0,5"	8" / -
Power selector @ 100V	40/20/10/5/2,5W	60/30/15/7.5/3.75W	60/30/15/7.5/3.75W
SPL 1W/1m	89 dB	88 dB	87 dB
Dimensions (øxD)	VIC6: 232x105mm / 9.1"x4.1" VIC6X: 232x170mm / 9.1"x6.7"	VIC8: 282x115mm / 11.1"x4.5" VIC8X: 282x200mm / 11.1"x7.9"	VICSB8: 282x135mm / 11.1"x5.3" VICSB8X: 282x200mm / 11.1"x7.9"
Weight	VIC6: 1.8kg / 3.9 lb. VIC6X: 2.3kg / 5 lb.	VIC8: 2.3kg / 5 lb. VIC8X: 3.1kg / 6.8 lb.	VICSB8: 3.2kg / 7 lb. VICSB8X: 3.9kg / 8.6 lb.

ACCESSORIES



AVICSG

VIC6/6X:



AVICCAN6L



AVICRG6

VIC8/SB8/8X/ SB8X:



AVICCAN8L



AVICRG8



LOUDSPEAKERS
In-Ceiling/In-Wall Loudspeakers
IC6CLASS Series

APPLICATIONS



IC6CLASS-TR integrates a very careful and efficient selection of components, together with a mechanical design that provide a high quality audio ("Hi-Fidelity" profile sound) and a very fast installation process, just using a basic set of tools.

IC6CLASS54X is a kit containing 2 x IC6CLASS-54 (EN54-24 In-ceiling /In-wall High-end Loudspeaker) + IC-TB8 (2 Tile bridges for IC8 & IC6CLASS series).

IC6CLASS-54 is a 2-way loudspeaker features a design which conforms to EN54-24 standard (Fire detection and fire alarm systems, Voice alarms - Loudspeakers)

KEY FEATURES

IC6CLASS-TR:

- High-end 2-way loudspeaker
- 16 Ω impedance, allowing for multiple units connected in parallel to a standard audio amplifier
- High impedance built-in transformer, allowing for multiple units connected in parallel to a 70V / 100V line audio amplifier (5 different power tapings available)
- Low/high impedance power selection accessible from the front panel, once the loudspeaker is already installed in the ceiling
- 6,5" Kevlar® woofer

- 1" Silk dome (ACCW) tweeter
- Aluminium front grill (RAL9003)
- Fast installation procedure using a basic set of tools

IC6CLASS54X:

- Fire rated back can
- Ceramic connection terminals
- Thermal fuse
- Internal FR wiring
- IC-TB8 Tile bridge included

	IC6CLASS-TR	IC6CLASS54X
RMS power / Program power (16 Ω)	75W / 150W	75W / 150W
Woofer / tweeter	6,5" / 1"	6,5" / 1"
Power selector @ 100V	3/7,5/15/20/30 W	3/7,5/15/20/30 W
SPL 1W/1m	86 dB	86 dB
Dimensions (WxHxD)	$\varnothing$ (internal)x $\varnothing$ (external)x D: 224x270x95mm / 8.81"x10.63"x3.74"	$\varnothing$ (internal)x $\varnothing$ (external)x D: 224x270x95mm / 8.81"x10.63"x3.74"
Weight	2,5 kg / 5.51 lb	3,1 kg / 6.83 lb

LOUDSPEAKERS
Painting Loudspeakers



The **PKIC** series is a simple solution for giving colour and homogeneity to ceiling loudspeakers in the IC or IC6CLASS series. These easy to install accessories make it possible to combine different loudspeaker models in the same ceiling or wall, offering a homogenous, elegant, colourful finish. You can paint them yourself or we can do it for you!

PKIC6: this is an accessory for personalizing the IC6 ceiling loudspeaker. The kit includes a grille that can be painted (with the appearance of the IC6CLASS) and an accessory (anchor ring) to mount this grille on the IC6. Easy to paint and mount.

PKIC8: this is an accessory to personalize the IC8 ceiling loudspeaker. The kit includes a grille that can be painted (with the appearance of the IC6CLASS) and an accessory (anchor ring) to mount this grill on the IC8.

AVICSG: square grille with magnetic mounting. Compatible with all VIC models.

AVICRG6 is a 2 paintable aluminum round grilles kit, compatible with VIC6 and VIC6X loudspeakers. Magnetic fixing, quick installation. Available in black and white.

AVICRG8 is a 2 paintable aluminum round grilles kit, compatible with the VIC8, VIC8X, VICSB8 and VICSB8X loudspeakers. Magnetic fixing, quick installation. Available in black and white.

Our painting service offers the possibility to paint any accessory in the PKIC and VIC series, without a minimum of loudspeakers and with delivery within 15 days.



LOUDSPEAKERS
Rail-mount Cabinet

TRAIL103

APPLICATIONS



TRAIL 103 Loudspeakers mounted on ceiling light rail

TRAIL 103 Mounting options (included): ceiling light rails, surface mount and truss/threaded bar adapter

TRAIL 103



TRAIL103 is a 3" lamp style loudspeaker cabinet.

KEY FEATURES

- 3" woofer
- Mounting options: ceiling light rails (Global Trac Pro and Eutrac compatible), surface mount or truss mount
- Low impedance connection: 4ohm
- High impedance connection: 15/30W selector
- Available in white (RAL9003) and black (RAL9005) finish.
- EASE Win file available

	TRAIL103
RMS power / Program power (4Ω)	15W / 30W
Woofer / tweeter	3" / -
Power selector @ 100V	15/30 W
SPL 1W/1m	83 dB
Dimensions (WxHxD)	øxH: 96x110mm / 3.78"x4.33"
Weight	1,0 kg / 2.20 lb

ACCESSORIES



PCS124

LOUDSPEAKERS
Concealable Subwoofer Cabinet

TRAILSB6T



APPLICATIONS



TRAILSB6T front

TRAILSB6T rear

TRAILSB6T bottom

TRAILSB6T with installation accessories (included)

TRAILSB6T is a wooden subwoofer reinforcement cabinet with a very compact format.

It has been specifically designed to fulfil permanent installation requirements, where low visual impact and integration with decoration are a must: concealed in false ceilings or partition walls, on walls' surface, etc. Installation accessories included.

KEY FEATURES

- Wooden subwoofer reinforcement for TRAIL103-type cabinets, in-ceiling loudspeakers or small surface-mount cabinets
- Concealed in false ceilings or partition walls, on walls' surface, etc
- Coupling pipe for false ceiling included
- Installation accessories included
- Available in black finish

	TRAILSB6T
RMS power / Program power (8Ω)	60W / 120W
Woofer / tweeter	6" / -
Power selector @ 100V	7,5/15/30/60 W
SPL 1W/1m	86 dB
Dimensions (WxHxD)	200x200x320mm / 7.87"x7.87"x12.60"
Weight	6,3 kg / 13.89 lb



LOUDSPEAKERS
Surface Mount Cabinets
eAMBIT Series

APPLICATIONS



eAMBIT103 / eAMBIT106 is an ultra compact 2-way coaxial loudspeaker cabinet with neutral an discreet design.

KEY FEATURES

- ABS 2-way architectural loudspeaker
- Built-in audio transformer for 100V applications
- 8 Ω and 70/100V operation selector
- Includes on-wall hardware, safety sling, screws and wrench for fast installation
- Available in black (RAL9005) and white (RAL9016) colours
- Spring loaded input terminals
- IP54 rated
- Anti UV cabinet avoids colour degradation in case of direct sunlight exposition

	eAMBIT103	eAMBIT106
RMS power / Program power (8 Ω)	25W / 50W	50W / 100W
Woofer / tweeter	3,5" / 0,5"	6,5" / 1"
Power selector @ 100V	2,5/5/7,5/15 W	5/7,5/15/30 W
SPL 1W/1m	87 dB	93 dB
Dimensions (WxHxD)	120x120x117mm / 4.72"x4.72"x4.60"	210x210x160mm / 8.27"x8.27"x6.30"
Weight	1,3 kg / 2.86 lb	2,8 kg / 6.17 lb

LOUDSPEAKERS
Surface Mount Cabinets
AUDEO Series



APPLICATIONS



AUDEO series has a balanced, innovative design, resulting from the collaboration between ECLER and the prestigious group Giugiaro Design. It satisfies today's demands with respect to aesthetics, design and integration into all types of architectural environments which, together with its excellent sound quality, make this series the ideal solution for use in numerous sound projects.

KEY FEATURES

AUDEO103 / AUDEO106:

- Full range, 2-way loudspeaker
- Made of reinforced ABS
- Available in black (RAL9005) or white (RAL9016)
- 8 Ω and 70/100 V line operating switch
- Accessories for wall-mounting included
- IP54 class outdoor rating
- Protective front grill with anti-rust treatment
- EASE Win file available

AUDEOSB110P:

- 10" woofer
- 150 W RMS integrated amplifier
- RCA inputs with mono conversion
- RCA stack outputs (link to other SB110P units, AUDEO speakers, etc.)
- PHASE and volume controls
- Internal 150Hz/18dB oct. LPF

	AUDEO103	AUDEO106	AUDEOSB110P
RMS power / Program power (8 Ω)	25W / 50W	50W / 100W	150W / 300W
Woofer / tweeter	3,5" / 0,5"	6,5" / 1"	10" / -
Power selector @ 100V	2,5/5/7,5/15 W	5/7,5/15/30 W	-
SPL 1W/1m	90 dB	92,5 dB	112 dB
Dimensions (WxHxD)	132x134x110mm / 5.29"x5.27"x4.33"	242x242x163mm / 9.52"x9.52"x6.41"	310x420x505mm / 12.20"x16.53"x19.88"
Weight	1,5 kg / 3.30 lb	2,3 kg / 5.07 lb	16,8 kg / 37.03 lb

ACCESSORIES





LOUDSPEAKERS
Surface Mount Cabinets
eMOTUS Series

APPLICATIONS
eMOTUS5P /
eMOTUS5PB:



eMOTUS5P / eMOTUS5PB is a kit of loudspeakers including an active and a passive acoustic box. eMOTUS5PB includes a wireless BT receiver, remote control and remote control volume port (0-10 VDC). Available in white colour (RAL9003).

KEY FEATURES

eMOTUS5P / eMOTUS5PB:

- Stereo 2-way loudspeaker stereo kit – powered loudspeaker + passive loudspeaker
- Full range: 5" woofer and 1" tweeter
- Integrated amplifier 2 x 25 WRMS (MASTER unit)
- Volume control and tone control (bass & treble) in the MASTER unit
- Euroblock balance stereo input on the MASTER UNIT
- Non-balanced RCA input on the MASTER UNIT
- Wireless BT stereo input (only on the eMOTUS5PB)
- Mono/Stereo switch

- Link between the MASTER and the SLAVE unit via Euroblock connectors.
- Integrated power supply source (MASTER unit)
- Selectable power voltage 115 V/230 V (MASTER unit)
- Auto standby function (automatic standby mode / energy saving without the need to turn the system on or off each day)
- Integrated Anti-Clip System
- LED activity display
- Reinforced ABS construction
- BT wireless connection, remote control port (0-10 VDC – RJ45 connector) and remote control (eMOTUS5PB)

	eMOTUS5P	eMOTUS5PB
RMS power / Program power	2 x 25W / 2 x 50W	2 x 25W / 2 x 50W
Power selector @ 100V	-	-
Audio inputs	2 ST LINE (bal. & unbal.)	2 ST LINE (bal. & unbal.) + BT
Others	Bass & treble EQ + ST/MONO switch	IR + Remote port + Bass & treble EQ + ST/ MONO switch
Dimensions (WxHxD)	173x180x185mm / 6.81"x 7.08"x7,28"	173x180x185mm / 6.81"x 7.08"x7,28"
Weight	2,1 kg / 4.62 lb	2,4 kg / 5.29 lb

ACCESSORIES

**eMOTUS5P/
PB/OD:**



PCS124

eMOTUS5PB:



WPa Series

LOUDSPEAKERS

eMOTUS Series



APPLICATIONS
eMOTUS5OD:



eMOTUS5OD & eMOTUS8OD



eMOTUS8OD side

eMOTUS8OD



eMOTUS5OD / eMOTUS8OD is a 2-way full range loudspeaker cabinet with eMOTUS unique design. Ready for indoor and outdoor applications, thanks to its aluminium grill and UV protection treatment (IP65-rated). Wall mount accessories and safety sling are included for an easy and secure installation.

KEY FEATURES

eMOTUS5OD / eMOTUS8OD:

- 2-way cabinet, 5" / 8" woofer and 1" tweeter
- 40WRMS @ 8Ω / 100WRMS @ 8Ω
- Power selector 70/100V: eMOTUS5OD: 3,75/7,5/15/30W,

eMOTUS8OD: 3,5/7,5/15/30/60W

- Outdoor design
- IP65 rated
- Back rubber cover for connections
- Available in black (RAL9005) and white(RAL9003) colour

	eMOTUS5OD	eMOTUS8OD
RMS power / Program power	40W / 80W (8Ω)	100W / 200W (8Ω)
Power selector @ 100V	7,5/15/30 W	60/30/15/7,5/3,5 W
Audio inputs	-	-
Others	IP65	IP65
Dimensions (WxHxD)	173x180x181mm / 6.81"x 7.08"x7.12"	268x242x264mm / 10,5"x9,5"x10,4"
Weight	2,4 kg / 5.29 lb	4,25kg / 9.37 lb

ACCESSORIES

eMOTUS5OD:



RAILAPTOR



LOUDSPEAKERS
Sphere Portion Cabinet
NEST106


APPLICATIONS



NEST106 front



NEST106 rear



3x NEST106 Corner cluster



4x NEST106 Half-sphere cluster



NEST106 installation loudspeaker is the result of an in-depth analysis of current and future needs for background music and voice systems.

NEST106 is a real unique loudspeaker cabinet: its design, with a front panel in the shape of a partial sphere ($\frac{1}{8}$ of a sphere) and the back in the shape of a triangular pyramid, permits a wide variety of potential installations, ranging from an individual sound box, fitting perfectly in a corner, to several merged units to become portions of a sphere or even a complete sphere hanging from the ceiling.

KEY FEATURES

- Full range, 2-way loudspeaker
- Built-in 70/100 V line transformer
- Euroblock-type connector
- Comes with accessories for wall-mounting, connectors, screws and Allen key
- IP54 class for installing outdoors
- 6,5" Woofer + coaxial Tweeter
- EASE Win file available
- Available in white (RAL9016)

ACCESSORIES



MP106NEST3



MP106NEST4

	NEST106
RMS power / Program power (8Ω)	60W / 120W
Woofer / tweeter	6,5" / 1"
Power selector @ 100V	7/10/15/30 W
SPL 1W/1m	93 dB
Dimensions (WxHxD)	330x230x197mm / 13"x9.05"x7.75"
Weight	3,3 kg / 7.27 lb

LOUDSPEAKERS
Architectural Wooden Cabinets
ARQIS Series



APPLICATIONS



ARQIS105 / 106
Connection plate



ARQIS105 / 106 / 108
Wall bracket (included)




ARQIS108 Connection plate



ARQIS105



ARQIS106

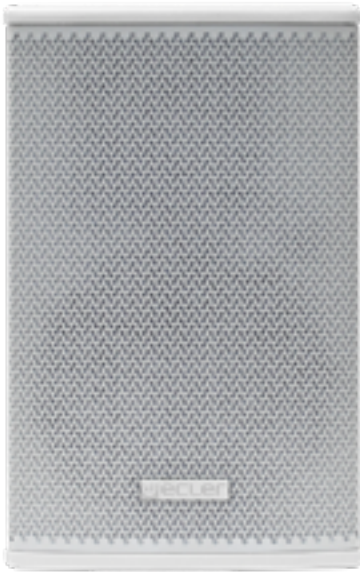

ARQIS108

ARQIS series has been specifically designed to fulfil permanent installation requirements where a perfect balance between sound performance and architectural / interior's design matching is a must.

KEY FEATURES

ARQIS105 / ARQIS106 / ARQIS108:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock (+ Speakon®: ARQIS108) type, with security attachment screws to avoid accidental disconnection
- Wall bracket included, allowing for pan&tilt adjustment, employing a single screw for fastening
- U-bracket wall-mount accessory compatible, ARQ108UB (not included) (ARQIS108)
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS105	ARQIS106	ARQIS108
RMS power / Program power (8Ω)	70W / 140W	120W / 240W	150W / 300W
Woofer / tweeter	5,25" / 1" (tweeter)	6,5" / 1"	8" / 1"
Connector	Euroblock	Euroblock	Euroblock + Speakon
SPL 1W/1m	89 dB	92 dB	93 dB
Dimensions (WxHxD)	186x280x210mm / 7.32"x 11.02"x8.26"	216x350x240mm / 8.50"x13.78"x9.45"	244x390x280mm / 9.60"x15.35"x11.02"
Weight	3,6 kg / 7.93 lb	7,4 kg / 16.31 lb	8,4 kg / 18.52 lb

ACCESSORIES

ARQIS108:



ARQ108UBWH



ARQ108UBBK



ARQIS Series



ARQIS205 / 208
Connection plate



ARQIS205
With U bracket (included in ARQIS205 / 208)



ARQIS208

KEY FEATURES

ARQIS205 / ARQIS208:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock + Speakon® type, with security attachment screws to avoid accidental disconnection
- "U" Shape wall bracket included, allowing for tilt adjustment
- 8 x M8 cabinet flying points.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS205	ARQIS208
RMS power / Program power (8Ω)	140W / 280W	300W / 600W
Woofer / driver	2x5,25" / 1"	2x8" / 1"
Connector	Euroblock + Speakon	Euroblock + Speakon
SPL 1W/1m	92 dB	96 dB
Dimensions (WxHxD)	480x186x210mm / 18.89"x7.32"x8.26"	610x244x280mm / 24.01"x9.60"x11.02"
Weight	8,4 kg / 18.52 lb	14,4 kg / 31.74 lb

ARQIS Series



ARQIS110 / 112 Connection plate



ARQIS110



ARQIS112

KEY FEATURES

ARQIS110 / ARQIS112:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock + Speakon® type, with security attachment screws to avoid accidental disconnection
- U-bracket wall-mount accessory compatible, ARQ110UB/ ARQ112UB (not included)
- 35 mm mount socket, compatible with SR12 wall brackets and TRIPO1 floor stands (not included)
- 8 x M8 cabinet flying points.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS110	ARQIS112
RMS power / Program power (8Ω)	220W / 440W	340W / 680W
Woofer / driver	10" / 1"	12" / 1,4"
Connector	Euroblock + Speakon	Euroblock + Speakon
SPL 1W/1m	95 dB	97 dB
Dimensions (WxHxD)	359x495x310mm / 14.13"x19.49"x13.86"	416x565x352mm / 16.37"x22.24"x13.86"
Weight	14,8 kg / 32.63 lb	20,0 kg / 44.09 lb

ACCESSORIES



TRIPO1



SR12

ARQIS110:



ARQ110UBWH



ARQ110UBBK

ARQIS112:



ARQ112UBWH



ARQ112UBBK



ARQIS / VERSOSB115P Series



KEY FEATURES

ARQISSB6T:

- Euroblock connector and spring loaded input terminals
- LPF cut-off frequency selection: OFF/ 120Hz / 150Hz
- Wall-mount hardware included
- Available in black or white finish

ARQISSB10:

- Euroblock connector and spring loaded input terminals
- LPF cut-off frequency selection: OFF/ 120Hz / 150Hz
- Wall-mount hardware included
- 12 x M8 cabinet flying points
- Available in black or white finish

ARQISSB15:

- Double INPUT/STACK connector, Speakon® type
- 35 mm top-hat mount socket, for pole mount combinations with ARQIS10, ARQIS12, etc.
- 8 x M8 cabinet flying points.
- Available in black finish

VERSOSB115P:

- PHASE and volume controls
- Internal 100 or 150 Hz LPF (selectable)
- Top-hat 35 mm. standard pole mount socket

	ARQISSB6T	ARQISSB10	ARQISSB15	VERSOSB115P
RMS power / Program power (8Ω)	60/120W @ 70/100V ; 120W @ 8Ω	150W / 300W	600W / 1200W	500W / 1000W
Woofer	6,5" + 6,5" passive radiator	10"	15"	15"
Connector	Euroblock + spring loaded terminals	Euroblock + spring loaded terminals	Speakon	1 ST LINE (mono conversion) / Stack out
SPL 1W/1m	86 dB	94 dB	98 dB	125 dB
Dimensions (WxHxD)	250x390x130mm / 9.84"x15.35"x5.12"	600x442x228mm / 23.62"x17.40"x8.97"	534x460x525mm / 21.02"x18.11"x20.67"	590x450x490mm / 23.23"x17.71"x12.29"
Weight	8,2 kg / 18.07 lb	16,5 kg / 36.37 lb	32,0 kg / 70.54 lb	41,3 kg / 91.05 lb

CKL110T / CKLSM115T / DPC118



Targeted to long-through vocal reproduction as well as music reinforcement applications in adverse acoustic environments. Manufactured in 18mm multi-layered Finnish birch plywood.

CKL110T is a 2-way, full range mid-high loudspeaker cabinet. It combines an enclosed 10" speaker attached to a Tractix horn with phase correction and a 2" compression driver.

CKLSM115T is mid-low frequencies loudspeaker cabinet, featuring a high performance horn loaded 15" speaker.

DPC118 is a low frequencies loudspeaker cabinet, featuring high performance 18" speaker. Two DPC118 units should be paired for a more powerful bass reinforcement.

KEY FEATURES

CKL110T / CKLSM115T:

- Internally reinforced. Trapezoidal shape
- Careful component selection
- Superior efficiency values: up to 112dB 1W/1m
- Scratch and shock proof polyurethane paint finish
- Side handles for easy set up
- 1.5mm protective front grid and acoustically transparent foam against dust and splashes
- Six ISO 7166 air cargo tracks for precise rigging
- Speakon® connectors

DPC118:

- Low frequencies loudspeaker cabinet
- 1200 WRMS @ 8Ω
- High performance 18" speaker
- Internally reinforced
- Careful component selection
- Superior efficiency values: up to 112dB 1W/1m
- Maximum SPL at 1m reaches 140dB
- Side handles for easy set up
- 1.5mm protective front grid and acoustically transparent foam against dust and splashes
- Speakon® connectors

	CKL110T	CKLSM115T	DPC118
RMS power / Program power (8Ω)	220W / 440W	600W / 1200W	1200W / 2400W
Woofer / driver	10" / 2"	15" (horn loaded) / -	18" / -
Frequency response	170 - 19kHz	70 - 280Hz	60 - 200Hz
SPL 1W/1m	112 dB	105 dB	112 dB
Dimensions (WxHxD)	550x550x650mm / 21.65"x21.65"x25.59"	550x550x650mm / 21.65"x21.65"x25.59"	750x570x720mm / 29.52"x22.44"x28.34"
Weight	47,0 kg / 103.61 lb	37,2 kg / 82.01 lb	55,5 kg / 122.35 lb

APPLICATIONS



ACCESSORIES



ADP



LOUDSPEAKERS
Column / Spherical Cabinets
eCS803 / eUC106

APPLICATIONS



eCS803: eUC106:

KEY FEATURES

- eCS803:**

 - Column type loudspeaker
 - Transformer selector: low/high impedance
 - Stripped wire connection
 - Aluminium enclosure
 - IP44 rated
 - Included wall bracket
 - Available in white (RAL9016)
- eUC106:**


 - Spherical pendant type loudspeaker
 - 8 Ω and 70/100 V (40W RMS)
 - 6.5" woofer + 1" tweeter
 - Transformer selector: 32W-16W-8W-4W 100V / 16W-8W-4W-2W 70V - 8 Ω
 - Stripped wire connection (3m)
 - Available in white (RAL9003) and black (RAL9005) finish
 - EASE Win file available

	eCS803	eUC106
RMS power / Program power (8 Ω)	80W / 160W	40W / 80W
Woofer / tweeter	8x3" / -	6,5" / 1"
Power selector @ 100V	5/10/20/30 W	4/8/16/32 W
SPL 1W/1m	94 dB	89 dB
Dimensions (WxHxD)	105x760x90mm / 4.13"x29.92"x3.54"	$\varnothing$ xH: 270x215mm / 10.62"x 8.46"
Weight	4,5 kg / 9,92 lb	3,0 kg / 6.61 lb



LOUDSPEAKERS
In-ground Cabinets
IG108 / eRK108

APPLICATIONS

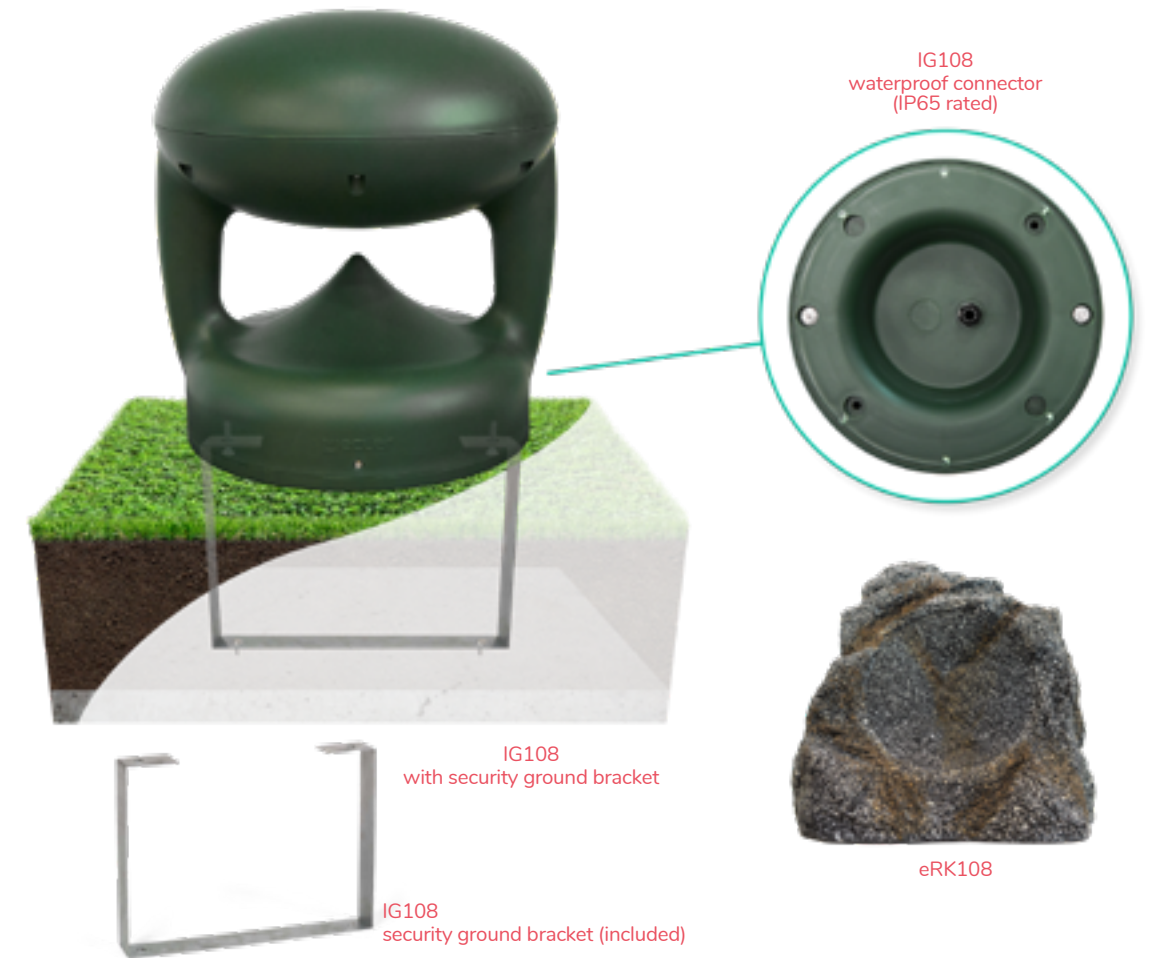

KEY FEATURES

- IG108:**

 - IP65 outdoor rated loudspeaker
 - 8 Ω and 70/100 V (7,5, 15, 30 or 60 W tap switch)
 - 8" Kevlar woofer and 1" ACCW silk dome tweeter
 - Frequency response (-10 dB): 50 Hz to 23 kHz
 - Omni directional horizontal coverage pattern (a circular area with an average radius of 4 to 6 meters can be covered by one unit, in a standard application)
 - Security ground bracket included
 - EASE Win file available
- eRK108:**

 - IP65 outdoor rated loudspeaker
 - 70/100 V (15 W)
 - 8" woofer + 0,5" tweeter
 - Stripped wire connection
 - EASE Win file available

	IG108	eRK108
RMS power / Program power (8 Ω)	100W / 200W	-
Woofer / tweeter	8" / 1"	8" / -
Power selector @ 100V	7,5/15/30/60 W	15 W
SPL 1W/1m	92 dB	89 dB
Dimensions (WxHxD)	$\varnothing$ xH: 360x392,5mm / 14.17"x15.45"	325x290x270mm / 12.79"x11.41"x10.63"
Weight	8,5 kg / 18.74 lb	5,0 kg / 11.02 lb



LOUDSPEAKERS
Public Address Cabinets

ePRS10Ti / ePRS20Ti / ePHS30Ti / eMSP50Ti

APPLICATIONS



ePRS10Ti



ePRS20Ti



ePHS30Ti



eMSP50Ti



ePRS10Ti / ePRS20Ti:



ePHS30Ti / eMSP50Ti:



Sound projectors carefully selected for the most extended 70V/100V paging and background music applications, offering durability and optimal speech and music reproduction.

KEY FEATURES

- ABS weatherproof
- Suitable for outdoor applications
- Power tappings for 70V and 100V
- EASE Win file available
- ePRS10Ti / ePRS20Ti available in white (RAL9016)
- ePHS30Ti available in light gray (RAL7035)
- eMSP50Ti available in papyrus white (RAL9018)

	ePRS10Ti	ePRS20Ti	ePHS30Ti	eMSP50Ti
RMS power / Program power (8Ω)	-	-	30W / 60W	50W / 100W
Power selector @ 70/100V	10/5/2,5W @ 100V 5/2,5/1,25W @ 70V	20W / 10W / 5W @ 100V 10/5/2,5W @ 70V	30/15/7,5/3,75W @ 100V 30/15/7,5/3,75 /1,9W @ 70V	50/25/12,5/9/4,5 /2,6W @ 100V 25/12,5/9/4,5/2,6 /1,3W @ 70V
IP Certified	IP55	IP55	IP66	IP66
SPL 1W/1m	91 dB	92 dB	108 dB	99 dB
Dimensions (WxHxD)	ØxH : Ø 138 x 205mm / Ø 5.4" x 8.1"	Ø 170 x 245mm / Ø 6.7" x 9.6"	Ø 246 x 292mm / Ø 9.7" x 11.5"	362 x 252 x 310mm / 14.3" x 9.9" x 12.2"
Weight	1.6 kg / 3.5 lb (including accessories)	1,8 kg / 4.0 lb (including accessories)	2,4 kg / 5.3 lb (including accessories)	3,9 kg. / 8.6 lb


LOUDSPEAKERS
Musical projectors

eCMP8 / eCMP12

APPLICATIONS



eCMP8

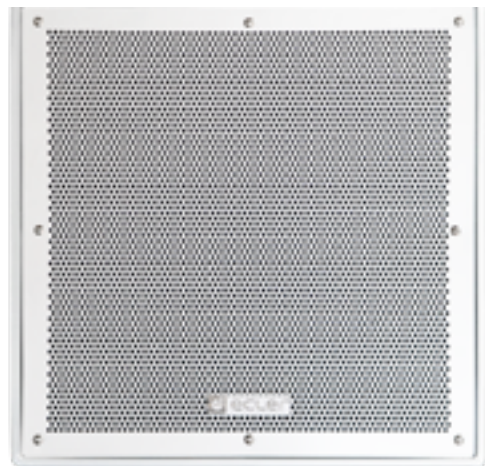

eCMP12



eCMP8 U-bracket (included)



eCMP8



Ecler Essentials **eCMP8 / eCMP12** are high efficiency musical projectors ready for outdoor applications due to its waterproof and sun screening building material (IP56). Grey finished color (RAL 538C). Suitable for high and low impedance. U-bracket included.

KEY FEATURES

eCMP8:

- Weatherproof 2-way music projector
- 150 W @ 8Ω
- Input & output connection via terminal block
- Dispersion (HxV): 100° x 100°
- Material: Polypropylene, aluminium (grille), hot-dipped galvanized steel (U-bracket)

eCMP12:

- Weatherproof 2-way music projector
- 300 W @ 8Ω
- Input & output connection via terminal block
- Dispersion (HxV): 80° x 80°
- Material: Polypropylene, aluminium (grille), hot-dipped galvanized steel (U-bracket)

	eCMP8	eCMP12
RMS power / Program power (8Ω)	150W / 300W	300W / 600W
Power selector	37,5/75/150W @ 100V 18,75/37,5/75W @ 70V	50/100/200W @ 100V 25/50/100W @ 70V
Others	IP56	IP56
SPL 1W/1m	96 dB	98 dB
Dimensions (WxHxD)	300 x 302 x 334mm / 11.8" x 11.9" x 13.2"	407 x 410 x 378mm / 16.0" x 16.1" x 14.9"
Weight	11,0 kg / 24.3 lb	20,0 kg / 44.1 lb



LOUDSPEAKERS
Compact PA Systems
LABI1 Series

APPLICATIONS



LABI1-C100i LABI1-SB18 front LABI1-SB18 back LABI1-SB18p back



ECLER LABI1 SERIES has been specially designed to provide a compact loudspeakers system solution for mobile and fixed installations in need of high output, easy and quick installation, and excellent sound quality. The variety of products and accessories allows several different configurations, depending on the needs required.

KEY FEATURES

LABI1-SB18:

- 18" passive subwoofer with a compact design
- Frequency range (-10dB): 38Hz – 250Hz

LABI1-SB18p:

- 18" powered subwoofer with a compact design
- 2400W built-in Class D amplification power
- Low frequency amplifier: 1200W
- Speaker output amplifier: 2x600W@4Ω
- 18 factory presets
- User control interface with LCD

LABI1-C100i:

- Full-range passive 100cm loudspeaker column
- Twelve 3" drivers with 0.75" neodymium voice coil
- 300W AES
- Speakon® and 2-pin Euroblock input connectors (+LINK connectors)
- Several mounting options
- Ready for outdoor applications
- Black finish available (RAL 9005)

	LABI1-SB18	LABI1-SB18P	LABI1-C100i
RMS power / Program power	500W / 1200W	2400W Class D built in amp	300W / 600W
Speaker type	18" subwoofer with 3" voice coil	18" subwoofer with 3" voice coil	12x3" speaker with 0.75" voice coil
Inputs / Outputs	Speakon® / Speakon®	XLR / XLR + Speakon® (powered output)	Speakon® and 2-pin Euroblock input connectors (+LINK connectors)
Max SPL @ 1m	131 dB	131 dB	127 dB
Dimensions (WxHxD)	513 x 513 x 704 mm / 20.2" x 20.2" x 27.7"	514 x 513 x 704 mm / 20.2" x 20.2" x 27.7"	89 x 1000 x 117mm / 3.5"x 39.4" x 4.6"
Weight	37.1 kg / 81.8 lb	39.1 kg / 86.2 lb	7.8 kg / 17.2 lb

ACCESSORIES



LABI1-SWK



LABI1-SPC



LABI1-CFC

LOUDSPEAKERS

LABI1 Series



1 x LABI1-C100i + LABI1-SB18p
Mono-single column configuration




2 x LABI1-C100i + LABI1-SB18p
Stereo-single column configuration



2 x LABI1-C100i + 1 x LABI1-SB18p
Mono-double column configuration



4 x LABI1-C100i + 1 x LABI1-SB18p
Stereo-double column configuration



LABI1-SAC
Subwoofer to column adapter



LABI1-CAC
Column to column adapter

ACCESSORIES



LABI1-SAC



LABI1-CAC



LABI1-TBC



LABI1-WBC



LABI1-PBC



LABI1-HBC



LABI1-ODCNX



MPAGE1r / MPAGE4/ eMPAGE

APPLICATIONS



MPAGE1r is a 1-zone desktop paging station, compatible with any device including a phantom-powered microphone input (SAM series, COMPACT series, DAM614, MIMO88, CA series, HMA series, etc.).

MPAGE4 is a 4-zone desktop paging station compatible with DAM614, CA series, etc. It allows for real-time paging with zones' destination selection.

eMPAGE is a digital paging station (MPAGE16's evolution), compatible with HUB, MIMO88, MIMO88SG and MIMO1212SG digital matrixes. Includes: a gooseneck cardioid microphone (removable); 16 zone-selection keys; ALL, CLEAR and PAGE keys; 2 programmable keys, F1 & F2, for zone-group selection. Text labelling for destination areas by means of programmable electronic ink display.

	MPAGE1r	MPAGE4	eMPAGE
Paging zones	1	4	16
Additional keys	-	ALL	ALL + CLEAR + F1 + F2
Phantom Power	10 - 48VDC	6 - 15VDC	48VDC, always ON
Connector	Euroblock	RJ45	RJ45 (internal)
Dimensions (WxHxD) (mic excluded)	120x43x126mm / 4.72"x1.69"x4.96"	120x43x126mm / 4.72"x1.69"x4.96"	150x50x180mm / 5.90"x1.96"x7.08"
Weight (mic excluded)	625 g / 1.37 lb	626 g / 1.37 lb	900 g / 1.98 lb

eMCONTROL1

APPLICATIONS



eMCONTROL1 is a digital control panel for the HUB series zoner with a wall format. It also makes it possible, as an option, to be coupled to a WPa type panel with an audio connector: the pair behaves like a single panel providing remote control + direct sending to the HUB from a balanced audio signal. To do so, it uses a single CAT5 type cable or higher. With exceptions, this does not require its own power supply: remote power supply from a REMOTE port on the HUB.

KEY FEATURES

- Digital control panel compatible with the HUB
- Volume adjustment, selection of sources and (programmable) EQ
- Compatible with WPa series panels with audio connector, for sending audio and control signals via a single CAT5 cable or higher
- Compatible with wall installation boxes with round shape and internal diameter ≥ 60 mm.
- Aesthetics designed in collaboration with Italdesign Giugiaro

	eMCONTROL1	eMCONTROL1US
Display	LCD	LCD
Resolution	128x128 Pixels	128x128 Pixels
Connection port	RJ45 remote port	RJ45 remote port
Control keys	Encoder, SELECTION key	Encoder, SELECTION key
Dimensions (WxHxD)	86x86x45mm / 3.38"x3.38"x1.77"	116,5 x 114,75 x 28 mm / 4.58" x 4.51" x 1.10"
Weight	150 g / 0.33 lb	150 g / 0.33 lb

ACCESSORIES





WPNETTOUCH



Compatible



Compatible

PAGENETDN



APPLICATIONS



WPNETTOUCH

WPNETTOUCH

VESA 75 mounting system (included)

WPNETTOUCH is a remote control TFT touchscreen compatible with all EclerNet products. Incorporates a capacitive 10" touch screen, a server client and UCP server (User Control Panel). Each unit could be configured to work as a single zone control panel or as a global multi-zone controller. It allows executing User Control Panels that are able to control volume, sound source selection, presets recovery, communication via TCP/UDP with external devices, etc.

KEY FEATURES

- EclerNet control device, with the ability to execute EclerNet projects on its internal engine, acting as a server and / or client of UCP panels
- 10 "capacitive touch screen
- PoE power or local power supply
- Ethernet communication interface
- VESA75 and desktop mounting systems included

	WPNETTOUCH
Display	10.1" IPS Capacitive multitouch
Resolution	1280 x 800 Pixels
Connection port	Ethernet Base-Tx 10/100Mb / 1GB CAT5e or better up to 100m. PoE enabled
Power Supply	12V (local PSU)
Dimensions (WxHxD)	260x178x28mm / 10.23"x7"x1.10"
Weight	700gr / 1.54 lb

APPLICATIONS



PAGENETDN



PAGENETDN is a desktop paging console for voice notices with Dante™ audio over IP which works perfectly to manage huge zoning projects in combination with MIMO7272DN matrices.

KEY FEATURES

- Desktop paging station based on touch screen and programmable UCP panels
- Flexo type microphone included
- Audio transport using Dante™
- EclerNet control device, with the ability to execute EclerNet projects on its internal engine, acting as a server and / or client of UCP panels
- 10 "capacitive touch screen
- PoE power or by local power supply
- Ethernet communication interface
- Analog audio output (MIMO88 / 88SG / 1212SG compatible)

	PAGENETDN
Display	10.1" IPS Capacitive multitouch
Resolution	1280 x 800 Pixels
Connection port	Ethernet Base-Tx 10/100Mb / 1GB CAT5e or better up to 100m. PoE enabled
Dante Network TX channels	2 (integrated MIC + external AUX input)
Dimensions (WxHxD) (mic excluded)	295x155x135 mm / 11.6"x6.1"x5.3"
Weight (mic excluded)	1.5 kg / 3.3 lbs



REMOTE CONTROLS AND INTERFACES
Dante™ Wall Interface / EclerNet Wall Panel
WP22DN / WPNETEX

APPLICATIONS



WP22DN



WPNETEX

WP22DN is a Dante™ interface in a wall panel format. It features 2 audio MIC/LINE Combo connector inputs in its frontal panel and 2 Dante™ conversion channels either directly or by the sum of channels (stereo to mono conversion). Also, it features 2 analogue outputs with duplicated connectors in XLR format for the front panel and Euroblock on the rear panel, both linked to 2 Dante™ channels coming from the local network.

WPNETEX is an EclerNet compatible wall panel, featuring an LCD screen, a digital rotary encoder and 4 control keys. Its end-user control features are volume control, source and preset selection and 3 band EQ functions.

KEY FEATURES

WP22DN:

- Dante™ interface wall panel
- PoE power or by local power supply
- Ecler Double gang surface mount box included

WPNETEX:

- Remote control panel of Dante™ digital matrixes (MIMO4040CDN/MIMO7272DN)
- Programmable, ready to admit extended control functions
- PoE power or by local power supply
- Ethernet communication interface
- Compatible with wall installation boxes with round shape and internal diameter ≥ 60 mm.
- Surface mount box included

	WP22DN		WPNETEX
Inputs	2 analog, balanced, MIC/LINE level	Display	LCD
Outputs	2 analog, balanced, line level	Resolution	128x128 Pixels
Connectors	Dante 2x2 interface, RJ45, PoE ready Audio In: 2x Combo / Audio Out: 2x XLR M (external) 2x Euroblock (internal)	Connection port	Ethernet interface, RJ45, PoE enabled
Phantom Power	+48VDC, 5mA max.	Control keys	Encoder, 4 SELECTION keys
Dimensions (WxHxD)	170x85x40mm / 3.38"x3.38"x1.57"	Dimensions (WxHxD)	170x85x40mm / 3.38"x3.38"x1.57"
Weight	400gr / 0.88 lb	Weight	120 gr / 0.26 lb

REMOTE CONTROLS AND INTERFACES
EclerNet Wall Panel

WPNET4KV / WPNET8K



APPLICATIONS



WPNET4KV



WPNET8K



WPNET4KV



WPNET8K



WPNET12KV



WPNET4KVUS (with USA frame)



WPNET8KUS (with USA frame)

WPNET4KV is an EclerNet compatible wall panel. It features a LCD screen, encoder and 4 selection keys. Works perfectly to enable volume control, source and preset selection functions.

WPNET8K is an EclerNet compatible wall panel. It features a LCD screen and 8 selection keys. Works perfectly to enable presets or source selection functions.

Note: in some cases is possible to combine a pair of WPNET4KV+WPNET8K to make them work together as a 12 selection key and a digital volume controller ("WPNET12KV"). This combination is compatible for instance, with MIMO7272DN matrix. For more information consult our tech support service.

KEY FEATURES

- Remote control panel of MIMO4040CDN/MIMO7272DN devices
- Compatible with NXA / MIMO88 / 88SG / 1212SG through dedicated firmware.

- PoE power or by local power supply
- Ethernet communication interface
- Compatible with wall installation boxes with round shape and internal diameter ≥ 60 mm
- Surface mount box included

	WPNET4KV	WPNET8K	WPNET4KVUS	WPNET4KVUS
Display	LCD	LCD	LCD	LCD
Resolution	128x128 Pixels	128x128 Pixels	128x128 Pixels	128x128 Pixels
Connection port	Ethernet interface, RJ45, PoE enabled	Ethernet interface, RJ45, PoE enabled	Ethernet interface, RJ45, PoE enabled	Ethernet interface, RJ45, PoE enabled
Control keys	Encoder, 4 SELECTION keys	8 SELECTION keys	Encoder, 4 SELECTION keys	9 SELECTION keys
Dimensions (WxHxD)	170x85x40mm / 3.38"x3.38"x1.57"	170x85x40mm / 3.38"x3.38"x1.57"	116,5x115x26mm / 4.59"x4.52"x1.02"	116,5x115x26mm / 4.59"x4.52"x1.02"
Weight	120 gr / 0.26 lb	120 gr / 0.26 lb	120 gr / 0.26 lb	120 gr / 0.26 lb

**WPa Series****WPa Series****APPLICATIONS**

WPaVOL



WPaVOL-J



WPaVOL-SR



WPaVOL-SR-J



WPaH-SL4



WPaH-AT6



WPaH-AT40



WPaH-AT100



WPaVOLUS (with USA frame)



WPaVOL-SRUS (with USA frame)

**ACCESSORIES**

WPa2SMBOX



WPa2FMBOX

WPa is a series of remote control wall panels for systems and interconnecting audio signals, with a modern, elegant, discrete aesthetic, designed in collaboration with Italdesign Giugiaro.

WPa series includes surface-mount installation box (except UBWPa).

WPaVOL is a remote wall panel control for one volume management. Compatible with all 0-10V DC REMOTE control port.

WPaVOL-J has the same features as WPa VOL + front panel stereo mini-jack connector.

WPaVOL-SR is a remote wall panel control for one volume management + source or preset selection. Compatible with all 0-10V DC REMOTE control port.

WPaVOL-SR-J has the same features as WPaVOL-SR + front panel stereo mini-jack connector.

WPaH-AT6 is a 70 / 100V line attenuator with integrated 24 VDC priority relay. 6W maximum output power.

WPaH-AT40 is a 70 / 100V line attenuator with integrated 24 VDC priority relay. 40W maximum output power.

WPaH-AT100 is a 70 / 100V line attenuator with integrated 24 VDC priority relay. 100W maximum output power.

WPaH-SL4 is a 70 / 100V V line selector (one out of 4 music program lines).



WPaMIX-T




WPaMIX-TUS (with USA frame)



WPaCNX-JRCA



WPaCNX-CBO

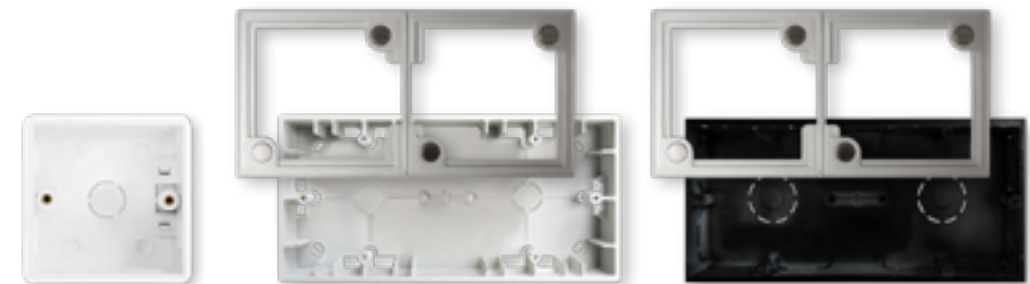

Different mounting options available:
Fully with single/double, surface/flush WPa series mount boxes

US single gang bare format.



UBWPaVOL



UBWPaCNX-JRCA

WPaMIX-T is a 2 channel micro-mixer which keeps the standard wall-panel format of the WPa series. It allows to mix a stereo unbalanced signal (2 x RCA) with a microphone signal (XLR), getting a balanced mono output that can be sent to a preamplifier, amplifier, mixer, digital or analogue matrix, etc., thus saving inputs in the receiver device.

The MIC input includes a 2 band EQ (BASS, TREBLE) and it can use the talk-over function to override the line signal when the microphone exceeds the talk-over detection threshold. Power supply not included (WP24-PSU).

WPaCNX-CBO is a connection Wall Plate with Female 3 pin XLR connector + Jack ST (combo connector). Screw-type connector at the back (no solder needed).

WPaCNX-JRCA is a connection Wall Plate with 1 x stereo minijack and 2 x RCA connectors.



Ecler WP24-PSU is a 24VDC 0.5A external PSU. International AC plugs set. Coaxial connector (+ center), compatible with eMPAGE, DN44BOB and WPaMIX-T.

WPPSU is an external, universal AC/DC converter for the DC supply of remote panels and devices. Compatible with all the WPa/WPNET series panels requiring external DC power supply (except WPNETTOUCH).

ETH232AD is a serial interface that allows bidirectional transparent transmission between RS-232/422/485 and Ethernet. It includes a setting webpage for Ethernet and Serial customized settings.

TR2-70 is a transformers kit including 2 transformers for the CA200z's amplified outputs' conversion: 4 Ω to 100V or 70V (high impedance).

TR2-70 Kit is compatible with the optional 2UHRMKIT "in-rack" mounting accesory.

1UHRMKIT is a kit that enables a half-width and 1U height rack device (ePLAYER1, etc.) to be mounted into a standard width rack cabinet.

2UHRMKIT is a kit that enables a half-width and 2U height rack device to be mounted into a standard width rack cabinet.

PUM3 is a rack-mount accessory that allows to mount two half-width RU devices in 1 standard width RU space. Mounting screws included.

VEO-RACK19 is a universal 19 "rack support. Includes velcro and fixing screws.

LABI1-SWK is a wheel kit for LABI1-SB18p subwoofer.

LABI1-SPC is a nylon protection cover for LABI1-SB18p subwoofer.

LABI1-CFC is a flight case for 2 LABI1-C100i + wiring + mounting accessories.



CNXXLRXLR1/5/10 is a 1m/5m/10m length XLR-XLR cable.

CNXEBEB1/2M5 is a 1m/2,5m length Euroblock bal.- Euroblock bal. cable.

CNXEBRCA1 is a 1m length 2xEuroblock bal. - 2xRCA Male/female.

CNXXLRFEB is a 0,5m length XLR female bal. - Euroblock bal.

CNXRCAEBAD is a RCA - Euroblock bal. adapter.

CNXMJXLR2 is a 2m lenght minijack ST to mono XLR male. Includes an internal resistance for overload protection and a proper sum of the signals.

CNXEBLINK4 is a 4 Euroblock link cable,12cm between connectors. It allows to link inputs channels on multichannel amplifiers such as eGPA series.

CNXAC8RM is a 19" 8 x sockets power strip with ON/OFF switch.

MBSTAND is a microphone stand with boom arm.

MDSTAND is a desktop microphone stand.

WPa2FMBOX is a double Flush-Mount box, compatible with the WPa wall panel series. It includes a single frame for fitting 2 adjacent panels in a twin housing.

WPa2SMBX is a double Surface-mount box, compatible with the WPa wall panel series. It includes a single frame for fitting 2 adjacent panels in a twin housing.



IC-TB6 is a tile bridge compatible with IC6 in-ceiling loudspeakers.

IC-TB8 is a tile bridge compatible with IC8 and IC6CLASS series in-ceiling loudspeakers.

ARQ108UB is a U-bracket wall-mount kit compatible with ARQIS108. Available in white and black finish.

ARQ110UB is a U-bracket wall-mount kit compatible with ARQIS110. Available in white and black finish.

ARQ112UB is a U-bracket wall-mount kit compatible with ARQIS112. Available in white and black finish.

ARQSB10SATB is a kit including 2 metal brackets, to convert an ARQIS SSB10 subwoofer unit into a hanging cluster, combining the ARQIS SB10 unit and 4 x eAMBIT103 satellite loudspeakers (loudspeakers not included with this reference).

SR12 is a mount bracket for ARQIS110 and ARQIS112 loudspeakers.

TRIPO1 is a 35mm loudspeaker floor stand set (2 units).

POLE01 is an adjustable 35 mm rod for pole for loudspeaker mount on top of a sub-woofer unit (ARQIS110 on top of ARQISSB15, VERSO series on top of VERSO SB115P, etc.).

ADP is a cargo restraint double stud and ring for the CKL series.

ACLASSCAN6L is an optional kit (2 units) for IC6CLASS-54 model. It features a low profile back can with 4" depth.

AVICCAN6L is an 6" low-profile back can, compatible with VIC6.

AVICCAN8L is an 8" low-profile back can, compatible with VIC8/VIC8SB.



RAILAPTOR is an adapter for hanging eMOTUS5OD or AUDEO103/106 loudspeakers from a ceiling light rail.

DSTANDAUEDEO is a desktop stand for one AUDEO103 / AUDEO106 / eMOTUS5 loudspeaker.

MSTANDAUEDEO allows to mount an AUDEO / eMOTUS5 loudspeaker on a standard microphone stand.

MP106NEST3 is a 3 NEST106 units corner mount bracket.

MP106NEST4 is a ceiling bracket for half sphere configurations (4 NEST106 units).

PCS124 is a cluster ceiling accessory for acoustic cabinets from eMOTUS5, TRAIL103 or AUDEO series. Available in black and white.

LABI1-SAC is a subwoofer-adapter-column, to install the LABI1-C100i satellite loudspeaker on LABI1-SB18p.

LABI1-CAC is a column-adapter-column, to connect vertically two LABI1-C100i column loudspeakers. Includes 60cm Speakon®-Speakon® cable.

LABI1-TBC is a support to install a LABI1-C100i loudspeaker to truss.

LABI1-WBC is a LABI1-C100i wall mount bracket.

LABI1-PBC is a pole adaptor to install LABI1-C100i loudspeakers in a 35mm standard pole.

LABI1-HBC are high-density foam pieces to let LABI1-C100i rest on the floor horizontally. Allows 0°/ 30°/ 45° inclinations relative to the horizontal surface.

LABI1-ODCNX is a outdoor kit to cover LABI1-C100i connections and make it ready for outdoor applications.

ACCESSORIES COMPATIBILITY CHART

	ePLAYER1	DUO-NET PLAYER	eSAM series	SAM series	COMPACT series	eCOMPACT4BT	MIMO 4040CDN / MIMO7272DN	MIMO / MIMOSG series	DN44BOB	HUB	DAM614	NXA series	ALMA series	eGPA series	GPA series	eHSA series
MPAGE1	-	-										-	-	-	-	-
MPAGE4	-	-	-	-	-	-	-	-	-	-		-	-	-	-	-
eMPAGE	-	-	-	-	-	-	-				-	-	-	-	-	-
PAGENETDN	-	-	-	-	-	-			-	-	-	-	-	-	-	-
WPNETTOUCH	-		-	-	-	-			-	-	-		-	-	-	-
WPNET series	-		-	-	-	-		(2)	-	-	-	(2)	-	-	-	-
WP22DN	-	-	-	-	-	-		-		-	-	-	-	-	-	-
eMCONTROL1	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-
WPaVOL	-	-	-	-	-	-				-				-		-
WPaVOL-J	-	-	-	-	-	-				-				-		-
WPaVOL-SR	-	-	-	-	-	-				-			-	-	-	-
WPaVOL-SR-J	-	-	-	-	-	-				-			-	-	-	-
WPaH-AT6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
WPaH-AT40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
WPaH-AT100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
WPaH-SL4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
WPaMIX-T	-	-														
WPaCNX-CBO	-	-														
WPaCNX-JRCA	-	-														
ETH232AD	-		-	-	-	-			-				-	-	-	-
WP24-PSU	-	-	(3)	(3)	(3)	(3)	(3)	(3) (4)	(3)	(3) (4)	(3)	(3)	(3)	(3)	(3)	-
WP-PSU	-	-	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	(3)	-
REVO-IR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TR2-70	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
VEO-RACK19		-	-	-	-	-	-	-		-	-	-	-	-	-	-
2UHRMKIT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1UHRMKIT		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PUM3	(5)	-	-	-	-	-	-	-		-	-	-	-	-	-	-
RAILAPTOR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PCS124	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DSTANDAUDIO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MSTANDAUDIO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NEST hardware	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SR12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ARQ108UB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ARQ110UB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ARQ112UB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ARQSB10SATB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
POLE01 / TRIPO1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ADP	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ACLASSCAN6L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
AVICCAN6L / 8L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
AVICSG	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LABI Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
IC TB series (tile bridge)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PKIC series (paint)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

(2) Using specific retro-compatible firmware (except WPNETEX)
(3) When including WPaMIX-T

(4) When including eMPAGE
(5) When including 1UHRMKIT

Full compatible
Compatible with some models (check particular model)
- Not compatible

	HSA series	HZA series	eHMA series	HMA series	eCA series	CA series	CA200Z	VIC series	IC series / IC6CLASS	NEST series	eAMBIT series	eMOTUS series	AUDEO series	ARQIS series	CKL-T series	DPC 118	LABI series
MPAGE1	-	-			-			-	-	-	-	-	-	-	-	-	-
MPAGE4	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-
eMPAGE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PAGENETDN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
WPNETTOUCH	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
WPNET series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
WP22DN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
eMCONTROL1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
WPaVOL								-	-	-	-		-	-	-	-	-
WPaVOL-J								-	-	-	-		-	-	-	-	-
WPaVOL-SR	-	-	-		-			-	-	-	-	-	-	-	-	-	-
WPaVOL-SR-J	-	-	-		-			-	-	-	-	-	-	-	-	-	-
WPaH-AT6							-	-	-	-	-	-	-	-	-	-	-
WPaH-AT40							-	-	-	-	-	-	-	-	-	-	-
WPaH-AT100							-	-	-	-	-	-	-	-	-	-	-
WPaH-SL4							-	-	-	-	-	-	-	-	-	-	-
WPaMIX-T								-	-	-	-		-	-	-	-	-
WPaCNX-CBO								-	-	-	-		-	-	-	-	-
WPaCNX-JRCA								-	-	-	-		-	-	-	-	-
ETH232AD	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-
WP24-PSU	-	(3)	(3)	(3)	(3)	(3)	(3)	-	-	-	-	-	-	-	-	-	-
WP-PSU	-	(3)	(3)	(3)	(3)	(3)	(3)	-	-	-	-	-	-	-	-	-	-
REVO-IR	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-
TR2-70	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-
VEO-RACK19	-	-		-	-			-	-	-	-	-	-	-	-	-	-
2UHRMKIT	-	-			-			-	-	-	-	-	-	-	-	-	-
1UHRMKIT	-	-		-	-			-	-	-	-	-	-	-	-	-	-
PUM3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
RAILAPTOR	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-
PCS124	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-
DSTANDAUDIO	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-	-
MSTANDAUDIO	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-	-
NEST hardware	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-
SR12	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
ARQ108UB	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
ARQ110UB	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
ARQ112UB	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
ARQSB10SATB	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
POLE01 / TRIPO1	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-
ADP	-	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-
ACLASSCAN6L	-	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-
AVICCAN6L / 8L	-	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-
AVICSG	-	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-
LABI Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
IC TB series (tile bridge)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PKIC series (paint)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



KNOW ALL OUR PRODUCTS

DOWNLOAD ALL ECLER CATALOGUES @
ECLER.COM



ECLER PROAUDIO, S.L.

08040 Barcelona, SPAIN

Domestic sales: T. (+34) 932 238 400

Export sales: T. (+34) 932 238 401

www.ecler.com

information@ecler.com

NEEC AUDIO DEUTSCHLAND GMBH

28359 Bremen, GERMANY

T. (+49) 0421 – 98976170

www.neec-audio.de

info@neec-audio.de



www.ecler.com



All product characteristics are subject to variation due to production tolerances. ECLER - NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.