




VNS2687

8-PORT POE INJECTOR

The VNS2687 8-Port POE Injector provides reliable, centralized power distribution to up to eight Visiplex devices over CAT-5, CAT-6, or CAT-7 network cabling—up to 300 feet away. Ideal for installations where AC outlets are limited or costly to install, this injector simplifies deployments of Visiplex wireless paging speakers, 2-way intercom stations, beacon lights, and LED message boards.

Low-Voltage Power Injector Wiring Diagram

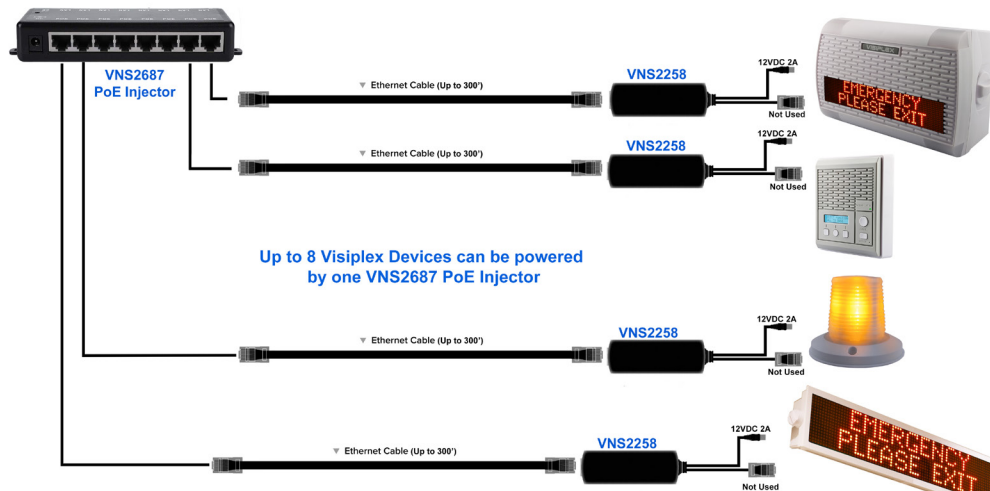

Parameter	Description
Power	Input: 100-240 VAC 50/60Hz, Output: 48V 5A 240Watt
Dimensions	Injector module: 6.4" x 2.1" x 1.1" (W x H x D) Power Adapter: 6.6" x 2.7" x 1.3"
Weight	Injector module: 4.6oz, Power Adapter: 25.2oz.



www.visiplex.com

1287 Barclay Blvd., Buffalo Grove, Illinois 60089

(847) 229-0250

Email: info@visiplex.com