


Niloé™ STEP

Socket outlets - French Standard

Cat. No(s): 3 98X 30B/33B, 8 63X 30B / 31B / 33B

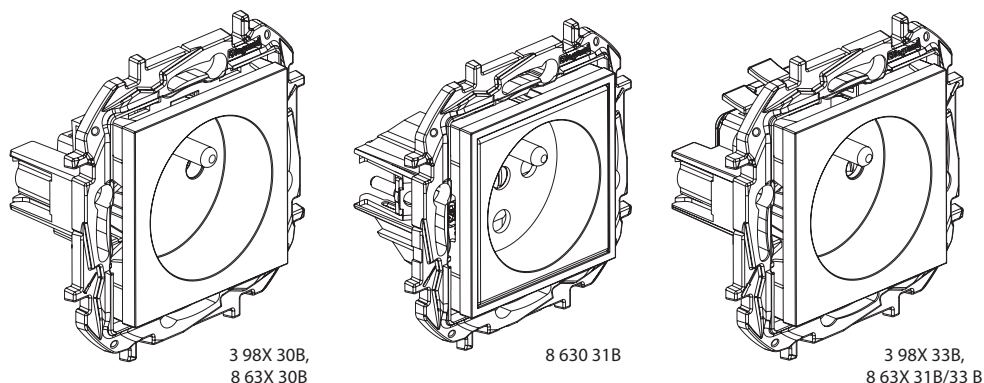


1. USE

Socket outlets with or without shutters.
Mechanisms supplied with protection cover.
To be equipped with plates one or several gangs.
The 8 630 31B mechanism can be used with tamperproof insert (Cat. No. 0 502 99), fitting directly into the plug.
Flush-mounting or surface-mounting.
Screw or claw fixing.

2. RANGE

Description	White	Aluminium	Medium Grey	Black	Red
2P+E socket automatic terminal	8 631 31B	8 633 31B	8 634 31B	8 635 31B	-
2 P+E socket screw terminal	3 981 30B, 8 631 30B	8 633 30B	3 984 30B, 8 634 30B	3 985 30B, 8 635 30B	-
2 P+E socket shutters automatic terminal	3 981 33B, 8 631 33B	8 633 33B	8 634 33B	3 985 33B, 8 635 33B	-
2P+E socket shutters screw terminal	-	-	-	-	8 630 30B
2 P+E socket shutters tamperproof screw terminal	-	-	-	-	8 630 31B

3. DIMENSIONS (mm)

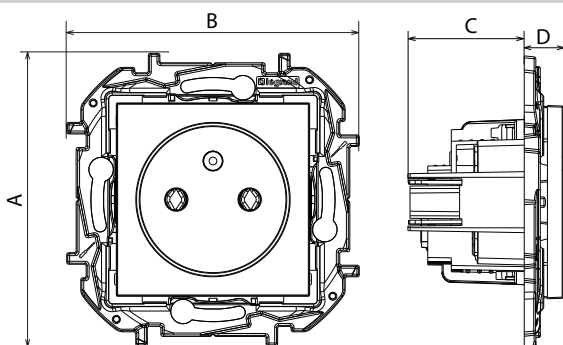

References	A	B	C	D
3 98X 30B, 8 63X 30B	75.8	75.8	30.2	10.3
3 98X 33B, 8 63X 31B/33B	75.8	75.8	30.2	10
8 630 31B	75.8	75.8	30	10.2

4. CONNECTION

Capacity: 2 x 2.5 mm²
Flexible or rigid cables compatible
Type of terminals:
automatic: 3 98X 33B, 8 63X 33B / 31B
screw: 3 98X 30B, 8 63X 30B, 8 630 31B
Stripping length:
12 mm 3 98X 33B, 8 63X 33B / 31B
10 mm 3 98X 30B, 8 63X 30B, 8 630 31B

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■ 5.2 Material characteristics

Mat appearance
Material : - Mechanism housing + Support: PC+SUP
- Claws: steel

Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 16 A
Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to +70° C
Usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos 3 981 30B - 3 981 33B - 3 984 30B - 3 985 30B - 3 985 33B - 8 630 30B - 8 630 31B - 8 631 30B - 8 631 31B - 8 631 33B - 8 633 30B - 8 633 31B - 8 633 33B - 8 634 30B - 8 634 31B - 8 634 33B - 8 635 31B - 8 635 30B - 8 635 33B) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue