



Smart LED Lighting

LED Stadium & Sport Lighter

Architectural Flood and Spot Luminaires

Features & Benefits:

- Directive 15° ~ 60° Beam Angle
- 10-Years / 80,000 Hours Warranty (★)
- Input Voltage Range 120V-277V-480V
- IP67 Suitable for Damp & Wet Locations
- Built-in 20KV/10KA Surge Protection (SPD)
- Optional Remote Driver ("RD") Applications
- 0~10V Dim to Off, or DMX512 Integral Controls
- Flicker Free <0.5%, Low THD <20%, High PF >0.95



Model	Product	Size	Power	Flux	HID Equal
SFL-300WD-ccK-NF-277V SFL-300WD-ccK-NF-480V	LED Stadium Flood Light 300W ccK 40° 277V/480V	(W) 17" (H) 17"	300W	52,000 Lumens	1,000W
SFL-400WD-ccK-NF-277V SFL-400WD-ccK-NF-480V	LED Stadium Flood Light 400W ccK 40° 277V/480V	(W) 17" (H) 17"	400W	69,000 Lumens	1,000W
SFL-500WD-ccK-NF-277V SFL-500WD-ccK-NF-480V	LED Stadium Flood Light 500W ccK 40° 277V/480V	(W) 17" (H) 17"	500W	87,000 Lumens	1,500W
SFL-600WD-ccK-NF-277V SFL-600WD-ccK-NF-480V	LED Stadium Flood Light 600W ccK 40° 277V/480V	(W) 17" (H) 17"	600W	105,000 Lumens	1,500W
SFL-800WD-ccK-NF-277V SFL-800WD-ccK-NF-480V	LED Stadium Flood Light 800W ccK 40° 277V/480V	(W) 17" (H) 17"	800W	143,600 Lumens	2,000W


- "277V" for 120-277Vac or "480V" for 208-480Vac ~50/60Hz • P.F. > 0.95 • THD < 20% • Cable Connection •
- "ccK" Color Temp. "18K" 1800K, "30K" 3000K, "40K" 4000K, "50K" 5000K ±10% • 174lm/W • CRI ≈ 80 •
- (★) Rated Life 80,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • (#) IP67 LED Housing ≈ NEMA Enclosure Rating 6 •
- Beam Angle: "SF" Sharp Flood 15°, "NF" Narrow Flood 40°, "MF" Medium Flood 60° • PC Lense •
- EPA 2.1 • Flicker Free "Low Optical Flicker" Less than 0.5% • <2% Blue • Marine Grade Finish •




Smart LED Lighting

LED Stadium & Sport Lighter


Architectural Flood and Spot Luminaires

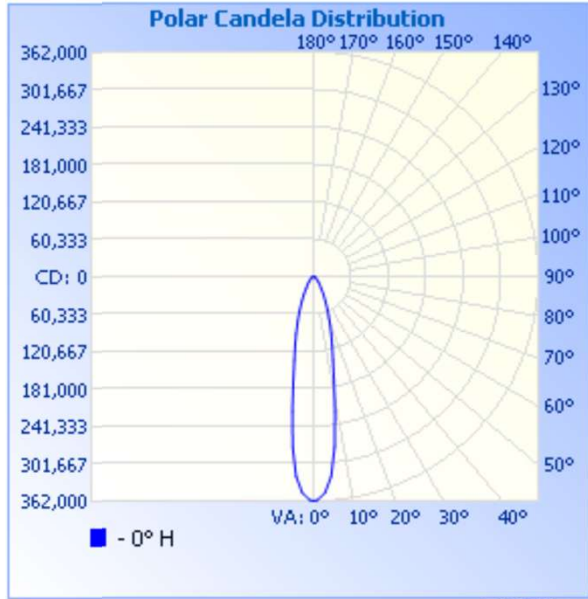

"SF" Sharp Flood 15°

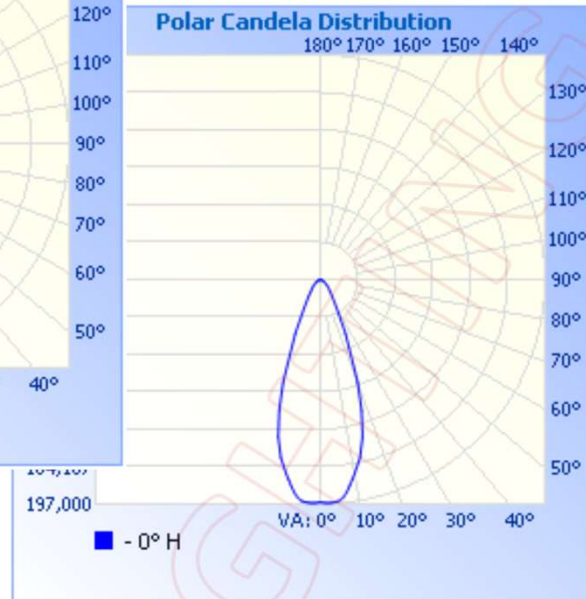

"NF" Narrow Flood 40°

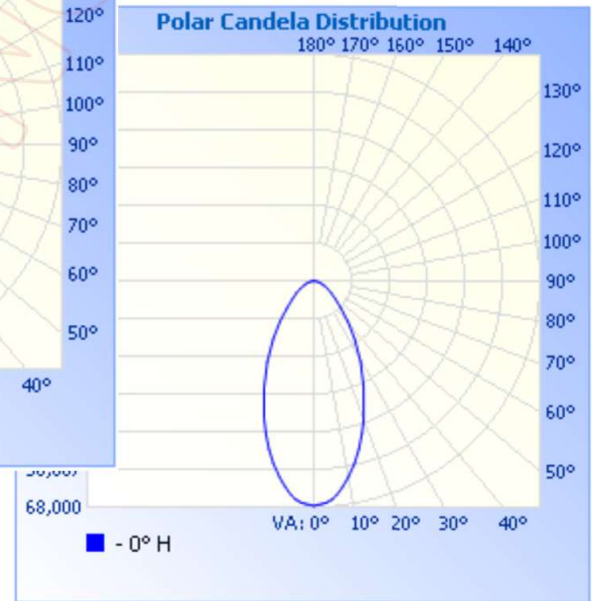

"MF" Medium Flood 60°

